

PRESTANDEDEKLARATION

DoP 0271

för Upat Betongskruv UCS (Metallankare för användning i betong)

SV

1. Produkttypens unika identifikationskod: DoP 0271
2. Avsedd användning/avsedda användningar: Infästning i efterhand i sprucken och osprucken betong, se bilaga, särskilt bilagor B1 - B4.
3. Tillverkare: Upat Vertriebs GmbH, Bebelstraße 11, 79108 Freiburg im Breisgau, Tyskland
4. Tillverkarens representant: -
5. System för bedömning och fortlöpande kontroll av prestanda: 1
6. Europeiskt bedömningsdokument: EAD 330232-00-0601
Europeisk teknisk bedömning: ETA-18/0762; 2018-12-12
Tekniskt bedömningsorgan: DIBt- Deutsches Institut für Bautechnik
Anmält/anmälda organ: 2873 TU Darmstadt

7. Angiven prestanda:

Mekanisk hållfasthet och stabilitet (BWR 1)

Karakteristisk bärförmåga för spänning (för statisk och kvasi-statisk belastning):

Stålets motståndskraft: Bilagor C1

$E_s = 210\,000\text{ MPa}$

Motstånd mot att skruven dras ut: Bilagor C1

Motstånd i betongkonen: Bilagor C1

Kraftighet: Bilagor C1

Minsta kant- och axelavstånd: Bilagor B3

Kantavstånd för att slippa sprickor under last: Bilagor C1

$N_{Rk,sp}^{0} = \text{NPD}$

Karakteristisk bärförmåga för skjuvning (för statisk och kvasi-statisk belastning):

Motstånd i stålet (tvärlast): Bilagor C1

Motstånd mot fläkning: Bilagor C1

Motstånd mot skador i betong: Bilagor C1

Förskjutningar under statisk och kvasistatisk belastning: Bilagor C5

Hållbarhet: Bilagor A2, B1

Karakteristiskt motstånd och Förskjutningar för seismiska prestandakategorier C1 och C2:

Motstånd i stålet: Bilagor C2, C3

Motstånd mot utdrag: Bilagor C2, C3

Brottöjning: Bilagor A2

Faktor cirkulärt hål: Bilagor C2, C3

Förskjutningar: Bilagor C5

Säkerhet vid brand (BWR 2)

Reaktion vid brand: Klass (A1)

Motståndskraft mot eld:

Brandmotstånd i stålet (tvärlast): Bilagor C4

Brandmotstånd mot utdrag (draglast): Bilagor C4

Brandmotstånd i stålet (tvärlast): Bilagor C4

8. Lämplig teknisk dokumentation och/eller särskild teknisk dokumentation: -

Prestandan för ovanstående produkt överensstämmer med den angivna prestandan. Denna prestandadeklaration har utfärdats i enlighet med förordning (EU) nr 305/2011 på eget ansvar av den tillverkare som anges ovan.

Undertecknad på tillverkarens vägnar av:



Dr.-Ing. Oliver Geibig, Verkställande direktör affärsenheter och teknik
Tumlingen, 2021-01-19

Jürgen Grün, Verkställande direktör kemi och kvalitet

Denna DoP har förberetts på olika språk. I händelse av tvist om tolkningen ska den engelska versionen alltid råda.

Bilagan innehåller frivilliga och kompletterande information på engelska som överskrider (det specifika språkets) lagkrav.

Specific Part

1 Technical description of the product

The Upat concrete screw UCS is an anchor of sizes 8, 10, 12 and 14 mm made of hardened carbon steel. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C 1
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 1
Displacements (static and quasi-static loading)	See Annex C 5
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C 2, C 3 and C 5

3.2 Safety in case of fire (BWR 2)


Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 4

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with European Assessment Document EAD No. 330232-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1


Product in the installed condition

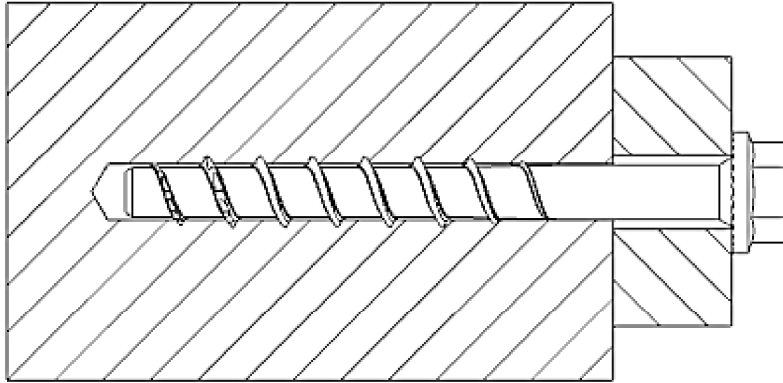

UCS US

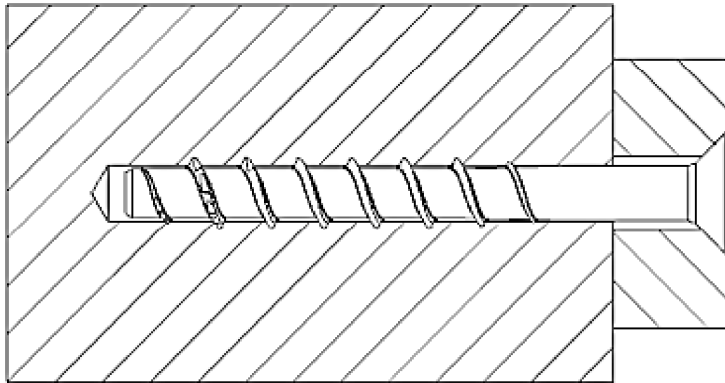

UCS SK

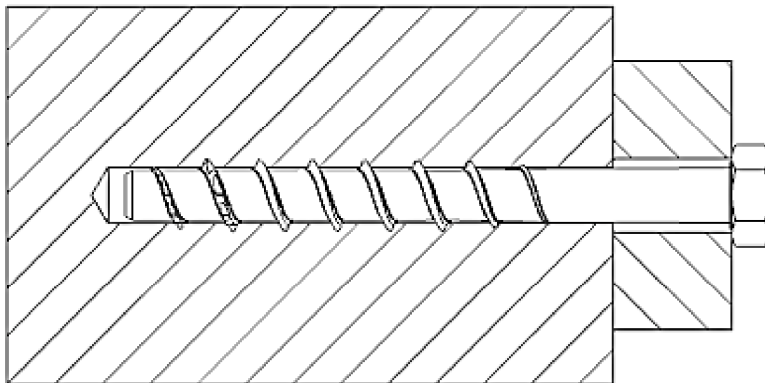

UCS S

Upat concrete screw UCS

Product description
Product in the installed condition


Annex A 1

Appendix 2 / 12

Table A1: Material and screw types

Type of screw / size			UCS US / SK / S			
			8	10	12	14
Thread outer diameter	d_a	[mm]	10,3	12,5	14,5	16,6
Core diameter	d_k	[mm]	7,4	9,4	11,3	13,3
Shaft diameter	d_s	[mm]	8,0	9,9	11,7	13,7
Material			Hardened carbon steel; $A_{5\%} \geq 8\%$			
Coating			galvanized			
Hexagon head with formed washer (US)						
Hexagon head with formed washer (US TX)						
Countersunk Head (SK)						
Hexagon Head (S)						
Hexagon Head (S TX)						

Head Marking



UCS : Product description

10: screw size

XXX: screw length

Upat concrete screw UCS

Product description
Material and screw types

Annex A 2

Appendix 3 / 12

Specifications of intended use

Table B1.1: Anchorages subject to

Size	8		10			12			14		
Nominal embedment depth [mm]	50	65	55	65	85	60	75	100	65	85	115
Static and quasi-static loads in cracked and uncracked concrete	✓										
Fire exposure											
Seismic performance category C1		✓			✓			✓			✓
Seismic performance category C2											

Base materials:

- Reinforced and unreinforced normal weight concrete according to EN 206:2013
- Strength classes C20/25 to C50/60 according to EN 206:2013
- Non-cracked or cracked concrete: All sizes and all embedment depths

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions.

Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the screw is indicated on the design drawings (e.g. position of the screw relative to reinforcement or to supports, etc.).
- Design of fastenings according to EN 1992-4:2018 and EOTA Technical Report TR 055

Installation:

- Hammer drilling or diamond drilling or hollow drilling according to Annex B4: All sizes and all embedment depths.
- Screw installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on site.
- In case of aborted hole: New hole must be drilled at a minimum distance of twice the depth of the aborted hole or closer, if the hole is filled with a high strength mortar and only if the hole is not in the direction of the oblique tensile or shear load.
- Adjustability according to Annex B3 for: All sizes and all embedment depths.
- Cleaning of drill hole is not necessary when using a hollow drill or:
 - If drilling vertically upwards
 - If drilling vertical downwards and the drill hole depth has been increased. It is recommended to increase the drill depth with additional $3 d_0$.
- After correct installation further turning of the screw head should not be possible
- The head of the screw must be fully engaged on the fixture and show no signs of damage.
- For Seismic Performance Category C2 applications: The gap between screw shaft and fixture must be filled with mortar; compressive strength $\geq 50 \text{ N/mm}^2$ (for example UPM 44 or UPM 55).

Upat concrete screw UCS


Intended Use
Specifications

Annex B 1

Appendix 4 / 12

Table B2.1: Installation parameters

screw size			UCS										
			8		10			12			14		
Nominal embedment depth	h_{nom}	[mm]	50	65	55	65	85	60	75	100	65	85	115
Nominal drill hole diameter	d_0	[mm]	8		10			12			14		
Cutting diameter of drill bits	$d_{cut} \leq$	[mm]	8,45		10,45			12,50			14,50		
Cutting diameter of diamond drillers	$d_{cut} \leq$	[mm]	8,10		10,30			12,30			14,30		
Clearance hole diameter	d_f	[mm]	10,6 – 12,0		12,8 – 14,0			14,8 – 16,0			16,9 – 18,0		
Wrench size (US,S)	SW	[mm]	13		15			17			21		
Tx size	Tx	-	40		50			-			-		
Countersunk head diameter	d_h	[mm]	18		21			-			-		
Countersunk diameter in fixture	d_c	[mm]	20		23			-			-		
Drill hole depth	$h_1 \geq$	[mm]	60	75	65	75	95	70	85	110	80	100	130
Drill hole depth (with adjustable setting process)	$h_1 \geq$	[mm]	70	85	75	85	105	80	95	120	90	110	140
Thickness of fixture	$t_{fix} \leq$	[mm]	L - h_{nom}										
Length of screw	$L_{min} =$	[mm]	50	65	55	65	85	60	75	100	65	85	115
	$L_{max} =$	[mm]	400	415	405	415	435	410	425	450	415	435	465
Torque impact screw driver	$T_{imp,max}$	[Nm]	600				650						

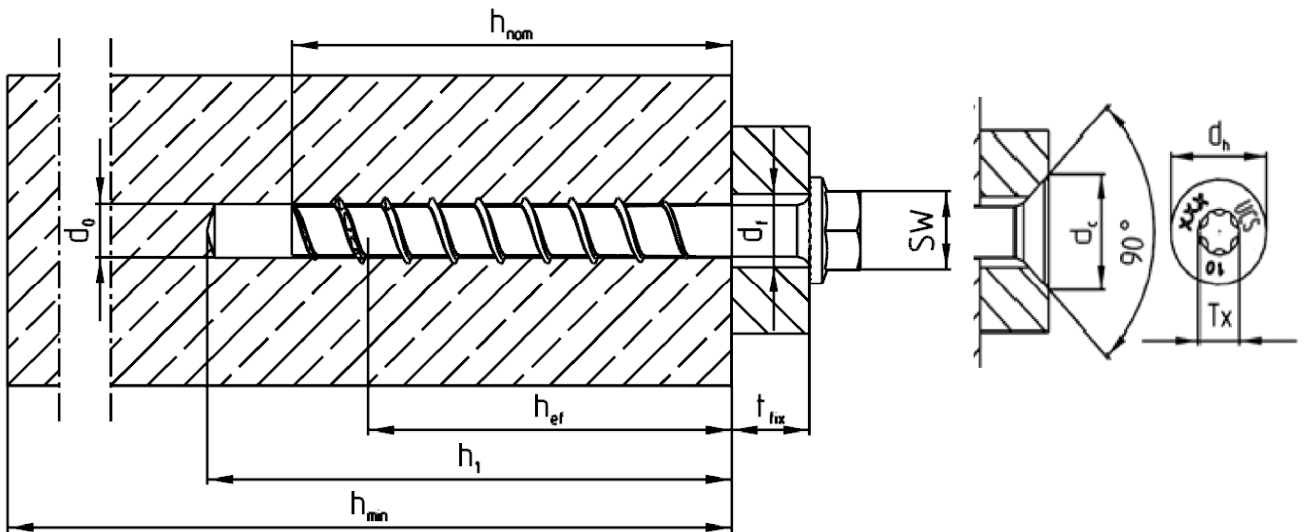

Upat concrete screw UCS

Intended Use


Installation parameters UCS 8 - 14

Annex B 2


Appendix 5 / 12

Adjustment


1)

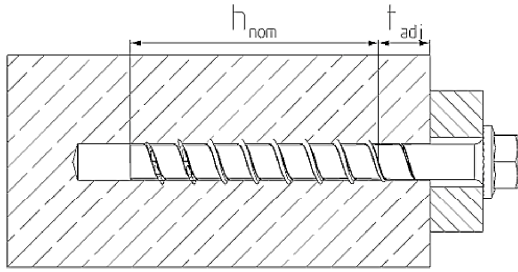


2)

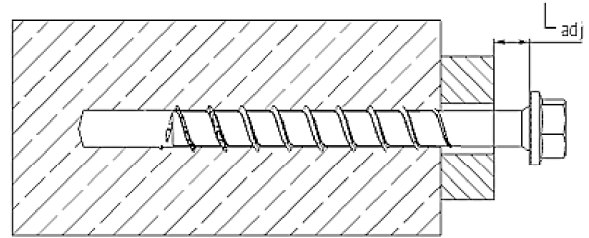

3)

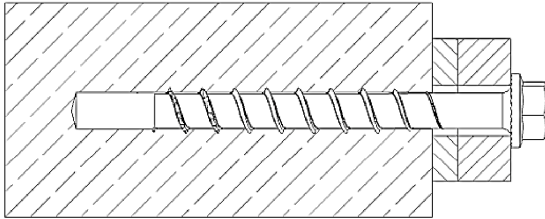

4)

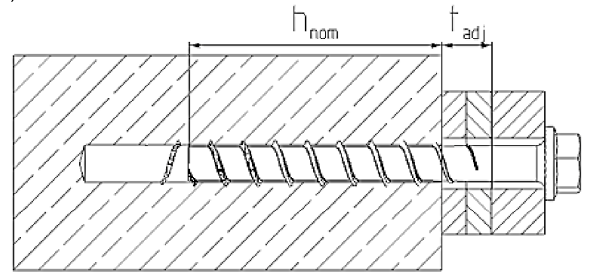

It is permissible to untighten the screw up to two times for adjustment purposes.

Therefore the screw may be untighten to a maximum of $L_{adj} = 20$ mm off the surface of the initial fixture.

The total permissible thickness of shims added during the adjustment process is $t_{adj} = 10$ mm.

Table B3: Minimum thickness of concrete members, minimum spacing and edge distance

Screw size			UCS										
			8		10			12			14		
Nominal embedment depth	h_{nom}	[mm]	50	65	55	65	85	60	75	100	65	85	115
Minimum thickness of concrete member	h_{min}	[mm]	100	120	100	120	140	110	130	150	120	140	180
Minimum spacing	s_{min}	[mm]	35		40			50			60		
Minimum edge distance	c_{min}	[mm]	35		40			50			60		

Upat concrete screw UCS

Intended Use










Adjustment

Minimum thickness of concrete members, minimum spacing and edge distance

Annex B 3

Appendix 6 / 12

Installation instruction

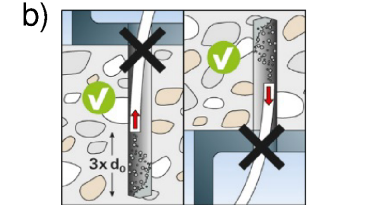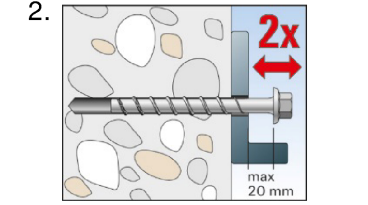		<p>Drill the hole using hammer drill, hollow drill or diamond core drill.</p> <p>Drill hole diameter d_0 and drill hole depth h_1 according to table B2.1</p>
<p>a)</p> 	<p>b)</p> 	<p>Option a): Clean the drill hole</p> <p>Option b): Cleaning of drill hole is not necessary when using a hollow drill or a diamond drill or:</p> <ul style="list-style-type: none"> - If drilling vertically upwards or - If drilling vertically downwards and the drill hole depth has been increased. It is recommended to increase the drill hole depth additional 3 times d_0.
		<p>Installation with any torque impact screw driver up to the maximum mentioned torque moment ($T_{imp,max}$ according to table B2.1). Alternatively, all other tools without an indicated torque moment are allowed (e.g. ratchet spanner). The indicated torque moments for impact screw driver are therefore not decisive.</p>
		<p>After installation a further turning of the screw must not be possible. The head of the screw must be in contact with the fixture and is not damaged</p>
<p>1.</p> 	<p>2.</p> 	<p>Optional: It is permissible to adjust the screw twice. Therefore the screw may be untightened to a maximum of $L_{adj} = 20$ mm off the surface of the initial fixture. The total permissible thickness of shims added during the adjustment process is $t_{adj} = 10$ mm.</p>
<p>3.</p> 		
		<p>For seismic performance category C2 applications: The gap between screw shaft and fixture must be filled with mortar; mortar compressive strength ≥ 50 N/mm² (e. g. UPM 44 or UPM 55). As an aid for filling the gap, the filling disc FFD is recommended.</p>

Upat concrete screw UCS

Intended Use
Installation instructions

Annex B 4

Appendix 7 / 12

Table C1: Performance for static and quasi-static action

Screw size			UCS											
			8		10			12			14			
Nominal embedment depth	h_{nom}	[mm]	50	65	55	65	85	60	75	100	65	85	115	
Steel failure for tension load and shear load														
Characteristic resistance	$N_{Rk,s}$	[kN]	35		55			76			103			
Partial factor	γ_{Ms}	[-]	1,4											
Characteristic resistance	$V_{Rk,s}$	[kN]	13,1	19,0	29,4		34,9	31,9		42,7	46,5		61,7	
Partial factor	γ_{Ms}	[-]	1,5											
Factor for ductility	k_7	[-]	1,0											
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	51		95			165			269			
Pullout failure														
Charact. resistance in concrete C20/25	cracked	$N_{Rk,p}$	[kN]	6	12	9	12	- ¹⁾	- ¹⁾	- ¹⁾	- ¹⁾	- ¹⁾	- ¹⁾	- ¹⁾
	uncracked	$N_{Rk,p}$	[kN]	- ¹⁾										
Increasing factor concrete	C25/30	ψ_c	[-]	1,12										
	C30/37			1,22										
	C35/45			1,32										
	C40/50			1,41										
	C45/55			1,48										
	C50/60			1,58										
Installation factor	γ_{inst}	[-]	1,0											
Concrete cone failure and splitting failure; Concrete pryout failure														
Effective embedment depth	h_{ef}	[mm]	40	52	43	51	68	47	60	81	50	67	93	
Factor for cracked concrete	$k_{cr,N}$	[-]	7,7											
Factor for uncracked concrete	$k_{ucr,N}$	[-]	11,0											
Characteristic edge distance	$c_{cr,N}$	[mm]	1,5 h_{ef}											
Characteristic spacing	$s_{cr,N}$	[mm]	3 h_{ef}											
Charact. edge distance for splitting	$c_{cr,sp}$	[mm]	1,5 h_{ef}											
Charact. spacing for splitting	$s_{cr,sp}$	[mm]	3 h_{ef}											
Factor for pryout failure	k_8	[-]	1,0	2,0	1,0	2,0								
Installation factor	γ_{inst}	[-]	1,0											
Concrete edge failure														
Effective length in concrete	l_f	[mm]	50	65	55	65	85	60	75	100	65	85	115	
Nominal diameter of screw	d_{nom}	[mm]	8		10			12			14			
Adjustment														
max. thickness of adjustment layers	t_{adj}	[mm]	10											
Max. number of adjustments	n_a	[-]	2											

¹⁾ Pullout failure not decisive.

Upat concrete screw UCS

Performances
Performance for static and quasi-static action

Annex C 1

Appendix 8 / 12

Table C2: Characteristic values for Seismic Performance Category C1

Screw size			UCS			
			8	10	12	14
Nominal embedment depth	h_{nom}	[mm]	65	85	100	115
Steel failure for tension load and shear load C1						
Characteristic resistance	$N_{Rk,s,eq}$	[kN]	35	55	76	103
	$V_{Rk,s,eq}$	[kN]	11,4	22,3	26,9	38,3
Without filling of the annular gap	α_{gap}	[-]	0,5			
With filling of the annular gap ¹⁾	α_{gap}	[-]	1,0			
Pullout failure						
Characteristic resistance in cracked concrete	$N_{Rk,p,eq}$	[kN]	12	_2)		
Concrete cone failure						
Effective embedment depth	h_{ef}	[mm]	52	68	81	93
Concrete cone failure	Edge distance	$c_{cr,N}$	1,5 h_{ef}			
	Spacing	$s_{cr,N}$	3 h_{ef}			
Installation factor	γ_{inst}	[-]	1,0			
Concrete pryout failure						
Factor for pryout failure	k_8	[-]	2,0			
Concrete edge failure						
Effective length in concrete	l_f	[mm]	65	85	100	115
Nominal diameter of screw	d_{nom}	[mm]	8	10	12	14

¹⁾ Filling of the annular gap according to Annex B4

²⁾ Pullout failure not decisive.

Upat concrete screw UCS

Performances

Characteristic values for Seismic Performance Category C1

Annex C 2

Appendix 9 / 12

Table C3: Characteristic values for Seismic Performance Category C2

Gap between screw shaft and fixture must be filled with mortar

Screw size			UCS			
			8	10	12	14
Nominal embedment depth	h_{nom}	[mm]	65	85	100	115
Steel failure for tension load and shear load C2						
Characteristic resistance	$N_{Rk,s,eq}$	[kN]	35,0	55	76,0	103
	$V_{Rk,s,eq}$	[kN]	13,3	20,4	29,9	35,2
With filling of the annular gap ¹⁾	α_{gap}	[-]	1,0			
Pullout failure						
Characteristic resistance in cracked concrete	$N_{Rk,p,eq}$	[kN]	2,1	6,0	8,9	17,1
Concrete cone failure						
Effective embedment depth	h_{ef}	[mm]	52	68	81	93
Concrete cone failure	Edge distance	$c_{cr,N}$	1,5 h_{ef}			
	Spacing	$s_{cr,N}$	3 h_{ef}			
Installation factor	γ_{inst}	[-]	1,0			
Concrete pryout failure						
Factor for pryout failure	k_8	[-]	2,0			
Concrete edge failure						
Effective length in concrete	l_f	[mm]	65	85	100	115
Nominal diameter of screw	d_{nom}	[mm]	8	10	12	14

¹⁾ Filling of the annular gap according to annex B4. Application without filling of the annular gap not allowed

Upat concrete screw UCS

Performances

Characteristic values for Seismic Performance Category C2

Annex C 3

Appendix 10 / 12

Table C4: Characteristic values for resistance to fire¹⁾

Screw size			UCS											
Minimum embedment depth			8		10			12			14			
	h_{nom}	[mm]	50	65	55	65	85	60	75	100	65	85	115	
Steel failure for tension load and shear load ($F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}$)														
Characteristic resistance for head shape	US, S	R30	$F_{Rk,s,fi}$	[kN]	2,33		3,45			4,62			6,46	
		R60	$F_{Rk,s,fi}$	[kN]	1,82		2,73			3,66			5,11	
		R90	$F_{Rk,s,fi}$	[kN]	1,30		2,00			2,69			3,75	
		R120	$F_{Rk,s,fi}$	[kN]	1,04		1,64			2,20			3,08	
	SK, US TX, S TX	R30	$F_{Rk,s,fi}$	[kN]	2,12		2,96			-			-	
		R60	$F_{Rk,s,fi}$	[kN]	1,67		2,26			-			-	
		R90	$F_{Rk,s,fi}$	[kN]	1,21		1,56			-			-	
		R120	$F_{Rk,s,fi}$	[kN]	0,99		1,21			-			-	
	All head shapes	R30	$M^0_{Rk,s,fi}$	[Nm]	2,62		4,92			7,83			12,89	
		R60	$M^0_{Rk,s,fi}$	[Nm]	2,05		3,89			6,20			10,19	
		R90	$M^0_{Rk,s,fi}$	[Nm]	1,46		2,85			4,56			7,48	
		R120	$M^0_{Rk,s,fi}$	[Nm]	1,17		2,34			3,73			6,14	
Pullout failure														
Characteristic resistance	R30	$N_{Rk,p,fi}$	[kN]											
	R60	$N_{Rk,p,fi}$	[kN]	1,5	3,0	2,3	3,0	5,0	2,9	4,2	6,6	3,2	4,9	8,1
	R90	$N_{Rk,p,fi}$	[kN]											
	R120	$N_{Rk,p,fi}$	[kN]	1,2	2,4	1,8	2,4	4,0	2,3	3,3	5,2	2,5	3,9	6,5
Edge distance														
R30 to R120	$C_{cr,fi}$	[mm]	$2 h_{ef}$											
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm														
Spacing														
R30 to R120	$S_{cr,fi}$	[mm]	$2 C_{cr,fi}$											
Concrete pryout failure														
R30 to R120	k_g	[-]	1,0	2,0	1,0	2,0								

¹⁾ The embedment depth has to be increased for wet concrete by at least 30 mm compared to the given value.

Upat concrete screw UCS

Performances:
Characteristic values for resistance to fire

Annex C 4

Appendix 11 / 12

Table C5: Displacements due to tension loads (static)

Screw size			UCS										
			8		10			12			14		
Nominal embedment depth	h_{nom}	[mm]	50	65	55	65	85	60	75	100	65	85	115
Tension load in cracked concrete	N	[kN]	2,9	5,7	4,3	5,7	9,6	5,5	8,0	12,5	6,1	9,4	15,3
Displacement	δ_{N0}	[mm]	0,5	0,9	0,7	0,7	0,8	0,7	0,9	0,8	0,8	1,0	0,8
	$\delta_{N\infty}$	[mm]	1,3	1,0	0,7	0,7	0,8	1,3	0,9	0,8	1,1	1,0	1,1
Tension load in non - cracked concrete	N	[kN]	7,9	12,0	6,8	8,8	13,5	7,7	11,0	17,4	8,5	13,2	21,6
Displacement	δ_{N0}	[mm]	0,9	1,4	0,9	0,9	1,4	0,9	1,1	1,4	1,0	1,3	1,1
	$\delta_{N\infty}$	[mm]	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,1	1,3	1,1

Table C6: Displacements due to shear loads (static)

Screw size			UCS										
			8		10			12			14		
Nominal embedment depth	h_{nom}	[mm]	50	65	55	65	85	60	75	100	65	85	115
Shear load in cracked and non-cracked concrete	V	[kN]	6,2	9,0	14,0	14,0	16,6	15,9	15,9	21,2	23,0	23,0	30,5
Displacement	δ_{V0}	[mm]	1,4	1,4	3,2	3,2	3,2	2,5	2,5	3,4	2,8	2,8	5,4
	$\delta_{V\infty}$	[mm]	2,0	2,1	4,9	4,9	4,9	3,8	3,8	5,1	4,2	4,2	8,1

Table C7: Displacements due to tension loads (Seismic Performance Category C2)

Screw size			UCS										
			8		10			12			14		
Nominal embedment depth	h_{nom}	[mm]	65		85			100			115		
Displacement DLS	$\delta_{N,eq(DLS)}$	[mm]	0,5		0,8			0,9			1,3		
Displacement ULS	$\delta_{N,eq(ULS)}$	[mm]	1,7		2,8			2,7			5,0		

Table C8: Displacements due to shear loads (Seismic Performance Category C2)

Screw size			UCS										
			8		10			12			14		
Nominal embedment depth	h_{nom}	[mm]	65		85			100			115		
Displacement DLS	$\delta_{V,eq(DLS)}$	[mm]	1,6		2,7			3,1			4,1		
Displacement ULS	$\delta_{V,eq(ULS)}$	[mm]	3,9		7,1			5,3			8,7		

Upat concrete screw UCS

Performances:
Displacements under tension and shear loads

Annex C 5

Appendix 12 / 12