

PRESTATIEVERKLARING**DoP 0285**

voor Upat High-performance-Bonded-Anchor UHB-I (Verbindingsbevestiging voor gebruik in beton)

NL

1. Unieke identificatiecode van het producttype: **DoP 0285**
2. Beoogd(e) gebruik(en): **Bevestigingen in gescheurd of ongescheurd beton, zie bijlage, met name de bijlagen B1 - B7.**
3. Fabrikant: **Upat Vertriebs GmbH, Bebelstraße 11, 79108 Freiburg im Breisgau, Duitsland**
4. Gemachtigde: **-**
5. Het systeem of de systemen voor de beoordeling en verificatie van de prestatiebestendigheid: **1**
6. Europees beoordelingsdocument: **EAD 330499-00-0601**
Europese technische beoordeling: **ETA-18/0864; 2018-12-12**
Technische beoordelingsinstantie: **DIBt- Deutsches Institut für Bautechnik**
Aangemelde instantie(s): **2873 TU Darmstadt**
7. Aangegeven prestatie(s):
Mechanische weerstand en stabiliteit (BWR 1)
Kenmerkende weerstand tegen trekbelasting (statische en quasi-statische belasting):
Weerstand tegen staalbreuk: Bijlagen C1, C2
Weerstand tegen gecombineerd uittrekken en betonnen kegelbreuk: Bijlagen C1, C2
Weerstand tegen betonnen kegelbreuk: Bijlagen C1, C2
Randafstand om spleetbreuk onder belasting te voorkomen: Bijlagen C1, C2
Robuustheid: Bijlagen C1, C2
Maximaal montagekoppel: Bijlagen B3, B4
Minimale rand- en hartafstand: Bijlagen B3, B4
Kenmerkende weerstand tegen schuifbelasting (statische en quasi-statische belasting):
Weerstand tegen staalbreuk: Bijlagen C3, C4
Weerstand tegen uitbreken (pryout): Bijlagen C3, C4
Weerstand tegen bezwijken van betonranden: Bijlagen C3, C4
Duurzaamheid:
Duurzaamheid: Bijlagen A5, B2
Kenmerkende weerstand en verplaatsingen voor de seismische prestatiecategorieën C1 en C2:
Weerstand tegen staalbreuk: NPD
Weerstand tegen uittrekken: NPD
Breukverlenging: NPD
Factor ringvormige opening: NPD
Verplaatsingen: NPD
Verplaatsingen onder korte- en langetermijnbelading:
Verplaatsingen onder korte- en langetermijnbelading: Bijlagen C5, C6
Hygiëne, gezondheid en milieu (BWR 3)
Content, emission and/or release of dangerous substances: NPD
8. Geëigende technische documentatie en/of specifieke technische documentatie: **-**

De prestaties van het hierboven omschreven product zijn conform de aangegeven prestaties. Deze prestatieverklaring wordt in overeenstemming met Verordening (EU) nr. 305/2011 onder de exclusieve verantwoordelijkheid van de hierboven vermelde fabrikant verstrekt.

Ondertekend voor en namens de fabrikant door:



Dr.-Ing. Oliver Geibig, Directeur Business Units & Engineering
Tumlingen, 2021-01-20



Jürgen Grün, Directeur Chemie & Kwaliteit

Deze DoP is opgesteld in meerdere talen. In het geval van geschillen over de interpretatie zal de Engelse tekst altijd prevaleren.

Het aanhangsel bevat vrijwillige en aanvullende informatie in het Engels die de (taal-neutraal gespecificeerde) wettelijke vereisten overschrijdt.

Specific Part

1 Technical description of the product

The Upat High-performance-Bonded-Anchor UHB is a torque controlled bonded anchor consisting of a mortar cartridge with mortar UPM 66 and an anchor rod UHB – I – A L or UHB - I – A S with hexagon nut and washer.

The anchor rod is placed into a drilled hole filled with injection mortar. The load transfer is realised by mechanical interlock of several cones in the bonding mortar and then via a combination of bonding and friction forces in the anchorage ground (concrete).

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C 1 and C 2
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 3 and C 4
Displacements (static and quasi-static loading)	See Annex C 5 and C 6
Characteristic resistance and displacements for seismic performance categories C1 and C2	No performance assessed

3.2 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed


4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330499-00-0601 the applicable European legal act is: [96/582/EC].


The system to be applied is: 1

Upat High-performance-Bonded-Anchor UHB - I - A L


Pre-positioned installation

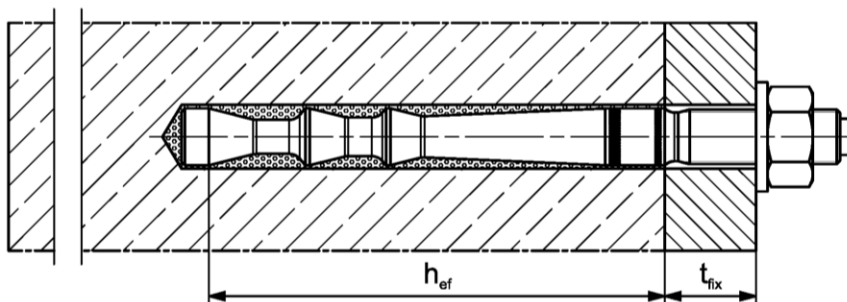

Push through installation (annular gap filled with mortar)

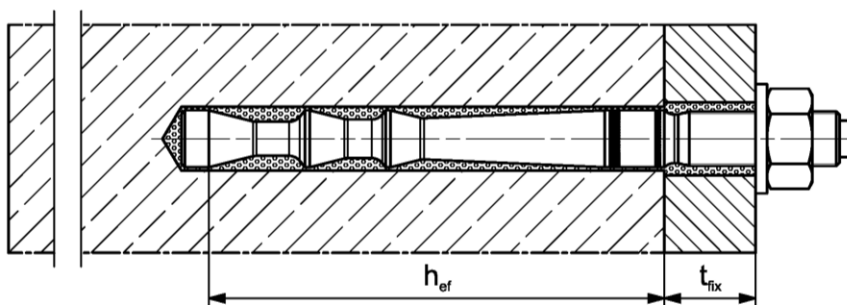

Pre-positioned or push through installation with subsequently pressed filling disk (annular gap filled with mortar)

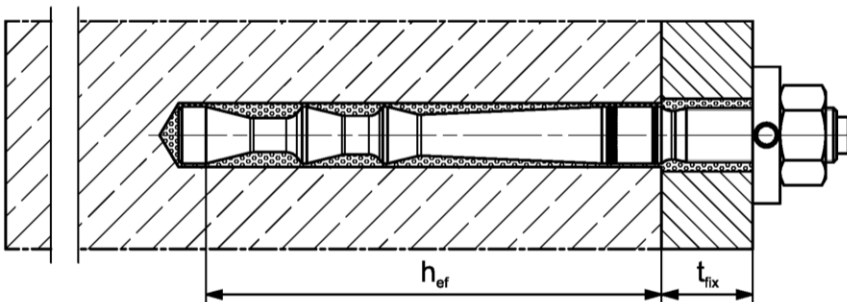

Pictures not to scale

h_{ef} = effective anchorage depth

t_{fix} = thickness of fixture

Upat High-performance-Bonded-Anchor UHB-I

Product description

Installation conditions part 1; UHB - I - A L


Annex A 1

Appendix 2 / 19


Installation conditions part 2

Upat High-performance-Bonded-Anchor UHB - I - A S


Pre-positioned installation

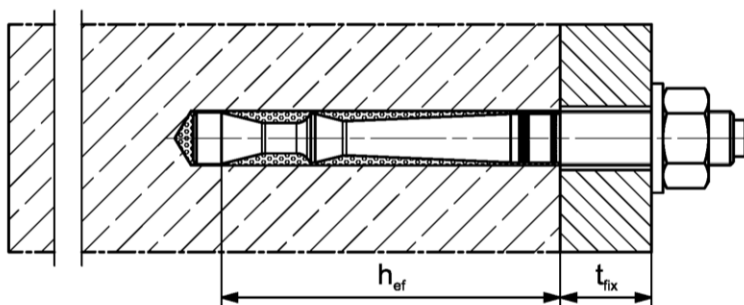

Push through installation

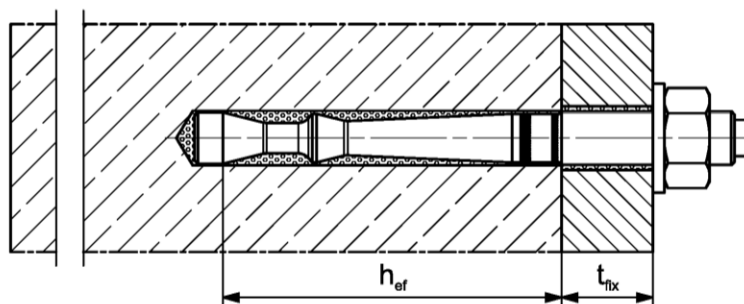

Pre-positioned or push through installation with subsequently pressed filling disk (annular gap filled with mortar)

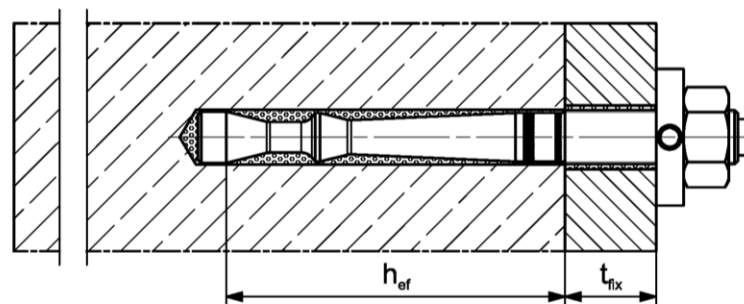

Pictures not to scale

h_{ef} = effective anchorage depth

t_{fix} = thickness of fixture

Upat High-performance-Bonded-Anchor UHB-I

Product description


Installation conditions part 2; UHB - I - A S

Annex A 2


Appendix 3 / 19

Overview system components part 1


Mortar cartridge (shuttle cartridge) with sealing cap; Size: 360 ml

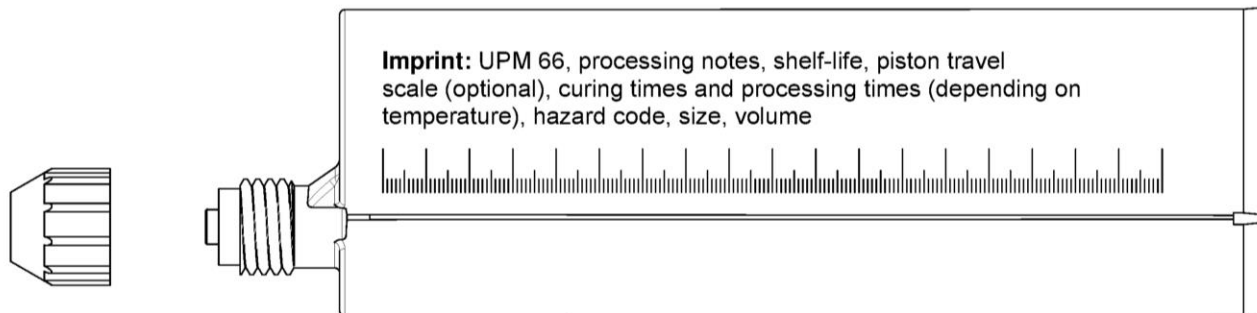

Mortar cartridge (coaxial cartridge) with sealing cap; Size: 150 ml, 300 ml

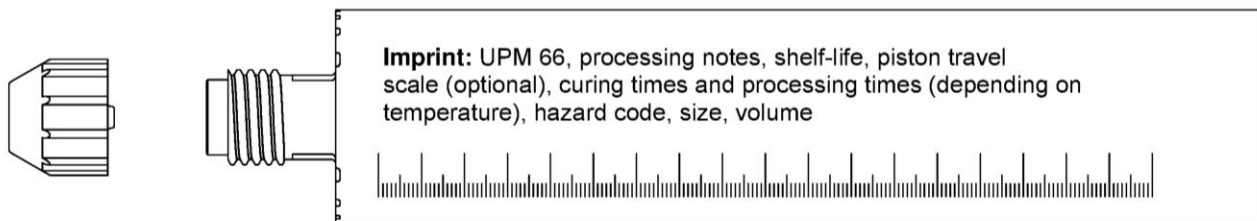

Static mixer Upat MR Plus



Extension tube for static mixer



Cleaning brush BS



Blow-out pump



Pictures not to scale

Upat High-performance-Bonded-Anchor UHB-I

System description

Overview system components part 1;
cartridges / accessories

Annex A 3



Appendix 4 / 19

Overview system components part 2

Upat High-performance-Anchor rod; pre-assembled condition


Upat High-performance-Anchor rod UHB - I - A L

Upat High-performance-Anchor rod UHB - I - A S




Anchor rod UHB - I - A L

Size: M8




Anchor rod UHB - I - A L

Size: M10, M12, M16




Anchor rod UHB - I - A L

Size: M20, M24




Anchor rod UHB - I - A S


Size: M10, M12, M16, M20, M24




Washer



Hexagon nut



Filling disk



Pictures not to scale

Upat High-performance-Bonded-Anchor UHB-I

System description

Overview system components part 2;
Anchor rod / washer / hexagon nut / filling disk

Annex A 4

Appendix 5 / 19

Table A5.1: Materials

Part	Designation	Material		
1	Mortar cartridge	Mortar, hardener, filler		
	Steel grade	Steel, zinc plated	Stainless steel A4	High corrosion resistant steel C
2	Upat High-performance-Anchor rod UHB - I - A L or UHB - I - A S	Property class 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, EN ISO 4042:1999 A2K $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12 \%$ fracture elongation	Property class 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662, 1.4462 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12 \%$ fracture elongation	Property class 80 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12 \%$ fracture elongation
3	Washer ISO 7089:2000	zinc plated $\geq 5 \mu\text{m}$, EN ISO 4042:1999 A2K	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	1.4565; 1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 8; EN ISO 898-2:2012 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:1999 A2K	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
5	Filling disk similar to DIN 6319-G	zinc plated $\geq 5 \mu\text{m}$, EN ISO 4042:1999 A2K	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	1.4565; 1.4529 EN 10088-1:2014


Upat High-performance-Bonded-Anchor UHB-I

System description
Materials**Annex A 5**

Appendix 6 / 19

Specifications of intended use (part 1)

Table B1.1: Overview use and performance categories

Anchorages subject to		UPM 66 with ...					
		UHB - I - A L		UHB - I - A S			
							
Hammer drilling with standard drill bit 		all sizes					
Hammer drilling with hollow drill bit (fischer "FHD", Heller "Duster Expert", Bosch "Speed-Clean" or Hilti "TE-CD, TE-YD") 		Nominal drill bit diameter (d_0) $\geq$ 12 mm					
Static or quasi static load, in	cracked concrete	all sizes	Tables: C1.1, C3.1, C5.1	all sizes	Tables: C2.1, C4.1, C6.1		
	uncracked concrete						
Use category	dry or wet concrete	all sizes					
Kind of installation	Pre-positioned anchor	all sizes					
	Push through anchor	all sizes					
Installation temperature		0°C to +40°C					
In-service temperature		-40°C to +80°C (max. short term temperature +80 °C and max. long term temperature +50 °C)					
Upat High-performance-Bonded-Anchor UHB-I					Annex B 1 Appendix 7 / 19		
Intended use Specifications (part 1)							

Specifications of intended use (part 2)

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres of Strength classes C20/25 to C50/60 according to EN 206:2013

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions
(zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist
(stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure, to permanently damp internal conditions or in other particular aggressive conditions (high corrosion resistant steel)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

Design:

- Anchorages have to be designed by a responsible engineer with experience of concrete anchor design
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages are designed in accordance with EN 1992-4:2018 and EOTA Technical Report TR055

Installation:

- Anchor installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- In case of aborted hole: The hole shall be filled with mortar
- Observe the effective anchorage depth
- Overhead installation is allowed

Upat High-performance-Bonded-Anchor UHB-I

Intended Use
Specifications (part 2)

Annex B 2


Appendix 8 / 19

Table B3.1: Installation parameters for Upat High-performance-Bonded-Anchor rods
UHB - I - A L

Anchor rod UHB - I - A L		Thread	M8x 60	M10x 95	M12x 100 120		M16x 125 145 160			M20x 210	M24x 210
Cone diameter	d _k	[mm]	9,4	10,7	12,5		16,8			23,0	
Width across flats	SW		13	17	19		24			30	36
Nominal drill hole diameter	d ₀		10	12	14		18			25	
Drill hole depth	h ₀		66	101	106	126	131	151	166	216	
Effective anchorage depth	h _{ef}		60	95	100	120	125	145	160	210	
Minimum spacing and minimum edge distance s _{min} = c _{min}			40		50		55	60	70	90	
Diameter of clearance hole in the fixture	pre-positioned anchorage d _f ≤		9	12	14		18			22	26
	push through anchorage d _f ≤		11	14	16		20			26	
Min. thickness of concrete member	h _{min}		100	140		170		190	220	280	
Installation torque	T _{inst}	[Nm]	15	20	40		60			100	
Thickness of fixure	t _{fix} ≤	[mm]	1500								
Filling disk ¹⁾	≥ d _a		-	26	30		38			46	54
	t _s		-	6	6		7			8	10

¹⁾ Using filling disk reduces t_{fix} (usable length of the anchor)

Upat High-performance-Bonded-Anchor rod UHB - I - A L

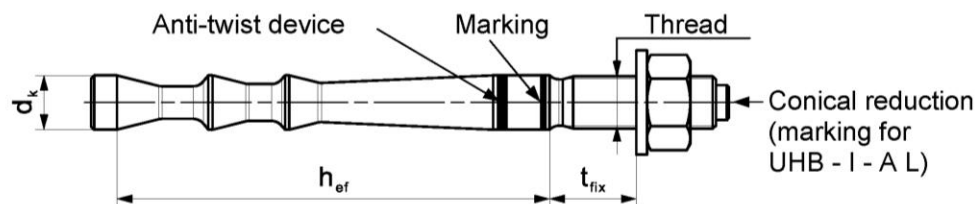


Marking: work symbol, size of anchor, setting depth. e.g.: UHB-I M10x95

For stainless steel additional **A4**. For high corrosion resistant steel additional **C**.

For high corrosion resistant steel additional marking **C** also on the face side

Installation conditions :

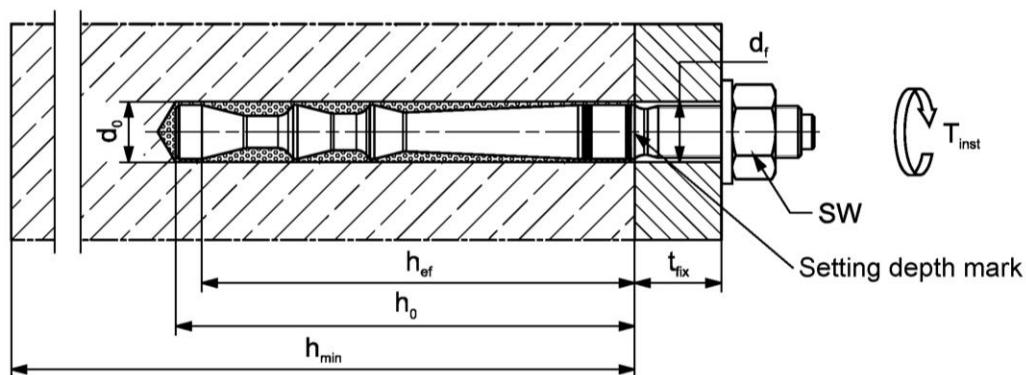

Pictures not to scale

Upat High-performance-Bonded-Anchor UHB-I

Intended Use

Installation parameters Upat High-performance-Bonded-Anchor rod UHB - I - A L

Annex B 3


Appendix 9 / 19

Table B4.1: Installation parameters for Upat High-performance-Bonded-Anchor rods
UHB - I - A S

Anchor rod UHB - I - A S		Thread	M10x		M12x	M16x	M20x	M24x	
			60	75	75	95	170	170	
Cone diameter	d _k	[mm]	9,4		11,3	14,5	23,0		
Width across flats	SW		17		19	24	30	36	
Nominal drill hole diameter	d ₀		10		12	16	25		
Drill hole depth	h ₀		66	81	81	101	176		
Effective anchorage depth	h _{ef}		60	75	75	95	170		
Minimum spacing and minimum edge distance s _{min} = c _{min}			40				50	80	
Diameter of pre-positioned clearance hole in the fixture	d _f ≤		12			14	18	22	26
	d _f ≤		12			14	18	26	
Min. thickness of concrete member	h _{min}		100	120			150	240	
Installation torque	T _{inst}	[Nm]	15		30	50	100		
Thickness of fixure	t _{fix} ≤	[mm]	1500						
filling disk ¹⁾	≥ d _a		26		30	38	46	54	
	t _s		6		6	7	8	10	

¹⁾ Using filling disk reduces t_{fix} (usable length of the anchor)

Upat High-performance-Bonded-Anchor rod UHB - I - A S

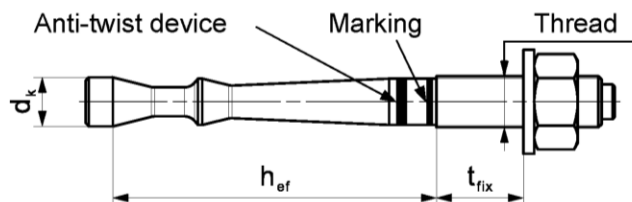


Marking: work symbol, size of anchor, setting depth. e.g.: UHB-I M10x75

For stainless steel additional **A4**. For high corrosion resistant steel additional **C**.

For high corrosion resistant steel additional marking **C** also on the face side

Installation conditions:

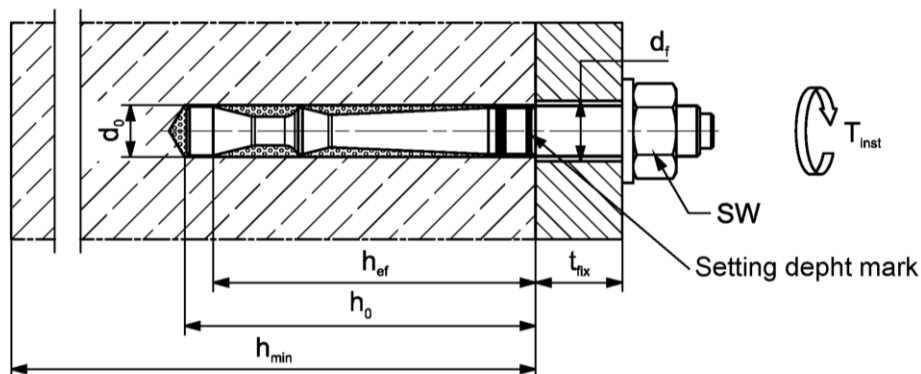

Pictures not to scale

Upat High-performance-Bonded-Anchor UHB-I

Intended Use

Installation parameters Upat High-performance-Bonded-Anchor rod UHB - I - A S

Annex B 4

Appendix 10 / 19

Table B5.1: Parameters of the cleaning brush BS (steel brush)

The size of the steel brush refers to the nominal drill hole diameter

Drill hole diameter	d_0	[mm]	10	12	14	16	18	25
Brush diameter	d_b		11	13	16	20		27



Table B5.2: Maximum processing time of the mortar UPM 66 and minimum curing time
(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature)

Concrete temperature [°C]	Maximum processing time t_{work}	Minimum curing time ¹⁾ t_{cure}
0 to +4	---	3 h
> +5 to +9	15 min	90 min
> +10 to +19	6 min	35 min
> +20 to +29	4 min	20 min
> +30 to +40	2 min	12 min

¹⁾ In wet concrete the curing times must be doubled

Pictures not to scale

Upat High-performance-Bonded-Anchor UHB-I

Intended Use





Parameters of the cleaning brush; Processing times and curing times

Annex B 5

Appendix 11 / 19


Installation instructions part 1; Installation with UPM 66

Drilling and cleaning the hole (hammer drilling with standard drill bit)

1		Drill the hole with hammer drill. Drill hole diameter d_0 and drill hole depth h_0 see Tables B3.1, B4.1
2		Blow out the drill hole twice. If necessary, remove standing water out of the bore hole
		For drill hole diameter $d_0 < 25$ mm with hand-blowout or oil-free compressed air
		For drill hole diameter $d_0 = 25$ mm with oil-free compressed air (> 6 bar) Use a cleaning nozzle.
3		Brush the bore hole twice. Corresponding brushes see Table B5.1
4		Blow out the drill hole twice
		For drill hole diameter $d_0 < 25$ mm with hand-blowout or oil-free compressed air
		For drill hole diameter $d_0 = 25$ mm with oil-free compressed air (> 6 bar) Use a cleaning nozzle.

Go to step 5

Drilling and cleaning the hole (hammer drilling with hollow drill bit)

1		Check a suitable hollow drill (see Table B1.1) for correct operation of the dust extraction
2		Use a suitable dust extraction system, e. g. Bosch GAS 35 M AFC or a comparable dust extraction system with equivalent performance data Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Diameter of drill hole d_0 and drill hole depth h_0 see Tables B3.1, B4.1

Go to step 5

Upat High-performance-Bonded-Anchor UHB-I

Intended use



Installation instructions part 1; Installation with injection mortar

Annex B 6




Appendix 12 / 19

Installation instructions part 2; Installation with UPM 66





Preparing the cartridge

5		Remove the sealing cap Screw on the static mixer (the spiral in the static mixer must be clearly visible)
6	 	Place the cartridge into the dispenser
7	 	Extrude approximately 10 cm of material until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey

Injection of the mortar

		Fill approximately 2/3 of the drill hole with mortar. Exact quantity of mortar (travel scale on the cartridge) see instruction sheet. Fill the drill hole with mortar, always begin from the bottom of the hole to avoid bubbles
8		Push-through installation: By using High-performance-Bonded-Anchor rods UHB - I - AL the drill hole in the fixture must be also filled with mortar. By using High-performance-Bonded-Anchor rods UHB - I - AS is this not necessary.
		For drill hole depth ≥ 170 mm use an extension tube

Installation High-performance-Bonded-Anchor rods UHB - I - A L and UHB - I - A S

9		Only use clean and oil-free anchor rods. Push the anchor rod down to the bottom of the hole, turning it slightly while doing so.
10	 	After inserting the anchor rod UHB - I - AL , surplus mortar must be escaped from the fixture. After inserting the anchor rod UHB - I - AS , surplus mortar must be escaped from the bore hole or must be visible in the fixture. For overhead installations support the anchor rod with wedges. (e.g. Upat centering wedges)
11		Wait for the specified curing time t_{cure} see Table B5.2
12		Mounting the fixture T_{inst} see Tables B3.1, B4.1
Option		After the minimum curing time is reached, the gap between anchor and fixture (annular clearance) may be filled with mortar via the filling disc. Compressive strength ≥ 50 N/mm ² (e.g. UPM 66). ATTENTION: Using filling disk reduces t_{fix} (usable length of the anchor)

Upat High-performance-Bonded-Anchor UHB-I

Intended use

Installation instructions part 2; Installation with injection mortar

Annex B 7

Appendix 13 / 19

Table C1.1: Essential characteristics under static and quasi-static **tension load** for **Upat High-performance-Bonded-Anchors UHB - I - A L**

Anchor rod UHB - I - A L			M8x 60	M10x 95	M12x 100 120		M16x 125 145 160			M20x 210	M24x 210
Bearing capacity under tensile load, steel failure											
Characteristic resistance $N_{Rk,s}$	Steel, zinc plated	[kN]	25,1	34,4	49,8		96,6			137,6	
	Stainless steel A4		25,1	34,4	49,8		96,6			137,6	
	High corrosion resistant steel C										
Partial factors ¹⁾											
Partial factor $\gamma_{Ms,N}$	Steel, zinc plated	[-]	1,5 ¹⁾								
	Stainless steel A4		1,5 ¹⁾								
	High corrosion resistant steel C		1,5 ¹⁾								
Pullout failure in cracked concrete C20/25											
Characteristic resistance	$N_{Rk,p}$	[kN]	--- ²⁾								
Pullout and splitting failure in uncracked concrete C20/25											
Characteristic resistance	$N_{Rk,p}$	[kN]	--- ²⁾								
Spacing	$s_{cr,sp}$	[mm]	300	476	380	600	375	500	580	630	
Edge distance	$c_{cr,sp}$		150	238	190	300	188	250	290	315	
Pullout and splitting failure in uncracked concrete C20/25											
Characteristic resistance	$N_{Rk,p}$	[kN]	20	35	40	50	--- ²⁾	75	95	--- ²⁾	
Spacing	$s_{cr,sp}$	[mm]	3,0h _{ef}								
Edge distance	$c_{cr,sp}$		1,5h _{ef}								
Factors for the compressive strength of concrete > C20/25											
Increasing factor for $N_{Rk,p}$	C25/30	Ψ_c	[-]	1,10							
	C30/37			1,22							
	C35/45			1,34							
	C40/50			1,41							
	C45/55			1,48							
	C50/60			1,55							
Factors for concrete cone failure											
Cracked concrete	$k_{cr,N}$	[-]	7,7								
Uncracked concrete	$k_{ucr,N}$		11,0								
Concrete cone failure											
Effective anchorage depth	h_{ef}	[mm]	60	95	100	120	125	145	160	210	
Partial factor ^{1) 3)}	γ_{Mc}	[-]	1,8								

¹⁾ In absence of other national regulations.

2) Not decisive

3) $\gamma_{\text{inst}} = 1,2$ is included.

Upat High-performance-Bonded-Anchor UHB-I	Annex C 1 Appendix 14 / 19
Performance Essential characteristics under static and quasi-static tension load for Upat High-performance-Bonded-Anchors UHB - I - A L	

Table C2.1: Essential characteristics under static and quasi-static tension load for Upat High-performance-Bonded-Anchors UHB - I - A S									
Anchor rod UHB - I - A S			M10x		M12x	M16x	M20x	M24x	
			60	75	75	95	170	170	
Bearing capacity under tensile load, steel failure									
Characteristic resistance $N_{Rk,s}$	Steel, zinc plated	[kN]	25,1		34,4	61,6	128,5		
	Stainless steel A4		25,1		34,4	61,6	128,5		
	High corrosion resistant steel C								
Partial factors ¹⁾									
Partial factor $\gamma_{Ms,N}$	Steel, zinc plated	[-]	1,5 ¹⁾						
	Stainless steel A4		1,5 ¹⁾						
	High corrosion resistant steel C		1,5 ¹⁾						
Pullout failure in cracked concrete C20/25									
Characteristic resistance	$N_{Rk,p}$	[kN]	--- ²⁾						
Pullout and splitting failure in uncracked concrete C20/25									
Characteristic resistance	$N_{Rk,p}$	[kN]	--- ²⁾						
Spacing	$s_{cr,sp}$	[mm]	300			340	510		
Edge distance	$c_{cr,sp}$		150			170	255		
Pullout and splitting failure in uncracked concrete C20/25									
Characteristic resistance	$N_{Rk,p}$	[kN]	20	25		40	--- ²⁾		
Spacing	$s_{cr,sp}$	[mm]	3,0h _{ef}						
Edge distance	$c_{cr,sp}$		1,5h _{ef}						
Factors for the compressive strength of concrete > C20/25									
Increasing factor for $N_{Rk,p}$	C25/30	Ψ_c	[-]	1,10					
	C30/37			1,22					
	C35/45			1,34					
	C40/50			1,41					
	C45/55			1,48					
	C50/60			1,55					
Factors for concrete cone failure									
Cracked concrete	$k_{cr,N}$	[-]	7,7						
Uncracked concrete	$k_{ucr,N}$		11,0						
Concrete cone failure									
Effective anchorage depth	h_{ef}	[mm]	60	75		95	170		
Partial factor ^{1) 3)}	γ_{Mc}	[-]	1,8						
¹⁾ In absence of other national regulations. ²⁾ Not decisive ³⁾ $\gamma_{inst} = 1,2$ is included.									
Upat High-performance-Bonded-Anchor UHB-I								Annex C 2 Appendix 15 / 19	
Performance									
Essential characteristics under static and quasi-static tension load for Upat High-performance-Bonded-Anchors UHB - I - A S									

Table C3.1: Essential characteristics under static and quasi-static **shear load** for **Upat High-performance-Bonded-Anchors UHB - I - A L**

Anchor rod UHB - I - A L			M8x 60	M10x 95	M12x 100 120		M16x 125 145 160			M20x 210	M24x 210
Bearing capacity under shear load, steel failure											
without lever arm											
Characteristic resistance	Steel, zinc plated	$V_{Rk,s}^0$ [kN]	13,7	20,8	30,3		56,3			87,9	126,9
	Stainless steel A4 and High corrosion resistant steel C		15,2	23,2	33,7		62,7			97,9	141
with lever arm											
Characteristic bending moment	Steel, zinc plated	$M_{Rk,s}^0$ [Nm]	31	62	105		266			519	896
	Stainless steel A4 and High corrosion resistant steel C		31	62	105		266			519	896
Partial factors											
Partial factor ¹⁾		$\gamma_{Ms,V}$	[-]	1,25							
Ductility factor		k_7	[-]	1,0							
Concrete pry-out failure											
Factor		k_8	[-]	2,0							
Partial factor ¹⁾		γ_{Mcp}		1,5							
Concrete edge failure											
Effective length of anchor		l_f	[mm]	60	95	100	112	125	144		200
Calculation diameter		d		10	12	14		18		25	
Partial factor ¹⁾		γ_{Mc}	[-]	1,5							

¹⁾ In absence of other national regulations.

Upat High-performance-Bonded-Anchor UHB-I	Annex C 3 Appendix 16 / 19
Performance Essential characteristics under static and quasi-static shear load for Upat High-performance-Bonded-Anchors UHB - I - A L	

Table C4.1: Essential characteristics under static and quasi-static **shear load** for **Upat High-performance-Bonded-Anchors UHB - I - A S**

Anchor rod UHB - I - A S			M10x		M12x	M16x	M20x	M24x
			60	75	75	95	170	170
Bearing capacity under shear load, steel failure								
without lever arm								
Characteristic resistance	Steel, zinc plated	$V_{Rk,s}^0$	[kN]	19,7	27,3	50,8	80,3	114,2
	Stainless steel A4			24,1	33,7	62,7	97,9	124,5
	High corrosion resistant steel C			24,1	33,7	62,7	97,9	141
with lever arm								
Characteristic bending moment	Steel, zinc plated	$M_{Rk,s}^0$	[Nm]	62	105	266	519	896
	Stainless steel A4 and High corrosion resistant steel C			62	105	266	519	896
Partial factors								
Partial factor ¹⁾		$\gamma_{Ms,V}$	[-]	1,25				
Ductility factor		k_7	[-]	1,0				
Concrete pry-out failure								
Factor		k_8	[-]	2,0				
Partial factor ¹⁾		γ_{Mcp}	[-]	1,5				
Concrete edge failure								
Effective length of anchor	l_f	[mm]	60	75	95	170		
Calculation diameter	d		10	12	16	25		
Partial factor ¹⁾		γ_{Mc}	[-]	1,5				

¹⁾ In absence of other national regulations.

Upat High-performance-Bonded-Anchor UHB-I	Annex C 4 Appendix 17 / 19
Performance Essential characteristics under static and quasi-static shear load for Upat High-performance-Bonded-Anchors UHB - I - A S	

Table C5.1: Displacement for Upat High-performance-Bonded-Anchor UHB - I - A L

Anchor rod UHB - I - A L	M8x 60	M10x 95	M12x 100 120		125	M16x 145	160	M20x 210	M24x 210
Displacement under tension load									
Cracked concrete									
Tension load [kN]	6,6	15,9	17,1	22,5	24,0	30,0	34,7	52,2	52,2
δ_{N0} [mm]	0,8				0,6				
$\delta_{N\infty}$	1,7								
Uncracked concrete									
Tension load [kN]	9,3	22,3	24,0	31,6	33,6	42,0	48,7	73,2	73,2
δ_{N0} [mm]	0,2	0,4						0,6	
$\delta_{N\infty}$	1,7								
Displacement under shear load									
Uncracked or cracked concrete									
Steel zinc plated									
Shear load [kN]	7,8	11,9	17,3		32,2			50,2	72,5
δ_{V0} [mm]	1,2		1,3				3,5		
$\delta_{V\infty}$	1,8		2,0				5,3		
Stainless steel A4									
Shear load [kN]	8,7	13,3	19,3		35,8			55,9	80,6
δ_{V0} [mm]	1,0		1,1		2,2			3,5	
$\delta_{V\infty}$	1,5		1,7		3,3			5,3	
High corrosion resistant steel C									
Shear load [kN]	8,7	13,3	19,3		35,8			55,9	80,6
δ_{V0} [mm]	1,2		1,3		2,4			3,7	5,0
$\delta_{V\infty}$	1,8		2,0		3,6			5,6	7,5

Table C6.1: Displacement for Upat High-performance-Bonded-Anchor UHB - I - A S

Anchor rod UHB - I - A S	M10x 60	75	M12x 75	M16x 95	M20x 170	M24x 170
Displacement under tension load						
Cracked concrete						
Tension load [kN]	6,6	11,1	15,9	38,0		
δ_{N0} [mm]	0,8	0,3	0,4	0,6		
$\delta_{N\infty}$	1,7					
Uncracked concrete						
Tension load [kN]	9,3	15,6	22,3	53,3		
δ_{N0} [mm]	0,2				0,5	
$\delta_{N\infty}$	1,7					
Displacement under shear load						
Cracked or uncracked concrete						
Steel zinc plated						
Shear load [kN]	11,3	12,7	29,0	45,9	65,3	
δ_{V0} [mm]	1,2	1,5	2,8			
$\delta_{V\infty}$	1,8	2,3	4,2			
Stainless steel A4						
Shear load [kN]	13,8	19,3	35,8	55,9	71,1	
δ_{V0} [mm]	1,0	1,1	2,2	3,5		
$\delta_{V\infty}$	1,5	1,7	3,3	5,3		
High corrosion resistant steel C						
Querlast [kN]	13,8	19,3	35,8	55,9	80,6	
δ_{V0} [mm]	1,2	1,3	2,4	3,7	5,0	
$\delta_{V\infty}$	1,8	2,0	3,6	5,6	7,5	
Upat High-performance-Bonded-Anchor UHB-I					Annex C 6 Appendix 19 / 19	
Performance Displacement for Upat High-performance-Bonded-Anchor UHB - I - A S						