

**DEKLARACJA WŁAŚCIWOŚCI UŻYTKOWYCH****DoP 0206**

dla Upat UKA3 Plus (Łączniki metalowe do stosowania w betonie)

PL

1. Niepowtarzalny kod identyfikacyjny typu wyrobu: **DoP 0206**
2. Zamierzone zastosowanie: **Mocowanie w betonie zarysowanym lub niezarysowanym, zobacz załącznik, w szczególności aneksy B1 - B7.**
3. Producent: **Upat Vertriebs GmbH, Bebelstraße 11, 79108 Freiburg im Breisgau, Niemcy**
4. Upoważniony przedstawiciel: **-**
5. System(-y) oceny i weryfikacji stałości właściwości użytkowych: **1**
6. Europejski dokument oceny: **ETAG 001, Part 5, April 2013, użyty jako EAD**  
Europejska ocena techniczna: **ETA-17/0197; 2017-04-03**  
Jednostka ds. oceny technicznej: **DIBt- Deutsches Institut für Bautechnik**  
Jednostka lub jednostki notyfikowane: **2873 TU Darmstadt**
7. Deklarowane właściwości użytkowe:  
**Wytrzymałość mechaniczna i stabilność osadzenia (BWR 1)**  
**Nośność charakterystyczna na wrywanie (nośności statyczne i quasi-statyczne):**  
Nośność do uszkodzenia stali: Aneksy C1, C2  
Nośność na wrywanie i zniszczenie stożka betonu: Aneks C4, C5  
Nośność do wyrwania stożka betonu: Aneks C3  
Odległość od krawędzi zapobiegająca pękaniu pod obciążeniem: Aneks C3  
Solidność: Aneksy C3, C4, C5  
Maksymalny moment dokręcania: Aneksy B3, B4  
Minimalne odstępki osiowe i krawędziowe: Aneksy B3, B4  
**Nośność charakterystyczna na ścinanie (nośności statyczne i quasi-statyczne):**  
Nośność do uszkodzenia stali: Aneksy C1, C2  
Nośność do uszkodzenia wyważenia: Aneks C3  
Nośność do zniszczenia krawędzi betonu: Aneks C3  
**Nośność charakterystyczna i przemieszczenia w warunkach sejsmicznych dla kategorii C1 i C2:**  
Nośność na wrywanie, zmiany, kategoria C1: NPD  
Nośność na wrywanie, zmiany kategoria C2: NPD  
Nośność na ścinanie, zmiany, kategoria C1: NPD  
Nośność na ścinanie, zmiany, kategoria C2: NPD  
Współczynnik szczeliny pierścieniowej: NPD  
**Przemieszczenia pod obciążeniem krótko- i długoterminowym:**  
Przemieszczenia pod obciążeniem krótko- i długoterminowym: Aneks C6  
**Higiena, zdrowie i środowisko (BWR 3)**  
Treść, emisja i / lub uwalnianie substancji niebezpiecznych: NPD
8. Odpowiednia dokumentacja techniczna lub specjalna dokumentacja techniczna: **-**

 $\psi_{sus}^0 = \text{NPD}$ 

Właściwości użytkowe określonego powyżej wyrobu są zgodne z zestawem deklarowanych właściwości użytkowych. Niniejsza deklaracja właściwości użytkowych wydana zostaje zgodnie z rozporządzeniem (UE) nr 305/2011 na wyłączną odpowiedzialność producenta określonego powyżej.

W imieniu producenta podpisał(-a):

Dr.-Ing. Oliver Geibig, Dyrektor Zarządzający ds. Jednostek Biznesowych i Inżynierii  
Tumlingen, 2021-03-01

Jürgen Grün, Dyrektor Zarządzający ds. Chemii i Jakości

Niniejsza Deklaracja Właściwości Użytkowych została przygotowana w różnych językach. W razie wątpliwości w interpretacji, wersja angielska jest zawsze miarodajna.

Załącznik zawiera dobrowolne i uzupełniające informacje w języku angielskim (neutralne językowo), a wykraczające poza wymagania prawne.

## Specific Part

### 1 Technical description of the product

The Upat UKA3 Plus is a bonded anchor for use in concrete consisting of a capsule UKA3 Plus and a steel element according to Annex A1.

The capsule UKA3 Plus is placed in the hole and the steel element is driven by machine with simultaneous hammering and turning.

The anchor rod is anchored via the bond between steel element, chemical mortar and concrete. The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic values under static and quasi-static action, Displacements	See Annex C 1 to C 6

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

#### 3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

#### 3.4 Safety in use (BWR 4)

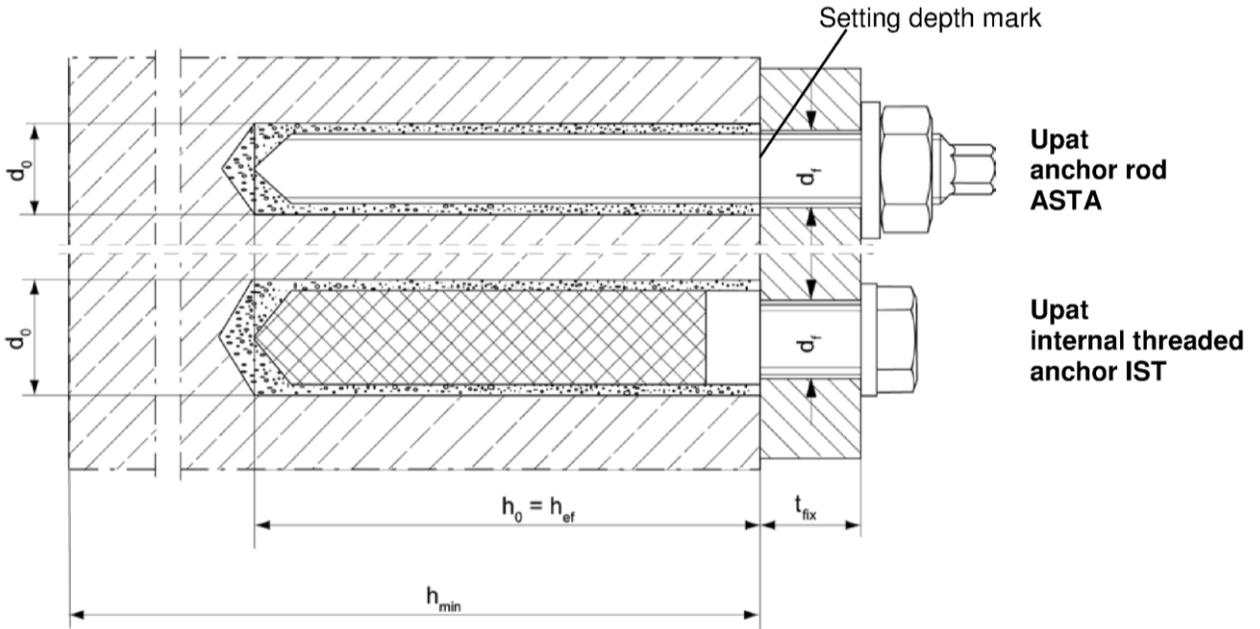
The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with guideline for European technical approval ETAG 001, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [96/582/EC].


The system to be applied is: 1

# Installation conditions



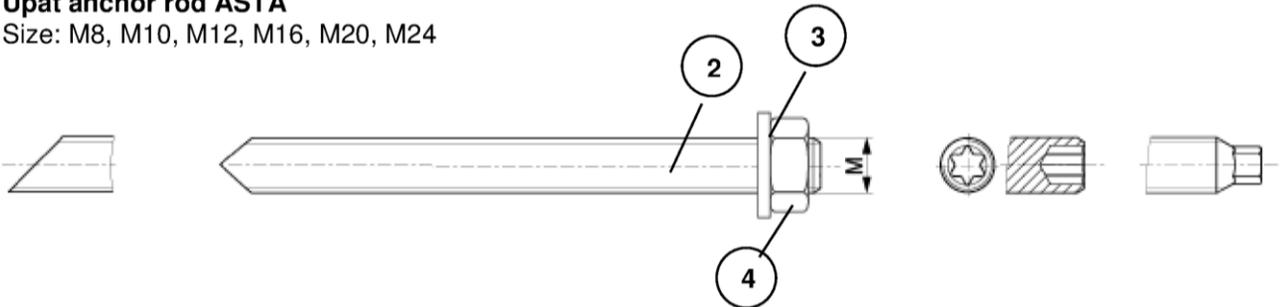
## Capsule UKA3 Plus

Size: 8, 10, 12, 16, 16E, 20 / 22, 24



## Upat anchor rod ASTA

Size: M8, M10, M12, M16, M20, M24



## Upat internal threaded anchor IST

Größe: M8, M10, M12, M16, M20



Descriptions of parts see Annex A 2

Upat UKA3 Plus

### Product description

Installation conditions

Capsule / anchor rod / internal threaded anchor

## Annex A 1

Appendix 3 / 17

**Table A1: Materials**

Part	Designation	Material		
1	Capsule UKA3 Plus	Mortar, hardener, filler		
	Steel grade	Steel, zinc plated	Stainless steel A4	High corrosion resistant steel C
2	Anchor rod	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$ , EN ISO 4042:1999 A2K or hot-dip galvanized $\geq 40 \mu\text{m}$ EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662, 1.4462 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$	Property class 50 or 80 EN ISO 3506-1:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$
		fracture elongation $A_5 > 8 \%$		
3	Washer ISO 7089:2000	zinc plated $\geq 5 \mu\text{m}$ , EN ISO 4042:1999 A2K or hot-dip galvanized $\geq 40 \mu\text{m}$ EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	1.4565; 1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2012 zinc plated $\geq 5 \mu\text{m}$ , ISO 4042:1999 A2K or hot-dip galvanized $\geq 40 \mu\text{m}$ EN ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
5	Upat internal threaded anchor IST	Property class 5.8 ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$ , ISO 4042:1999 A2K	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
6	Commercial standard screw or anchor / threaded rod for Upat internal threaded anchor IST	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$ , ISO 4042:1999 A2K fracture elongation $A_5 > 8 \%$	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014 fracture elongation $A_5 > 8 \%$	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014 fracture elongation $A_5 > 8 \%$


Upat UKA3 Plus

**Product description**  
Materials
**Annex A 2**

Appendix 4 / 17

## Specifications of intended use (part 1)

**Table B1:** Overview use and performance categories

Anchorages subject to		UKA3 Plus with ...			
		Upat anchor rod ASTA		Upat internal threaded anchor IST	
					
Hammer drilling with standard drill bit		all sizes		all sizes	
Hammer drilling with hollow drill bit (Heller "Duster Expert" or Hilti "TE-CD, TE-YD")		Nominal drill bit diameter ( $d_0$ ) 12 mm to 28 mm		all sizes	
Static and quasi static load, in	uncracked concrete	all sizes	Tables: C1, C3, C4, C6	all sizes	Tables: C2, C3, C5, C7
	cracked concrete	M10, M12, M16, M20, M24		all sizes	
	Use category	dry or wet concrete		all sizes	
	flooded hole	M12, M16, M20, M24		M8, M10, M16	
Installation temperature		-15 °C to +40 °C			
In-service temperature	Temperature range I	-40 °C bis +40 °C (max. long term temperature +24 °C and max. short term temperature +40 °C)			
	Temperature range II	-40 °C bis +120 °C (max. long term temperature +72 °C and max. short term temperature +120 °C)			

Upat UKA3 Plus

**Intended Use**  
Specifications (part 1)

**Annex B 1**

Appendix 5 / 17

## Specifications of intended use (part 2)

### Base materials:

- Reinforced or unreinforced normal weight concrete Strength classes C20/25 to C50/60 according to EN 206-1:2000

### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure, to permanently damp internal conditions or in other particular aggressive conditions (high corrosion resistant steel)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

### Design:

- Anchorages have to be designed by a responsible engineer with experience of concrete anchor design
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages under static or quasi-static actions are designed in accordance with EOTA Technical Report TR 029 "Design of bonded anchors" Edition September 2010 or CEN/TS 1992-4:2009

### Installation:

- Anchor installation has to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- In case of aborted hole: The hole shall be filled with mortar
- Anchorage depth should be marked and adhered to on installation
- Overhead installation is allowed

Upat UKA3 Plus

**Intended Use**  
Specifications (part 2)

**Annex B 2**

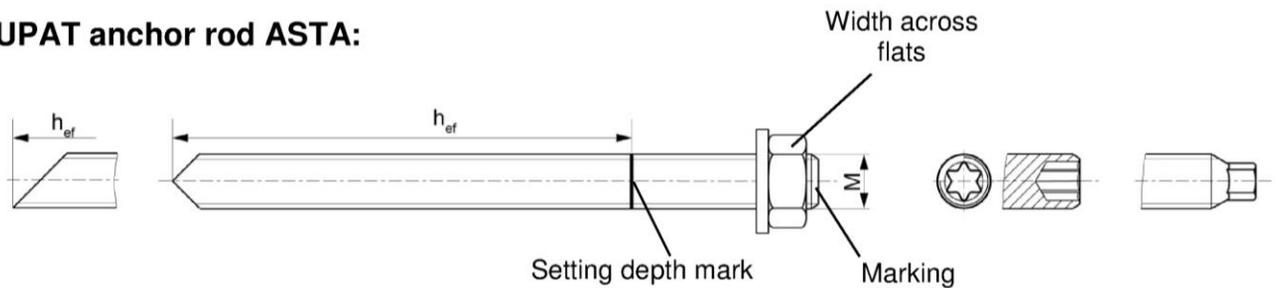
Appendix 6 / 17

**Table B2: Installation parameters for Upat anchor rods ASTA**

Size		M8	M10	M12	M16	M20	M24	
Width across flats	SW	13	17	19	24	30	36	
Nominal drill bit diameter	$d_0$	10	12	14	18	25	28	
Drill hole depth	$h_0$	$h_0 = h_{ef}$						
Effective anchorage depth	$h_{ef}$	80	90	110	125	170	210	
Minimum spacing and minimum edge distance	$s_{min}$ = $c_{min}$	40	45	55	65	85	105	
Diameter of pre-positioned clearance hole in the fixture <sup>1)</sup>	$d_f$	9	12	14	18	22	26	
Minimum thickness of concrete member	$h_{min}$	$h_{ef} + 30$ ( $\geq 100$ )			$h_{ef} + 2d_0$			
Maximum installation torque	$T_{inst,max}$	[Nm]	10	20	40	60	120	150

<sup>1)</sup> For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

**UPAT anchor rod ASTA:**



**Marking (on random place) UPAT anchor rod ASTA:**

Property class 8.8, stainless steel, property class 80 or high corrosion resistant steel, property class 80: •  
 Stainless steel A4, property class 50 and high corrosion resistant steel, property class 50: ••  
 Or colour coding according to DIN 976-1

Upat UKA3 Plus

**Intended Use**

Installation parameters UPAT anchor rods ASTA

**Annex B 3**

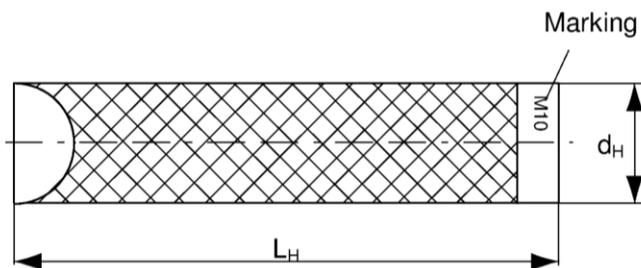
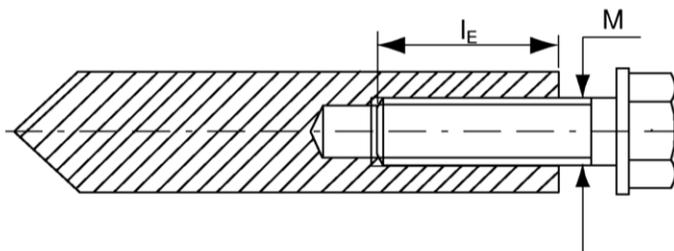
Appendix 7 / 17

**Table B3:** Installation parameters for Upat internal threaded anchors IST

Size		M8	M10	M12	M16	M20
Diameter of anchor	$d_H$	12	16	18	22	28
Nominal drill bit diameter	$d_0$	14	18	20	24	32
Drill hole depth	$h_0$	$h_0 = h_{ef}$				
Effective anchorage depth ( $h_{ef} = L_H$ )	$h_{ef}$	90	90	125	160	200
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$	55	65	75	95	125
Diameter of clearance hole in the fixture <sup>1)</sup>	$d_f$	9	12	14	18	22
Minimum thickness of concrete member	$h_{min}$	120	125	165	205	260
Maximum screw-in depth	$l_{E,max}$	18	23	26	35	45
Minimum screw-in depth	$l_{E,min}$	8	10	12	16	20
Maximum installation torque	$T_{inst,max}$ [Nm]	10	20	40	80	120

<sup>1)</sup> For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

### Upat internal threaded anchor IST



**Marking:** Anchor size  
e.g.: **M10**

Stainless steel additional **A4**  
e.g.: **M10 A4**

High corrosion resistant steel  
additional **C**  
e.g.: **M10 C**

Retaining bolt or threaded rods (including nut and washer) must comply with the appropriate material and strength class of Annex A 2, Table A1

Upat UKA3 Plus

**Intended Use**

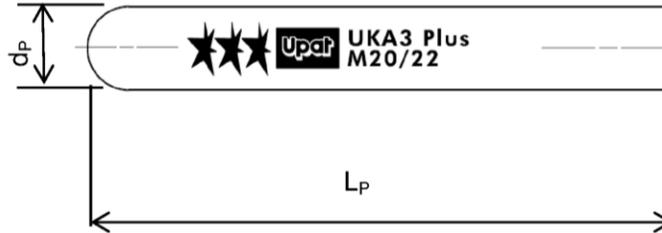
Installation parameters Upat internal threaded anchors IST

**Annex B 4**

Appendix 8 / 17

**Table B4:** Dimensions of capsules UKA3 Plus

Capsule UKA3 Plus		8	10	12	16	16 E	20 / 22	24
Capsule diameter	$d_p$	9,0	10,5	12,5	16,5		23,0	
Capsule length	$L_p$				85	90	97	95

**Table B5:** Assignment of the capsule UKA3 Plus to the Upat anchor rod ASTA

Size ASTA		M8	M10	M12	M16	M20	M24
Effective anchorage depth	$h_{ef}$ [mm]	80	90	110	125	170	210
Related capsule UKA3 Plus	[-]	8	10	12	16	20 / 22	24

**Table B6:** Assignment of the capsule UKA3 Plus to the Upat internal threaded anchor IST

Size IST		M8	M10	M12	M16	M20
Effective anchorage depth	$h_{ef}$ [mm]	90	90	125	160	200
Related capsule UKA3 Plus	[-]	10	12	16	16E	24

**Table B1:** Minimum curing time

(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature; minimal capsule temperature -15 °C)

Concrete temperature [°C]	Minimum curing time $t_{cure}$ [minutes]
-15 to -10	30 hours
-9 to -5	16 hours
-4 to $\pm 0$	10 hours
+1 to +5	45
+6 to +10	30
+11 to +20	20
+21 to +30	5
+31 to +40	3

Upat UKA3 Plus

**Intended Use**


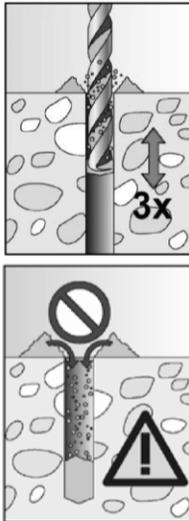
Dimensions of the capsules, Assignment of the capsule to the anchor rod and internal threaded anchor, Minimum curing time

**Annex B 5**

Appendix 9 / 17


## Installation instructions part 1

### Drilling and cleaning the hole (hammer drilling with standard drill bit)

1		<p>Specified drill hole depth <math>h_0</math> should be adhered to (e.g. mark on the drill bit). Drill the hole. Drill hole diameter <math>d_0</math> and drill hole depth <math>h_0</math> see <b>Tables B2, B3</b></p>
2		<p>When reaching the drill hole depth <math>h_0</math> pull out the drill bit whilst power drill is switched on. To reduce the drill dust in the drill hole repeat this step minimum <b>three times</b>, beginning from the drill hole bottom (discharging the bore hole)</p> <p>Trickling of the bore dust into the drill hole has to be avoided. (e.g. with exhausting the drill dust) Blowing out or brushing the drill hole is not necessary</p>

Go to step 3

### Drilling and cleaning the hole (hammer drilling with hollow drill bit)

1		<p>Check a suitable hollow drill (see <b>Table B1</b>) for correct operation of the dust extraction</p>
2		<p>Use a suitable dust extraction system, e.g. Bosch GAS 35 M AFC or a comparable dust extraction system with equivalent performance data</p> <p>Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Diameter of drill hole <math>d_0</math> and drill hole depth <math>h_0</math> see <b>Tables B2, B3</b></p>

Go to step 3

Upat UKA3 Plus

**Intended use**  
Installation instructions part 1







**Annex B 6**

Appendix 10 / 17

## Installation instructions part 2

Installation of capsule UKA3 Plus with Upat anchor rods ASTA or

Upat internal threaded anchors IST

3		<p>Push the capsule UKA3 Plus into the drill hole</p>	 <p>Depending on the anchor being installed, use a suitable setting tool (e.g. MW-SDS)</p>
4			<p>Only use clean and oil-free anchors. Using a suitable adapter, drive the ASTA or Upat internal threaded anchor IST into the capsule using a hammer drill set on rotary hammer action. Stop when the anchor reaches the bottom of the hole and is set to the correct embedment depth</p>
5			<p>When reaching the correct embedment depth, excess mortar must be emerged from the mouth of the drill hole</p>
6			<p>Wait for the specified curing time <math>t_{cure}</math> see <b>Table B7</b></p> <p>Mounting the fixture <math>T_{inst,max}</math> see <b>Table B2, B3</b></p>

Upat UKA3 Plus

**Intended use**  
Installation instructions part 2

**Annex B 7**

Appendix 11 / 17

**Table C1: Characteristic values for the steel bearing capacity of Upat anchor rods ASTA under tensile / shear load**

Size			M8	M10	M12	M16	M20	M24		
<b>Bearing capacity under tensile load, steel failure</b>										
Charact.bearing capacity $N_{Rk,S}$	Steel zinc plated	5.8	Property class	[kN]	19	29	43	79	123	177
		8.8			29	47	68	126	196	282
	Stainless steel A4 and High corrosion resistant steel C	50			19	29	43	79	123	177
		70			26	41	59	110	172	247
		80			30	47	68	126	196	282
<b>Partial safety factors<sup>1)</sup></b>										
Partial safety factor $\gamma_{Ms,N}$	Steel zinc plated	5.8	Property class	[-]	1,50					
		8.8			1,50					
	Stainless steel A4 and High corrosion resistant steel C	50			2,86					
		70			1,50 <sup>2)</sup> / 1,87					
		80			1,60					
<b>Bearing capacity under shear load, steel failure</b>										
<b>without lever arm</b>										
Charact.bearing capacity $V_{Rk,S}$	Steel zinc plated	5.8	Property class	[kN]	9	15	21	39	61	89
		8.8			15	23	34	63	98	141
	Stainless steel A4 and High corrosion resistant steel C	50			9	15	21	39	61	89
		70			13	20	30	55	86	124
		80			15	23	34	63	98	141
Ductility factor acc. to CEN/TS 1992-4-5:2009 Section 6.3.2.1		$k_2$	[-]	1,0						
<b>with lever arm</b>										
Charact.bending moment $M_{Rk,S}^0$	Steel zinc plated	5.8	Property class	[Nm]	19	37	65	166	324	560
		8.8			30	60	105	266	519	896
	Stainless steel A4 and High corrosion resistant steel C	50			19	37	65	166	324	560
		70			26	52	92	232	454	784
		80			30	60	105	266	519	896
<b>Partial safety factors<sup>1)</sup></b>										
Partial safety factor $\gamma_{Ms,V}$	Steel zinc plated	5.8	Property class	[-]	1,25					
		8.8			1,25					
	Stainless steel A4 and High corrosion resistant steel C	50			2,38					
		70			1,25 <sup>2)</sup> / 1,56					
		80			1,33					

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> Only for Upat ASTA made of high corrosion-resistant steel C

Upat UKA3 Plus

**Performances**

Characteristic steel bearing capacity of Upat anchor rods ASTA

**Annex C 1**

Appendix 12 / 17

**Table C2: Characteristic values for the steel bearing capacity of Upat internal threaded anchors IST under tensile / shear load**

Size			M8	M10	M12	M16	M20	
<b>Bearing capacity under tensile load, steel failure</b>								
Characteristic bearing capacity with screw	Property class	5.8	[kN]	19	29	43	79	123
		8.8		29	47	68	108	179
		A4		26	41	59	110	172
		class 70		C	26	41	59	110
<b>Partial safety factors<sup>1)</sup></b>								
Partial safety factor	Property class	5.8	[-]	1,50				
		8.8		1,50				
		A4		1,87				
		class 70		C	1,87			
<b>Bearing capacity under shear load, steel failure</b>								
<b>without lever arm</b>								
Characteristic bearing capacity with screw	Property class	5.8	[kN]	9,2	14,5	21,1	39,2	62,0
		8.8		14,6	23,2	33,7	54,0	90,0
		A4		12,8	20,3	29,5	54,8	86,0
		class 70		C	12,8	20,3	29,5	54,8
Ductility factor acc. to CEN/TS 1992-4-5:2009 Section 6.3.2.1		k <sub>2</sub>	[-]	1,0				
<b>with lever arm</b>								
Characteristic bending moment with screw	Property class	5.8	[Nm]	20	39	68	173	337
		8.8		30	60	105	266	519
		A4		26	52	92	232	454
		class 70		C	26	52	92	232
<b>Partial safety factors<sup>1)</sup></b>								
Partial safety factor	Property class	5.8	[-]	1,25				
		8.8		1,25				
		A4		1,56				
		class 70		C	1,56			

<sup>1)</sup> In absence of other national regulations

Upat UKA3 Plus

**Performances**

Characteristic steel bearing capacity of Upat internal threaded anchor IST

**Annex C 2**

Appendix 13 / 17

**Table C3: General design factors for the bearing capacity under tensile / shear load; uncracked or cracked concrete**

Size		All Sizes						
<b>Bearing capacity under tensile load</b>								
<b>Factors acc. to CEN/TS 1992-4-5:2009 Section 6.2.3.1</b>								
Uncracked concrete	$k_{ucr}$	[-]	10,1					
Cracked concrete	$k_{cr}$		7,2					
<b>Factors for the compressive strength of concrete &gt; C20/25</b>								
Increasing factor for $\tau_{Rk}$	C25/30	$\Psi_c$	[-]	1,02				
	C30/37			1,04				
	C35/45			1,07				
	C40/50			1,08				
	C45/55			1,09				
	C50/60			1,10				
<b>Splitting failure</b>								
Edge distance	$h / h_{ef} \geq 2,0$	$c_{cr,sp}$	[mm]	1,0 $h_{ef}$				
	$2,0 > h / h_{ef} > 1,3$			4,6 $h_{ef}$ - 1,8 h				
	$h / h_{ef} \leq 1,3$			2,26 $h_{ef}$				
Spacing	$s_{cr,sp}$			2 $c_{cr,sp}$				
<b>Concrete cone failure acc. to CEN/TS 1992-4-5:2009 Section 6.2.3.2</b>								
Edge distance	$c_{cr,N}$	[mm]	1,5 $h_{ef}$					
Spacing	$s_{cr,N}$		2 $c_{cr,N}$					
<b>Bearing capacity under shear load</b>								
<b>Installation safety factors</b>								
All installation conditions	$\gamma_2 = \gamma_{inst}$	[-]	1,0					
<b>Concrete pry-out failure</b>								
Factor k acc. to TR029 Section 5.2.3.3 resp. $k_3$ acc. to CEN/TS 1992-4-5:2009 Section 6.3.3	$k_{(3)}$	[-]	2,0					
<b>Concrete edge failure</b>								
The value of $h_{ef}$ (= $l_f$ ) under shear load		[mm]	$h_{ef} = h_0$					
<b>Calculation diameters</b>								
Size			M8	M10	M12	M16	M20	M24
Upat anchor rods ASTA	d	[mm]	8	10	12	16	20	24
Upat internal threaded anchors IST	$d_{nom}$		12	16	18	22	28	---

Upat UKA3 Plus

**Performances**

General design factors relating to the characteristic bearing capacity under tensile / shear load

**Annex C 3**

Appendix 14 / 17

**Table C4: Characteristic values of resistance for Upat anchor rods ASTA; uncracked or cracked concrete**

Size	M8	M10	M12	M16	M20	M24
<b>Combined pullout and concrete cone failure</b>						
Calculation diameter d [mm]	8	10	12	16	20	24
<b>Uncracked concrete</b>						
<b>Characteristic bond resistance in uncracked concrete C20/25</b>						
<u>Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)</u>						
Temperature range I: 24 °C / 40 °C II: 72 °C / 120 °C	$\tau_{Rk,ucr}$ [N/mm <sup>2</sup> ]	12,5	12,5	12,5	12,5	12,5
		10,5	10,5	10,5	10,5	10,5
<u>Hammer-drilling with standard drill bit or hollow drill bit (flooded hole)</u>						
Temperature range I: 24 °C / 40 °C II: 72 °C / 120 °C	$\tau_{Rk,ucr}$ [N/mm <sup>2</sup> ]	---	---	12,5	12,5	12,5
		---	---	10,5	10,5	10,5
<b>Installation safety factors</b>						
Dry and wet concrete	$\gamma_2 = \gamma_{inst}$ [-]	1,2				
Flooded hole		---	1,4			
<b>Cracked concrete</b>						
<b>Characteristic bond resistance in cracked concrete C20/25</b>						
<u>Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)</u>						
Temperature range I: 24 °C / 40 °C II: 72 °C / 120 °C	$\tau_{Rk,cr}$ [N/mm <sup>2</sup> ]	---	4,5	4,5	4,5	4,5
		---	3,5	3,5	3,5	3,5
<u>Hammer-drilling with standard drill bit or hollow drill bit (flooded hole)</u>						
Temperature range I: 24 °C / 40 °C II: 72 °C / 120 °C	$\tau_{Rk,cr}$ [N/mm <sup>2</sup> ]	---	---	4,5	4,5	4,5
		---	---	3,5	3,5	3,5
<b>Installation safety factors</b>						
Dry and wet concrete	$\gamma_2 = \gamma_{inst}$ [-]	---	1,2			
Flooded hole		---	1,4			

Upat UKA3 Plus

**Performances**

Characteristic values for static or quasi-static action under tensile load for Upat anchor rod ASTA (uncracked or cracked concrete)

**Annex C 4**

Appendix 15 / 17

**Table C5: Characteristic values of resistance for Upat internal threaded anchors IST; uncracked or cracked concrete**

Size	M8	M10	M12	M16	M20
<b>Combined pullout and concrete cone failure</b>					
Calculation diameter d [mm]	12	16	18	22	28
<b>Uncracked concrete</b>					
<b>Characteristic bond resistance in uncracked concrete C20/25</b>					
<u>Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)</u>					
Temperature range I: 24 °C / 40 °C II: 72 °C / 120 °C	$\tau_{Rk,ucr}$ [N/mm <sup>2</sup> ]	11	11	11	11
		9,5	9,5	9,5	9,5
<u>Hammer-drilling with standard drill bit or hollow drill bit (flooded hole)</u>					
Temperature range I: 24 °C / 40 °C II: 72 °C / 120 °C	$\tau_{Rk,ucr}$ [N/mm <sup>2</sup> ]	11	11	---	11
		9,5	9,5	---	9,5
<b>Installation safety factors</b>					
Dry and wet concrete	$\gamma_2 = \gamma_{inst}$ [-]	1,2			
Flooded hole		1,4	---	1,4	---
<b>Cracked concrete</b>					
<b>Characteristic bond resistance in cracked concrete C20/25</b>					
<u>Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)</u>					
Temperature range I: 24 °C / 40 °C II: 72 °C / 120 °C	$\tau_{Rk,cr}$ [N/mm <sup>2</sup> ]	4,5	4,5	4,5	4,5
		3,5	3,5	3,5	3,5
<u>Hammer-drilling with standard drill bit or hollow drill bit (flooded hole)</u>					
Temperature range I: 24 °C / 40 °C II: 72 °C / 120 °C	$\tau_{Rk,cr}$ [N/mm <sup>2</sup> ]	4,5	4,5	---	4,5
		3,5	3,5	---	3,5
<b>Installation safety factors</b>					
Dry and wet concrete	$\gamma_2 = \gamma_{inst}$ [-]	1,2			
Flooded hole		1,4	---	1,4	---

Upat UKA3 Plus

**Performances**

Characteristic values for static or quasi-static action under tensile load for Upat internal threaded anchors IST (uncracked or cracked concrete)

**Annex C 5**

Appendix 16 / 17

**Table C6: Displacements for Upat anchor rods ASTA**

Size		M8	M10	M12	M16	M20	M24
<b>Displacement-Factors for tensile load<sup>1)</sup></b>							
<b>Uncracked or cracked concrete; Temperature range I, II</b>							
$\delta_{N0}$ -Faktor	[mm/(N/mm <sup>2</sup> )]	0,07	0,08	0,09	0,10	0,11	0,12
$\delta_{N\infty}$ -Faktor		0,13	0,14	0,15	0,17	0,17	0,18
<b>Displacement-Factors for shear load<sup>2)</sup></b>							
<b>Uncracked or cracked concrete; Temperature range I, II</b>							
$\delta_{V0}$ -Faktor	[mm/kN]	0,18	0,15	0,12	0,09	0,07	0,06
$\delta_{V\infty}$ -Faktor		0,27	0,22	0,18	0,14	0,11	0,09

<sup>1)</sup> Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0\text{-Faktor}} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty\text{-Faktor}} \cdot \tau_{Ed}$$

( $\tau_{Ed}$ : Design value of the applied tensile stress)

<sup>2)</sup> Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0\text{-Faktor}} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty\text{-Faktor}} \cdot V_{Ed}$$

( $V_{Ed}$ : Design value of the applied shear force)

**Table C7: Displacements for Upat internal threaded anchors IST**

Size		M8	M10	M12	M16	M20
<b>Displacement-Factors for tensile load<sup>1)</sup></b>						
<b>Uncracked or cracked concrete; Temperature range I, II</b>						
$\delta_{N0}$ -Faktor	[mm/(N/mm <sup>2</sup> )]	0,09	0,10	0,10	0,11	0,19
$\delta_{N\infty}$ -Faktor		0,13	0,15	0,15	0,17	0,19
<b>Displacement-Factors for shear load<sup>2)</sup></b>						
<b>Uncracked or cracked concrete; Temperature range I, II</b>						
$\delta_{V0}$ -Faktor	[mm/kN]	0,12	0,09	0,08	0,07	0,05
$\delta_{V\infty}$ -Faktor		0,18	0,14	0,12	0,10	0,08

<sup>1)</sup> Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0\text{-Faktor}} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty\text{-Faktor}} \cdot \tau_{Ed}$$

( $\tau_{Ed}$ : Design value of the applied tensile stress)

<sup>2)</sup> Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0\text{-Faktor}} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty\text{-Faktor}} \cdot V_{Ed}$$

( $V_{Ed}$ : Design value of the applied shear force)

Upat UKA3 Plus

**Performances**

Displacements for Upat anchor rods ASTA and Upat internal threaded anchors IST

**Annex C 6**

Appendix 17 / 17