Einfach. Sicher. Upat

DICHIARAZIONE DI PRESTAZIONE

DoP 0264

per ancorante a percussione Upat USA (ancorante meccanico per l'utilizzo nel calcestruzzo) IT

1. Codice di identificazione unico del prodotto-tipo: **DoP 0264**

2. Usi previsti: **Fissaggio post-installato in calcestruzzo non fessurato, vedi appendice, in particolare gli allegati da B1 - B4.**

3. Fabbricante: **Upat Vertriebs GmbH, Bebelstraße 11, 79108 Freiburg im Breisgau, Germany**

4. Mandatario: **–**

5. Sistemi di VVCP: **1**

6. Documento per la valutazione europea: **EAD 330232-00-0601**
   Valutazione tecnica europea: **ETA-10/0172; 2017-04-25**
   Organismo di valutazione tecnica: **DIBt- Deutsches Institut für Bautechnik**
   Organismi notificati: **2873 TU Darmstadt**

7. Prestazioni dichiarate:

Resistenza meccanica e stabilità (BWR 1)

Resistenza caratteristica al carico di tensione (carico statico e quasi-statico):

Resistenza alla rottura dell'acciaio: Allegato C1	E_S= 210 000 MPa
Resistenza alla rottura per sfilamento: Allegato C1	
Resistenza alla rottura del cono di calcestruzzo: Allegato C1	
Robustezza: Allegato C1	
Distanza dal bordo e interassi minimi: Allegato B2	
Distanza dal bordo per evitare lo splitting sotto carico: Allegato C1	$N^0_{Rk,sp}$=NPD

Resistenza caratteristica al carico di taglio (carico statico e quasi statico):

Resistenza alla rottura dell'acciaio (carico di taglio): Allegato C2
Resistenza alla rottura per pry-out: Allegato C3
Resistenza alla rottura del bordo di calcestruzzo: Allegato C3
Spostamenti sotto azioni statiche e quasi statiche: Allegato C4
Durabilità: Allegati A3, B1

Resistenza e spostamenti caratteristici per le categorie di prestazione sismica C1 e C2:

Resistenza alla rottura dell'acciaio: NPD
Resistenza alla rottura per sfilamento: NPD
Allungamento a rottura: NPD
Fattore spazio anulare: NPD
Spostamenti: NPD

Sicurezza in caso di incendio (BWR 2)

Reazione al fuoco: Classe (A1)

Resistenza al fuoco:

Resistenza al fuoco alla rottura dell'acciaio (carico di trazione): NPD
Resistenza al fuoco alla rottura per sfilamento (carico di trazione): NPD
Resistenza la fuoco alla rottura dell'acciaio (carico di taglio): NPD

8. Documentazione tecnica appropriata e/o documentazione tecnica specifica: **–**

La prestazione del prodotto sopra identificato è conforme all'insieme delle prestazioni dichiarate. La presente dichiarazione di prestazione è emessa, in conformità al regolamento (UE) n. 305/2011, sotto la sola responsabilità del fabbricante sopra identificato.

Firmato a nome e per conto del fabbricante da:



Dr.-Ing. Oliver Geibig, Direttore Generale Unità di Business & Engineering



Jürgen Grün, Direttore Generale Chimica & Qualità

Tumlingen, 2021-01-12

Questa Dichiarazione di Prestazione (DoP) è stata preparata in varie lingue. In caso di contestazioni sull'interpretazione, prevarrà sempre la versione inglese.

L'Appendice include informazioni volontarie e complementari in lingua inglese che superano i requisiti di legge (lingua specificata in modo neutrale).

Specific Part

1 Technical description of the product

The Upat Drop-in Anchor USA is an anchor made of galvanized or stainless steel which is placed into a drilled hole and anchored by deformation-controlled expansion.

The fixture shall be anchored with a fastening screw or threaded rod.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance for static and quasi-static loading, displacements	See Annex C 1 to C 4

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorages satisfy requirements for Class A1
Resistance to fire	No performance assessed

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Documents EAD No. 330232-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

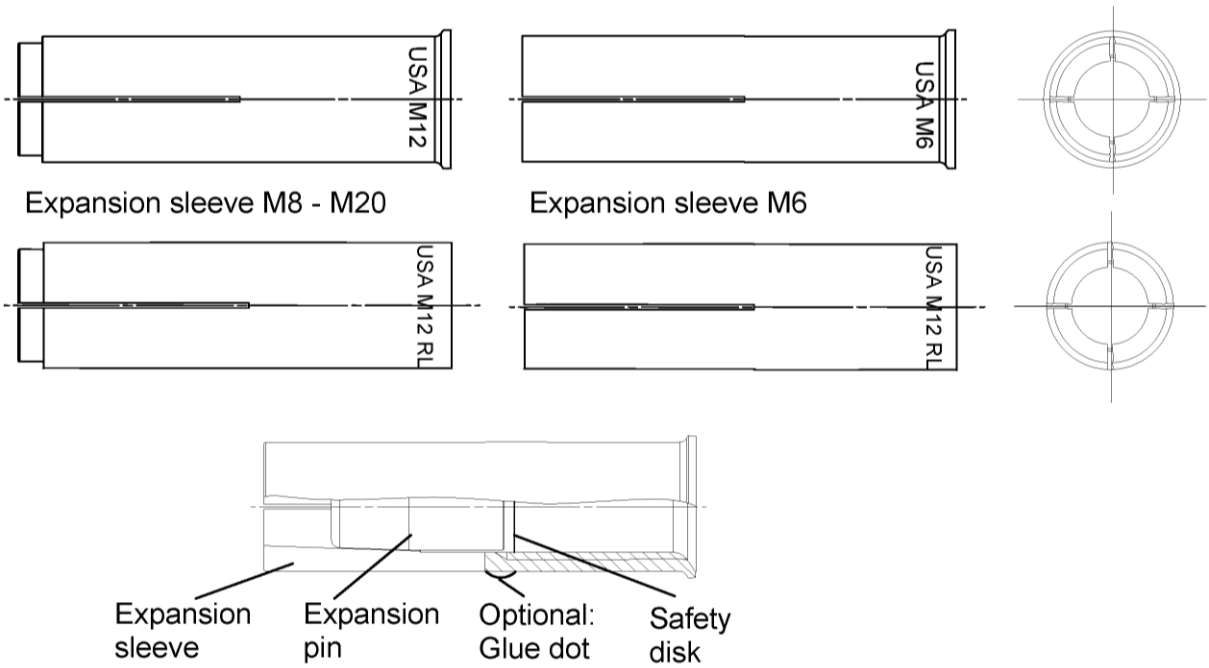

Intended use in concrete

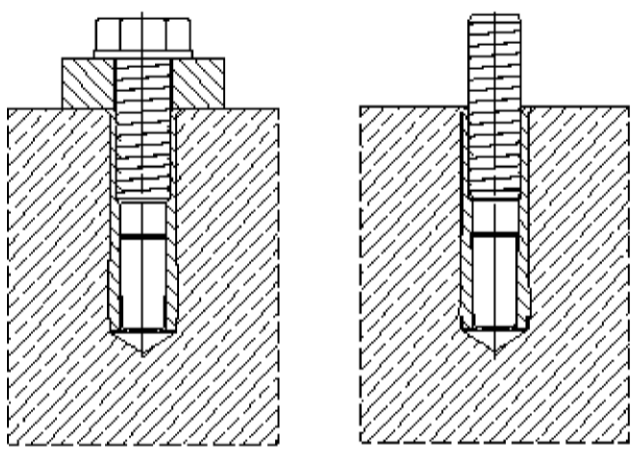

Upat Drop-in Anchor USA

Product description
Anchor types
Installed condition

Annex A 1

Expansion sleeve

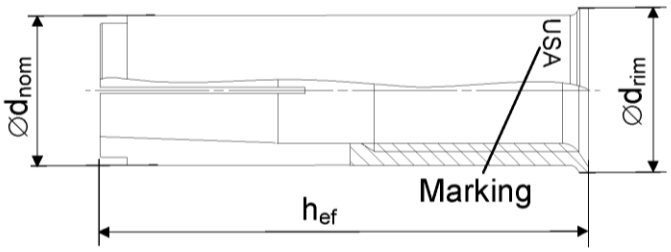

Expansion pin



Anchor size USA	M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x50 D	M16x65	M20x80
h_{ef} [mm]	30	30	40	30	40	50		65	80
∅ d_{nom} [mm]	8	10		12		15	16	20	25
∅ d_{rim} [mm]	9,5	11,5		13,5		16,5	17,5	21,5	27,0
∅ d_1 [mm]	5	6,5		8		10		13,5	17,5
l_1 [mm]	14	13,5		13	18	18		25	26

Distinctive feature



0× groove for:

- USA M6x30..
- USA M8x30..
- USA M10x40..
- USA M12x50..
- USA M16x65..
- USA M20x80..

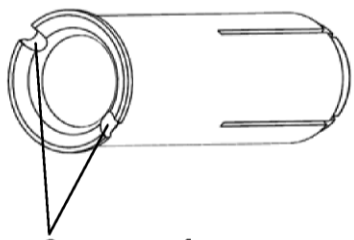

2× groove for:

- USA M8x40..
- USA M10x30..

Marking on anchor body

galvanized steel (gvz)		stainless steel (A4)	
with rim	*rimless*	*with rim*	*rimless*
USA M6x30	USA M6x30 RL	USA M6x30 A4	USA M6x30 RL A4
USA M8x30	USA M8x30 RL	USA M8x30 A4	USA M8x30 RL A4
USA M8x40	USA M8x40 RL	USA M8x40 A4	USA M8x40 RL A4
USA M10x30	USA M10x30 RL	USA M10x30 A4	USA M10x30 RL A4
USA M10x40	USA M10x40 RL	USA M10x40 A4	USA M10x40 RL A4
USA M12x50	USA M12x50 RL	USA M12x50 A4	USA M12x50 RL A4
USA M12x50 D	USA M12x50 RL D	USA M12x50 D A4	USA M12x50 RL D A4
USA M16x65	USA M16x65 RL	USA M16x65 A4	USA M16x65 RL A4
USA M20x80	USA M20x80 RL	USA M20x80 A4	USA M20x80 RL A4

Upat Drop-in Anchor USA

Product description
Anchor types

Annex A 2

Expansion sleeve

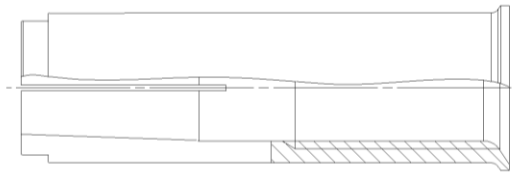

Expansion pin



Table A1: Materials

	Material	
Designation	galvanised steel (≥ 5 µm)	stainless steel
Expansion sleeve	EN 10277:2008 or EN 10084:2008 or EN 10111:2008 or EN 10263:2001 or EN 10087:1998 or ASTM A29/A29M	EN 10088:2005
Expansion pin		
Fastening screw or threaded rod	steel, property class 4.6, 5.6, 5.8 or 8.8 according to EN ISO 898-1:2012	property class 50, 70 or 80 according to EN ISO 3506:2009

Specifications of Intended use

Anchorages subject to:

- Static and quasi-static loads

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000
- Strength classes C20/25 to C50/60 according to EN 206-1:2000
- Non-cracked concrete: all sizes

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions
  (zinc coated steel or stainless steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist
  (stainless steel)

  Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking into account the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.)
- Design of fastenings in accordance to FprEN 1992-4:2016 and EOTA Technical Report TR 055.
- Fasteners can be used as a single fixing for use in structural application.

Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Create drill hole with hammer drill or with hollow drill and vacuum cleaner
- The anchor may only be used once
- In case of aborted hole: New hole must be drilled at a minimum distance of twice the depth of the aborted hole or closer, if the hole is filled with a high strength mortar and only if the hole is not in the direction of the oblique tensile or shear load
- Anchor expansion by impact using the setting tools given in Annex B 3. The anchor is property set if the stop of the setting tool reaches the expansion sleeve. The manual setting tool with installation control leaves a visible mark on the sleeve, as illustrated in Annex B 3 and B 4

Table B2: Installation parameters for concrete C20/25 to C50/60

Anchor size			M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x50 D	M16x65	M20x80
Nominal drill hole diameter	d_0	[mm]	8	10		12		15	16	20	25
Effective anchorage depth	h_{ef}	[mm]	30	30	40	30	40	50		65	80
Maximum installation torque	max. T_{inst}	[Nm]	4	8		15		35		60	120
Minimum drill hole depth	h_1	[mm]	32	33	43	33	43	54		70	85
Minimum screw-in depth	$l_{s,min}$	[mm]	6	8		10		12		16	20
Maximum screw-in depth	$l_{s,max}$	[mm]	14	14		14	17	22		28	34
Clearance of hole diameter	$\varnothing\ d_f \leq$	[mm]	7	9		12		14		18	22
h_{min} = 80 mm											
Minimum spacing	s_{min}	[mm]	70	110	200	200		-	-	-	-
Minimum edge distance	c_{min}	[mm]	150	150		150		-	-	-	-
h_{min} = 100 mm											
Minimum spacing	s_{min}	[mm]	65	70		90	150	200		-	-
Minimum edge distance	c_{min}	[mm]	115	115		160	180			-	-
h_{min} = 120 mm											
Minimum spacing	s_{min}	[mm]	65	70		85	95	145		-	-
Minimum edge distance	c_{min}	[mm]	115	115		140	150	200		-	-
h_{min} = 160 mm											
Minimum spacing	s_{min}	[mm]	65	70		85	95	145		180	-
Minimum edge distance	c_{min}	[mm]	115	115		140	150	200		240	-
h_{min} = 200 mm											
Minimum spacing	s_{min}	[mm]	65	70		85	95	145		180	190
Minimum edge distance	c_{min}	[mm]	115	115		140	150	200		240	280

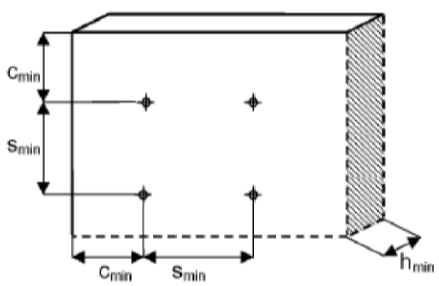

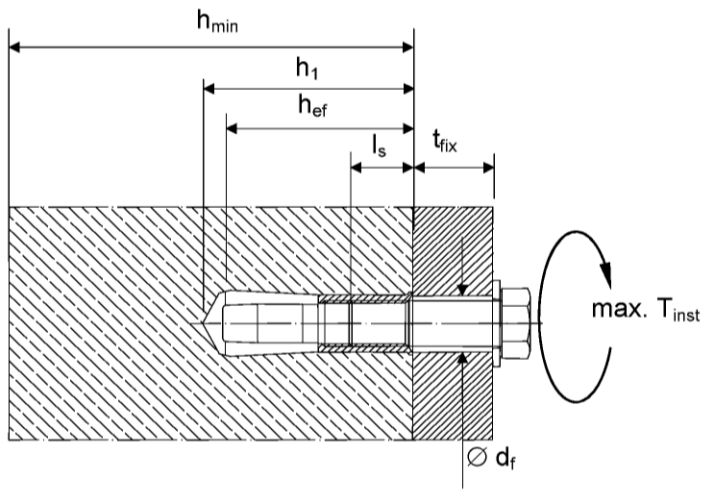

Fastening screw or threaded rod:

- Minimum property class and materials according to table A1
- The length of the fastening screw or threaded rod shall be determined depending on thickness of fixture t_{fix}, admissible tolerances and maximum screw length $l_{s,max}$ as well as minimum screw-in depth $l_{s,min}$

Setting & drilling tools

Setting tools	Marking	Description	Marking on USA with rim and rimless
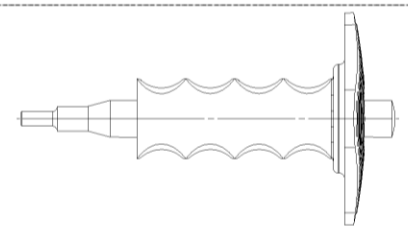	EHS Plus M..x h_{ef}	Manual setting tool with hand guard	
	EHS M..x h_{ef}	Manual setting tool basic format	
	EMS M..x h_{ef}	Machine setting tool with SDS Plus	No marking

Drilling tools

	EBB ∅D x l	Stop drill
Or other usual driller		



Table B3: Parameters of setting tools

Manual setting tool	Machine setting tool	Stop drill	For anchor size USA	∅ D1	∅ D2	L
EHS M6x25/30	EMS M6x25/30	EBB 8x30	USA M6x30	4,8	9,0	17,0
EHS M8x25/30	EMS M8x25/30	EBB 10x30	USA M8x30	6,4	11,0	18,0
EHS M8x40	EMS M8x40	EBB 10x40	USA M8x40			28,0
EHS M10x25/30	EMS M10x25/30	EBB 12x30	USA M10x30	7,9	13,0	18,0
EHS M10x40	EMS M10x40	EBB 12x40	USA M10x40			24,0
EHS M12x50	EMS M12x50	EBB 15x50	USA M12x50	10,2	16,5	30,0
EHS M12x50	EMS M12x50	EBB 16x50	USA M12x50 D			
EHS M16x65	EMS M16x65	EBB 20x65	USA M16x65	13,5	22	36,0
EHS M20x80	EMS M20x80	EBB 25x80	USA M20x80	16,4	27	50,0

Installation instructions

1

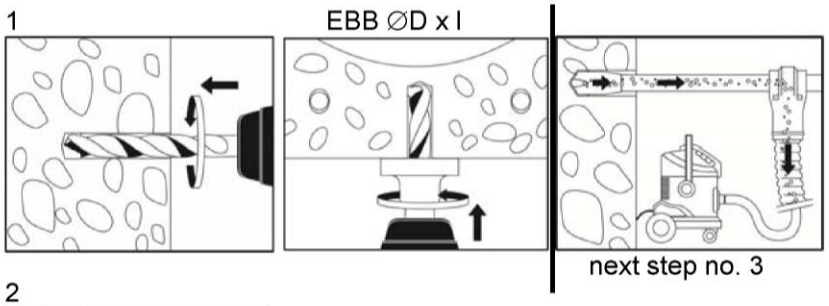

2



3



4

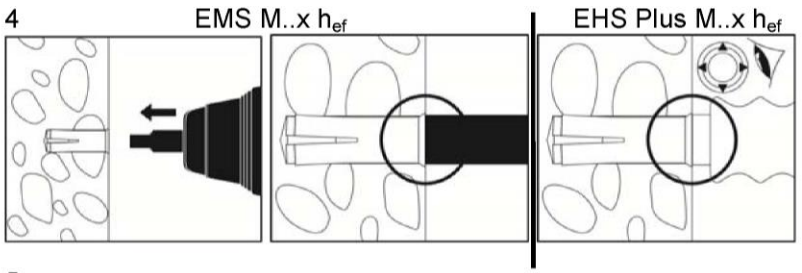

5



No.	Description
1	Create drill hole with hammer drill or with hollow drill and vacuum cleaner
2	Clean from drill-dust
3	Set anchor till anchor is flush with surface of concrete
4	Expand the sleeve by driving the pin into the sleeve and control the correct setting
5	Fixation of fixture. Maximum installation torque max. T_{inst} must not be crossed

Table C1: Characteristic values for tension loads

USA		property class	M6x30[1)]	M8x30[1)]	M8x40	M10x30[1)]	M10x40	M12x50	M12x50 D	M16x65	M20x80
Inastallation safety factor	γ_{inst}	[-]	1,0								
Steel failure											
Characteristic resistance	$N_{Rk,s}$ [kN]	A4-50	10,1	18,3		29,0		42,1		78,3	122,4
Partial safety factor	γ_{Ms}		2,86								
Characteristic resistance	$N_{Rk,s}$ [kN]	A4-70	14,1	19,6		24,9		45,1	59,0	73,8	117,2
Partial safety factor	γ_{Ms}		1,87	1,5					1,87	1,5	
Characteristic resistance	$N_{Rk,s}$ [kN]	A4-80	16,1	19,6		24,9		45,1	59,0	73,8	117,2
Partial safety factor	γ_{Ms}		1,6	1,5							
Characteristic resistance	$N_{Rk,s}$ [kN]	steel 4.6	8,0	14,6		23,2		33,7		62,7	97,9
Partial safety factor	γ_{Ms}		2,0								
Characteristic resistance	$N_{Rk,s}$ [kN]	steel 5.6	10,1	18,3		29,0		42,1		78,3	122,4
Partial safety factor	γ_{Ms}		2,0								
Characteristic resistance	$N_{Rk,s}$ [kN]	steel 5.8	10,1	17,2		21,8		39,6	42,1	64,7	102,8
Partial safety factor	γ_{Ms}		1,5								
Characteristic resistance	$N_{Rk,s}$ [kN]	steel 8.8	13,5	17,2		21,8		39,6	53,3	64,7	102,8
Partial safety factor	γ_{Ms}		1,5								
Pull-out failure not decisive											
Concrete cone failure											
Effective anchorage depth	h_{ef}	[mm]	30		40	30	40	50		65	80
Characteristic spacing	$s_{cr,N}$	[mm]	90		120	90	120	150		195	240
Characteristic edge distance	$c_{cr,N}$	[mm]	45		60	45	60	75		97	120
Factor k_1	$k_{ucr,N}$	[-]	11,0								
Splitting failure											
Characteristic spacing	$s_{cr,sp}$	[mm]	210		280	210	320	350		455	560
Characteristic edge distance	$c_{cr,sp}$	[mm]	105		140	105	160	175		227	280

[1)] Only for application with statically indeterminate structural components.

Table C2: Characteristic values for shear loads

USA		property class	M6x30[1)]	M8x30[1)]	M8x40	M10x30[1)]	M10x40	M12x50	M12x50 D	M16x65	M20x80
Factor for ductility	k_7 [-]		1,0								
Steel failure without lever arm											
Characteristic resistance	$V_{Rk,s}$ [kN]	A4-50	5,0	9,2		14,5		21,1		39,2	61,2
Partial safety factor	γ_{Ms}		2,38								
Characteristic resistance	$V_{Rk,s}$ [kN]	A4-70	7,0	9,8		12,4		22,6	29,5	37	59
Partial safety factor	γ_{Ms}		1,56	1,25					1,56	1,25	
Characteristic resistance	$V_{Rk,s}$ [kN]	A4-80	8,0	9,8		12,4		22,6	30,4	36,9	58,6
Partial safety factor	γ_{Ms}		1,33	1,25							
Characteristic resistance	$V_{Rk,s}$ [kN]	steel 4.6	4,0	7,3		11,6		16,9		31	49
Partial safety factor	γ_{Ms}		1,67								
Characteristic resistance	$V_{Rk,s}$ [kN]	steel 5.6	5,0	9,2		14,5		21,1		39	61
Partial safety factor	γ_{Ms}		1,67								
Characteristic resistance	$V_{Rk,s}$ [kN]	steel 5.8	5,0	8,6		10,9		19,8	21,1	32	51
Partial safety factor	γ_{Ms}		1,25								
Characteristic resistance	$V_{Rk,s}$ [kN]	steel 8.8	6,8	8,6		10,9		19,8	27	32	51
Partial safety factor	γ_{Ms}		1,25								
Steel failure with lever arm											
Characteristic resistance	$M^0_{Rk,s}$ [Nm]	A4-50	8	19		37		66		166	324
Partial safety factor	γ_{Ms}		2,38								
Characteristic resistance	$M^0_{Rk,s}$ [Nm]	A4-70	11	26		52		92		232	454
Partial safety factor	γ_{Ms}		1,56								
Characteristic resistance	$M^0_{Rk,s}$ [Nm]	A4-80	12	30		60		105		266	519
Partial safety factor	γ_{Ms}		1,33								
Characteristic resistance	$M^0_{Rk,s}$ [Nm]	Stahl 4.6	6,1	15		30		52		133	259
Partial safety factor	γ_{Ms}		1,67								
Characteristic resistance	$M^0_{Rk,s}$ [Nm]	Stahl 5.6	7,6	19		37		66		166	324
Partial safety factor	γ_{Ms}		1,67								
Characteristic resistance	$M^0_{Rk,s}$ [Nm]	Stahl 5.8	7,6	19		37		66		166	324
Partial safety factor	γ_{Ms}		1,25								
Characteristic resistance	$M^0_{Rk,s}$ [Nm]	Stahl 8.8	12	30		60		105		266	517
Partial safety factor	γ_{Ms}		1,25								

[1)] Only for application with statically indeterminate structural components.

Table C3: Characteristic values for shear loads

USA			M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x50 D	M16x65	M20x80
Concrete pry out failure											
Factor	k_8	[-]	1,74		1,88	1,74	1,88	2,0			
Installation safety factor	γ_{inst}	[-]	1,0								
Concrete edge failure											
Effective length of anchor in shear loading	$l_f = h_{ef}$	[mm]	30		40	30	40	50		65	80
Effective diameter of anchor	$\varnothing d_{nom}$	[mm]	8	10		12		15	16	20	25

Table C4.1: Displacements under tension and shear loads for USA in galvanised steel

USA			M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x50 D	M16x65	M20x80
Tension load in C20/25 to C50/60	N	[kN]	4,0		6,1	4,0	6,1	8,5		12,6	17,2
Displacement	δ_{No}	[mm]	0,1								
	$\delta_{N\infty}$	[mm]	0,2								
Shear load in C20/25 to C50/60	V	[kN]	3,9	4,9	6,2			11,3	15,2	18,5	29,4
Displacement	δ_{Vo}	[mm]	0,95	1,00		1,05		1,10		1,40	1,80
	$\delta_{V\infty}$	[mm]	1,40	1,50		1,60		1,70		2,10	2,70

Table C4.2: Displacements under tension and shear loads for USA in stainless steel

USA A4			M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x50 D	M16x65	M20x80
Tension load in C20/25 to C50/60	N	[kN]	4,0		6,1	4,0	6,1	8,5		12,6	17,2
Displacement	δ_{No}	[mm]	0,1								
	$\delta_{N\infty}$	[mm]	0,2								
Shear load in C20/25 to C50/60	V	[kN]	3,2	5,6	7,1			12,9	13,5	21,1	33,5
Displacement	δ_{Vo}	[mm]	0,95	1,00		1,05		1,10		1,40	1,80
	$\delta_{V\infty}$	[mm]	1,40	1,50		1,60		1,70		2,10	2,70