



Einfach. Sicher.



PRESTANDADEKLARATION

DoP 0204

för Upat injektionssystem UPM 33 (Metallankare för användning i betong)

SV

1. Produktypens unika identifikationskod: DoP 0204
2. Avsedd användning/avsedda användningar: Infästning i efterhand i sprucken och osprucken betong, se bilaga, särskilt bilagor B1 - B8.

3. Tillverkare: Upat Vertriebs GmbH, Bebelstraße 11, 79108 Freiburg im Breisgau, Tyskland

4. Tillverkarens representant: -

5. System för bedömning och fortlöpande kontroll av prestanda: 1

6. Europeiskt bedömningsdokument: EAD 330499-01-0601, Edition 04/2020
Europeisk teknisk bedömning: ETA-10/0171; 2021-04-28
Tekniskt bedömningsorgan: DIBt- Deutsches Institut für Bautechnik
Anmält/anmälta organ: 2873 TU Darmstadt

7. Angiven prestanda:

Mekanisk hållfasthet och stabilitet (BWR 1)

Karakteristisk bärformåga för spänning (för statisk och kvasi-statisk belastning):

Stålets motståndskraft: Bilagor C1, C2
Motstånd mot kombinerat fel vid utdragnings och betongkon: Bilagor C3 - C5
Motstånd i betongkonken: Bilaga C3
Kantavstånd för att slippa sprickor under last: Bilaga C3
Kraftighet: Bilagor C3 - C5
Maximal vridkraft vid installation: Bilagor B3, B4
Minsta kant- och axelavstånd: Bilagor B3, B4

$E_s = 210\ 000 \text{ MPa}$

$\Psi_{sus}^0 = \text{NPD}$

Karakteristisk bärformåga för skjutning (för statisk och kvasi-statisk belastning):

Motstånd i stålet: Bilagor C1 - C2
Motstånd mot fläckning: Bilaga C3
Motstånd mot skador i betong: Bilaga C3

Karakteristiskt motstånd och Förskjutningar för seismiska prestandakategorier C1 och C2:

Motstånd mot draglast, förskjutningar, kategori C1: NPD
Motstånd mot draglast, förskjutningar, kategori C2: NPD
Motstånd mot tvärlast, förskjutningar, kategori C1: NPD
Motstånd mot tvärlast, förskjutningar, kategori C2: NPD
Faktor cirkulärt hål: NPD

Förflyttningar under kort- och långvarig belastning:

Förflyttningar under kort- och långvarig belastning: Bilaga C6

Hygien, hälsa och miljö (BWR 3)

Innehåll, frisläppning och / eller frisläppning av farliga ämnen: NPD

8. Lämplig teknisk dokumentation och/eller särskild teknisk dokumentation: -

Prestandan för ovanstående produkt överensstämmer med den angivna prestandan. Denna prestandadeklaration har utfärdats i enlighet med förordning (EU) nr 305/2011 på eget ansvar av den tillverkare som anges ovan.

Undertecknad på tillverkarens vägnar av:

Dr.-Ing. Oliver Geibig, Verkställande direktör affärsheter och teknik
Tumlingen, 2021-05-12

Jürgen Grün, Verkställande direktör kemi och kvalitet

Denna DoP har förberetts på olika språk. I händelse av tvist om tolkningen ska den engelska versionen alltid råda.

Bilagan innehåller frivilliga och kompletterande information på engelska som överskrider (det specifika språkets) lagkrav.

Specific Part

1 Technical description of the product

The "Injection system UPM 33" is a bonded fastener consisting of a cartridge with injection mortar UPM 33, UPM 33 Relax or UPM 33 Express and a steel element according to Annex A4.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

| Essential characteristic | Performance |
|--|--------------------------------------|
| Characteristic resistance to tension load (static and quasi-static loading) | See Annex B 3 and B 4, C 1 to C 5 |
| Characteristic resistance to shear load (static and quasi-static loading) | See Annex C 1 to C 3 |
| Displacements under short-term and long-term loading | See Annex C 6 |
| Characteristic resistance and displacements for seismic performance categories C1 and C2 | No performance assessed |

3.2 Hygiene, health and the environment (BWR 3)

| Essential characteristic | Performance |
|--|-------------------------|
| Content, emission and/or release of dangerous substances | No performance assessed |

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with the European Assessment Document EAD 330499-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1


Installation conditions part 1

Upat anchor rod


Pre-positioned installation

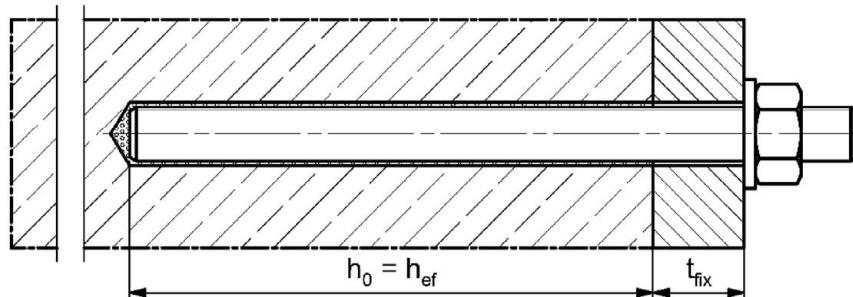

Push through installation (annular gap filled with mortar)

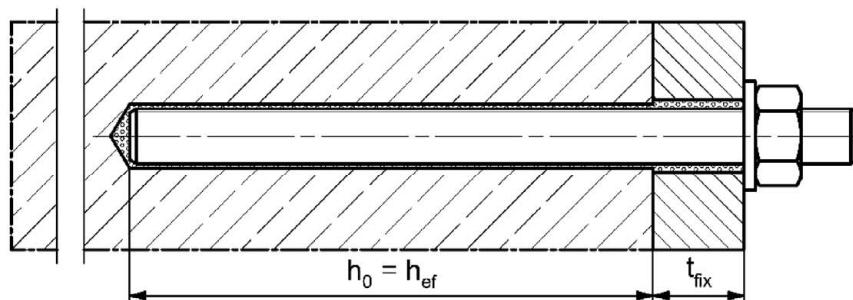

Pre-positioned or push through installation with subsequently injected filling disc (annular gap filled with mortar)

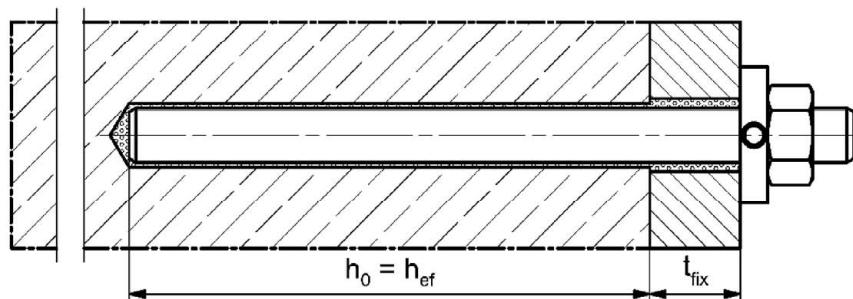

Figures not to scale

h_0 = drill hole depth

h_{ef} = effective embedment depth

t_{fix} = thickness of fixture

Injection system UPM 33

Product description

Installation conditions part 1


Annex A 1

Appendix 3 / 21


Installation conditions part 2

Upat internal threaded anchor IST

Pre-positioned installation

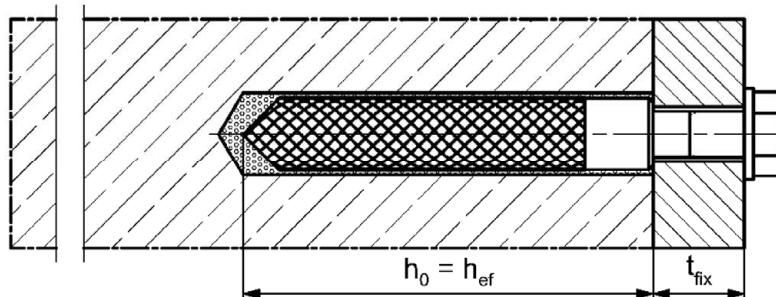

Pre-positioned installation with subsequently injected filling disc (annular gap filled with mortar)

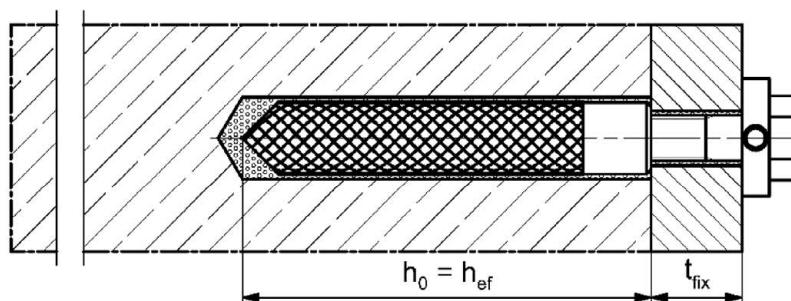

Figures not to scale

h_0 = drill hole depth

h_{ef} = effective embedment depth

t_{fix} = thickness of fixture

Injection system UPM 33

Product description



Installation conditions part 2

Annex A 2

Appendix 4 / 21

Overview system components part 1



Injection cartridge (shuttle cartridge) with sealing cap; Sizes: 350 ml, 360 ml, 390 ml, 550 ml, 1100 ml, 1500 ml



Imprint: UPM 33 or UPM 33 Relax or UPM 33 Express, processing notes, shelf-life, piston travel scale (optional), curing times and processing times (depending on temperature), hazard code, size, volume




Injection cartridge (coaxial cartridge) with sealing cap; Sizes: 100 ml, 150 ml, 300 ml, 380 ml, 400 ml, 410 ml



Imprint: UPM 33 or UPM 33 Relax or UPM 33 Express, processing notes, shelf-life, piston travel scale (optional), curing times and processing times (depending on temperature), hazard code, size, volume



Static mixer Upat MR Plus

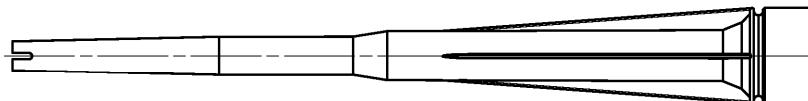

Injection adapter and Extension tube for static mixer



Cleaning brush UP BS



Blow-out pump UPM or ABP



Figures not to scale

Injection system UPM 33

Product description

Overview system components part 1;
cartridges / static mixer / accessories

Annex A 3

Appendix 5 / 21

Overview system components part 2

Upat anchor rod

Size: M6, M8, M10, M12, M16, M20, M24, M27, M30




Upat internal threaded anchor IST


Size: M8, M10, M12, M16, M20



Screw / threaded rod / washer / hexagon nut

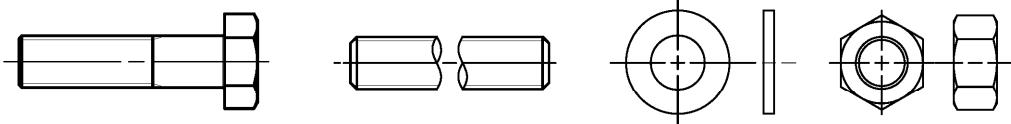

filling disc with injection adapter

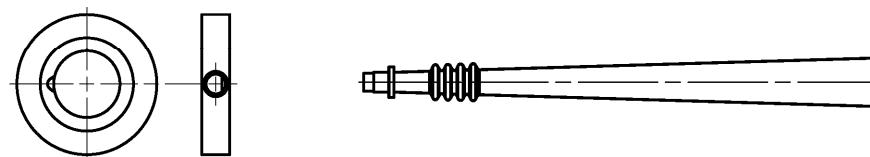

Figures not to scale

Injection system UPM 33

Product description

Overview system components part 2;
steel components

Annex A 4

Appendix 6 / 21

Table A5.1: Materials

| Part | Designation | Material | | |
|-------------|--|--|--|--|
| 1 | Injection cartridge | Mortar, hardener, filler | | |
| Steel grade | Steel | Stainless steel R | High corrosion resistant steel HCR | |
| | zinc plated | acc. to EN 10088-1:2014 Corrosion resistance class CRC III acc. to EN 1993-1-4:2015 | acc. to EN 10088-1:2014 Corrosion resistance class CRC V acc. to EN 1993-1-4:2015 | |
| 2 | Anchor rod | Property class 4.8, 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018/Zn5/An(A2K) or hot dip galvanised $\geq 40 \mu\text{m}$ EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation | Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662, 1.4462; EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation | Property class 50 or 80 EN ISO 3506-1:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529; EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation |
| 3 | Washer ISO 7089:2000 | zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018/Zn5/An(A2K) or hot dip galvanised $\geq 40 \mu\text{m}$ EN ISO 10684:2004 | 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014 | 1.4565; 1.4529; EN 10088-1:2014 |
| 4 | Hexagon nut | Property class 4, 5 or 8; EN ISO 898-2:2012 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018/Zn5/An(A2K) or hot dip galvanised $\geq 40 \mu\text{m}$ EN ISO 10684:2004 | Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014 | Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4565; 1.4529; EN 10088-1:2014 |
| 5 | Upat internal threaded anchor IST | Property class 5.8 ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018/Zn5/An(A2K) | Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014 | Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529; EN 10088-1:2014 |
| 6 | Commercial standard screw or threaded rod for Upat internal threaded anchor IST | Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018/Zn5/An(A2K) $A_5 > 8\%$ fracture elongation | Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014 $A_5 > 8\%$ fracture elongation | Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529; EN 10088-1:2014 $A_5 > 8\%$ fracture elongation |
| 7 | filling disc similar to DIN 6319-G | zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018/Zn5/An(A2K) or hot dip galvanised $\geq 40 \mu\text{m}$ EN ISO 10684:2004 | 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014 | 1.4565; 1.4529; EN 10088-1:2014 |

Injection system UPM 33

Product description
Materials

Annex A 5

Specifications of intended use (part 1)

Table B1.1: Overview use and performance categories

| Anchorages subject to | UPM 33 with ... | | | | | | |
|---|--|-----------------------------------|---|---|--|--|--|
| | Anchor rod | Upat internal threaded anchor IST | |  | | | |
| Hammer drilling with standard drill bit | all sizes | | | | | | |
| Hammer drilling with hollow drill bit (fischer FHD, Heller "Duster Expert"; Bosch „Speed Clean“; Hilti "TE-CD, TE-YD", DreBo „D-Plus“, DreBo „D-Max“) | Nominal drill bit diameter (d_0) 12 mm to 35 mm | | | | | | |
| Static and quasi static load, in | uncracked concrete | all sizes | Tables: C1.1 C3.1 C4.1 C6.1 | Tables: C2.1 C3.1 C5.1 C6.2 | | | |
| | cracked concrete | M10 bis M20 | | - ²⁾ | | | |
| I1 | dry or wet concrete | all sizes | | | | | |
| I2 | water filled hole ¹⁾ | M 12 to M 30 | | M 8 bis M 20 | | | |
| Installation direction | D3 (downward and horizontal and upwards (e.g. overhead) installation) | | | | | | |
| Installation temperature | $T_{i,min} = -10 \text{ }^{\circ}\text{C}$ to $T_{i,max} = +40 \text{ }^{\circ}\text{C}$ for the standard variation of temperature after installation | | | | | | |
| In-service temperature | Temperature range I | -40 °C to +80 °C | (max. short term temperature +80 °C; max. long term temperature +50 °C) | | | | |
| | Temperature range II | -40 °C to +120 °C | (max. short term temperature +120 °C; max. long term temperature +72 °C) | | | | |
| ¹⁾ Only with coaxial cartridges: 380ml, 400 ml, 410 ml ²⁾ No performance assessed | | | | | | | |
| Injection system UPM 33 | | | | Annex B 1 Appendix 8 / 21 | | | |
| Intended use Specifications (part 1) | | | | | | | |

Specifications of intended use (part 2)

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres of strength classes C20/25 to C50/60 according to EN 206:2013+A1:2016

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel).
- For all other conditions according to EN1993-1-4:2015 corresponding to corrosion resistance classes to Annex A 5 table A5.1.

Design:

- Anchorages have to be designed by a responsible engineer with experience of concrete anchor design.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed in accordance with:
EN 1992-4:2018 and EOTA Technical Report TR 055, Edition February 2018.

Installation:

- Anchor installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- In case of aborted hole: The hole shall be filled with mortar
- Anchorage depth should be marked and adhered to on installation
- Overhead installation is allowed

Injection system UPM 33

Intended use
Specifications (part 2)


Annex B 2

Appendix 9 / 21

Table B3.1: Installation parameters for anchor rods

| Anchor rods | Thread | M6 | M8 | M10 | M12 | M16 | M20 | M24 | M27 | M30 | | |
|---|-----------------------|-----------------------------------|---------------------------------|-----|-----|-----|------------------------|-----|-----|-----|-----|----|
| Width across flats | [mm] | SW | 10 | 13 | 17 | 19 | 24 | 30 | 36 | 41 | 46 | |
| Nominal drill hole diameter | | d_0 | 8 | 10 | 12 | 14 | 18 | 24 | 28 | 30 | 35 | |
| Drill hole depth | | h_0 | $h_0 = h_{\text{ef}}$ | | | | | | | | | |
| Effective embedment depth | | $h_{\text{ef, min}}$ | 50 | 60 | 60 | 70 | 80 | 90 | 96 | 108 | 120 | |
| | | $h_{\text{ef, max}}$ | 72 | 160 | 200 | 240 | 320 | 400 | 480 | 540 | 600 | |
| Minimum spacing and minimum edge distance | | $s_{\text{min}} = c_{\text{min}}$ | 40 | 40 | 45 | 55 | 65 | 85 | 105 | 125 | 140 | |
| Diameter of the clearance hole of the fixture | | pre-positioned installation | d_f | 7 | 9 | 12 | 14 | 18 | 22 | 26 | 30 | 33 |
| | | push through installation | d_f | 9 | 12 | 14 | 16 | 20 | 26 | 30 | 33 | 40 |
| Minimum thickness of concrete member | | h_{min} | $h_{\text{ef}} + 30 (\geq 100)$ | | | | $h_{\text{ef}} + 2d_0$ | | | | | |
| Maximum installation torque | max T_{inst} | [Nm] | 5 | 10 | 20 | 40 | 60 | 120 | 150 | 200 | 300 | |

Upat anchor rod

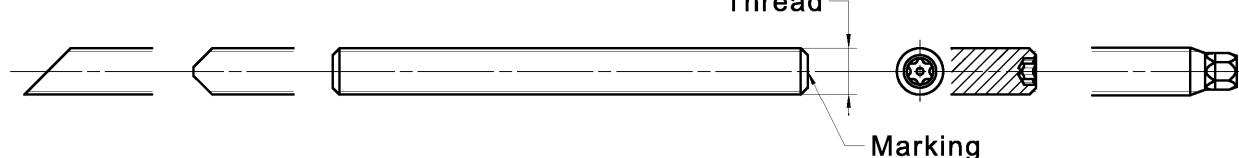


Marking (on random place) Upat anchor rod:

| | | | |
|--|--------|--|---|
| Steel zinc plated PC ¹⁾ 8.8 | • or + | Steel hot-dip PC ¹⁾ 8.8 | • |
| High corrosion resistant steel HCR PC ¹⁾ 50 | • | High corrosion resistant steel HCR PC ¹⁾ 70 | - |
| High corrosion resistant steel HCR PC ¹⁾ 80 | (| Stainless steel R property class 50 | ~ |
| Stainless steel R property class 80 | * | | |

Alternatively: Colour coding according to DIN 976-1:2016

¹⁾ PC = property class

Installation conditions:

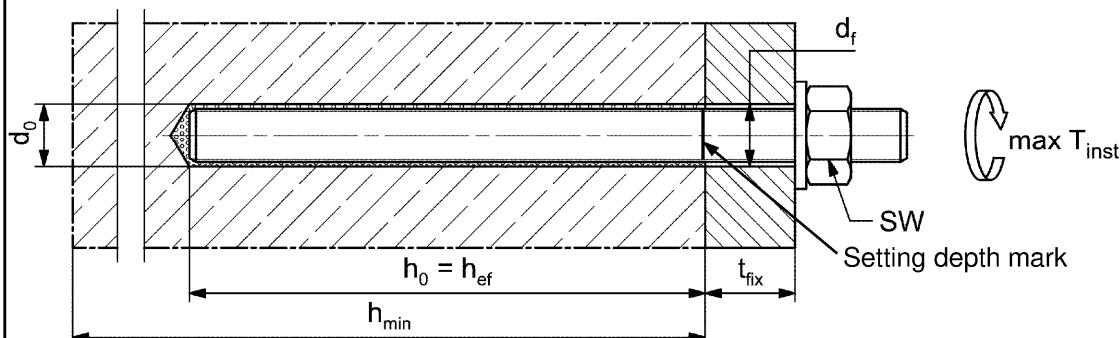

Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled

- Materials, dimensions and mechanical properties according to Annex A 5, Table A5.1
- Inspection certificate 3.1 according to EN 10204:2004, the documents have to be stored
- Setting depth is marked

Figures not to scale

Injection system UPM 33


Intended use
Installation parameters anchor rods

Annex B 3

Table B4.1: Installation parameters for Upat internal threaded anchors IST

| Internal threaded anchors IST | Thread | M8 | M10 | M12 | M16 | M20 |
|---|--------|-----------------------------|-----|-----|-----|-----|
| Diameter of anchor $d_{\text{nom}} = d_H$ | | 12 | 16 | 18 | 22 | 28 |
| Nominal drill hole diameter d_0 | | 14 | 18 | 20 | 24 | 32 |
| Drill hole depth h_0 | | $h_0 = h_{\text{ef}} = L_H$ | | | | |
| Effective embedment depth ($h_{\text{ef}} = L_H$) | | 90 | 90 | 125 | 160 | 200 |
| Minimum spacing and minimum edge distance $s_{\text{min}} = c_{\text{min}}$ | [mm] | 55 | 65 | 75 | 95 | 125 |
| Diameter of clearance hole in the fixture d_f | | 9 | 12 | 14 | 18 | 22 |
| Minimum thickness of concrete member h_{min} | | 120 | 125 | 165 | 205 | 260 |
| Maximum screw-in depth $l_{E,\text{max}}$ | | 18 | 23 | 26 | 35 | 45 |
| Minimum screw-in depth $l_{E,\text{min}}$ | | 8 | 10 | 12 | 16 | 20 |
| Maximum installation torque $\text{max } T_{\text{inst}}$ | [Nm] | 10 | 20 | 40 | 80 | 120 |

Upat internal threaded anchor IST

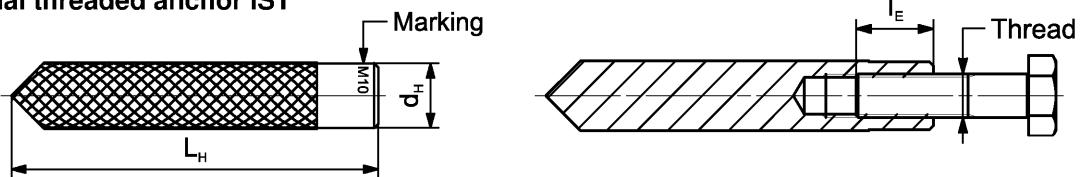


Marking: Anchor size e. g.: **M10**

Stainless steel → additional **R**; e.g.: **M10 R**

High corrosion resistant steel → additional **HCR**; e.g.: **M10 HCR**

Retaining bolt or threaded rods (including nut and washer) must comply with the appropriate material and strength class of Annex A 5, Table A5.1

Installation conditions:

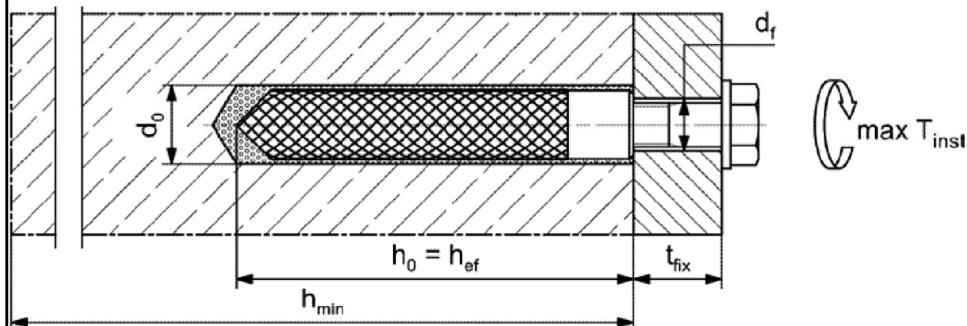

Figures not to scale

Injection system UPM 33

Intended use


Installation parameters Upat internal threaded anchors IST

Annex B 4

Table B5.1: Parameters of the **cleaning brush UP BS** (steel brush with steel bristles)

The size of the cleaning brush refers to the drill hole diameter

| | | | | | | | | | | | | | | |
|-----------------------------|-------|------|---|----|----|----|----|----|----|----|----|----|----|----|
| Nominal drill hole diameter | d_0 | [mm] | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 24 | 25 | 28 | 30 | 35 |
| Steel brush diameter BS | d_b | | 9 | 11 | 14 | 16 | | 20 | | 25 | 26 | 27 | 30 | 40 |

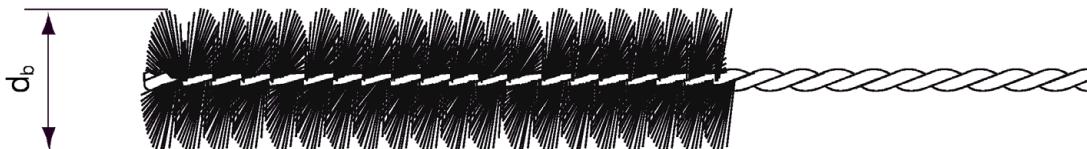**Table B5.2** **Maximum processing time** of the mortar and **minimum curing time**

(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature)

| Temperature at anchoring base [°C] | Maximum processing time t_{work} | | | Minimum curing time ¹⁾ t_{cure} | | |
|---------------------------------------|---------------------------------------|--------|--------------|---|--------|--------------|
| | UPM 33 Express | UPM 33 | UPM 33 Relax | UPM 33 Express | UPM 33 | UPM 33 Relax |
| -10 to -5 ²⁾ | - | - | - | 12 h | - | - |
| > -5 to 0 ²⁾ | 5 min | - | - | 3 h | 24 h | - |
| > 0 to 5 ²⁾ | 5 min | 13 min | - | 3 h | 3 h | 6 h |
| > 5 to 10 | 3 min | 9 min | 20 min | 50 min | 90 min | 3 h |
| > 10 to 20 | 1 min | 5 min | 10 min | 30 min | 60 min | 2 h |
| > 20 to 30 | - | 4 min | 6 min | - | 45 min | 60 min |
| > 30 to 40 | - | 2 min | 4 min | - | 35 min | 30 min |

¹⁾ In wet concrete or water filled holes the curing times must be doubled²⁾ Minimal cartridge temperature +5°C

Injection system UPM 33

Intended use





Cleaning brush (steel brush)

Processing time and curing time

Annex B 5



Installation instructions part 1

Drilling and cleaning the hole (hammer drilling with standard drill bit)
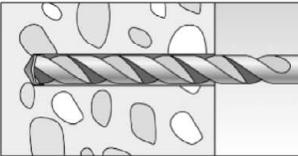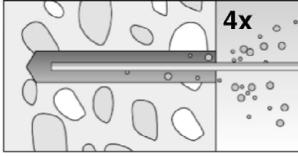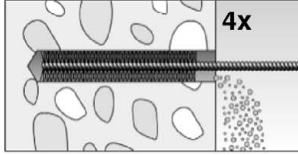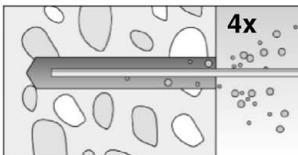
| | |
|---|--|
| 1 |  <p>Drill the hole. Nominal drill hole diameter d_0 and drill hole depth h_0 see tables B3.1, B4.1</p> |
| 2 |  <p>Clean the drill hole: For $h_{ef} \leq 12d$ and $d_0 < 18$ mm blow out the hole four times by hand</p> |
| 3 |  <p>Brush the drill hole four times. For deep holes use an extension. Corresponding brushes see table B5.1</p> |
| 4 |  <p>Clean the drill hole: For $h_{ef} \leq 12d$ and $d_0 < 18$ mm blow out the hole four times by hand</p> |

Go to step 5

Drilling and cleaning the hole (hammer drilling with hollow drill bit)
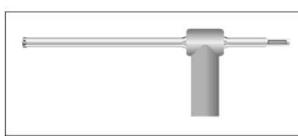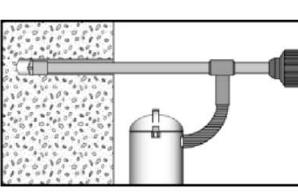
| | |
|---|---|
| 1 |  <p>Check a suitable hollow drill (see table B1.1) for correct operation of the dust extraction</p> |
| 2 |  <p>Use a suitable dust extraction system, e. g. fischer FVC 35 M or a comparable dust extraction system with equivalent performance data</p> <p>Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Nominal drill hole diameter d_0 and drill hole depth h_0 see tables B3.1, B4.1</p> |

Go to step 5



Injection system UPM 33

Intended use
Installation instructions part 1

Annex B 6




Installation instructions part 2

Preparing the cartridge
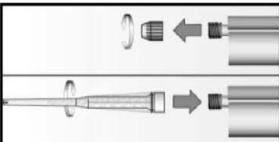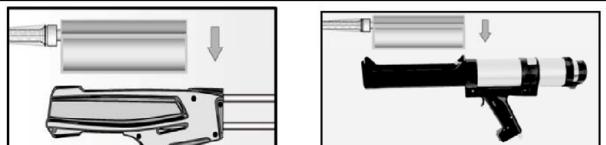
| | | |
|---|---|--|
| 5 |  | Remove the sealing cap Screw on the static mixer (the spiral in the static mixer must be clearly visible) |
| 6 |  | Place the cartridge into the dispenser |
| 7 |  | Extrude approximately 10 cm of material out until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey |

Go to step 8

Injection of the mortar
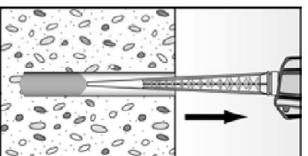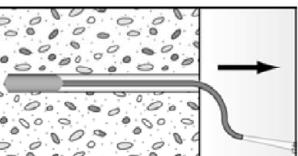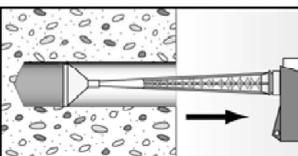
| | | |
|---|---|---|
| 8 |    | Fill approximately 2/3 of the drill hole with mortar. Always begin from the bottom of the hole and avoid bubbles For drill hole depth ≥ 150 mm use an extension tube For overhead installation, deep holes ($h_0 > 250$ mm) or drill hole diameter ($d_0 \geq 40$ mm) use an injection adapter |
|---|---|---|

Go to step 9

Injection system UPM 33

Intended use

Installation instructions part 2

Annex B 7

Appendix 14 / 21

Installation instructions part 3

Installation of anchor rods or Upat internal threaded anchors IST

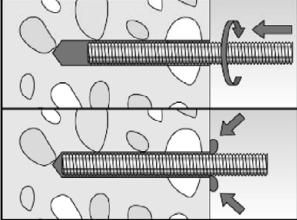
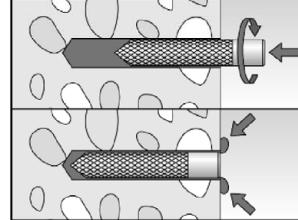

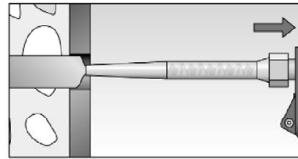
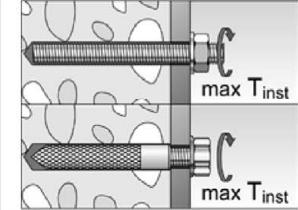
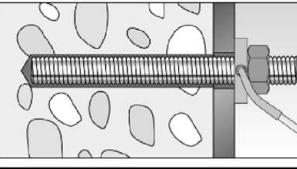
| | | |
|---|---|--|
| 9 |   | <p>Only use clean and oil-free metal parts. Mark the setting depth of the metal part. Push the anchor rod or Upat internal threaded IST anchor down to the bottom of the hole, turning it slightly while doing so. After inserting the metal parts, excess mortar must be emerged around the anchor element.</p> |
| |  <p>For overhead installations support the metal part with wedges (e. g. centering wedges) or overhead clips.</p> |  <p>For push through installation fill the annular gap with mortar</p> |
| 10 |  <p>Wait for the specified curing time t_{cure} see table B5.2</p> |  <p>Mounting the fixture $\text{max } T_{\text{inst}}$ see tables B3.1 and B4.1</p> |
| Option |  <p>After the minimum curing time is reached, the gap between metal part and fixture (annular clearance) may be filled with mortar via the filling disc. Compressive strength $\geq 50 \text{ N/mm}^2$ (e.g. Upat injection mortars UPM 33, UPM 44, UPM 55).). ATTENTION: Using filling disc reduces t_{fix} (usable length of the anchor)</p> | |
| Injection system UPM 33 | | |
| Intended use Installation instructions part 3 | | Annex B 8 Appendix 15 / 21 |

Table C1.1: Characteristic values for under tension / shear load of Upat anchor rods and standard threaded rods

| Anchor rod / standard threaded rod | | | M6 | M8 | M10 | M12 | M16 | M20 | M24 | M27 | M30 | | |
|---|----------------|------|-----|----|--------|--------|-----|-----|-----|------------------|---------------------------|------|--|
| Bearing capacity under tension load, steel failure ³⁾ | | | | | | | | | | | | | |
| Characteristic resistance $N_{Rk,s}$ | Property class | [kN] | 4.8 | 8 | 15(13) | 23(21) | 33 | 63 | 98 | 141 | 184 | 224 | |
| | | | 5.8 | 10 | 19(17) | 29(27) | 43 | 79 | 123 | 177 | 230 | 281 | |
| | | | 8.8 | 16 | 29(27) | 47(43) | 68 | 126 | 196 | 282 | 368 | 449 | |
| | | | 50 | 10 | 19 | 29 | 43 | 79 | 123 | 177 | 230 | 281 | |
| | | | 70 | 14 | 26 | 41 | 59 | 110 | 172 | 247 | 322 | 393 | |
| | | | 80 | 16 | 30 | 47 | 68 | 126 | 196 | 282 | 368 | 449 | |
| | | | | | | | | | | | | | |
| Partial factors ¹⁾ | | | | | | | | | | | | | |
| Partial factor $\gamma_{Ms,N}$ | Property class | [-] | 4.8 | | | | | | | | 1,50 | | |
| | | | 5.8 | | | | | | | | 1,50 | | |
| | | | 8.8 | | | | | | | | 1,50 | | |
| | | | 50 | | | | | | | | 2,86 | | |
| | | | 70 | | | | | | | | 1,50 ²⁾ / 1,87 | | |
| | | | 80 | | | | | | | | 1,60 | | |
| | | | | | | | | | | | | | |
| Bearing capacity under shear load, steel failure ³⁾ | | | | | | | | | | | | | |
| without lever arm | | | | | | | | | | | | | |
| Characteristic resistance $V^0_{Rk,s}$ | Property class | [kN] | 4.8 | 4 | 9(8) | 14(13) | 20 | 38 | 59 | 85 | 110 | 135 | |
| | | | 5.8 | 6 | 11(10) | 17(16) | 25 | 47 | 74 | 106 | 138 | 168 | |
| | | | 8.8 | 8 | 15(13) | 23(21) | 34 | 63 | 98 | 141 | 184 | 225 | |
| | | | 50 | 5 | 9 | 15 | 21 | 39 | 61 | 89 | 115 | 141 | |
| | | | 70 | 7 | 13 | 20 | 30 | 55 | 86 | 124 | 161 | 197 | |
| | | | 80 | 8 | 15 | 23 | 34 | 63 | 98 | 141 | 184 | 225 | |
| | | | | | | | | | | | | | |
| Ductility factor | k_7 | [-] | | | | | | | | | 1,0 | | |
| with lever arm | | | | | | | | | | | | | |
| Characteristic resistance $M^0_{Rk,s}$ | Property class | [Nm] | 4.8 | 6 | 15(13) | 30(27) | 52 | 133 | 259 | 448 | 665 | 899 | |
| | | | 5.8 | 7 | 19(16) | 37(33) | 65 | 166 | 324 | 560 | 833 | 1123 | |
| | | | 8.8 | 12 | 30(26) | 60(53) | 105 | 266 | 519 | 896 | 1333 | 1797 | |
| | | | 50 | 7 | 19 | 37 | 65 | 166 | 324 | 560 | 833 | 1123 | |
| | | | 70 | 10 | 26 | 52 | 92 | 232 | 454 | 784 | 1167 | 1573 | |
| | | | 80 | 12 | 30 | 60 | 105 | 266 | 519 | 896 | 1333 | 1797 | |
| | | | | | | | | | | | | | |
| Partial factors ¹⁾ | | | | | | | | | | | | | |
| Partial factor $\gamma_{Ms,V}$ | Property class | [-] | 4.8 | | | | | | | | 1,25 | | |
| | | | 5.8 | | | | | | | | 1,25 | | |
| | | | 8.8 | | | | | | | | 1,25 | | |
| | | | 50 | | | | | | | | 2,38 | | |
| | | | 70 | | | | | | | | 1,25 ²⁾ / 1,56 | | |
| | | | 80 | | | | | | | | 1,33 | | |
| | | | | | | | | | | | | | |
| ¹⁾ In absence of other national regulations | | | | | | | | | | | | | |
| ²⁾ Only admissible for high corrosion resistant steel HCR, with $f_{yk} / f_{uk} \geq 0,8$ and $A_5 > 12\%$ (e.g. Upat anchor rods) | | | | | | | | | | | | | |
| ³⁾ Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot dip galvanised standard threaded rods according to EN ISO 10684:2004+AC:2009 | | | | | | | | | | | | | |
| Injection system UPM 33 | | | | | | | | | | Annex C 1 | | | |
| Performances Characteristic values for steel failure under tension / shear load of Upat anchor rods and standard threaded rods | | | | | | | | | | | | | |
| | | | | | | | | | | Appendix 16 / 21 | | | |

Table C2.1: Characteristic values for steel failure under tension / shear load of Upat internal threaded anchors IST

| Upat internal threaded anchors IST | | | M8 | M10 | M12 | M16 | M20 | | |
|--|--------------------------------|----------------|-----|------|------|--------------------------------------|------|------|------|
| Bearing capacity under tension load, steel failure | | | | | | | | | |
| Charact. resistance with screw | N _{Rk,s} | Property class | 5.8 | [kN] | 19 | 29 | 43 | 79 | 123 |
| | | 8.8 | | | 29 | 47 | 68 | 108 | 179 |
| | | Property class | R | | 26 | 41 | 59 | 110 | 172 |
| | | 70 | HCR | | 26 | 41 | 59 | 110 | 172 |
| Partial factors¹⁾ | | | | | | | | | |
| Partial factors | γ _{Ms,N} | Property class | 5.8 | [-] | | 1,50 | | | |
| | | 8.8 | | | | 1,50 | | | |
| | | Property class | R | | | 1,87 | | | |
| | | 70 | HCR | | | 1,87 | | | |
| Bearing capacity under shear load, steel failure | | | | | | | | | |
| Without lever arm | | | | | | | | | |
| Charact. resistance with screw | V ⁰ _{Rk,s} | Property class | 5.8 | [kN] | 9,2 | 14,5 | 21,1 | 39,2 | 62,0 |
| | | 8.8 | | | 14,6 | 23,2 | 33,7 | 54,0 | 90,0 |
| | | Property class | R | | 12,8 | 20,3 | 29,5 | 54,8 | 86,0 |
| | | 70 | HCR | | 12,8 | 20,3 | 29,5 | 54,8 | 86,0 |
| Ductility factor | | k ₇ | [-] | | | 1,0 | | | |
| With lever arm | | | | | | | | | |
| Charact. resistance with screw | M ⁰ _{Rk,s} | Property class | 5.8 | [Nm] | 20 | 39 | 68 | 173 | 337 |
| | | 8.8 | | | 30 | 60 | 105 | 266 | 519 |
| | | Property class | R | | 26 | 52 | 92 | 232 | 454 |
| | | 70 | HCR | | 26 | 52 | 92 | 232 | 454 |
| Partial factors¹⁾ | | | | | | | | | |
| Partial factors | γ _{Ms,V} | Property class | 5.8 | [-] | | 1,25 | | | |
| | | 8.8 | | | | 1,25 | | | |
| | | Property class | R | | | 1,56 | | | |
| | | 70 | HCR | | | 1,56 | | | |
| 1) In absence of other national regulations | | | | | | | | | |
| Injection system UPM 33 | | | | | | | | | |
| Performances Characteristic values for steel failure under tension / shear load of Upat internal threaded anchor IST | | | | | | Annex C 2 Appendix 17 / 21 | | | |

Table C3.1: Characteristic values for concrete failure under tension / shear load

| Size | | All sizes | | | | | | | | | | |
|--|--------------------------|-------------|----------------------|--|-----|-----|----------------|------------------|-----------------|-----------------|-----------------|--|
| Tension load | | | | | | | | | | | | |
| Installation factor | γ_{inst} | [-] | See annex C 4 to C 5 | | | | | | | | | |
| Factors for the compressive strength of concrete > C20/25 | | | | | | | | | | | | |
| Increasing factor for τ_{Rk} | C25/30 | Ψ_c | [-] | 1,05 | | | | | | | | |
| | C30/37 | | | 1,10 | | | | | | | | |
| | C35/45 | | | 1,15 | | | | | | | | |
| | C40/50 | | | 1,19 | | | | | | | | |
| | C45/55 | | | 1,22 | | | | | | | | |
| | C50/60 | | | 1,26 | | | | | | | | |
| Splitting failure | | | | | | | | | | | | |
| Edge distance | $h / h_{ef} \geq 2,0$ | $c_{cr,sp}$ | [mm] | 1,0 h_{ef} | | | | | | | | |
| | $2,0 > h / h_{ef} > 1,3$ | | | 4,6 h_{ef} - 1,8 h | | | | | | | | |
| | $h / h_{ef} \leq 1,3$ | | | 2,26 h_{ef} | | | | | | | | |
| Spacing | $s_{cr,sp}$ | | | 2 $c_{cr,sp}$ | | | | | | | | |
| Concrete cone failure | | | | | | | | | | | | |
| Uncracked concrete | $k_{ucr,N}$ | [-] | | 11,0 | | | | | | | | |
| Cracked concrete | $k_{cr,N}$ | | | 7,7 | | | | | | | | |
| Edge distance | $c_{cr,N}$ | [mm] | | 1,5 h_{ef} | | | | | | | | |
| Spacing | $s_{cr,N}$ | | | 2 $c_{cr,N}$ | | | | | | | | |
| Factors for sustained tension load | | | | | | | | | | | | |
| Temperature range | | [-] | | 50 °C / 80 °C | | | 72 °C / 120 °C | | | | | |
| Factor | ψ_{sus}^0 | [-] | | 0,74 | | | 0,87 | | | | | |
| Shear load | | | | | | | | | | | | |
| Installation factor | γ_{inst} | [-] | | 1,2 | | | | | | | | |
| Concrete pry-out failure | | | | | | | | | | | | |
| Factor for pry-out failure | k_8 | [-] | | 2,0 | | | | | | | | |
| Concrete edge failure | | | | | | | | | | | | |
| Effective length of fastener in shear loading | l_f | [mm] | | for $d_{nom} \leq 24$ mm: min (h_{ef} ; 12 d_{nom}) for $d_{nom} > 24$ mm: min (h_{ef} ; 8 d_{nom} ; 300 mm) | | | | | | | | |
| Calculation diameters | | | | | | | | | | | | |
| Size | | | M6 | M8 | M10 | M12 | M16 | M20 | M24 | M27 | M30 | |
| Upat anchor rods and standard threaded rods | d_{nom} | [mm] | 6 | 8 | 10 | 12 | 16 | 20 | 24 | 27 | 30 | |
| Upat internal threaded anchors IST | d_{nom} | | - ¹⁾ | 12 | 16 | 18 | 22 | 28 | - ¹⁾ | - ¹⁾ | - ¹⁾ | |
| 1) Anchor type not part of the assessment | | | | | | | | | | | | |
| Injection system UPM 33 | | | | | | | | Annex C 3 | | | | |
| Performances Characteristic values for concrete failure under tension / shear load | | | | | | | | Appendix 18 / 21 | | | | |

Table C4.1: Characteristic values for combined pull-out and concrete failure for **Upat anchor rods** and **standard threaded rods** in hammer drilled holes; **uncracked or cracked concrete**

| Anchor rod / standard threaded rod | | M6 | M8 | M10 | M12 | M16 | M20 | M24 | M27 | M30 |
|--|---------------------|--------------------------------------|-----|------|------|------|------|--------------------------------------|-----|-----|
| Combined pullout and concrete cone failure | | | | | | | | | | |
| Calculation diameter | d [mm] | 6 | 8 | 10 | 12 | 16 | 20 | 24 | 27 | 30 |
| Uncracked concrete | | | | | | | | | | |
| Characteristic bond resistance in uncracked concrete C20/25 | | | | | | | | | | |
| Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete) | | | | | | | | | | |
| Tem- pera ture range | I: 50 °C / 80 °C | $\tau_{Rk,ucr}$ [N/mm ²] | 9,0 | 11,0 | 11,0 | 11,0 | 10,0 | 9,5 | 9,0 | 8,5 |
| | II: 72 °C / 120 °C | | 6,5 | 9,5 | 9,5 | 9,0 | 8,5 | 8,0 | 7,5 | 7,0 |
| Hammer-drilling with standard drill bit or hollow drill bit (water filled hole) ¹⁾ | | | | | | | | | | |
| Tem- pera ture range | I: 50 °C / 80 °C | $\tau_{Rk,ucr}$ [N/mm ²] | -2) | -2) | -2) | 9,5 | 8,5 | 8,0 | 7,5 | 7,0 |
| | II: 72 °C / 120 °C | | -2) | -2) | -2) | 7,5 | 7,0 | 6,5 | 6,0 | 6,0 |
| Installation factors | | | | | | | | | | |
| Dry or wet concrete | γ_{inst} [-] | | | | | | 1,2 | | | |
| Water filled hole | | | -2) | -2) | -2) | | | 1,4 ¹⁾ | | |
| Cracked concrete | | | | | | | | | | |
| Characteristic bond resistance in cracked concrete C20/25 | | | | | | | | | | |
| Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete) | | | | | | | | | | |
| Tem- pera ture range | I: 50 °C / 80 °C | $\tau_{Rk,cr}$ [N/mm ²] | -2) | -2) | 6,0 | 6,0 | 6,0 | 5,5 | -2) | -2) |
| | II: 72 °C / 120 °C | | -2) | -2) | 5,0 | 6,0 | 6,0 | 5,0 | -2) | -2) |
| Hammer-drilling with standard drill bit or hollow drill bit (water filled hole) ¹⁾ | | | | | | | | | | |
| Tem- pera ture range | I: 50 °C / 80 °C | $\tau_{Rk,cr}$ [N/mm ²] | -2) | -2) | -2) | 5,0 | 5,0 | 4,5 | -2) | -2) |
| | II: 72 °C / 120 °C | | -2) | -2) | -2) | 4,0 | 4,0 | 4,0 | -2) | -2) |
| Installation factors | | | | | | | | | | |
| Dry or wet concrete | γ_{inst} [-] | | | | | | 1,2 | | | |
| Water filled hole | | | -2) | -2) | -2) | | | 1,4 ¹⁾ | | |
| ¹⁾ Only with coaxial cartridges: 380ml, 400 ml, 410 ml | | | | | | | | | | |
| ²⁾ No Performance assessed | | | | | | | | | | |
| Injection system UPM 33 | | | | | | | | | | |
| Performances Characteristic values for combined pull-out and concrete failure for Upat anchor rod and standard threaded rods | | | | | | | | Annex C 4 Appendix 19 / 21 | | |

Table C5.1: Characteristic values for combined pull-out and concrete failure for **Upat internal threaded anchors IST** in hammer drilled holes; **uncracked concrete**

| Internal threaded anchor IST | M8 | M10 | M12 | M16 | M20 |
|--|--------------------------------------|-------------|-------------|--------------------------------------|------------|
| Combined pullout and concrete cone failure | | | | | |
| Calculation diameter d [mm] | 12 | 16 | 18 | 22 | 28 |
| Uncracked concrete | | | | | |
| Characteristic bond resistance in uncracked concrete C20/25 | | | | | |
| Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete) | | | | | |
| Temperature range I: 50 °C / 80 °C II: 72 °C / 120 °C | $\tau_{Rk,ucr}$ [N/mm ²] | 10,5 9,0 | 10,0 8,0 | 9,5 8,0 | 9,0 7,5 |
| Hammer-drilling with standard drill bit or hollow drill bit (water filled hole) ¹⁾ | | | | | |
| Temperature range I: 50 °C / 80 °C II: 72 °C / 120 °C | $\tau_{Rk,ucr}$ [N/mm ²] | 10,0 7,5 | 9,0 6,5 | 9,0 6,5 | 8,5 6,0 |
| Installation factors | | | | | |
| Dry or wet concrete | γ_{inst} [-] | | | 1,2 | |
| Water filled hole | | | | 1,4 ¹⁾ | |
| ¹⁾ Only with coaxial cartridges: 380 ml, 400 ml, 410 ml | | | | | |
| Injection system UPM 33 | | | | | |
| Performances Characteristic values for combined pull-out and concrete failure for Upat internal threaded anchors IST | | | | | |
| | | | | Annex C 5 Appendix 20 / 21 | |

Table C6.1: Displacements for anchor rods

| Anchor rod | M6 | M8 | M10 | M12 | M16 | M20 | M24 | M27 | M30 |
|---|--------------|-----------------|-----------------|------|------|------|------|-----------------|-----------------|
| Displacement-Factors for tension load¹⁾ | | | | | | | | | |
| Uncracked concrete; Temperature range I, II | | | | | | | | | |
| δN₀-Factor | [mm/(N/mm²)] | 0,09 | 0,09 | 0,09 | 0,10 | 0,10 | 0,10 | 0,10 | 0,12 |
| δN∞-Factor | | 0,10 | 0,10 | 0,10 | 0,12 | 0,12 | 0,13 | 0,13 | 0,14 |
| Cracked concrete; Temperature range I, II | | | | | | | | | |
| δN₀-Factor | [mm/(N/mm²)] | - ³⁾ | - ³⁾ | 0,12 | 0,12 | 0,13 | 0,13 | - ³⁾ | - ³⁾ |
| δN∞-Factor | | - ³⁾ | - ³⁾ | 0,27 | 0,30 | 0,30 | 0,30 | - ³⁾ | - ³⁾ |
| Displacement-Factors for shear load²⁾ | | | | | | | | | |
| Uncracked or cracked concrete; Temperature range I, II | | | | | | | | | |
| δv₀-Factor | [mm/kN] | 0,11 | 0,11 | 0,11 | 0,10 | 0,10 | 0,09 | 0,09 | 0,08 |
| δv∞-Factor | | 0,12 | 0,12 | 0,12 | 0,11 | 0,11 | 0,10 | 0,10 | 0,09 |

1) Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0\text{-Factor}} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty\text{-Factor}} \cdot \tau_{Ed}$$

(τ_{Ed} : Design value of the applied tensile stress)

3) No performance assessed

2) Calculation of effective displacement:

$$\delta_{v0} = \delta_{v0\text{-Factor}} \cdot V_{Ed}$$

$$\delta_{v\infty} = \delta_{v\infty\text{-Factor}} \cdot V_{Ed}$$

(V_{Ed} : Design value of the applied shear force)

Table C6.2: Displacements for Upat internal threaded anchors IST

| Internal threaded anchor IST | M8 | M10 | M12 | M16 | M20 |
|---|--------------|------|------|------|------|
| Displacement-Factors for tension load¹⁾ | | | | | |
| Uncracked concrete; Temperature range I, II | | | | | |
| δN₀-Factor | [mm/(N/mm²)] | 0,10 | 0,11 | 0,12 | 0,13 |
| δN∞-Factor | | 0,13 | 0,14 | 0,15 | 0,16 |
| Displacement-Factors for shear load²⁾ | | | | | |
| Uncracked concrete; Temperature range I, II | | | | | |
| δv₀-Factor | [mm/kN] | 0,12 | 0,12 | 0,12 | 0,12 |
| δv∞-Factor | | 0,14 | 0,14 | 0,14 | 0,14 |

1) Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0\text{-Factor}} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty\text{-Factor}} \cdot \tau_{Ed}$$

(τ_{Ed} : Design value of the applied tensile stress)

2) Calculation of effective displacement:

$$\delta_{v0} = \delta_{v0\text{-Factor}} \cdot V_{Ed}$$

$$\delta_{v\infty} = \delta_{v\infty\text{-Factor}} \cdot V_{Ed}$$

(V_{Ed} : Design value of the applied shear force)

Injection system UPM 33

Performances

Displacements for anchor rods and Upat internal threaded anchors IST

Annex C 6