



PROHLÁŠENÍ O VLASTNOSTECH

DoP 0217

pro pro vstřikovací systém fischer Superbond (Kovové kotvy do betonu)

CS

1. Jedinečný identifikační kód typu výrobku:

DoP 0217

2. Zamýšlené/zamýšlená použití:

Dodatečné upevnění v tažené a tlačené zóně betonu. Viz. dodatek, obzvláště Přílohy B1- B15.

3. Výrobce:

fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Německo

4. Zplnomocněný zástupce:

-

5. Systém/systémy POSV:

1

6. Evropský dokument pro posuzování:

EAD 330499-01-0601

ETA-12/0258; 2020-06-17

Subjekt pro technické posuzování:

DIBt- Deutsches Institut für Bautechnik

Oznámený subjekt/oznámené subjekty:

2873 TU Darmstadt

7. Deklarovaná vlastnost/Deklarované vlastnosti:

Mechanická odolnost a stabilita (BWR 1)

Charakteristická únosnost v tahu (pro statickou a kvazistatickou akci):

Odolnost proti selhání oceli: Přílohy C1- C3

Odolnost proti kombinovanému porušení vytážením a selháním betonu: Přílohy C4- C10

$\tau_{Rk,100} = NPD$

Odolnost proti selhání betonu: Přílohy C4

Okrajová vzdálenost bránící rozštěpení při zatížení: Přílohy C4

Pevnost: Přílohy C4-C10, C15, C16

Maximální utahovací moment při instalaci: Přílohy B4- B8

Minimální vzdálenost od okraje a rozteč: Přílohy B4- B8

Charakteristická únosnost ve smyku (pro statickou a kvazistatickou akci):

Odolnost proti selhání oceli: Přílohy C1- C3

Odolnost proti selhání rozštěpením: Přílohy C4

Odolnost proti selhání okraje betonu: Přílohy C4

posuny při krátkodobém a dlouhodobém zatížení:

Posuny při krátkodobém a dlouhodobém zatížení: Přílohy C11- C12

Charakteristická únosnost a posuny pro seismické kategorie C1 a C2:

Odolnost proti tahovému zatížení, posuny, kategorie C1: Přílohy C13, C14, C15

Odolnost proti tahovému zatížení, posuny, kategorie C2: Přílohy C13, C14, C16

Odolnost proti smykovému zatížení, posuny, kategorie C1: Přílohy C13, C14

Odolnost proti smykovému zatížení, posuny, kategorie C2: Přílohy C13, C14, C16

Koefficient prstencové mezery: Přílohy C13

Hygiena, zdraví a životní prostředí (BWR 3)

Obsah, emise a / nebo uvolňování nebezpečných látek: NPD

8. Příslušná technická dokumentace a/nebo specifická technická dokumentace: -

Vlastnosti výše uvedeného výrobku jsou ve shodě se souborem deklarovaných vlastností. Toto prohlášení o vlastnostech se v souladu s nařízením (EU) č. 305/2011 vydává na výhradní odpovědnost výrobce uvedeného výše.

Podepsáno za výrobce a jeho jménem:

Dr.-Ing. Oliver Geibig, Výkonný ředitel pro obchodní jednotky a inženýrství
Tumlingen, 2021-04-01

Jürgen Grün, Výkonný ředitel pro chemii a kvalitu

Toto PoV bylo připraveno v různých jazykových mutacích. V případě rozporu vždy rozhoduje interpretace verze v anglickém jazyce.

Příloha obsahuje nepovinné a doplňkové informace v anglickém jazyce nad rámec zákonních požadavků.

Specific Part

1 Technical description of the product

The injection system fischer Superbond is a bonded anchor for use in concrete consisting of a cartridge with injection mortar fischer FIS SB or a resin capsule fischer RSB and a steel element according to Annex A 5.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The resin capsule is placed into the hole and the steel element is driven by machine with simultaneous hammering and turning. The anchor rod is anchored via the bond between steel element, chemical mortar and concrete

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B 4 to B 8, C 1 to C 10
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 1 to C 4
Displacements under short-term and long-term loading	See Annex C 11 and C 12
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C 13 to C 16

3.2 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with the European Assessment Document EAD 330499-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1


Installation conditions part 1

anchor rod or fischer anchor rod RG M with fischer injection system FIS SB


Pre-positioned installation

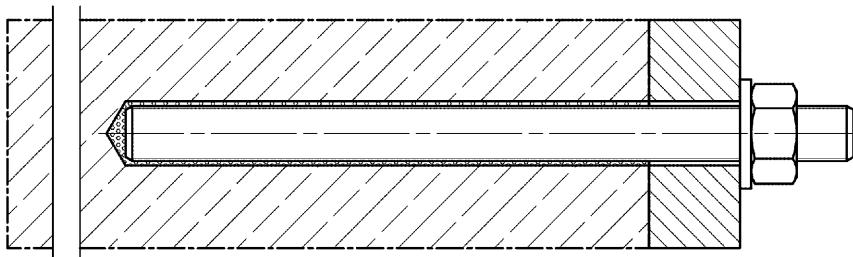

Push through installation (annular gap filled with mortar)

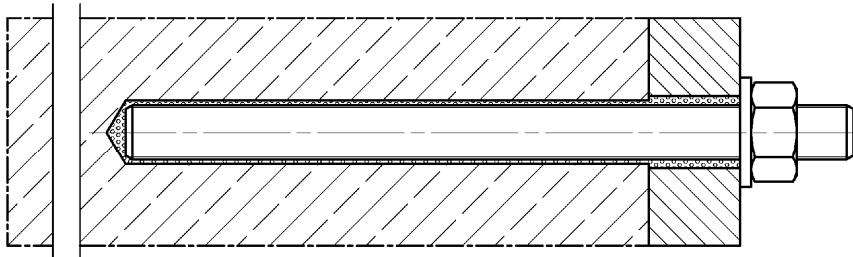

Pre-positioned or push through installation with subsequently injected fischer filling disc
(annular gap filled with mortar)

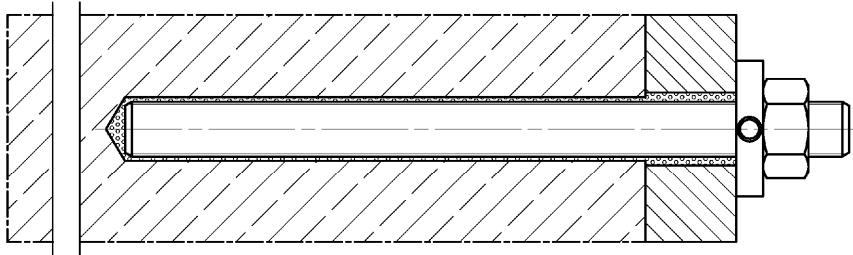

Figures not to scale

fischer Superbond


Product description
Installation conditions part 1

Annex A 1

Appendix 3/ 40


Installation conditions part 2

Reinforcing bar with fischer injection system FIS SB

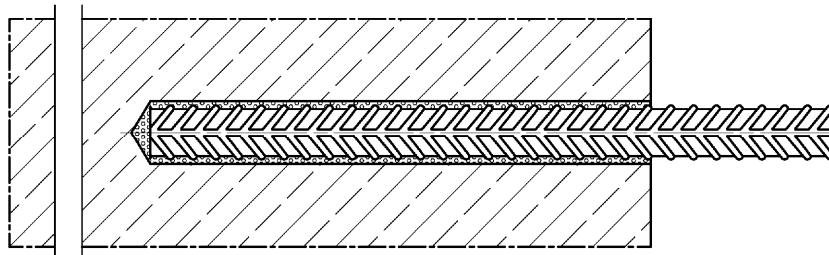


fischer rebar anchor FRA with fischer injection system FIS SB

Pre-positioned installation

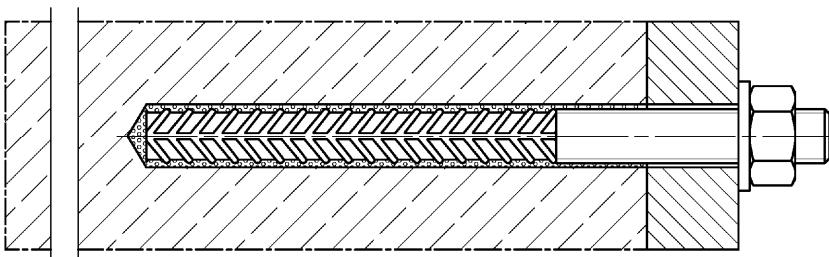

Push through installation (annular gap filled with mortar)

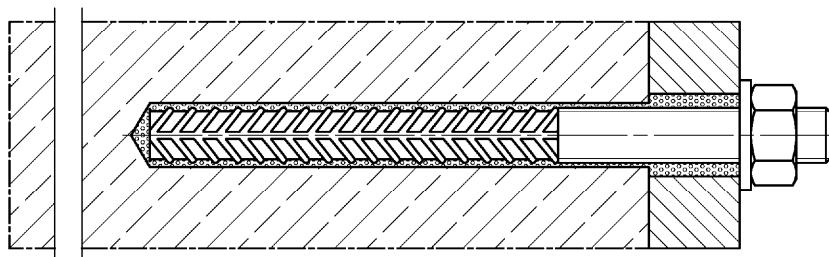

Figures not to scale

fischer Superbond

Product description
Installation conditions part 2


Annex A 2

Appendix 4/ 40


Installation conditions part 3

fischer internal threaded anchor RG MI with fischer resin capsule system RSB or fischer injection system FIS SB

Pre-positioned installation

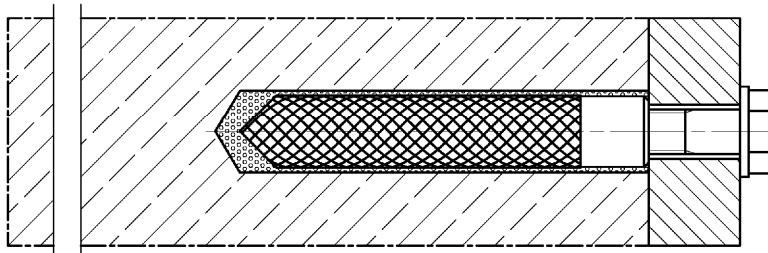


Pre-positioned installation with subsequently injected fischer filling disc (annular gap filled with mortar)

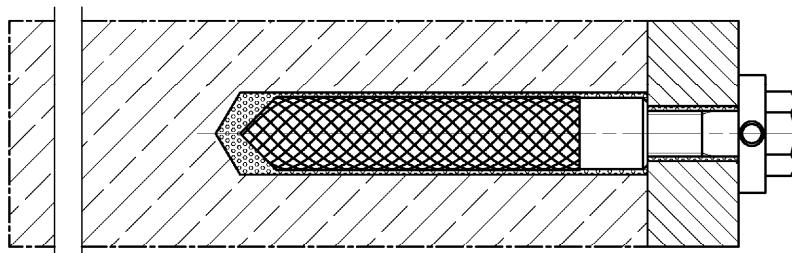


fischer anchor rod RG M with fischer resin capsule system RSB

Pre-positioned installation

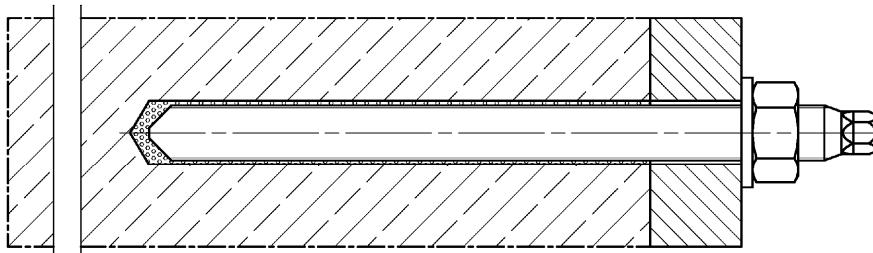

Pre-positioned installation with subsequently injected fischer filling disc (annular gap filled with mortar)

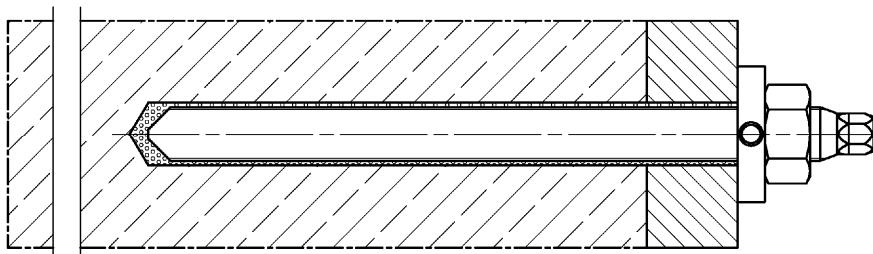

Figures not to scale

fischer Superbond

Product description


Installation conditions part 3

Annex A 3


Appendix 5/ 40

Overview system components Part 1

Mortar cartridge (shuttle cartridge) with sealing cap; Sizes: 390 ml, 585 ml, 1100 ml, 1500 ml



Imprint: fischer FIS SB, FIS SB High Speed, processing notes, shelf-life, piston travel scale (optional), curing times and processing times (depending on temperature), hazard code, size, volume


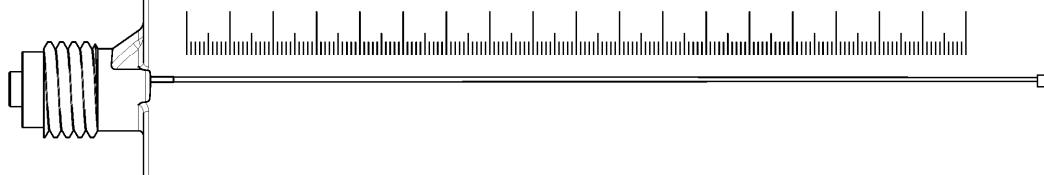


Resin capsule


Sizes: 8, 10 mini, 10, 12 mini, 12, 16 mini, 16, 16 E, 20, 20 E / 24, 30



Static mixer FIS MR Plus or UMR



Injection adapter / extension tube for static mixer



Figures not to scale

fischer Superbond

Product description

Overview system components part 1;
cartridges / capsule / static mixer / injection adapter


Annex A 4

Appendix 6/ 40

Overview system components Part 2


anchor rod

Sizes: M8, M10, M12, M16, M20, M24, M27, M30



fischer anchor rod RG M

Sizes: M8, M10, M12, M16, M20, M24, M30






fischer internal threaded anchor RG MI



Size: M8, M10, M12, M16, M20



Screw / threaded rod / washer / hexagon nut



fischer filling disc with injection adapter



Reinforcing bar

Nominal diameters: $\phi 8, \phi 10, \phi 12, \phi 14, \phi 16, \phi 20, \phi 25, \phi 28, \phi 32$



fischer rebar anchor FRA

Sizes: M12, M16, M20, M24



Figures not to scale

fischer Superbond

Product description

Overview system components part 2;
steel components

Annex A 5

Appendix 7/ 40

Overview system components Part 3

Cleaning brush BS / BSB



Blow-out pump ABG or ABP with cleaning nozzle



Figures not to scale

fischer Superbond

Product description

Overview system components part 3;
cleaning brush / blow-out pump / injection adapter

Annex A 6

Appendix 8/ 40

Table A7.1: Materials

Part	Designation	Material		
1	Injection cartridge	Mortar, hardener, filler		
Steel grade	Steel	Stainless steel R	High corrosion resistant steel HCR ²⁾	
	zinc plated	acc. to EN 10088-1:2014 Corrosion resistance class CRC III acc. to EN 1993-1-4:2015	acc. to EN 10088-1:2014 Corrosion resistance class CRC V acc. to EN 1993-1-4:2015	
2	Anchor rod	Property class 4.8, 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018/Zn5/An(A2K) or hot dip galvanised $\geq 40 \mu\text{m}$ EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12\%$ fracture elongation	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662, 1.4462; EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12\%$ fracture elongation	Property class 50 or 80 EN ISO 3506-1:2009 or property class 70 with $f_y = 560 \text{ N/mm}^2$ 1.4565; 1.4529; EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12\%$ fracture elongation
		Fracture elongation $A_5 > 8\%$, for applications without requirements for seismic performance category C2		
3	Washer ISO 7089:2000	zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018/Zn5/An(A2K) or hot dip galvanised $\geq 40 \mu\text{m}$ EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	1.4565; 1.4529; EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2012 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018/Zn5/An(A2K) or hot dip galvanised $\geq 40 \mu\text{m}$ EN ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4565; 1.4529; EN 10088-1:2014
5	fischer internal threaded anchor RG MI	Property class 5.8 ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018/Zn5/An(A2K)	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529; EN 10088-1:2014
6	Commercial standard screw or threaded rod for fischer internal threaded anchor RG MI	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018/Zn5/An(A2K), $A_5 > 8\%$ fracture elongation	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014 $A_5 > 8\%$ fracture elongation	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529; EN 10088-1:2014 $A_5 > 8\%$ fracture elongation
7	fischer filling disc similar to DIN 6319-G	zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018/Zn5/An(A2K) or hot dip galvanised $\geq 40 \mu\text{m}$ EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	1.4565; 1.4529; EN 10088-1:2014
8	Reinforcing bar EN 1992-1-1:2004 and AC:2010, Annex C	Bars and de-coiled rods, class B or C with f_{yk} and k according to NDP or NCL according to EN 1992-1-1/NA $f_{uk} = f_{ik} = k \cdot f_{yk}$		
9	fischer rebar anchor FRA	Rebar part: Bars and de-coiled rods class B or C with f_{yk} and k according to NDP or NCL of EN 1992-1-1:2004+AC:2010 $f_{uk} = f_{ik} = k \cdot f_{yk}$	Threaded part: Property class 70 or 80 EN ISO 3506-1:2009 1.4401, 1.4404, 1.4571, 1.4578, 1.4439, 1.4362, 1.4062 acc. to EN 10088-1:2014 Corrosion resistance class CRC III acc. to EN 1993-1-4:2015 1.4565; 1.4529 acc. to EN 10088-1:2014 Corrosion resistance class CRC V acc. to EN 1993-1-4:2015	

fischer Superbond

Product description
Materials

Annex A 7

Appendix 9/ 40

Specifications of intended use (part 1)

Table B1.1: Overview use and performance categories, **injection mortar system FIS SB**

Anchors subject to		FIS SB with ...												
		anchor rod	fischer internal threaded anchor RG MI	Reinforcing bar	fischer rebar anchor FRA									
Hammer drilling with standard drill bit		all sizes												
Hammer drilling with hollow drill bit (fischer "FHD", Heller "Duster Expert"; Bosch „Speed Clean“; Hilti "TE-CD, TE-YD", DreBo „D-Plus“, DreBo „D-Max“)						Nominal drill bit diameter (d_0) 12 mm to 35 mm								
Diamond drilling		not permitted												
Static and quasi static load, in	uncracked concrete cracked concrete	all sizes	Tables: C1.1 C4.1 C5.1 C11.1	all sizes	Tables: C2.1 C4.1 C7.1 C11.2	all sizes	Tables: C3.1 C4.1 C9.1 C12.1	all sizes						
Seismic performance category (only hammer drilling with standard / hollow drill bits)	C1 C2	all sizes M12 M16 M20 M24	Tables: C13.1 C14.2 C15.1 Tables: C13.1 C14.2 C16.1	- ¹⁾	all sizes - ¹⁾	Tables: C14.1 C14.2 C15.2 - ¹⁾	- ¹⁾	- ¹⁾						
Use category	I1 I2	dry or wet concrete water filled hole	all sizes not permitted											
Installation direction	D3 (downward and horizontal and upwards (overhead) installation)													
Installation method	pre-positioned or push through installation													
Installation temperature	FIS SB: $T_{i,\min} = -15^\circ\text{C}$ to $T_{i,\max} = +40^\circ\text{C}$ FIS SB High Speed: $T_{i,\min} = -20^\circ\text{C}$ to $T_{i,\max} = +40^\circ\text{C}$													
In-service temperature	Temperature range I	-40 °C to +40 °C	$T_{st} = +40^\circ\text{C}$ / $T_{lt} = +24^\circ\text{C}$											
	Temperature range II	-40 °C to +80 °C	$T_{st} = +80^\circ\text{C}$ / $T_{lt} = +50^\circ\text{C}$											
	Temperature range III	-40 °C to +120 °C	$T_{st} = +120^\circ\text{C}$ / $T_{lt} = +72^\circ\text{C}$											
	Temperature range IV	-40 °C to +150 °C	$T_{st} = +150^\circ\text{C}$ / $T_{lt} = +90^\circ\text{C}$											

¹⁾ No performance assessed

fischer Superbond

Intended use

Specifications (part 1), fischer injection mortar system FIS SB

Annex B 1

Specifications of intended use (part 2)

Table B2.1: Overview use and performance categories, resin capsule system RSB

Anchorage subject to		RSB with ...											
		fischer anchor rod RG M 	fischer internal threaded anchor RG MI 										
Hammer drilling with standard drill bit 		all sizes											
Hammer drilling with hollow drill bit (fischer "FHD", Heller "Duster Expert"; Bosch "Speed Clean"; Hilti "TE-CD, TE-YD", DreBo "D-Plus", DreBo "D-Max") 		Nominal drill bit diameter (d_0) 12 mm to 35 mm		all sizes									
Diamond drilling 		all sizes ¹⁾											
Static and quasi static load, in	uncracked concrete	all sizes	Tables: C1.1 C4.1 C6.1 C11.1	all sizes	Tables: C2.1 C4.1 C8.1 C11.2								
	cracked concrete	all sizes ¹⁾		all sizes ¹⁾									
Seismic performance category (only hammer drilling with standard / hollow drill bits)	C1	all sizes	Tables: C13.1 C14.2 C15.1	⁻²⁾									
	C2	⁻²⁾		⁻²⁾									
Use category	I1 dry or wet concrete	all sizes											
	I2 water filled hole	all sizes											
Installation direction	D3 (downward and horizontal and upwards (overhead) installation)												
Installation method	only pre-positioned installation												
Installation temperature	$T_{i,\min} = -30^\circ\text{C}$ to $T_{i,\max} = +40^\circ\text{C}$												
In-service temperature	Temperature range I	-40 °C to +40 °C	$T_{st} = +40^\circ\text{C}$ / $T_{lt} = +24^\circ\text{C}$										
	Temperature range II	-40 °C to +80 °C	$T_{st} = +80^\circ\text{C}$ / $T_{lt} = +50^\circ\text{C}$										
	Temperature range III	-40 °C to +120 °C	$T_{st} = +120^\circ\text{C}$ / $T_{lt} = +72^\circ\text{C}$										
	Temperature range IV	-40 °C to +150 °C	$T_{st} = +150^\circ\text{C}$ / $T_{lt} = +90^\circ\text{C}$										

¹⁾ For diamond drilling in cracked concrete only nominal drill bit diameters (d_0) ≥ 18 mm are permitted

²⁾ No performance assessed

fischer Superbond

Intended use
Specifications (part 2), fischer resin capsule system RSB

Annex B 2

Appendix 11/ 40

Specifications of intended use (part 3)

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres of strength classes C20/25 to C50/60 according to EN 206:2013+A1:2016

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel).
- For all other conditions according to EN1993-1-4:2015 corresponding to corrosion resistance classes to Annex A 7 table A7.1.

Design:

- Anchorages have to be designed by a responsible engineer with experience of concrete anchor design.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed in accordance with:
EN 1992-4:2018 and EOTA Technical Report TR 055, Edition February 2018.

Installation:

- Anchor installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- In case of aborted hole: The hole shall be filled with mortar
- Anchorage depth should be marked and adhered to on installation
- Overhead installation is allowed

fischer Superbond

Intended use
Specifications (part 3)


Annex B 3

Appendix 12/ 40

Table B4.1: Installation parameters for anchor rods in combination with injection mortar system FIS SB

Anchor rods	Thread	M8	M10	M12	M16	M20	M24	M27	M30
Width across flats	SW	13	17	19	24	30	36	41	46
Nominal drill hole diameter	d_0	10	12	14	18	24	28	30	35
Drill hole depth	h_0								
Effective embedment depth	h_{ef} , min h_{ef} , max	60 160	60 200	70 240	80 320	90 400	96 480	108 540	120 600
Minimum spacing and minimum edge distance	$s_{\text{min}} = c_{\text{min}}$	40	45	55	65	85	105	120	140
Diameter of the clearance hole of the fixture	pre-positioned installation	9	12	14	18	22	26	30	33
	push through installation	11	14	16	20	26	30	33	40
Min. thickness of concrete member	h_{min}	$h_{\text{ef}} + 30 \ (\geq 100)$				$h_{\text{ef}} + 2d_0$			
Maximum setting torque	max T_{inst}	[Nm]	10	20	40	60	120	150	200
									300

fischer anchor rod

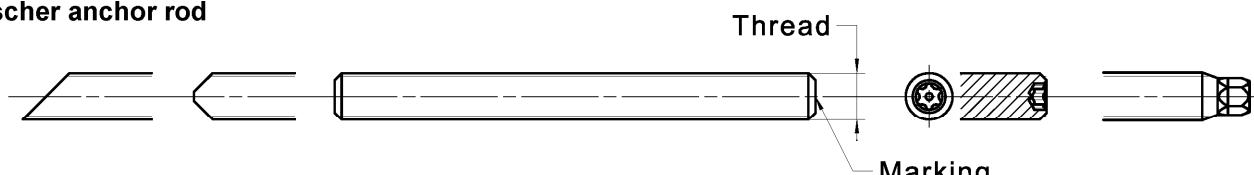


Marking (on random place) fischer anchor rod:

Steel zinc plated PC ¹⁾ 8.8	• or +	Steel hot-dip PC ¹⁾ 8.8	•
High corrosion resistant steel HCR PC ¹⁾ 50	•	High corrosion resistant steel HCR PC ¹⁾ 70	-
High corrosion resistant steel HCR PC ¹⁾ 80	(Stainless steel R property class 50	~
Stainless steel R property class 80	*		

Alternatively: Colour coding according to DIN 976-1:2016

¹⁾ PC = property class

Installation conditions:

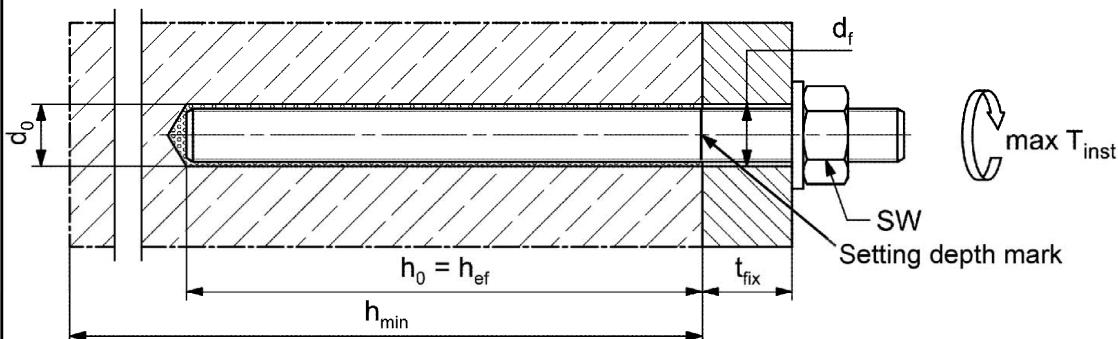

Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

- Materials, dimensions and mechanical properties according to Annex A 7, Table A7.1
- Inspection certificate 3.1 according to EN 10204:2004, the documents have to be stored
- Setting depth is marked

Figures not to scale

fischer Superbond

Intended use


Installation parameters for anchor rods in combination with injection mortar system FIS SB

Annex B 4

Table B5.1: Installation parameters for fischer anchor rods RG M in combination with resin capsule system RSB

Anchor rod RG M	Thread	M8	M10	M12	M16	M20	M24	M30
Width across flats	SW	13	17	19	24	30	36	46
Nominal drill hole diameter	d_0	10	12	14	18	25	28	35
Drill hole depth	h_0					$h_0 = h_{\text{ref}}$		
	$h_{\text{ref},1}$	---	75	75	95	---	---	---
Effective embedment depth	$h_{\text{ref},2}$	80	90	110	125	170	210	280
	$h_{\text{ref},3}$	---	150	150	190	210	---	---
Minimum spacing and minimum edge distance	$s_{\min} = c_{\min}$	40	45	55	65	85	105	140
Diameter of the pre-clearance hole of the fixture	d_f	9	12	14	18	22	26	33
Min. thickness of concrete member	h_{\min}			$h_{\text{ref}} + 30$ (≥ 100)			$h_{\text{ref}} + 2d_0$	
Maximum setting torque	max T_{inst} [Nm]	10	20	40	60	120	150	300

fischer anchor rod RG M

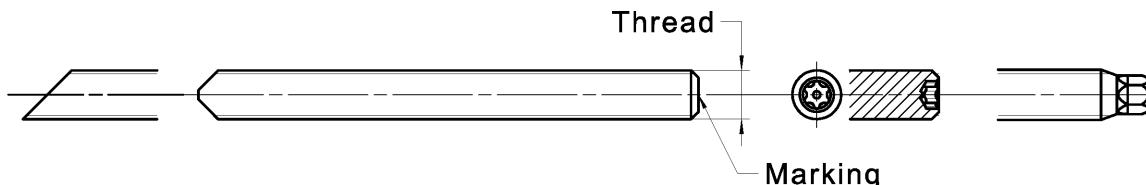


Marking (on random place) fischer anchor rod RG M:

Steel zinc plated PC ¹⁾ 8.8	• or +	Steel hot-dip PC ¹⁾ 8.8	•
High corrosion resistant steel HCR PC ¹⁾ 50	•	High corrosion resistant steel HCR PC ¹⁾ 70	-
High corrosion resistant steel HCR PC ¹⁾ 80	(Stainless steel R property class 50	~
Stainless steel R property class 80	*		

Alternatively: Colour coding according to DIN 976-1:2016

¹⁾ PC = property class

Installation conditions:

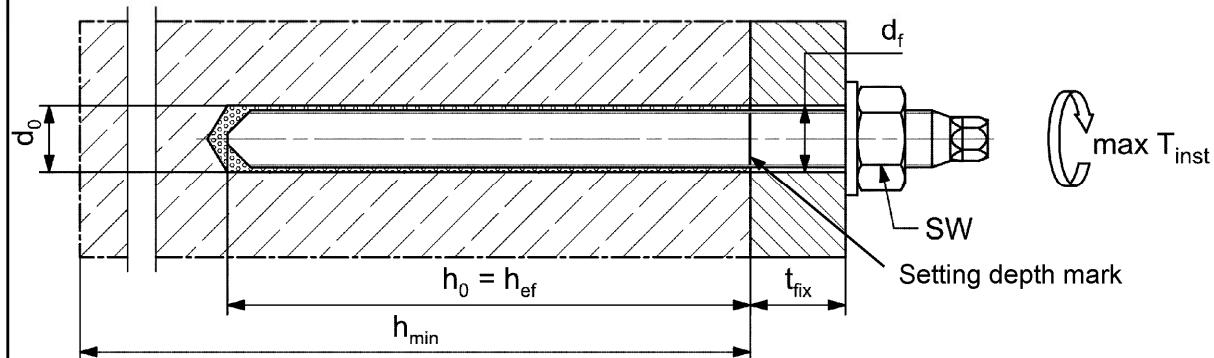

Figures not to scale

fischer Superbond

Intended use

Installation parameters for fischer anchor rods RG M in combination with resin capsule system RSB



Annex B 5

Appendix 14/ 40

Table B6.1: Installation parameters for **fischer internal threaded anchors RG MI**

Internal threaded anchor RG MI	Thread	M8	M10	M12	M16	M20
Sleeve diameter $d = d_H$	[mm]	12	16	18	22	28
Nominal drill hole diameter d_0		14	18	20	24	32
Drill hole depth h_0		$h_0 = h_{\text{ef}} = L_H$				
Effective embedment depth ($h_{\text{ef}} = L_H$)		90	90	125	160	200
Minimum spacing and minimum edge distance $s_{\text{min}} = c_{\text{min}}$		55	65	75	95	125
Diameter of clearance hole in the fixture d_f		9	12	14	18	22
Minimum thickness of concrete member h_{min}		120	125	165	205	260
Maximum screw-in depth $l_{E,\text{max}}$		18	23	26	35	45
Minimum screw-in depth $l_{E,\text{min}}$		8	10	12	16	20
Maximum installation torque $\text{max } T_{\text{inst}}$	[Nm]	10	20	40	80	120

fischer internal threaded anchor RG MI

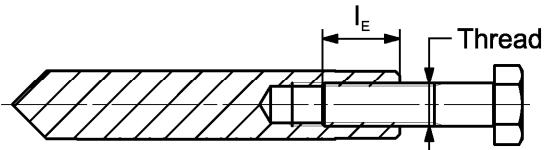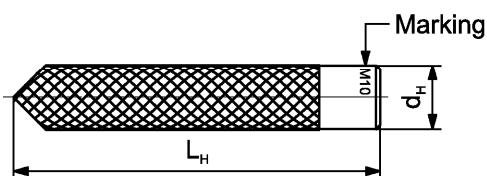


Marking: Anchor size e. g.: **M10**

Stainless steel → additional R; e.g.: **M10 R**

High corrosion resistant steel R → additional C; e.g.: **M10 HCR**

Retaining bolt or threaded rods (including nut and washer) must comply with the appropriate material and strength class of Annex A 7, Table A7.1

Installation conditions:

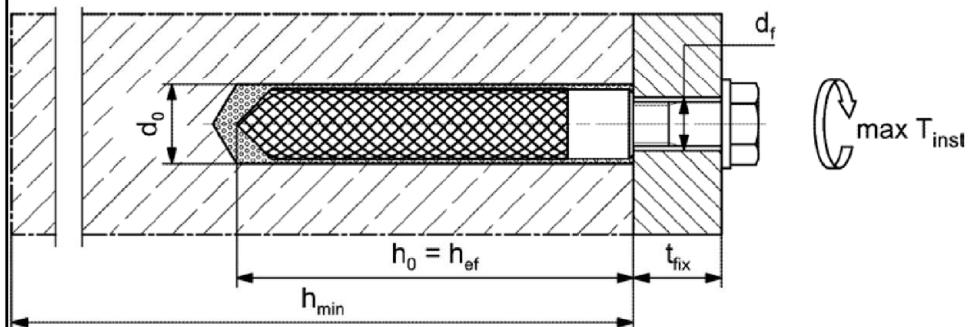

Figures not to scale

fischer Superbond

Intended use

Installation parameters for fischer internal threaded anchors RG MI

Annex B 6

Table B7.1: Installation parameters for **reinforcing bars**

Nominal diameter of the bar	Φ	8 ¹⁾	10 ¹⁾	12 ¹⁾	14	16	20	25	28	32			
Nominal drill hole diameter	d ₀ [mm]	10	12	12	14	14	16	18	20	25	30	35	40
Drill hole depth								$h_0 = h_{ef}$					
Effective embedment depth		60	60	70	75	80	90	100	112	128			
		160	200	240	280	320	400	500	560	640			
Minimum spacing and minimum edge distance		40	45	55	60	65	85	110	130	160			
Minimum thickness of concrete member		$h_{ef} + 30$ (≥ 100)			$h_{ef} + 2d_0$								


¹⁾ Both drill hole diameters can be used

Reinforcing bar



- The minimum value of related rib area $f_{R,min}$ must fulfil the requirements of EN 1992-1-1:2004+AC:2010
- The rib height must be within the range: $0,05 \cdot \phi \leq h_{rib} \leq 0,07 \cdot \phi$
(ϕ = Nominal diameter of the bar, h_{rib} = rib height)

Installation conditions:

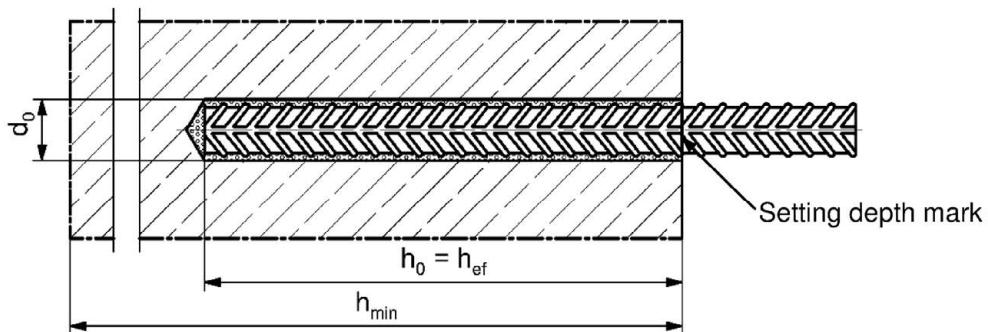

Figures not to scale

fischer Superbond

Intended use
Installation parameters reinforcing bars

Annex B 7


Appendix 16/ 40

Table B8.1: Installation parameters for **fischer rebar anchor FRA**

Rebar anchor FRA	Thread	M12 ¹⁾	M16	M20	M24	
Nominal diameter of the bar	φ SW d_0 h_0 $h_{ef,min}$ $h_{ef,max}$ l_e $s_{min} = c_{min}$ ≤ d_f ≤ d_f	12	16	20	25	
Width across flats		19	24	30	36	
Nominal drill hole diameter		14	16	20	25	
Drill hole depth		$h_{ef} + l_e$				
Effective embedment depth		70	80	90	96	
Distance concrete surface to welded joint		140	220	300	380	
Minimum spacing and minimum edge distance		100				
Diameter of clearance hole in the fixture		55	65	85	105	
Minimum thickness of concrete member		14	18	22	26	
Maximum installation torque		18	22	26	32	
		$h_0 + 30$	$h_0 + 2d_0$			
Maximum installation torque	max T_{inst}	[Nm]	40	60	120	150

¹⁾ Both drill hole diameters can be used


fischer rebar anchor FRA

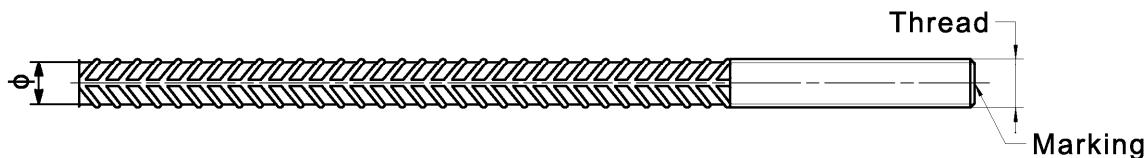

Marking frontal e. g:

FRA (for stainless steel);
 FRA HCR (for high corrosion resistant steel)

Installation conditions:

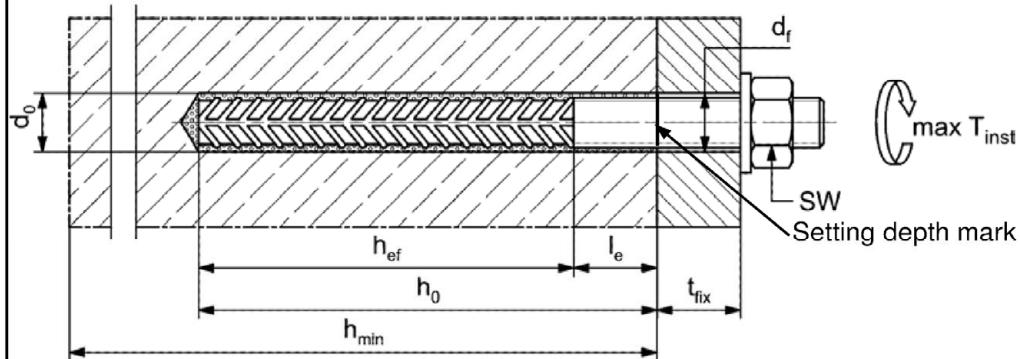

Figures not to scale

fischer Superbond

Intended use
Installation parameters rebar anchor FRA

Annex B 8

Appendix 17/ 40

Table B9.1: Dimension of resin capsule RSB

Resin capsule RSB		RSB 8	RSB 10 mini	RSB 10	RSB 12 mini	RSB 12	RSB 16 mini	RSB 16	RSB 16 E	RSB 20	RSB 20 E / 24	RSB 30
Capsule diameter d_p	[mm]	9,0	10,5		12,5		16,5		23,0		27,5	
Capsule length L_p		85	72	90	72	97	72	95	123	160	190	260

**Table B9.2:** Assignment of resin capsule RSB to fischer anchor rod RG M

Anchor rod RG M		M8	M10	M12	M16	M20	M24	M30
Effective embedment depth $h_{ef, 1}$	[mm]	---	75	75	95	---	---	---
Related capsule RSB	[-]	---	10 mini	12 mini	16 mini	---	---	---
Effective embedment depth $h_{ef, 2}$	[mm]	80	90	110	125	170	210	280
Related capsule RSB	[-]	8	10	12	16	20	20 E / 24	30
Effective embedment depth $h_{ef, 3}$	[mm]	---	150	150	190	210	---	---
Related capsule RSB	[-]	---	2 x 10 mini	2 x 12 mini	2 x 16 mini	20 E / 24	---	---

Table B9.3: Assignment of resin capsule RSB to fischer internal threaded anchor RG MI

Internal threaded anchor RG MI		M8	M10	M12	M16	M20
Effective embedment depth h_{ef}	[mm]	90	90	125	160	200
Related capsule RSB	[-]	10	12	16	16 E	20 E / 24

Figures not to scale

fischer Superbond

Intended use

Dimensions of the capsules; Assignment of the capsule to the fischer anchor rod RG M and fischer internal threaded anchor RG MI


Annex B 9

Appendix 18/ 40

Table B10.1: Parameters of the cleaning brush BS / BSB (steel brush with steel bristles)

The size of the cleaning brush refers to the drill hole diameter

Nominal drill hole diameter	d_0	[mm]	10	12	14	16	18	20	24	25	28	30	32	35	40
Steel brush diameter BS	d_b		11	14	16	20		25	26	27	30		40		-
Steel brush diameter BSB	d_b		-	-	-	-	-	-	-	-	-	-	-	-	42

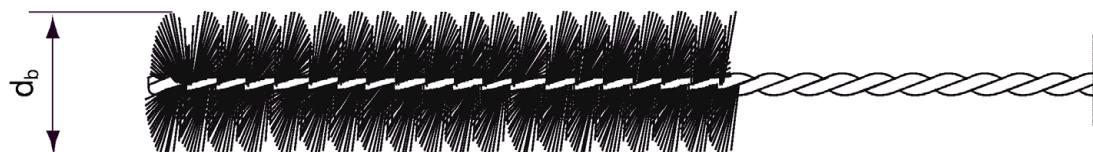**Table B10.2:** Maximum **processing time** of the mortar and minimum **curing time**

(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature. Minimal cartridge temperature +5 °C; minimal resin capsule temperature -15 °C)

Temperature at anchoring base [°C]	Maximum processing time t_{work}		Minimum curing time t_{cure}		
	FIS SB	FIS SB High Speed	FIS SB	FIS SB High Speed	RSB
-30 to -20	---	---	---	---	120 h
> -20 to -15	---	60 min	---	24 h	48 h
> -15 to -10	60 min	30 min	36 h	8 h	30 h
> -10 to -5	30 min	15 min	24 h	3 h	16 h
> -5 to 0	20 min	10 min	8 h	2 h	10 h
> 0 to 5	13 min	5 min	4 h	1 h	45 min
> 5 to 10	9 min	3 min	2 h	45 min	30 min
> 10 to 20	5 min	2 min	1 h	30 min	20 min
> 20 to 30	4 min	1 min	45 min	15 min	5 min
> 30 to 40	2 min	---	30 min	---	3 min

Figures not to scale





fischer Superbond

Intended useCleaning brush (steel brush)
Processing time and curing time**Annex B 10**

Appendix 19/ 40


Installation instructions part 1; Injection mortar system FIS SB

Drilling and cleaning the hole (hammer drilling with standard drill bit)

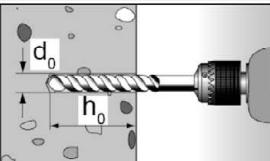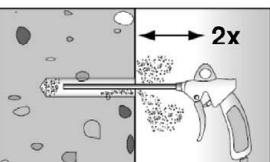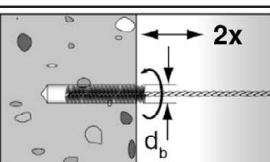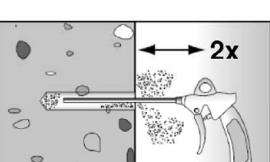1	 <p>Drill the hole. Nominal drill hole diameter d_0 and drill hole depth h_0 see tables B4.1, B6.1, B7.1, B8.1</p>
2	 <p>Clean the drill hole: Blow out the drill hole twice, with oil free compressed air ($p \geq 6$ bar) In uncracked concrete the use of the manual blow-out pump ABG is possible (Installation parameters: $d_0 < 18$ mm and $h_{ef} < 10d$)</p>
3	 <p>Brush the drill hole twice. For drill hole diameter ≥ 30 mm use a power drill. For deep holes use an extension. Corresponding brushes see table B10.1</p>
4	 <p>Clean the drill hole: Blow out the drill hole twice, with oil free compressed air ($p \geq 6$ bar) In uncracked concrete the use of the manual blow-out pump ABG is possible (Installation parameters: $d_0 < 18$ mm and $h_{ef} < 10d$)</p>

Go to step 5 (Annex B 12)

Drilling and cleaning the hole (hammer drilling with hollow drill bit)

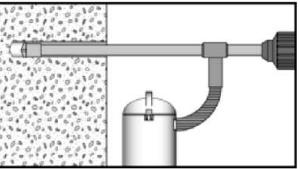1	 <p>Check a suitable hollow drill (see table B1.1) for correct operation of the dust extraction</p>
2	 <p>Use a suitable dust extraction system, e. g. fischer FVC 35 M or a comparable dust extraction system with equivalent performance data.</p> <p>Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Nominal drill hole diameter d_0 and drill hole depth h_0 see tables B4.1, B6.1, B7.1, B8.1</p>

Go to step 5 (Annex B 12)

fischer Superbond

Intended use

Installation instructions part 1; injection mortar system FIS SB

Annex B 11

Appendix 20/ 40

Installation instructions part 2; injection mortar system FIS SB

Preparing the cartridge

5		Remove the sealing cap Screw on the static mixer (the spiral in the static mixer must be clearly visible)
6		Place the cartridge into the dispenser
7		Extrude approximately 10 cm of material out until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey

Injection of the mortar

8		Fill approximately 2/3 of the drill hole with mortar. Always begin from the bottom of the hole and avoid bubbles For drill hole depth ≥ 150 mm use an extension tube	For overhead installation, deep holes ($h_0 > 250$ mm) or drill hole diameter ($d_0 \geq 40$ mm) use an injection-adapter
---	--	--	---

Go to step 9 (Annex B 13)

fischer Superbond

Intended use






Installation instructions part 2; injection mortar system FIS SB

Annex B 12




Appendix 21 / 40

Installation instructions part 3; injection mortar system FIS SB

Installation of anchor rods or fischer internal threaded anchors RG MI

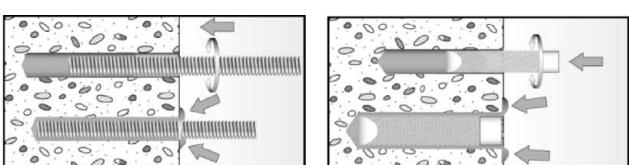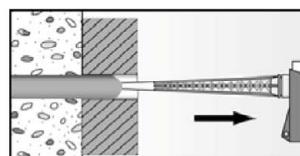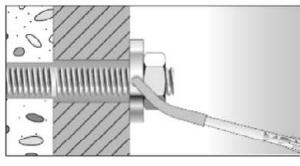9		Only use clean and oil-free metal part. Mark the setting depth of the metal part. Push the anchor rod or fischer internal threaded RG MI anchor down to the bottom of the hole, turning it slightly while doing so. After inserting the metal part, excess mortar must be emerged around the anchor element. If not, pull out the metal part immediately and reinject mortar.			
		For overhead installations support the metal part with wedges. (e. g. fischer centering wedges)			
		For push through installation fill the annular gap with mortar			
11		Wait for the specified curing time t_{cure} see table B10.2	12		Mounting the fixture max T_{inst} see tables B4.1 and B6.1
Option		After the minimum curing time is reached, the gap between metal part and fixture (annular clearance) may be filled with mortar via the fischer filling disc. Compressive strength $\geq 50 \text{ N/mm}^2$ (e.g. fischer injection mortars FIS HB, FIS SB, FIS V, FIS EM Plus) ATTENTION: Using fischer filling disc reduces t_{fix} (usable length of the anchor)			

Installation reinforcing bars and fischer rebar anchor FRA

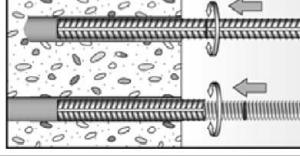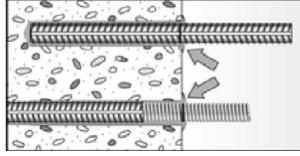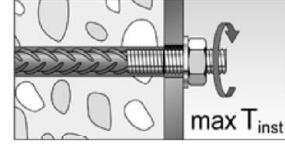10		Only use clean and oil-free reinforcing bars or fischer FRA. Mark the setting depth. Turn while using force to push the reinforcement bar or the fischer FRA into the filled hole up to the setting depth mark			
		When the setting depth mark is reached, excess mortar must be emerged from the mouth of the drill hole. If not, pull out the anchor element immediately and reinject mortar.			
11		Wait for the specified curing time t_{cure} see table B10.2	12		Mounting the fixture max T_{inst} see table B8.1

fischer Superbond



Intended use

Installation instructions part 3; injection mortar system FIS SB

Annex B 13







Installation instructions part 4; resin capsule RSB

Drilling and cleaning the hole (hammer drilling with standard drill bit)

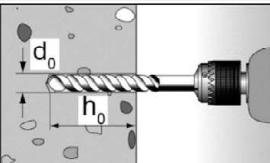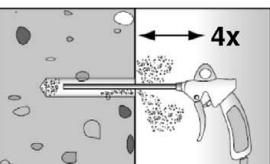1	 <p>Drill the hole. Nominal drill hole diameter d_0 and drill hole depth h_0 see tables B5.1 and B6.1</p>
2	 <p>Clean the drill hole: Blow out the drill hole four times, with oil free compressed air ($p \geq 6$ bar) In uncracked concrete the use of the manual blow-out pump ABG is possible (Installation parameters: $d_0 < 18$ mm and $h_{ef} < 10d$)</p> 

Go to step 6 (Annex B 15)

Drilling and cleaning the hole (wet drilling with diamond drill bit)

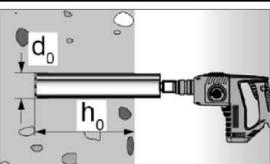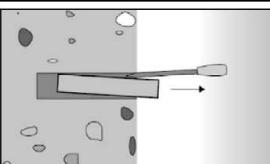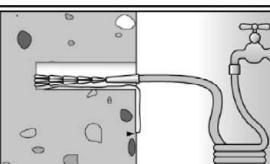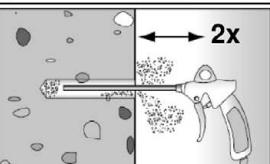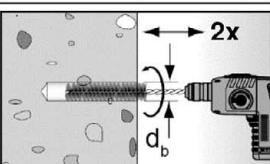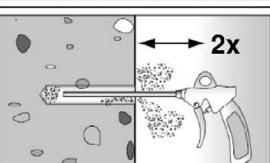1	 <p>Drill the hole. Drill hole diameter d_0 and drill hole depth h_0 see tables B5.1 and B6.1</p>	 <p>Break the drill core and remove it</p>
2	 <p>Flush the drill hole with clean water until it flows clear</p>	
3	 <p>Blow out the drill hole twice, using oil-free compressed air ($p > 6$ bar)</p>	
4	 <p>Brush the drill hole twice using a power drill. Corresponding brushes see table B10.1</p>	
5	 <p>Blow out the drill hole twice, using oil-free compressed air ($p > 6$ bar)</p>	

Go to step 6 (Annex B 15)

fischer Superbond


Intended use
Installation instructions part 4; resin capsule RSB

Annex B 14

Appendix 23/ 40






Installation instructions part 5; resin capsule RSB

Drilling and cleaning the hole (hammer drilling with hollow drill bit)

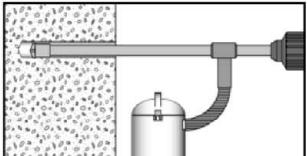1		Check a suitable hollow drill (see table B2.1) for correct operation of the dust extraction
2		<p>Use a suitable dust extraction system, e. g. fischer FVC 35 M or a comparable dust extraction system with equivalent performance data.</p> <p>Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Nominal drill hole diameter d_0 and drill hole depth h_0 see tables B5.1 and B6.1</p>

Go to step 6 (Annex B 15)

Installation fischer anchor rod RG M or fischer internal threaded anchor RG MI

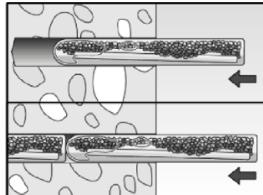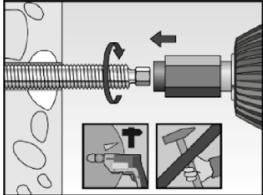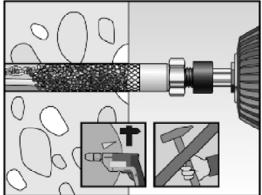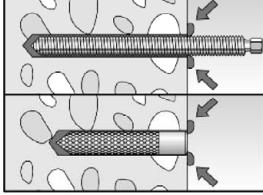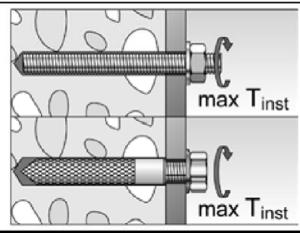6		Insert the resin capsule into the drill hole by hand. Suitable resin capsule RSB or RSB mini see table B9.2 .	 	Depending on the metal part being installed, use a suitable setting tool
7			Only use clean and grease-free metal parts. Using a suitable adapter, drive the fischer anchor rod RG M or the fischer internal threaded anchor RG MI into the capsule using a hammer drill set on rotary hammer action. Stop when the metal parts reaches the bottom of the hole and is set to the correct embedment depth	
8		When reaching the correct embedment depth, excess mortar must emerge from the mouth of the drill hole. If not, the metal parts must be pulled out directly and a second resin capsule must be pushed into the drill hole. Setting process must be repeated (Step 7)		
9		Wait for the specified curing time, t_{cure} see table B10.2	10	

fischer Superbond

Intended use
Installation instructions part 5; resin capsule RSB

Annex B 15

Appendix 24/ 40

Table C1.1: Characteristic values for **steel failure** under tension / shear load of **fischer anchor rods** and **standard threaded rods**

Anchor rod / standard threaded rod		M8	M10	M12	M16	M20	M24	M27	M30										
Bearing capacity under tension load, steel failure³⁾																			
Characteristic resistance $N_{Rk,s}$	Steel zinc plated	Property class 4.8 5.8 8.8 50	[kN]	15(13)	23(21)	33	63	98	141										
				19(17)	29(27)	43	79	123	177										
				29(27)	47(43)	68	126	196	282										
				19	29	43	79	123	177										
	Stainless steel R and high corrosion resistant steel HCR	Property class 70 80		26	41	59	110	172	247										
				30	47	68	126	196	282										
				30	47	68	126	196	282										
				30	47	68	126	196	282										
Partial factors¹⁾																			
Partial factor $\gamma_{Ms,N}$	Steel zinc plated	Property class 4.8 5.8 8.8	[-]	1,50															
				1,50															
				1,50															
	Stainless steel R and high corrosion resistant steel HCR	Property class 50 70 80		2,86															
				1,50 ²⁾ / 1,87															
				1,60															
Bearing capacity under shear load, steel failure³⁾																			
without lever arm																			
Characteristic resistance $V^0_{Rk,s}$	Steel zinc plated	Property class 4.8 5.8 8.8 50	[kN]	9(8)	14(13)	20	38	59	85										
				11(10)	17(16)	25	47	74	106										
				15(13)	23(21)	34	63	98	141										
				9	15	21	39	61	89										
	Stainless steel R and high corrosion resistant steel HCR	Property class 70 80		13	20	30	55	86	124										
				15	23	34	63	98	141										
				15	23	34	63	98	141										
				15	23	34	63	98	141										
Ductility factor	k ₇	[-]		1,0															
with lever arm																			
Characteristic resistance $M^0_{Rk,s}$	Steel zinc plated	Property class 4.8 5.8 8.8 50	[Nm]	15(13)	30(27)	52	133	259	448										
				19(16)	37(33)	65	166	324	560										
				30(26)	60(53)	105	266	519	896										
				19	37	65	166	324	560										
	Stainless steel R and high corrosion resistant steel HCR	Property class 70 80		26	52	92	232	454	784										
				30	60	105	266	519	896										
				30	60	105	266	519	896										
				30	60	105	266	519	896										
Partial factors¹⁾																			
Partial factor $\gamma_{Ms,V}$	Steel zinc plated	Property class 4.8 5.8 8.8 50	[-]	1.25															
				1.25															
				1.25															
				2.38															
	Stainless steel R and high corrosion resistant steel HCR	Property class 70 80		1.25 ²⁾ / 1.56															
				1.33															
				1.33															
				1.33															
¹⁾ In absence of other national regulations																			
²⁾ Only admissible for high corrosion resistant steel C, with $f_{yk} / f_{uk} \geq 0,8$ and $A_5 > 12\%$ (e.g. fischer anchor rods)																			
³⁾ Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hotdip galvanized standard threaded rods according to EN ISO 10684:2004+AC:2009																			
fischer Superbond								Annex C 1											
Performances																			
Characteristic values for steel failure capacity of fischer anchor rods and standard threaded rods								Appendix 25/ 40											

Table C2.1: Characteristic values for **steel failure** under tension / shear load of **fischer internal threaded anchors RG MI**

fischer internal threaded anchors RG MI			M8	M10	M12	M16	M20					
Bearing capacity under tension load, steel failure												
Charact. resistance with screw	N _{Rk,s}	Property class	5.8	[kN]	19	29	43	79	123			
		Property class	8.8		29	47	68	108	179			
		Property class	R		26	41	59	110	172			
		Property class 70	HCR		26	41	59	110	172			
Partial factors¹⁾												
Partial factors	γ _{Ms,N}	Property class	5.8	[-]	1,50							
		Property class	8.8		1,50							
		Property class	R		1,87							
		Property class 70	HCR		1,87							
Bearing capacity under shear load, steel failure												
Without lever arm												
Charact. resistance with screw	V ⁰ _{Rk,s}	Property class	5.8	[kN]	9,2	14,5	21,1	39,2	62,0			
		Property class	8.8		14,6	23,2	33,7	54,0	90,0			
		Property class	R		12,8	20,3	29,5	54,8	86,0			
		Property class 70	HCR		12,8	20,3	29,5	54,8	86,0			
Ductility factor		k ₇	[-]		1,0							
With lever arm												
Charact. resistance with screw	M ⁰ _{Rk,s}	Property class	5.8	[Nm]	20	39	68	173	337			
		Property class	8.8		30	60	105	266	519			
		Property class	R		26	52	92	232	454			
		Property class 70	HCR		26	52	92	232	454			
Partial factors¹⁾												
Partial factors	γ _{Ms,V}	Property class	5.8	[-]	1,25							
		Property class	8.8		1,25							
		Property class	R		1,56							
		Property class 70	HCR		1,56							

¹⁾ In absence of other national regulations

fischer Superbond

Performances

Characteristic values for steel failure under tension / shear load
fischer internal threaded anchor RG MI

Annex C 2

Table C3.1: Characteristic values for **steel failure** under tension / shear load of **reinforcing bars**

Nominal diameter of the bar	ϕ	8	10	12	14	16	20	25	28	32
Bearing capacity under tension load, steel failure										
Characteristic resistance	$N_{Rk,s}$	[kN]								$A_s \cdot f_{uk}^1)$
Bearing capacity under shear load, steel failure										
Without lever arm										
Characteristic resistance	$V_{Rk,s}$	[kN]								$0,5 \cdot A_s \cdot f_{uk}^1)$
Ductility factor	k_7	[-]								1,0
With lever arm										
Characteristic resistance	$M_{Rk,s}^0$	[Nm]								$1,2 \cdot W_{el} \cdot f_{uk}^1)$

¹⁾ f_{uk} or f_{yk} respectively must be taken from the specifications of the reinforcing bar

Table C3.2: Characteristic values for **steel failure** under tension / shear load of **fischer rebar anchors FRA**

fischer rebar anchor FRA		M12	M16	M20	M24	
Bearing capacity under tension load, steel failure						
Characteristic resistance	$N_{Rk,s}$	[kN]	63	111	173	270
Partial factor¹⁾						
Partial factor	$\gamma_{Ms,N}$	[-]				1,4
Bearing capacity under shear load, steel failure						
Without lever arm						
Characteristic resistance	$V_{Rk,s}$	[kN]	30	55	86	124
Ductility factor	k_7	[-]				1,0
With lever arm						
Characteristic resistance	$M_{Rk,s}^0$	[Nm]	92	233	454	785
Partial factor¹⁾						
Partial factor	$\gamma_{Ms,V}$	[-]				1,56

¹⁾ In absence of other national regulations

fischer Superbond

Performances

Characteristic values for steel failure under tension / shear load of reinforcing bars and fischer rebar anchors FRA

Annex C 3

Table C4.1: Characteristic values for **concrete failure** under tension / shear load

Size		All sizes										
Tension load												
Installation factor	γ_{inst}	[-]	See annex C 5 to C 10 and C 15 to C16									
Factors for the compressive strength of concrete > C20/25												
Increasing factor for τ_{RK}	C25/30	Ψ_c	[-]	1,02								
	C30/37			1,04								
	C35/45			1,07								
	C40/50			1,08								
	C45/55			1,09								
	C50/60			1,10								
Splitting failure												
Edge distance	$h / h_{ref} \geq 2,0$	$C_{cr,sp}$	[mm]	1,0 h_{ref}								
	$2,0 > h / h_{ref} > 1,3$			4,6 h_{ref} - 1,8 h								
	$h / h_{ref} \leq 1,3$			2,26 h_{ref}								
Spacing	$s_{cr,sp}$			2 $C_{cr,sp}$								
Concrete cone failure												
Uncracked concrete	$k_{ucr,N}$	[-]		11,0								
Cracked concrete	$k_{cr,N}$			7,7								
Edge distance	$C_{cr,N}$	[mm]		1,5 h_{ref}								
Spacing	$s_{cr,N}$			2 $C_{cr,N}$								
Factors for sustained tension load												
Temperature range	[-]	24 °C / 40 °C		50 °C / 80 °C		72 °C / 120 °C		90 °C / 150 °C				
Factor	Ψ_{sus}^0	[-]	0,84		0,86		0,84		0,91			
Shear load												
Installation factor	γ_{inst}	[-]	1,0									
Concrete pry-out failure												
Factor for pry-out failure	k_8	[-]	2,0									
Concrete edge failure												
Effective length of fastener in shear loading	l_f	[mm]	for $d_{nom} \leq 24$ mm: min (h_{ref} ; 12 d_{nom}) for $d_{nom} > 24$ mm: min (h_{ref} ; 8 d_{nom} ; 300 mm)									
Calculation diameters												
Size			M8	M10	M12	M16	M20	M24	M27	M30		
fischer anchor rods and standard threaded rods	d_{nom}	[mm]	8	10	12	16	20	24	27	30		
fischer internal threaded anchors RG MI	d_{nom}		12	16	18	22	28	- ¹⁾	- ¹⁾	- ¹⁾		
fischer rebar anchor FRA	d_{nom}		- ¹⁾	- ¹⁾	12	16	20	25	- ¹⁾	- ¹⁾		
Size (nominal diameter of the bar)	ϕ		8	10	12	14	16	20	25	28	32	
Reinforcing bar	d_{nom}	[mm]	8	10	12	14	16	20	25	28	32	
¹⁾ Anchor type not part of the ETA												
fischer Superbond												
Performances Characteristic values for concrete failure under tension / shear load								Annex C 4				
								Appendix 28/ 40				

Table C5.1: Characteristic values for combined pull-out and concrete failure for **fischer anchor rods** and **standard threaded rods** in hammer drilled holes in combination with **injection mortar FIS SB; uncracked or cracked concrete**

Table C6.1: Characteristic values for **combined pull-out** and concrete failure for **fischer anchor rods RG M** in hammer or diamond drilled holes in combination with **resin capsule RSB; uncracked or cracked concrete**

Anchor rod RG M		M8	M10	M12	M16	M20	M24	M30
Combined pullout and concrete cone failure								
Thread diameter	d [mm]	8	10	12	16	20	24	30
Uncracked concrete								
Characteristic bond resistance in uncracked concrete C20/25								
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete as well as water filled hole)								
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$ [N/mm ²]	12	13	13	13	12	10
	II: 50 °C / 80 °C		12	12	12	13	12	10
	III: 72 °C / 120 °C		10	11	11	11	11	9,0
	IV: 90 °C / 150 °C		10	10	10	11	10	8,0
Diamond-drilling (dry or wet concrete as well as water filled hole)								
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$ [N/mm ²]	13	13	14	14	13	11
	II: 50 °C / 80 °C		12	13	13	14	13	10
	III: 72 °C / 120 °C		11	12	12	12	11	9,5
	IV: 90 °C / 150 °C		10	11	11	11	10	8,5
Installation factors								
Dry or wet concrete	γ_{inst} [-]					1,0		
Water filled hole			1,2				1,0	
Cracked concrete								
Characteristic bond resistance in cracked concrete C20/25								
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete as well as water filled hole)								
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$ [N/mm ²]	6,5	7,0	7,5	7,5	7,5	7,5
	II: 50 °C / 80 °C		6,0	6,5	7,5	7,5	7,5	7,0
	III: 72 °C / 120 °C		5,5	6,0	6,5	6,5	6,5	6,0
	IV: 90 °C / 150 °C		5,0	5,5	6,0	6,0	6,0	5,5
Diamond-drilling (dry or wet concrete as well as water filled hole)								
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$ [N/mm ²]	- ¹⁾	- ¹⁾	- ¹⁾	7,5	7,5	7,5
	II: 50 °C / 80 °C		- ¹⁾	- ¹⁾	- ¹⁾	7,5	7,5	7,5
	III: 72 °C / 120 °C		- ¹⁾	- ¹⁾	- ¹⁾	6,5	6,5	6,5
	IV: 90 °C / 150 °C		- ¹⁾	- ¹⁾	- ¹⁾	6,0	6,0	6,0
Installation factors								
Dry or wet concrete	γ_{inst} [-]					1,0		
Water filled hole			1,2				1,0	
¹⁾ No performance assessed								
fischer Superbond								Annex C 6
Performances Characteristic values for combined pull-out and concrete failure for fischer anchor rod RG M with resin capsule RSB								
								Appendix 30/ 40

Table C7.1: Characteristic values for **combined pull-out** and concrete failure for **fischer internal threaded anchors RG MI** in hammer drilled holes in combination with **injection mortar FIS SB; uncracked or cracked concrete**

Table C8.1: Characteristic values for **combined pull-out** and concrete failure for **fischer internal threaded anchors RG MI** in hammer or diamond drilled holes in combination with **resin capsule RSB; uncracked or cracked concrete**

Internal threaded anchor RG MI		M8	M10	M12	M16	M20					
Combined pullout and concrete cone failure											
Sleeve diameter	d	[mm]	12	16	18	22					
Uncracked concrete											
Characteristic bond resistance in uncracked concrete C20/25											
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete as well as water filled hole)											
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$ [N/mm ²]	12	12	11	11					
	II: 50 °C / 80 °C		12	11	11	10					
	III: 72 °C / 120 °C		11	10	10	9,0					
	IV: 90 °C / 150 °C		10	9,5	9,0	8,5					
Diamond-drilling (dry or wet concrete as well as water filled hole)											
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$ [N/mm ²]	13	12	12	11					
	II: 50 °C / 80 °C		13	12	12	11					
	III: 72 °C / 120 °C		11	11	10	9,5					
	IV: 90 °C / 150 °C		10	10	9,5	9,0					
Installation factors											
Dry or wet concrete	γ_{inst} [-]		1,0								
Water filled hole			1,2	1,0							
Cracked concrete											
Characteristic bond resistance in cracked concrete C20/25											
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete as well as water filled hole)											
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$ [N/mm ²]	5,0								
	II: 50 °C / 80 °C		5,0								
	III: 72 °C / 120 °C		4,5								
	IV: 90 °C / 150 °C		4,0								
Diamond-drilling (dry or wet concrete as well as water filled hole)											
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$ [N/mm ²]	-1)	5,0							
	II: 50 °C / 80 °C		-1)	5,0							
	III: 72 °C / 120 °C		-1)	4,5							
	IV: 90 °C / 150 °C		-1)	4,0							
Installation factors											
Dry or wet concrete	γ_{inst} [-]		1,0								
Water filled hole			1,2	1,0							

¹⁾ No performance assessed

fischer Superbond

Performances

Characteristic values for combined pull-out and concrete failure for fischer internal threaded anchor RG MI with resin capsule RSB

Annex C 8

Table C9.1: Characteristic values for **combined pull-out** and concrete failure for **reinforcing bars** in hammer drilled holes in combination with **injection mortar FIS SB; uncracked or cracked concrete**

Table C10.1: Characteristic values for **combined pull-out** and concrete failure for **fischer rebar anchors FRA** in hammer drilled holes in combination with **injection mortar FIS SB**; uncracked or cracked concrete

fischer rebar anchor FRA		M12	M16	M20	M24	
Combined pullout and concrete cone failure						
Bar diameter	d [mm]	12	16	20	25	
Uncracked concrete						
Characteristic bond resistance in uncracked concrete C20/25						
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)						
Tem- perature range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$ [N/mm ²]	9,0	9,5	10	9,5
	II: 50 °C / 80 °C		9,0	9,5	9,5	9,0
	III: 72 °C / 120 °C		8,0	8,5	8,5	8,0
	IV: 90 °C / 150 °C		7,0	7,5	8,0	7,5
Installation factors						
Dry or wet concrete	γ_{inst} [-]			1,0		
Cracked concrete						
Characteristic bond resistance in cracked concrete C20/25						
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)						
Tem- perature range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$ [N/mm ²]	6,0	7,0	6,0	6,0
	II: 50 °C / 80 °C		5,5	6,5	6,0	6,0
	III: 72 °C / 120 °C		5,0	6,0	5,5	5,5
	IV: 90 °C / 150 °C		4,5	5,5	5,0	5,0
Installation factors						
Dry or wet concrete	γ_{inst} [-]			1,0		
fischer Superbond						
Performances						
Characteristic values for combined pull-out and concrete failure for fischer rebar anchors FRA with injection mortar FIS SB						
Annex C 10						
Appendix 34/ 40						

Table C11.1: Displacements for anchor rods

Anchor rod	M8	M10	M12	M16	M20	M24	M27	M30
Displacement-Factors for tension load¹⁾								
Uncracked or cracked concrete; Temperature range I, II, III, IV								
δ_{N0} -Factor	[mm/(N/mm ²)]	0,07	0,08	0,09	0,10	0,11	0,12	0,13
$\delta_{N\infty}$ -Factor		0,13	0,14	0,15	0,17	0,17	0,18	0,19
Displacement-Factors for shear load²⁾								
Uncracked or cracked concrete; Temperature range I, II, III, IV								
δ_{V0} -Factor	[mm/kN]	0,18	0,15	0,12	0,09	0,07	0,06	0,05
$\delta_{V\infty}$ -Factor		0,27	0,22	0,18	0,14	0,11	0,09	0,08

1) Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau_{Ed}$$

(τ_{Ed} : Design value of the applied tensile stress)

2) Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V_{Ed}$$

(V_{Ed} : Design value of the applied shear force)

Table C11.2: Displacements for fischer internal threaded anchors RG MI

Internal threaded anchor RG MI	M8	M10	M12	M16	M20
Displacement-Factors for tension load¹⁾					
Uncracked or cracked concrete; Temperature range I, II, III, IV					
δ_{N0} -Factor	[mm/(N/mm ²)]	0,09	0,10	0,10	0,11
$\delta_{N\infty}$ -Factor		0,13	0,15	0,15	0,17
Displacement-Factors for shear load²⁾					
Uncracked or cracked concrete; Temperature range I, II, III, IV					
δ_{V0} -Factor	[mm/kN]	0,12	0,09	0,08	0,07
$\delta_{V\infty}$ -Factor		0,18	0,14	0,12	0,10

1) Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau_{Ed}$$

(τ_{Ed} : Design value of the applied tensile stress)

2) Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V_{Ed}$$

(V_{Ed} : Design value of the applied shear force)

fischer Superbond

Performances

Displacements for anchor rods and fischer internal threaded anchors RG MI

Annex C 11

Appendix 35/ 40

Table C12.1: Displacements for reinforcing bars

Nominal diameter of the bar	ϕ	8	10	12	14	16	20	25	28	32
Displacement-Factors for tension load¹⁾										
Uncracked or cracked concrete; Temperature range I, II, III, IV										
δ_{N0} -Factor	[mm/(N/mm ²)]	0,07	0,08	0,09	0,09	0,10	0,11	0,12	0,13	0,13
$\delta_{N\infty}$ -Factor		0,11	0,13	0,13	0,15	0,16	0,16	0,18	0,20	0,20
Displacement-Factors for shear load²⁾										
Uncracked or cracked concrete; Temperature range I, II, III, IV										
δ_{V0} -Factor	[mm/kN]	0,18	0,15	0,12	0,10	0,09	0,07	0,06	0,05	0,05
$\delta_{V\infty}$ -Factor		0,27	0,22	0,18	0,16	0,14	0,11	0,09	0,08	0,06

1) Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau_{Ed}$$

(τ_{Ed} : Design value of the applied tensile stress)

2) Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V_{Ed}$$

(V_{Ed} : Design value of the applied shear force)

Table C12.2: Displacements for fischer rebar anchors FRA

fischer rebar anchor FRA	M12	M16	M20	M24	
Displacement-Factors for tension load¹⁾					
Uncracked or cracked concrete; Temperature range I, II, III, IV					
δ_{N0} -Factor	[mm/(N/mm ²)]	0,09	0,10	0,11	0,12
$\delta_{N\infty}$ -Factor		0,13	0,15	0,16	0,18
Displacement-Factors for shear load²⁾					
Uncracked or cracked concrete; Temperature range I, II, III, IV					
δ_{V0} -Factor	[mm/kN]	0,12	0,09	0,07	0,06
$\delta_{V\infty}$ -Factor		0,18	0,14	0,11	0,09

1) Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau_{Ed}$$

(τ_{Ed} : Design value of the applied tensile stress)

2) Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V_{Ed}$$

(V_{Ed} : Design value of the applied shear force)

fischer Superbond

Performances

Displacements for reinforcing bars and fischer rebar anchors FRA

Annex C 12

Table C13.1: Characteristic values for steel failure under tension / shear load of **fischer anchor rods** and **standard threaded rods** under seismic action performance category C1 or C2

¹⁾ Partial factors for performance category C1 or C2 see table C14.2; for fischer anchor rods FIS A / RG M the factor for steel ductility is 1,0

²⁾ Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot dip galvanised standard threaded rods according to EN ISO 10684:2004+AC:2009.

³⁾ Values in brackets are valid for filled annular gaps between the anchor rod and the through-hole in the attachment. It is necessary to use the fischer filling disc according to Annex A 1 and A 3

4) No performance assessed

fischer Superbond

Performances

Characteristic values for steel failure under tension / shear load for fischer anchor rods and standard threaded rods under seismic action (performance category C1 / C2)

Annex C 13

Table C14.1: Characteristic values for **steel failure** under tension / shear load for of **reinforcing bars (B500B)** under seismic action performance category **C1**

Nominal diameter of the bar	φ	8	10	12	14	16	20	25	28	32
Bearing capacity under tension load, steel failure¹⁾										
Reinforcing bar B500B acc. to DIN 488-2:2009-08, performance category C1										
Characteristic resistance	N _{Rk,s,C1} [kN]	28	44	63	85	111	173	270	339	443
Bearing capacity under shear load, steel failure without lever arm¹⁾										
Reinforcing bar B500B acc. to DIN 488-2:2009-08, performance category C1										
Characteristic resistance	V _{Rk,s,C1} [kN]	10	15	22	30	39	61	95	119	155

¹⁾ Partial factors for performance category C1 see table C14.2

Table C14.2: Partial factors for fischer anchor rods, standard threaded rods and reinforcing bars (B500B) under seismic action performance category C1 or C2

Anchor rod / standard threaded rod		M8	M10	M12	M16	M20	M24	M27	M30	
Nominal diameter of the bar	φ	8	10	12	14	16	20	25	28	32
Tension load, steel failure¹⁾										
Partial factor $\gamma_{Ms,N}$	Steel zinc plated	5.8	Property class [-]	5.8	8.8	50	70	80	1,50 ²⁾ / 1,87	1,50
		8.8								1,50
		50								2,86
		70								1,50 ²⁾ / 1,87
		80								1,60
Partial factor $\gamma_{Ms,V}$	Reinforcing bar	B500B								1,40
Shear load, steel failure¹⁾										
Partial factor $\gamma_{Ms,V}$	Steel zinc plated	5.8	Property class [-]	5.8	8.8	50	70	80	1,25 ²⁾ / 1,56	1,25
		8.8								1,25
		50								2,38
		70								1,25 ²⁾ / 1,56
		80								1,33
Partial factor $\gamma_{Ms,V}$	Reinforcing bar	B500B								1,50

¹⁾ In absence of other national regulations

²⁾ Only admissible for high corrosion resistant steel HCR, with $f_{yk} / f_{uk} \geq 0,8$ and $A_5 > 12\%$ (e.g. fischer anchor rods)

fischer Superbond

Performances

Characteristic values for steel failure under tension / shear load for reinforcing bars under seismic action (performance category C1); partial factors (performance category C1 / C2)

Annex C 14

Table C15.1: Characteristic values for **combined pull-out** and concrete failure for **fischer anchor rods** and **standard threaded rods** in hammer drilled holes with **injection mortar FIS SB** or **resin capsule RSB** under seismic action performance category C1

Anchor rod / standard threaded rod		M8	M10	M12	M16	M20	M24	M27 ¹⁾	M30
Characteristic bond resistance, combined pullout and concrete cone failure									
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete; resin capsule RSB additional in water filled holes)									
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{Rk,C1}$ [N/mm ²]	4,6	5,0	5,6	5,6	5,6	5,6	6,4
	II: 50 °C / 80 °C		4,3	4,6	5,6	5,6	5,6	5,6	6,0
	III: 72 °C / 120 °C		3,9	4,3	4,9	4,9	4,9	4,9	5,1
	IV: 90 °C / 150 °C		3,6	3,9	4,5	4,5	4,5	4,5	4,7
Installation factors									
Dry or wet concrete	γ_{inst}	[-]	1,0						
Water filled hole			1,2 ²⁾		1,0 ²⁾				

¹⁾ Only use with injection mortar FIS SB

²⁾ Only use with resin capsule RSB in water filled hole

Table C15.2: Characteristic values for **combined pull-out** and concrete failure for **reinforcing bars** in hammer drilled holes with **injection mortar FIS SB** under seismic action performance category C1

Nominal diameter of the bar	Φ	8	10	12	14	16	20	25	28	32
Characteristic bond resistance, combined pullout and concrete cone failure										
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)										
Tem- pera- ture range	I: 24 °C / 40 °C	$\tau_{Rk,C1}$ [N/mm ²]	3,2	4,3	4,5	4,5	5,3	4,5	4,5	5,1
	II: 50 °C / 80 °C		3,2	3,9	4,1	4,1	4,9	4,5	4,5	5,1
	III: 72 °C / 120 °C		2,8	3,6	3,8	3,8	4,5	4,1	4,1	4,7
	IV: 90 °C / 150 °C		2,5	3,2	3,4	3,4	4,1	3,8	3,8	4,3
Installation factors										
Dry or wet concrete	γ_{inst}	[-]	1,0							

fischer Superbond

Performances

Characteristic values for combined pull-out and concrete failure under seismic action (performance category C1) for fischer anchor rods, standard threaded rods and reinf. bars

Annex C 15

Appendix 39/ 40

Table C16.1: Characteristic values for **combined pull-out** and concrete failure for for **fischer anchor rods** and **standard threaded rods** in hammer drilled holes with **injection mortar FIS SB** under seismic action performance category C2

Anchor rod / standard threaded rod		M12	M16	M20	M24				
Characteristic bond resistance, combined pullout and concrete cone failure									
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)									
Tem- perature range	I: 24 °C / 40 °C	$\tau_{Rk,C2}$ [N/mm ²]	4,5	3,2	2,6				
	II: 50 °C / 80 °C		4,5	3,2	3,0				
	III: 72 °C / 120 °C		3,9	2,7	2,3				
	IV: 90 °C / 150 °C		3,6	2,5	2,1				
Installation factors									
Dry or wet concrete	γ_{inst}	[-]		1,0					
Displacement-Factors for tension load¹⁾									
$\delta_{N,C2}$ (DLS)-Factor	[mm/(N/mm ²)]	0,09	0,10	0,11	0,12				
$\delta_{N,C2}$ (ULS)-Factor		0,15	0,17	0,17	0,18				
Displacement-Factors for shear load²⁾									
$\delta_{V,C2}$ (DLS)-Factor	[mm/kN]	0,18	0,10	0,07	0,06				
$\delta_{V,C2}$ (ULS)-Factor		0,25	0,14	0,11	0,09				
1) Calculation of effective displacement:			2) Calculation of effective displacement:						
$\delta_{N,C2}$ (DLS) = $\delta_{N,C2}$ (DLS)-Factor · τ_{Ed}			$\delta_{V,C2}$ (DLS) = $\delta_{V,C2}$ (DLS)-Factor · V_{Ed}						
$\delta_{N,C2}$ (ULS) = $\delta_{N,C2}$ (ULS)-Factor · τ_{Ed}			$\delta_{V,C2}$ (ULS) = $\delta_{V,C2}$ (ULS)-Factor · V_{Ed}						
(τ_{Ed} : Design value of the applied tensile stress)			(V_{Ed} : Design value of the applied shear force)						
fischer Superbond									
Performances Characteristic values for combined pull-out and concrete failure under seismic action (performance category C2) for fischer anchor rods and standard threaded rods									
				Annex C 16					
				Appendix 40/ 40					