



## YDEEVNEDEKLARATION



Nr. 0081 – DA

1. Varetypens unikke identifikationskode: **fischer boltanker FAZ II**

2. Tilsigtet anvendelse:

| Produkt                              | Anvendelsesområde/r                                                                                         |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Moment-kontrolleret ekspansionsanker | Post-installeret befæstigelse i revnet eller ikke-revnet beton, Se appendiks, specifikt appendiks B 1 - B 4 |

3. Fabrikant: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Straße 1, 72178 Waldachtal, Tyskland**

4. Bemyndiget repræsentant: --

5. System eller systemer til vurdering og kontrol af konstansen af ydeevnen: **1**

6a. Harmoniseret standard: ---

Notificeret organ/notificerede organer: ---

6b. Europæisk vurderingsdokument: **ETAG 001; 2013-04**Europæisk teknisk vurdering: **ETA-05/0069; 2016-08-05**Teknisk vurderingsorgan: **DIBt**Notificeret organ/notificerede organer: **1343 – MPA Darmstadt**

7. Deklareret ydeevne/deklarerede ydeevner:

**Mekanisk styrke og stabilitet (BWR 1)**

| Vigtigste funktion                                            | Ydeevne                                     |
|---------------------------------------------------------------|---------------------------------------------|
| Karakteristisk modstand for statisk og kvasi-statisk handling | Se appendiks, specifikt appendiks C 1 - C 3 |
| Karakteristiske værdier for seismiske kategorier C 1 og C2    | Se appendiks, specifikt appendiks C 6 - C 7 |
| Forskydninger ved statiske og kvasistiske indvirkninger       | Se appendiks, specifikt appendiks C 8       |
| Forskydninger ved seismiske indvirkninger                     | Se appendiks, specifikt appendiks C 9       |

**Brandbeskyttelse (BWR 2)**

| Vigtigste funktion | Ydeevne                                     |
|--------------------|---------------------------------------------|
| Brandegenskaber    | Ankret overholder kravene i klasse A1       |
| Brandbeskyttelse   | Se appendiks, specifikt appendiks C 4 + C 5 |

8. Relevant teknisk dokumentation og/eller specifik teknisk dokumentation: ---

Ydeevnen for den vare, der er anført ovenfor, er i overensstemmelse med den deklarerede ydeevne. Denne ydeevnedeklaration er udarbejdet i overensstemmelse med forordning (EU) nr. 305/2011 på eneansvar af den fabrikant, der er anført ovenfor.

Underskrevet for fabrikanten og på dennes vegne af:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

Tumlingen, 2016-08-16

- Denne DoP er tilgængelig i forskellige sprogversioner. I tilfælde af forskellige fortolkninger gælder den engelske version..
- Appendixet indeholder frivillige og udvidede informationer på engelsk. De overgår de lokale (sprogneutrale) retslige krav.

## Specific Part

### 1 Technical description of the product

The fischer Bolt Anchor FAZ II is an anchor made of galvanised steel (FAZ II) or made of stainless steel (FAZ II A4) or high corrosion resistant steel (FAZ II C) which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

| Essential characteristic                                               | Performance          |
|------------------------------------------------------------------------|----------------------|
| Characteristic resistance for static and quasi static action           | See Annex C 1 to C 3 |
| Characteristic resistance for seismic performance categories C1 and C2 | See Annex C 6 to C 7 |
| Displacements under static and quasi static action                     | See Annex C 8        |
| Displacements under seismic action                                     | See Annex C 9        |

#### 3.2 Safety in case of fire (BWR 2)

| Essential characteristic                      | Performance                                 |
|-----------------------------------------------|---------------------------------------------|
| Reaction to fire                              | Anchorage satisfy requirements for Class A1 |
| Characteristic resistance under fire exposure | See Annex C 4 and C 5                       |

#### 3.3 Safety in use (BWR 4)


The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base



In accordance with guideline for European technical approval ETAG 001, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

Cone bolt manufactured by cold - forming:

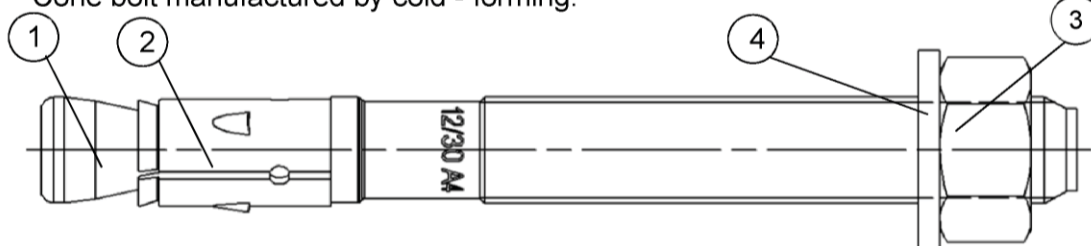

Cone bolt manufactured by turning:

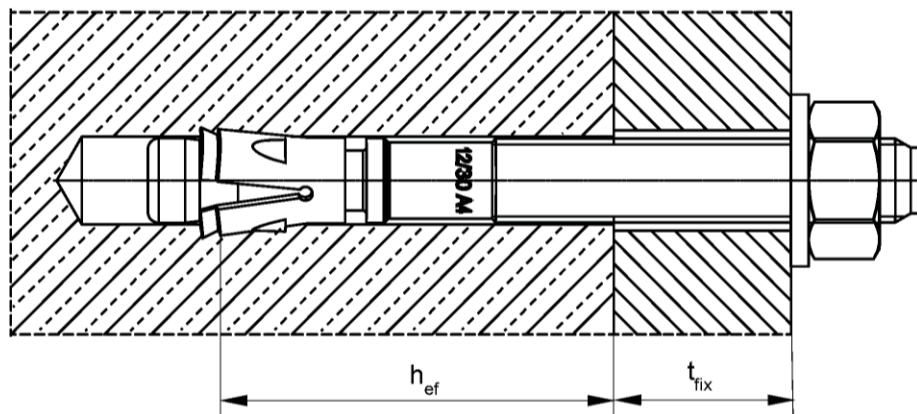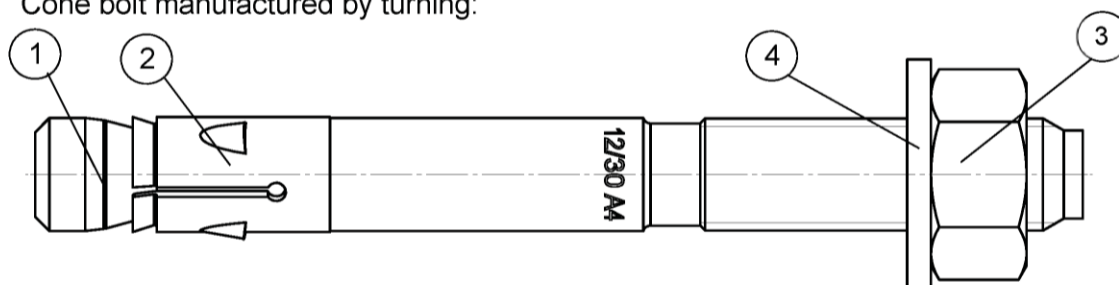

- ① Cone bolt (cold – formed or turned)
- ② Expansion sleeve
- ③ Hexagon nut
- ④ Washer


$h_{ef}$  = Effective anchorage depth  
 $t_{fix}$  = Thickness of fixture

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Product description**  
 Installed condition

**Annex A 1**

### FAZ II for use with standard and reduced anchorage depth ( $h_{ef, sta}$ and $h_{ef, red}$ ):

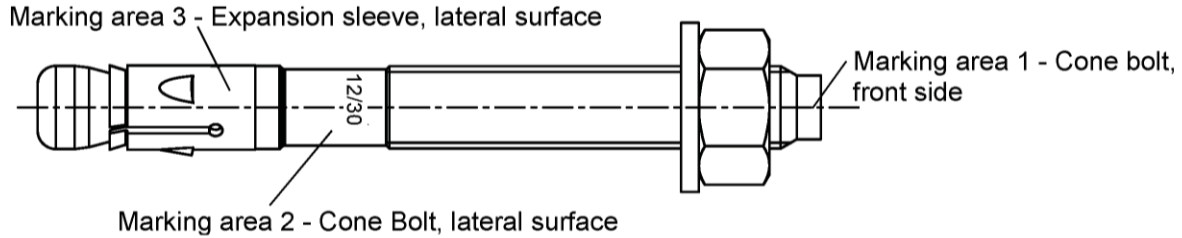

Product label, example:

 FAZ II 12/10 A4

Brand | type of anchor


placed on marking area 2 or marking area 3

thread size / max. thickness of fixture ( $t_{fix}$ ) for  $h_{ef, sta}$   
identification A4 placed on marking area 2

**Table A1:** Letter-code on marking area 1 and maximum thickness of fixture  $t_{fix}$ :

| marking                             |         | (A) | (B) | (C) | (D) | (E) | (F) | (G) | (H) | (I) | (K) | (L) | (M) | (N) | (O) | (P) | (R) | (S) | (T) | (U) | (V) | (W) | (X) | (Y) | (Z) |
|-------------------------------------|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| max. $t_{fix}$<br>for $h_{ef, sta}$ | M8-M24  | 5   | 10  | 15  | 20  | 25  | 30  | 35  | 40  | 45  | 50  | 60  | 70  | 80  | 90  | 100 | 120 | 140 | 160 | 180 | 200 | 250 | 300 | 350 | 400 |
| max. $t_{fix}$<br>for $h_{ef, red}$ | M10-M16 | 25  | 30  | 35  | 40  | 45  | 50  | 55  | 60  | 65  | 70  | 80  | 90  | 100 | 110 | 120 | 140 | 160 | 180 | 200 | 220 | 270 | 320 | 370 | 420 |

### FAZ II K for use with reduced anchorage depth only ( $h_{ef, red}$ ):

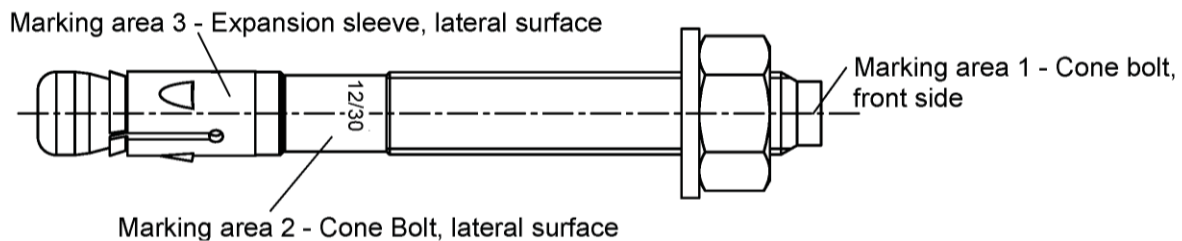

Product label, example:

 FAZ II 12/10 K A4

Brand | type of anchor

placed on marking area 2 or marking area 3

thread size / max. thickness of fixture ( $t_{fix}$ )  
identification K for  $h_{ef, red}$   
identification A4 placed on marking area 2

**Table A2:** Letter-code on marking area 1 and maximum thickness of fixture  $t_{fix}$ :


| marking                             |        | (a) | (b) | (c) | (d) |
|-------------------------------------|--------|-----|-----|-----|-----|
| max. $t_{fix}$<br>for $h_{ef, red}$ | M8-M16 | 5   | 10  | 15  | 20  |

Identification for  $h_{ef, red}$  are lower-case letters

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Product description**  
Anchor Types

**Annex A 2**

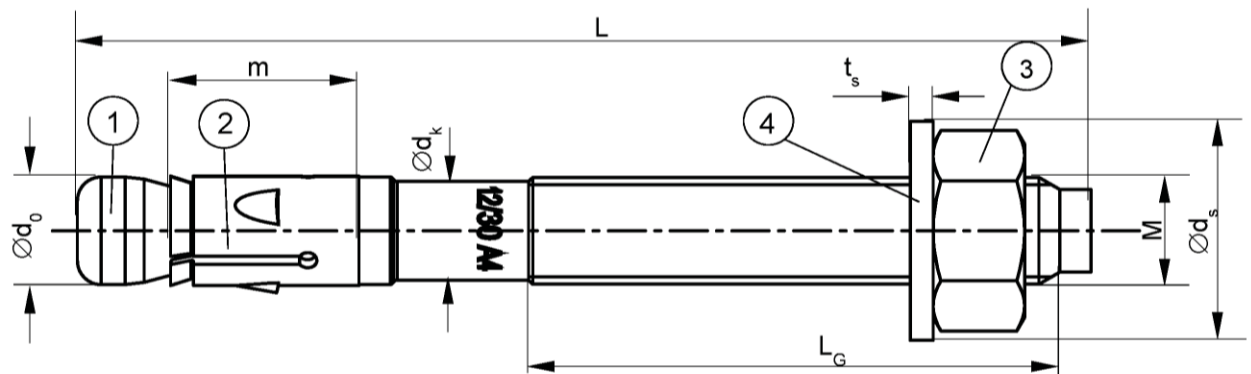**Table A3:** Anchor dimensions [mm]

| Part                 | Designation      |                  |   | FAZ II, FAZ II A4, FAZ II C |      |      |      |      |      |
|----------------------|------------------|------------------|---|-----------------------------|------|------|------|------|------|
|                      |                  |                  |   | M8                          | M10  | M12  | M16  | M20  | M24  |
| 1                    | Cone bolt        | thread size M    |   | M8                          | M10  | M12  | M16  | M20  | M24  |
|                      |                  | Ø d <sub>0</sub> |   | 7,8                         | 9,8  | 11,8 | 15,7 | 19,8 | 23,5 |
|                      |                  | Ø d <sub>k</sub> |   | 7,1                         | 8,9  | 10,7 | 14,5 | 18,2 | 21,8 |
|                      |                  | L <sub>G</sub>   | ≥ | 19                          | 26   | 31   | 40   | 50   | 57   |
| 2                    | Expansion sleeve | m                |   | 17,8                        | 20,0 | 20,6 | 27,5 | 33,4 | 40,2 |
|                      |                  | sheet thickness  |   | 1,3                         | 1,4  | 1,6  | 2,4  | 2,4  | 3,0  |
| 3                    | Hexagon nut      | wrench size      |   | 13                          | 17   | 19   | 24   | 30   | 36   |
| 4                    | Washer           | t <sub>s</sub>   | ≥ | 1,4                         | 1,8  | 2,3  | 2,7  | 2,7  | 3,7  |
|                      |                  | Ø d <sub>s</sub> | ≥ | 15                          | 19   | 23   | 29   | 36   | 43   |
| Thickness of fixture |                  | t <sub>fix</sub> | ≥ | 0                           | 0    | 0    | 0    | 0    | 0    |
|                      |                  |                  | ≤ | 200                         | 250  | 300  | 400  | 500  | 600  |
| Length of anchor     |                  | L <sub>min</sub> | = | 54,5                        | 64,5 | 79   | 102  | 141  | 174  |
|                      |                  | L <sub>max</sub> | = | 267                         | 336  | 401  | 525  | 644  | 777  |

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Product description**  
 Anchor dimensions
**Annex A 3**

**Table A4:** Materials FAZ II

| Part | Designation      | Material                                                                                                                          |
|------|------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| 1    | Cone bolt        | Cold form steel or free cutting steel (zinc plated)<br>Nominal steel tensile strength: $f_{uk} \leq 1000 \text{ N/mm}^2$ (thread) |
| 2    | Expansion sleeve | Cold strip, EN 10139:2016 (zinc plated) <sup>1)</sup>                                                                             |
| 3    | Hexagon nut      | Steel, property class min. 8, EN ISO 898-2:2012 (zinc plated)                                                                     |
| 4    | Washer           | Cold strip, EN 10139: 2016 (zinc plated)                                                                                          |

<sup>1)</sup> Optional stainless steel EN 10088:2014

**Table A5:** Materials FAZ II A4

| Part | Designation      | Material                                                                                                    |
|------|------------------|-------------------------------------------------------------------------------------------------------------|
| 1    | Cone bolt        | stainless steel EN 10088:2014<br>Nominal steel tensile strength: $f_{uk} \leq 1000 \text{ N/mm}^2$ (thread) |
| 2    | Expansion sleeve | stainless steel EN 10088:2014                                                                               |
| 3    | Hexagon nut      | stainless steel EN 10088:2014;<br>ISO 3506-2: 2009; property class – min. 70                                |
| 4    | Washer           | stainless steel EN 10088:2014                                                                               |

**Table A6:** Materials FAZ II C

| Part | Designation      | Material                                                                                                                   |
|------|------------------|----------------------------------------------------------------------------------------------------------------------------|
| 1    | Cone bolt        | high corrosion resistant steel EN 10088:2014<br>Nominal steel tensile strength: $f_{uk} \leq 1000 \text{ N/mm}^2$ (thread) |
| 2    | Expansion sleeve | stainless steel EN 10088:2014                                                                                              |
| 3    | Hexagon nut      | high corrosion resistant steel EN 10088:2014;<br>ISO 3506-2:2009; property class – min. 70                                 |
| 4    | Washer           | high corrosion resistant steel EN 10088:2014                                                                               |

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Product description**  
Materials

**Annex A 4**

### Specifications of intended use

#### Anchorage subject to:

|                                         |                  |     |     |     |     |     |   |
|-----------------------------------------|------------------|-----|-----|-----|-----|-----|---|
| Standard anchorage depth                |                  |     |     | ✓   |     |     |   |
| Bolt Anchor FAZ II, FAZ II A4, FAZ II C | M8               | M10 | M12 | M16 | M20 | M24 |   |
| Static and quasi-static loads           |                  |     |     | ✓   |     |     |   |
| Cracked and uncracked concrete          |                  |     |     | ✓   |     |     |   |
| Fire exposure                           |                  |     |     | ✓   |     |     |   |
| Seismic action for Performance Category | C1               |     |     | ✓   |     |     |   |
|                                         | C2 <sup>1)</sup> | -   |     | ✓   |     |     | - |
| Reduced anchorage depth                 |                  |     | ✓   |     |     |     |   |
| Bolt Anchor FAZ II, FAZ II A4, FAZ II C | M8 <sup>2)</sup> | M10 | M12 | M16 |     |     |   |
| Static and quasi-static loads           |                  |     | ✓   |     |     |     |   |
| Cracked and uncracked concrete          |                  |     | ✓   |     |     |     |   |
| Fire exposure                           |                  |     | ✓   |     |     |     |   |
| Seismic action for Performance Category | C1               |     | ✓   |     |     |     |   |
|                                         | C2 <sup>1)</sup> | -   | ✓   |     |     |     |   |

<sup>1)</sup> FAZ II C: Only valid for cold-formed version (see A1)

<sup>2)</sup> Use restricted to anchoring of structural components which are statically indeterminate

#### Base materials:

- Reinforced and unreinforced normal weight concrete (cracked and uncracked) according to EN 206-1:2000
- Strength classes C20/25 to C50/60 according to EN 206-1:2000

#### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (FAZ II, FAZ II A4, FAZ II C)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (FAZ II A4, FAZ II C)
- Structures subject to external atmospheric exposure and permanently damp internal condition, if other particular aggressive conditions exist (FAZ II C)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

#### Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages under static or quasi-static actions are to be designed in accordance with:
  - ETAG 001, Annex C, design method A, Edition August 2010 or
  - CEN/TS 1992-4:2009, design method A
- Anchorages under seismic actions (cracked concrete) are to be designed in accordance with:
  - EOTA Technical Report TR 045, Edition February 2013
  - Anchorages shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure
  - Fastenings in stand-off installation or with a grout layer under seismic action are not allowed
- Anchorages under fire exposure are to be designed in accordance with:
  - EOTA Technical Report TR 020, Edition May 2004 or
  - CEN/TS 1992-4:2009, Annex D
  - It must be ensured that local spalling of the concrete cover does not occur

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Intended Use**  
Specifications


**Annex B 1**

**Table B1:** Installation parameters

| Type of anchor / size                                   |                                      | FAZ II, FAZ II A4, FAZ II C |       |      |      |       |       |
|---------------------------------------------------------|--------------------------------------|-----------------------------|-------|------|------|-------|-------|
|                                                         |                                      | M8                          | M10   | M12  | M16  | M20   | M24   |
| Nominal drill hole diameter                             | $d_0 = [\text{mm}]$                  | 8                           | 10    | 12   | 16   | 20    | 24    |
| Cutting diameter of drill bit                           | $d_{\text{cut}} \leq [\text{mm}]$    | 8,45                        | 10,45 | 12,5 | 16,5 | 20,55 | 24,55 |
| Standard anchorage depth                                | $h_{\text{ef,sta}} \geq [\text{mm}]$ | 45                          | 60    | 70   | 85   | 100   | 125   |
| Depth of drill hole in concrete for $h_{\text{ef,sta}}$ | $h_{1,\text{sta}} \geq [\text{mm}]$  | 55                          | 75    | 90   | 110  | 125   | 155   |
| Reduced anchorage depth                                 | $h_{\text{ef,red}} \geq [\text{mm}]$ | 35 <sup>2)</sup>            | 40    | 50   | 65   | -     | -     |
| Depth of drill hole in concrete for $h_{\text{ef,red}}$ | $h_{1,\text{red}} \geq [\text{mm}]$  | 45 <sup>2)</sup>            | 55    | 70   | 90   | -     | -     |
| Diameter of clearance hole in the fixture <sup>1)</sup> | $d_f \leq [\text{mm}]$               | 9                           | 12    | 14   | 18   | 22    | 26    |
| Required torque moment                                  | $T_{\text{inst}} = [\text{Nm}]$      | 20                          | 45    | 60   | 110  | 200   | 270   |

<sup>1)</sup> If a larger diameter of the clearance hole in the fixture is used, see Chapter 4.2.2.1 of ETAG 001, Annex C

<sup>2)</sup> Use restricted to anchoring of structural components which are statically indeterminate

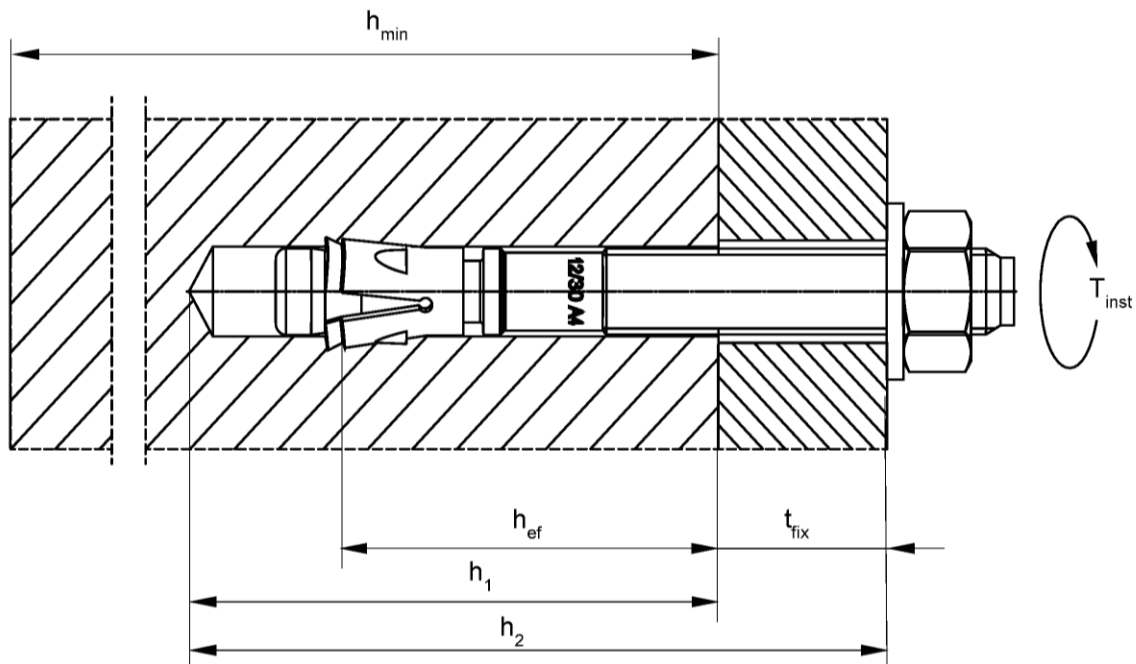

$h_{\text{ef}}$  = Effective anchorage depth  
 $t_{\text{fix}}$  = Thickness of fixture  
 $h_1$  = Drill hole depth  
 $h_2$  = Min.drill hole depth for push-through installation  
 $h_{\text{min}}$  = Thickness of concrete member  
 $T_{\text{inst}}$  = Required torque moment

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Intended Use**  
Installation parameters

**Annex B 2**

**Table B2:** Minimum thickness of concrete members, minimum spacings and minimum edge distances of anchors for **standard anchorage depth ( $h_{ef, sta}$ )**

| Type of anchor / size                                                      |                                                       |                   | FAZ II, FAZ II A4, FAZ II C |     |     |     |     |     |
|----------------------------------------------------------------------------|-------------------------------------------------------|-------------------|-----------------------------|-----|-----|-----|-----|-----|
|                                                                            |                                                       |                   | M8                          | M10 | M12 | M16 | M20 | M24 |
| Standard effective anchorage depth $h_{ef,sta} \geq [mm]$                  |                                                       |                   | 45                          | 60  | 70  | 85  | 100 | 125 |
| Applications with concrete members of thickness $\geq 2 \times h_{ef,sta}$ | Minimum thickness of concrete member $h_{min,1} [mm]$ |                   | 100                         | 120 | 140 | 170 | 200 | 250 |
|                                                                            | Uncracked concrete                                    |                   |                             |     |     |     |     |     |
|                                                                            | Minimum spacing                                       | $s_{min} [mm]$    | 40                          | 40  | 50  | 65  | 95  | 100 |
|                                                                            |                                                       | for $c \geq [mm]$ | 50                          | 60  | 70  | 95  | 180 | 200 |
|                                                                            | Minimum edge distance                                 | $c_{min} [mm]$    | 40                          | 45  | 55  | 65  | 95  | 135 |
|                                                                            |                                                       | for $s \geq [mm]$ | 100                         | 80  | 110 | 150 | 190 | 235 |
|                                                                            | Cracked concrete                                      |                   |                             |     |     |     |     |     |
|                                                                            | Minimum spacing                                       | $s_{min} [mm]$    | 35                          | 40  | 50  | 65  | 95  | 100 |
|                                                                            |                                                       | for $c \geq [mm]$ | 50                          | 55  | 70  | 95  | 140 | 170 |
|                                                                            | Minimum edge distance                                 | $c_{min} [mm]$    | 40                          | 45  | 55  | 65  | 85  | 100 |
| for $s \geq [mm]$                                                          |                                                       | 70                | 80                          | 110 | 150 | 190 | 220 |     |
| Applications with concrete members of thickness $< 2 \times h_{ef,sta}$    | Minimum thickness of concrete member $h_{min,2} [mm]$ |                   | 80                          | 100 | 120 | 140 | 160 | 200 |
|                                                                            | Cracked and uncracked concrete                        |                   |                             |     |     |     |     |     |
|                                                                            | Minimum spacing                                       | $s_{min} [mm]$    | 35                          | 40  | 50  | 80  | 125 | 150 |
|                                                                            |                                                       | for $c \geq [mm]$ | 70                          | 100 | 90  | 130 | 220 | 230 |
|                                                                            | Minimum edge distance                                 | $c_{min} [mm]$    | 40                          | 60  | 60  | 65  | 125 | 135 |
|                                                                            |                                                       | for $s \geq [mm]$ | 100                         | 90  | 120 | 180 | 230 | 235 |

Intermediate values for  $s_{min}$  and  $c_{min}$  inside of the same thickness of concrete member by linear interpolation.

**Table B3:** Minimum thickness of concrete members, minimum spacings and minimum edge distances of anchors for **reduced anchorage depth ( $h_{ef, red}$ )**

| Type of anchor / size                                                             |                                                                      | FAZ II, FAZ II A4, FAZ II C  |     |     |     |     |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------|------------------------------|-----|-----|-----|-----|
|                                                                                   |                                                                      | M8                           | M10 | M12 | M16 |     |
| Reduced effective anchorage depth $h_{\text{ef,red}} \geq [\text{mm}]$            |                                                                      | 35 <sup>1)</sup>             | 40  | 50  | 65  |     |
| Applications with concrete members of thickness $\geq 2 \times h_{\text{ef,red}}$ | Minimum thickness of concrete member $h_{\text{min, 3}} [\text{mm}]$ | 80                           | 80  | 100 | 140 |     |
|                                                                                   | Uncracked concrete                                                   |                              |     |     |     |     |
|                                                                                   | Minimum spacing                                                      | $s_{\text{min}} [\text{mm}]$ | 40  | 40  | 50  | 65  |
|                                                                                   |                                                                      | for $c \geq [\text{mm}]$     | 100 | 100 | 110 | 130 |
|                                                                                   | Minimum edge distance                                                | $c_{\text{min}} [\text{mm}]$ | 45  | 45  | 55  | 65  |
|                                                                                   |                                                                      | for $s \geq [\text{mm}]$     | 180 | 180 | 220 | 250 |
|                                                                                   | Cracked concrete                                                     |                              |     |     |     |     |
|                                                                                   | Minimum spacing                                                      | $s_{\text{min}} [\text{mm}]$ | 40  | 40  | 50  | 65  |
|                                                                                   |                                                                      | for $c \geq [\text{mm}]$     | 90  | 90  | 110 | 130 |
|                                                                                   | Minimum edge distance                                                | $c_{\text{min}} [\text{mm}]$ | 45  | 45  | 55  | 65  |
| for $s \geq [\text{mm}]$                                                          |                                                                      | 180                          | 180 | 220 | 250 |     |

Intermediate values for  $s_{min}$  and  $c_{min}$  by linear interpolation.

<sup>1)</sup> Only in anchoring structural components which are statically indeterminate

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

#### Intended Use

Minimum thickness of member, minimum spacings and edge distances

**Annex B 3**


**Table B4:** Minimum spacings and minimum edge distances of anchors according to **TR 020 and ETAG 001, Annex C** under **fire exposure** and according to **CEN/TS 1992-4: 2009, Annex D** under **fire exposure**

| Type of anchor / size |           |      | FAZ II, FAZ II A4, FAZ II C                                                                      |     |     |     |     |     |
|-----------------------|-----------|------|--------------------------------------------------------------------------------------------------|-----|-----|-----|-----|-----|
|                       |           |      | M8                                                                                               | M10 | M12 | M16 | M20 | M24 |
| Spacing               | $s_{min}$ | [mm] | 35                                                                                               | 40  | 50  | 60  | 95  | 100 |
| Edge distance         | $c_{min}$ | [mm] | $c_{min} = 2 \times h_{ef}$ ,<br>for fire exposure from more than one side $c_{min} \geq 300$ mm |     |     |     |     |     |

### Installation instructions

The fitness for use of the anchor can only be assumed if the anchor is installed as follows:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Use of the anchor only as supplied by the manufacturer without exchanging the components of the anchor
- Checking before placing the anchor to ensure that the strength class of the concrete in which the anchor is to be placed is in the range given and is not lower than that of the concrete to which the characteristic loads apply
- Check of concrete being well compacted, e.g. without significant voids
- Edge distances and spacing not less than the specified values without minus tolerances
- Drill hole perpendicular to concrete surface, positioning without damaging the reinforcement. In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application

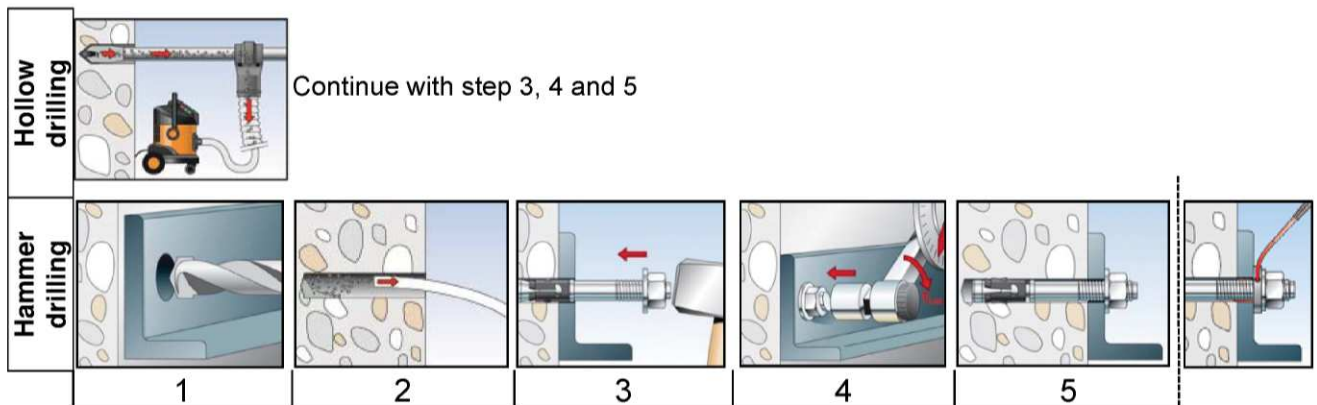

| No. | Description                                                  |                                                        |
|-----|--------------------------------------------------------------|--------------------------------------------------------|
| 1   | Create drill hole with hammer drill                          | Create drill hole with hollow drill and vacuum cleaner |
| 2   | Clean bore hole                                              | -                                                      |
| 3   | Set anchor                                                   |                                                        |
| 4   | Expand anchor with prescribed installation torque $T_{inst}$ |                                                        |
| 5   | Finished installation                                        |                                                        |

|          |                                                                                                                                                            |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Optional | The gap between bolt and fixture may be filled with mortar; compressive strength $\geq 50$ N/mm <sup>2</sup> for example: FIS V, FIS EM, FIS HB or FIS SB. |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------|

| Types of drills |  |
|-----------------|--|
| Hammer drill    |  |
| Hollow drill    |  |

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Intended Use**  
Minimum spacings and minimum edge distances of anchors  
Installation parameters

**Annex B 4**

**Table C1:** Characteristic values of **tension** resistance for **standard anchorage depth** under static and quasi-static action (Design method A, according to **ETAG 001, Annex C** or **CEN/TS 1992-4:2009**)

| Type of anchor / size                                                                                                                    |             |                   |        | FAZ II, FAZ II A4, FAZ II C              |      |      |                 |       |       |
|------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------------|--------|------------------------------------------|------|------|-----------------|-------|-------|
|                                                                                                                                          |             |                   |        | M8                                       | M10  | M12  | M16             | M20   | M24   |
| Steel failure for standard anchorage depth                                                                                               |             |                   |        |                                          |      |      |                 |       |       |
| Characteristic resistance                                                                                                                | FAZ II      | $N_{Rk,s}$        | [kN]   | 16,0                                     | 27,0 | 41,5 | 66,0            | 111,0 | 150,0 |
|                                                                                                                                          | FAZ II A4/C | $N_{Rk,s}$        | [kN]   | 17,0                                     | 27,2 | 44,3 | 70,6            | 111,0 | 160,8 |
| Partial safety factor                                                                                                                    |             |                   |        | $\gamma_{Ms}$ 1,5                        |      |      |                 |       |       |
| Pullout failure for standard anchorage depth                                                                                             |             |                   |        |                                          |      |      |                 |       |       |
| Effective anchorage depth                                                                                                                |             | $h_{ef,sta} \geq$ | [mm]   | 45                                       | 60   | 70   | 85              | 100   | 125   |
| Characteristic resistance in cracked concrete C20/25                                                                                     |             | $N_{Rk,p}$        | [kN]   | 7,5                                      | 12   | 20   | - <sup>1)</sup> |       |       |
| Characteristic resistance in uncracked concrete C20/25                                                                                   |             | $N_{Rk,p}$        | [kN]   | 9                                        | 16   | 25   | - <sup>1)</sup> |       |       |
| Increasing factors for $N_{Rk,p}$ for cracked and uncracked concrete                                                                     |             | $\psi_c$          | C25/30 | 1,10                                     |      |      |                 |       |       |
|                                                                                                                                          |             |                   | C30/37 | 1,22                                     |      |      |                 |       |       |
|                                                                                                                                          |             |                   | C35/45 | 1,34                                     |      |      |                 |       |       |
|                                                                                                                                          |             |                   | C40/50 | 1,41                                     |      |      |                 |       |       |
|                                                                                                                                          |             |                   | C45/55 | 1,48                                     |      |      |                 |       |       |
|                                                                                                                                          |             |                   | C50/60 | 1,55                                     |      |      |                 |       |       |
| Installation safety factor                                                                                                               |             |                   |        | $\gamma_2^{3)} = \gamma_{inst}^{4)}$ 1,0 |      |      |                 |       |       |
| Concrete cone and splitting failure for standard anchorage depth in applications with concrete members of thickness $\geq 2x h_{ef,sta}$ |             |                   |        |                                          |      |      |                 |       |       |
| Effective anchorage depth                                                                                                                |             | $h_{ef}$          | [mm]   | 45                                       | 60   | 70   | 85              | 100   | 125   |
| Factor for uncracked concrete                                                                                                            |             | $k_{ucr}^{4)}$    | [-]    | 10,1                                     |      |      |                 |       |       |
| Factor for cracked concrete                                                                                                              |             | $k_{cr}$          | [-]    | 7,2                                      |      |      |                 |       |       |
| Min. thickness of concrete member                                                                                                        |             | $h_{min,1}$       | [mm]   | 100                                      | 120  | 140  | 170             | 200   | 250   |
| Characteristic spacing                                                                                                                   |             | $s_{cr,N}$        | [mm]   | 3 $h_{ef}$                               |      |      |                 |       |       |
| Characteristic edge distance                                                                                                             |             | $c_{cr,N}$        | [mm]   | 1,5 $h_{ef}$                             |      |      |                 |       |       |
| Spacing (splitting failure) <sup>2)</sup>                                                                                                |             | $s_{cr,sp}$       | [mm]   | 140                                      | 180  | 210  | 260             | 370   | 430   |
| Edge distance (splitting failure) <sup>2)</sup>                                                                                          |             | $c_{cr,sp}$       | [mm]   | 70                                       | 90   | 105  | 130             | 185   | 215   |
| Concrete cone and splitting failure for standard anchorage depth in applications with concrete members of thickness $< 2x h_{ef,sta}$    |             |                   |        |                                          |      |      |                 |       |       |
| Effective anchorage depth                                                                                                                |             | $h_{ef}$          | [mm]   | 45                                       | 60   | 70   | 85              | 100   | 125   |
| Factor for uncracked concrete                                                                                                            |             | $k_{ucr}^{4)}$    | [-]    | 10,1                                     |      |      |                 |       |       |
| Factor for cracked concrete                                                                                                              |             | $k_{cr}$          | [-]    | 7,2                                      |      |      |                 |       |       |
| Min. thickness of concrete member                                                                                                        |             | $h_{min,2}$       | [mm]   | 80                                       | 100  | 120  | 140             | 160   | 200   |
| Characteristic spacing                                                                                                                   |             | $s_{cr,N}$        | [mm]   | 3 $h_{ef}$                               |      |      |                 |       |       |
| Characteristic edge distance                                                                                                             |             | $c_{cr,N}$        | [mm]   | 1,5 $h_{ef}$                             |      |      |                 |       |       |
| Spacing (splitting failure) <sup>2)</sup>                                                                                                |             | $s_{cr,sp}$       | [mm]   | 180                                      | 240  | 280  | 340             | 480   | 550   |
| Edge distance (splitting failure) <sup>2)</sup>                                                                                          |             | $c_{cr,sp}$       | [mm]   | 90                                       | 120  | 140  | 170             | 240   | 275   |

<sup>1)</sup> Pullout failure not relevant.

<sup>2)</sup> Intermediate values for  $s_{cr,sp}$  and  $c_{cr,sp}$  between concrete thickness  $h_{min,2}$  and  $h_{min,1}$  by linear interpolation.

<sup>3)</sup> Parameter relevant for design according to ETAG 001, Annex C

<sup>4)</sup> Parameter relevant for design according to CEN/TS 1992-4:2009

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

#### Performances

Characteristic values of resistance under tension loads for standard anchorage depth

**Annex C 1**

**Table C2:** Characteristic values of **tension** resistance for **reduced anchorage depth** under static and quasi-static action (Design method A, according to **ETAG 001, Annex C** or **CEN/TS 1992-4:2009**)

| Type of anchor / size                                                |             |                   |                                      | FAZ II, FAZ II A4, FAZ II C |                 |      |      |
|----------------------------------------------------------------------|-------------|-------------------|--------------------------------------|-----------------------------|-----------------|------|------|
|                                                                      |             |                   |                                      | M8                          | M10             | M12  | M16  |
| Steel failure for reduced anchorage depth                            |             |                   |                                      |                             |                 |      |      |
| Characteristic resistance                                            | FAZ II      | $N_{Rk,s}$        | [kN]                                 | 16,0                        | 27,0            | 41,5 | 66,0 |
|                                                                      | FAZ II A4/C | $N_{Rk,s}$        | [kN]                                 | 17,0                        | 27,2            | 44,3 | 70,6 |
| Partial safety factor                                                |             |                   | $\gamma_{Ms}$                        | 1,5                         |                 |      |      |
| Pullout failure for reduced anchorage depth                          |             |                   |                                      |                             |                 |      |      |
| Effective anchorage depth                                            |             | $h_{ef,red} \geq$ | [mm]                                 | 35 <sup>2)</sup>            | 40              | 50   | 65   |
| Characteristic resistance in cracked concrete C20/25                 |             | $N_{Rk,p}$        | [kN]                                 | 5                           | - <sup>1)</sup> |      |      |
| Characteristic resistance in uncracked concrete 20/25                |             | $N_{Rk,p}$        | [kN]                                 | - <sup>1)</sup>             |                 |      |      |
| Increasing factors for $N_{Rk,p}$ for cracked and uncracked concrete |             | $\psi_c$          | C25/30                               | 1,10                        |                 |      |      |
|                                                                      |             |                   | C30/37                               | 1,22                        |                 |      |      |
|                                                                      |             |                   | C35/45                               | 1,34                        |                 |      |      |
|                                                                      |             |                   | C40/50                               | 1,41                        |                 |      |      |
|                                                                      |             |                   | C45/55                               | 1,48                        |                 |      |      |
|                                                                      |             |                   | C50/60                               | 1,55                        |                 |      |      |
| Installation safety factor                                           |             |                   | $\gamma_2^{3)} = \gamma_{inst}^{4)}$ | 1,0                         |                 |      |      |
| Concrete cone and splitting failure for reduced anchorage depth      |             |                   |                                      |                             |                 |      |      |
| Effective anchorage depth                                            |             | $h_{ef}$          | [mm]                                 | 35 <sup>2)</sup>            | 40              | 50   | 65   |
| Factor for uncracked concrete                                        |             | $k_{ucr}^{4)}$    | [-]                                  | 10,1                        |                 |      |      |
| Factor for cracked concrete                                          |             | $k_{cr}^{4)}$     | [-]                                  | 7,2                         |                 |      |      |
| Min. thickness of concrete member                                    |             | $h_{min,3}$       | [mm]                                 | 80                          | 80              | 100  | 140  |
| Characteristic spacing                                               |             | $s_{cr,N}$        | [mm]                                 | 3 $h_{ef}$                  |                 |      |      |
| Characteristic edge distance                                         |             | $c_{cr,N}$        | [mm]                                 | 1,5 $h_{ef}$                |                 |      |      |
| Spacing (splitting failure)                                          |             | $s_{cr,sp}$       | [mm]                                 | 140                         | 160             | 200  | 260  |
| Edge distance (splitting failure)                                    |             | $c_{cr,sp}$       | [mm]                                 | 70                          | 80              | 100  | 130  |

<sup>1)</sup> Pullout failure not relevant.

<sup>2)</sup> Use restricted to anchoring of structural components which are statically indeterminate

<sup>3)</sup> Parameter relevant for design according to ETAG 001, Annex C

<sup>4)</sup> Parameter relevant for design according to CEN/TS 1992-4:2009

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

#### Performances

Characteristic values of resistance under tension for reduced anchorage depth

**Annex C 2**

**Table C3:** Characteristic values of **shear** resistance for **standard and reduced anchorage depth** under static and quasi-static action (Design method A, according to **ETAG 001, Annex C** or **CEN/TS 1992-4:2009**)

| Type of anchor / size                                                       |             | FAZ II, FAZ II A4, FAZ II C          |      |      |      |      |       |      |       |
|-----------------------------------------------------------------------------|-------------|--------------------------------------|------|------|------|------|-------|------|-------|
|                                                                             |             | M8                                   | M10  | M12  | M16  | M20  | M24   |      |       |
| Steel failure without lever arm for standard and reduced anchorage depth    |             |                                      |      |      |      |      |       |      |       |
| Characteristic resistance                                                   | FAZ II      | $V_{Rk,s}$                           | [kN] | 12,0 | 20,0 | 29,5 | 55,0  | 70,0 | 86,0  |
|                                                                             | FAZ II A4/C | $V_{Rk,s}$                           |      | 17,6 | 23,8 | 36,5 | 70,9  | 94,4 | 138,2 |
| Partial safety factor                                                       |             | $\gamma_{Ms}$                        |      | 1,25 |      |      |       |      |       |
| Factor for ductility                                                        |             | $k_2^{2)}$                           | [-]  | 1,0  |      |      |       |      |       |
| Standard anchorage depth                                                    |             |                                      |      |      |      |      |       |      |       |
| Steel failure with lever arm                                                |             |                                      |      |      |      |      |       |      |       |
| Characteristic bending resistance                                           | FAZ II      | $M_{Rk,s}^0$                         | [Nm] | 26   | 52   | 92   | 233   | 487  | 769   |
|                                                                             | FAZ II A4/C | $M_{Rk,s}^0$                         |      | 29   | 56   | 94   | 256   | 454  | 785   |
| Partial safety factor                                                       |             | $\gamma_{Ms}$                        |      | 1,25 |      |      |       |      |       |
| Factor for ductility                                                        |             | $k_2^{2)}$                           | [-]  | 1,0  |      |      |       |      |       |
| Concrete pryout failure                                                     |             |                                      |      |      |      |      |       |      |       |
| Factor k according to ETAG 001, Annex C or $k_3$ according to CEN/TS 1992-4 |             | $k^{1)}=k_{(3)}^{2)}$                | [-]  | 2,2  | 2,4  | 2,8  |       |      |       |
| Concrete edge failure                                                       |             |                                      |      |      |      |      |       |      |       |
| Effective length of anchor in shear loading                                 |             | $l_f$                                | [mm] | 45   | 60   | 70   | 85    | 100  | 125   |
| Effective diameter of anchor                                                |             | $d_{nom}$                            | [mm] | 8    | 10   | 12   | 16    | 20   | 24    |
| Installation safety factor                                                  |             | $\gamma_2^{1)} = \gamma_{inst}^{2)}$ |      | 1,0  |      |      |       |      |       |
| Reduced anchorage depth                                                     |             |                                      |      |      |      |      |       |      |       |
| Steel failure with lever arm                                                |             |                                      |      |      |      |      |       |      |       |
| Characteristic bending resistance                                           | FAZ II      | $M_{Rk,s}^0$                         | [Nm] | 15   | 38,3 | 89   | 171   | -    | -     |
|                                                                             | FAZ II A4/C | $M_{Rk,s}^0$                         |      | 18,9 | 38,3 | 90,7 | 179,5 | -    | -     |
| Partial safety factor                                                       |             | $\gamma_{Ms}$                        |      | 1,25 |      |      |       |      |       |
| Factor for ductility                                                        |             | $k_2^{2)}$                           | [-]  | 1,0  |      |      |       |      |       |
| Concrete pryout failure                                                     |             |                                      |      |      |      |      |       |      |       |
| Factor k according to ETAG 001, Annex C or $k_3$ according to CEN/TS 1992-4 |             | $k^{1)} = k_{(3)}^{2)}$              | [-]  | 1,0  | 2,0  | 2,3  | -     | -    |       |
| Concrete edge failure                                                       |             |                                      |      |      |      |      |       |      |       |
| Effective length of anchor in shear loading                                 |             | $l_f$                                | [mm] | 35   | 40   | 50   | 65    | -    | -     |
| Effective diameter of anchor                                                |             | $d_{nom}$                            | [mm] | 8    | 10   | 12   | 16    | -    | -     |

<sup>1)</sup> Parameter relevant for design according to ETAG 001, Annex C

<sup>2)</sup> Parameter relevant for design according to CEN/TS 1992-4:2009

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

#### Performances

Characteristic values of resistance under shear loads

**Annex C 3**

**Table C4:** Characteristic values of **tension** resistance under **fire exposure** in cracked and uncracked concrete for **standard and reduced anchorage depth** (Design according to **TR 020 and ETAG 001, Annex C** or **CEN/TS 1992-4: 2009, Annex D**)

| Type of anchor / size<br><b>FAZ II, FAZ II A4, FAZ II C</b> | <b>R30</b><br>Fire resistance 30 minutes |                            |                            | <b>R60</b><br>Fire resistance 60 minutes   |                            |                             |
|-------------------------------------------------------------|------------------------------------------|----------------------------|----------------------------|--------------------------------------------|----------------------------|-----------------------------|
|                                                             | $N_{Rk,s,fi,30}$<br>[kN]                 | $N_{Rk,p,fi,30}$<br>[kN]   | $N^0_{Rk,c,fi,30}$<br>[kN] | $N_{Rk,s,fi,60}$<br>[kN]                   | $N_{Rk,p,fi,60}$<br>[kN]   | $N^0_{Rk,c,fi,60}$<br>[kN]  |
| <b>Standard anchorage depth</b>                             |                                          |                            |                            |                                            |                            |                             |
| M8                                                          | 1,4                                      | 2,0                        | 2,4                        | 1,2                                        | 2,0                        | 2,4                         |
| M10                                                         | 2,8                                      | 3,3                        | 5,0                        | 2,3                                        | 3,3                        | 5,0                         |
| M12                                                         | 5,0                                      | 5,0                        | 7,4                        | 4,1                                        | 5,0                        | 7,4                         |
| M16                                                         | 9,4                                      | 7,1                        | 12,0                       | 7,7                                        | 7,1                        | 12,0                        |
| M20                                                         | 14,7                                     | 9,0                        | 18,0                       | 12,0                                       | 9,0                        | 18,0                        |
| M24                                                         | 21,1                                     | 12,6                       | 31,4                       | 17,3                                       | 12,6                       | 31,4                        |
| <b>Reduced anchorage depth</b>                              |                                          |                            |                            |                                            |                            |                             |
| M8                                                          | $0,9^{1)}$<br>$(0,6)^{2)}$               | $0,9^{1)}$<br>$(0,6)^{2)}$ | $0,9^{1)}$<br>$(0,6)^{2)}$ | $0,8^{1)}$<br>$(0,6)^{2)}$                 | $0,8^{1)}$<br>$(0,6)^{2)}$ | $0,8^{1)}$<br>$(0,6)^{2)}$  |
| M10                                                         | 2,8                                      | 2,3                        | 1,8                        | 2,3                                        | 2,3                        | 1,8                         |
| M12                                                         | 5,0                                      | 3,2                        | 3,2                        | 4,1                                        | 3,2                        | 3,2                         |
| M16                                                         | 9,4                                      | 4,7                        | 6,1                        | 7,7                                        | 4,7                        | 6,1                         |
|                                                             |                                          |                            |                            |                                            |                            |                             |
|                                                             | <b>R90</b><br>Fire resistance 90 minutes |                            |                            | <b>R120</b><br>Fire resistance 120 minutes |                            |                             |
|                                                             | $N_{Rk,s,fi,90}$<br>[kN]                 | $N_{Rk,p,fi,90}$<br>[kN]   | $N^0_{Rk,c,fi,90}$<br>[kN] | $N_{Rk,s,fi,120}$<br>[kN]                  | $N_{Rk,p,fi,120}$<br>[kN]  | $N^0_{Rk,c,fi,120}$<br>[kN] |
| <b>Standard anchorage depth</b>                             |                                          |                            |                            |                                            |                            |                             |
| M8                                                          | 0,9                                      | 2,0                        | 2,4                        | 0,8                                        | 1,6                        | 1,9                         |
| M10                                                         | 1,9                                      | 3,3                        | 5,0                        | 1,6                                        | 2,6                        | 4,0                         |
| M12                                                         | 3,2                                      | 5,0                        | 7,4                        | 2,8                                        | 4,0                        | 5,9                         |
| M16                                                         | 6,0                                      | 7,1                        | 12,0                       | 5,2                                        | 5,6                        | 9,6                         |
| M20                                                         | 9,4                                      | 9,0                        | 18,0                       | 8,1                                        | 7,2                        | 14,4                        |
| M24                                                         | 13,5                                     | 12,6                       | 31,4                       | 11,6                                       | 10,1                       | 25,1                        |
| <b>Reduced anchorage depth</b>                              |                                          |                            |                            |                                            |                            |                             |
| M8                                                          | 0,5                                      | 0,5                        | 0,5                        | 0,3                                        | 0,3                        | 0,3                         |
| M10                                                         | 1,9                                      | 2,3                        | 1,8                        | 1,6                                        | 1,8                        | 1,4                         |
| M12                                                         | 3,2                                      | 3,2                        | 3,2                        | 2,8                                        | 2,5                        | 2,5                         |
| M16                                                         | 6,0                                      | 4,7                        | 6,1                        | 5,2                                        | 3,8                        | 4,9                         |

<sup>1)</sup> Values for  $s_{cr,fi} = 120$  mm and  $c_{cr,fi} = 60$  mm

<sup>2)</sup> Values for  $s_{cr,fi} = 100$  mm and  $c_{cr,fi} = 50$  mm

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Performances:**  
Characteristic values of resistance under tension loads

**Annex C 4**

**Table C5:** Characteristic values of **shear** resistance under **fire exposure** in cracked and uncracked concrete for **standard and reduced anchorage depth** (Design according to **TR 020** and **ETAG 001, Annex C** or **CEN/TS 1992-4:2009, Annex D**)

| Type of anchor / size<br><b>FAZ II, FAZ II A4, FAZ II C</b> | <b>R30</b><br>Fire resistance 30 minutes |                            |     | <b>R60</b><br>Fire resistance 60 minutes   |                             |     |
|-------------------------------------------------------------|------------------------------------------|----------------------------|-----|--------------------------------------------|-----------------------------|-----|
|                                                             | $V_{Rk,s,fi,30}$<br>[kN]                 | $M_{Rk,s,fi,30}^0$<br>[Nm] | k   | $V_{Rk,s,fi,60}$<br>[kN]                   | $M_{Rk,s,fi,60}^0$<br>[Nm]  | k   |
| <b>Standard anchorage depth</b>                             |                                          |                            |     |                                            |                             |     |
| M8                                                          | 1,8                                      | 1,4                        | 2,2 | 1,6                                        | 1,2                         | 2,2 |
| M10                                                         | 3,6                                      | 3,6                        | 2,2 | 2,9                                        | 3,0                         | 2,2 |
| M12                                                         | 6,3                                      | 7,8                        | 2,4 | 4,9                                        | 6,4                         | 2,4 |
| M16                                                         | 11,7                                     | 19,9                       | 2,8 | 9,1                                        | 16,3                        | 2,8 |
| M20                                                         | 18,2                                     | 39,0                       | 2,8 | 14,2                                       | 31,8                        | 2,8 |
| M24                                                         | 26,3                                     | 67,3                       | 2,8 | 20,5                                       | 55,0                        | 2,8 |
| <b>Reduced anchorage depth</b>                              |                                          |                            |     |                                            |                             |     |
| M8                                                          | 1,8                                      | 1,4                        | 1,0 | 1,6                                        | 1,2                         | 1,0 |
| M10                                                         | 3,6                                      | 3,6                        | 2,0 | 2,9                                        | 3,0                         | 2,0 |
| M12                                                         | 6,3                                      | 7,8                        | 2,3 | 4,9                                        | 6,4                         | 2,3 |
| M16                                                         | 11,7                                     | 20,0                       | 2,3 | 9,1                                        | 16,3                        | 2,3 |
|                                                             |                                          |                            |     |                                            |                             |     |
|                                                             | <b>R90</b><br>Fire resistance 90 minutes |                            |     | <b>R120</b><br>Fire resistance 120 minutes |                             |     |
|                                                             | $V_{Rk,s,fi,90}$<br>[kN]                 | $M_{Rk,s,fi,90}^0$<br>[Nm] | k   | $V_{Rk,s,fi,120}$<br>[kN]                  | $M_{Rk,s,fi,120}^0$<br>[Nm] | k   |
| <b>Standard anchorage depth</b>                             |                                          |                            |     |                                            |                             |     |
| M8                                                          | 1,3                                      | 1,0                        | 2,2 | 1,2                                        | 0,8                         | 2,2 |
| M10                                                         | 2,2                                      | 2,4                        | 2,2 | 1,9                                        | 2,1                         | 2,2 |
| M12                                                         | 3,5                                      | 5,0                        | 2,4 | 2,8                                        | 4,3                         | 2,4 |
| M16                                                         | 6,6                                      | 12,6                       | 2,8 | 5,3                                        | 11,0                        | 2,8 |
| M20                                                         | 10,3                                     | 24,6                       | 2,8 | 8,3                                        | 21,4                        | 2,8 |
| M24                                                         | 14,8                                     | 42,6                       | 2,8 | 11,9                                       | 37,0                        | 2,8 |
| <b>Reduced anchorage depth</b>                              |                                          |                            |     |                                            |                             |     |
| M8                                                          | 1,3                                      | 1,0                        | 1,0 | 1,2                                        | 0,9                         | 1,0 |
| M10                                                         | 2,2                                      | 2,4                        | 2,0 | 1,9                                        | 2,1                         | 2,0 |
| M12                                                         | 3,5                                      | 5,0                        | 2,3 | 2,8                                        | 4,3                         | 2,3 |
| M16                                                         | 6,6                                      | 12,6                       | 2,3 | 5,3                                        | 11,0                        | 2,3 |

**Concrete pryout failure:** In Equation (5.6) of ETAG 001, Annex C, 5.2.3.3 the  $k_{(3)}$ -factor of Table C3 and the relevant values of  $N_{0Rk,c,fi}$  of Table C4 have to be considered.

**Concrete edge failure:** The characteristic resistance  $V_{Rk,c,fi}^0$  in concrete C20/25 to C50/60 is determined by:  $V_{Rk,c,fi}^0 = 0,25 \times V_{Rk,c}^0$  (R30, R60, R90),  $V_{Rk,c,fi}^0 = 0,20 \times V_{Rk,c}^0$  (R120) with  $V_{Rk,c}^0$  as initial value of the characteristic resistance in cracked concrete C20/25 under normal temperature according to ETAG 001, Annex C, 5.2.3.4.

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Performances:**  
Characteristic values of resistance under shear loads and fire exposure

**Annex C 5**

**Table C6:** Valid anchor sizes for seismic design, **performance category C1, standard and reduced anchorage depth**

| Type of anchor / size                     |                        | FAZ II, FAZ II A4, FAZ II C |      |     |     |     |     |
|-------------------------------------------|------------------------|-----------------------------|------|-----|-----|-----|-----|
|                                           |                        | M8                          | M10  | M12 | M16 | M20 | M24 |
| <b>Standard effective anchorage depth</b> | $h_{ef,sta} \geq [mm]$ | 45                          | 60   | 70  | 85  | 100 | 125 |
| Thickness of fixture                      | $t_{fix,min} = [mm]$   | 0                           | 0    | 0   | 0   | 0   | 0   |
|                                           | $t_{fix,max} = [mm]$   | 100                         | 100  | 120 | 160 | 250 | 300 |
| Length of anchor                          | $L_{min} = [mm]$       | 54,5                        | 84,5 | 99  | 122 | 141 | 174 |
|                                           | $L_{max} = [mm]$       | 167                         | 186  | 221 | 285 | 394 | 477 |
| <b>Reduced effective anchorage depth</b>  | $h_{ef,red} \geq [mm]$ | -                           | 40   | 50  | 65  | -   | -   |
| Thickness of fixture                      | $t_{fix,min} = [mm]$   |                             | 0    | 0   | 0   |     |     |
|                                           | $t_{fix,max} = [mm]$   |                             | 120  | 140 | 180 |     |     |
| Length of anchor                          | $L_{min} = [mm]$       |                             | 64,5 | 79  | 102 |     |     |
|                                           | $L_{max} = [mm]$       |                             | 186  | 221 | 285 |     |     |

**Table C7:** Valid anchor sizes for seismic design, **performance category C2, standard and reduced anchorage depth**

| Type of anchor / size                     |                        | FAZ II, FAZ II A4, FAZ II C <sup>1)</sup> |      |     |       |     |     |
|-------------------------------------------|------------------------|-------------------------------------------|------|-----|-------|-----|-----|
|                                           |                        | M8                                        | M10  | M12 | M16   | M20 | M24 |
| <b>Standard effective anchorage depth</b> | $h_{ef,sta} \geq [mm]$ | -                                         | 60   | 70  | 85    | 100 | -   |
| Thickness of fixture                      | $t_{fix,min} = [mm]$   |                                           | 0    | 0   | 0     | 0   |     |
|                                           | $t_{fix,max} = [mm]$   |                                           | 100  | 120 | 160   | 250 |     |
| Length of anchor                          | $L_{min} = [mm]$       |                                           | 84,5 | 99  | 122   | 141 |     |
|                                           | $L_{max} = [mm]$       |                                           | 186  | 221 | 285   | 394 |     |
| <b>Reduced effective anchorage depth</b>  | $h_{ef,red} \geq [mm]$ | -                                         | 40   | 50  | 65    | -   | -   |
| Thickness of fixture                      | $t_{fix,min} = [mm]$   |                                           | 0    | 0   | 0     |     |     |
|                                           | $t_{fix,max} = [mm]$   |                                           | 120  | 140 | 180   |     |     |
| Length of anchor                          | $L_{min} = [mm]$       |                                           | 64,5 | 79  | 102   |     |     |
|                                           | $L_{max} = [mm]$       |                                           | 186  | 221 | 284,5 |     |     |

<sup>1)</sup> FAZ II C: Only valid for cold-formed version (see A1)

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Performances:**

Valid sizes in cracked concrete for seismic design

**Annex C 6**

**Table C8:** Characteristic values of **tension and shear** resistance for **standard- and reduced anchorage depth** under **seismic action**  
(Design according to **TR 045: Performance category C1**)

| Type of anchor / size                                         |                                  |                    | FAZ II, FAZ II A4, FAZ II C |      |      |      |       |       |
|---------------------------------------------------------------|----------------------------------|--------------------|-----------------------------|------|------|------|-------|-------|
|                                                               |                                  |                    | M8                          | M10  | M12  | M16  | M20   | M24   |
| Steel failure                                                 |                                  |                    |                             |      |      |      |       |       |
| Characteristic resistance tension load C1                     | $\frac{h_{ef,sta}}{h_{ef,red.}}$ | $N_{Rk,s,C1}$ [kN] | 16,0                        | 27,0 | 41,0 | 66,0 | 111,0 | 150,0 |
|                                                               | -                                |                    | -                           |      |      |      | -     |       |
| Partial safety factor $\gamma_{Ms,C1}$ [-]                    |                                  |                    | 1,5                         |      |      |      |       |       |
| Pullout failure                                               |                                  |                    |                             |      |      |      |       |       |
| Characteristic resistance tension load in cracked concrete C1 | $\frac{h_{ef,sta}}{h_{ef,red.}}$ | $N_{Rk,p,C1}$ [kN] | 4,6                         | 8,0  | 16,0 | 28,2 | 36,0  | 50,3  |
|                                                               | -                                |                    | -                           |      |      |      | -     |       |
| Installation safety factor $\gamma_{2,C1}$ [-]                |                                  |                    | 1,0                         |      |      |      |       |       |
| Steel failure without lever arm                               |                                  |                    |                             |      |      |      |       |       |
| Characteristic resistance shear load C1                       | $\frac{h_{ef,sta}}{h_{ef,red.}}$ | $V_{Rk,s,C1}$ [kN] | 11                          | 17   | 27   | 47   | 56    | 69    |
|                                                               | -                                |                    | -                           |      |      |      | -     |       |
| Partial safety factor $\gamma_{Ms,C1}$ [-]                    |                                  |                    | 1,25                        |      |      |      |       |       |

**Table C9:** Characteristic values of **tension and shear** resistance for **standard- and reduced anchorage depth** under **seismic action**  
(Design according to **TR 045: Performance category C2**)

| Type of anchor / size                                         | FAZ II, FAZ II A4, FAZ II C <sup>1)</sup> |                    |     |      |      |      |      |   |
|---------------------------------------------------------------|-------------------------------------------|--------------------|-----|------|------|------|------|---|
|                                                               | M8                                        | M10                | M12 | M16  | M20  | M24  |      |   |
| Steel failure                                                 |                                           |                    |     |      |      |      |      |   |
| Characteristic resistance tension load C2                     | $\frac{h_{ef,sta}}{h_{ef,red.}}$          | $N_{Rk,s,C2}$ [kN] | -   | 27   | 41   | 66   | 111  | - |
|                                                               |                                           |                    |     |      |      |      | -    |   |
| Partial safety factor                                         | $\gamma_{Ms,C2}$ [-]                      | 1,5                |     |      |      |      |      |   |
| Pullout failure                                               |                                           |                    |     |      |      |      |      |   |
| Characteristic resistance tension load in cracked concrete C2 | $\frac{h_{ef,sta}}{h_{ef,red.}}$          | $N_{Rk,p,C2}$ [kN] | -   | 5,1  | 7,4  | 21,5 | 30,7 | - |
|                                                               |                                           |                    |     | 2,7  | 4,4  | 16,4 | -    |   |
| Installation safety factor                                    | $\gamma_{2,C2}$ [-]                       | 1,0                |     |      |      |      |      |   |
| Steel failure without lever arm                               |                                           |                    |     |      |      |      |      |   |
| Characteristic resistance shear load C2                       | $\frac{h_{ef,sta}}{h_{ef,red.}}$          | $V_{Rk,s,C2}$ [kN] | -   | 10,0 | 17,4 | 27,5 | 39,9 | - |
|                                                               |                                           |                    |     | 7,0  | 12,7 | 22,0 | -    |   |
| Partial safety factor                                         | $\gamma_{Ms,C2}$ [-]                      | 1,25               |     |      |      |      |      |   |

<sup>1)</sup> FAZ II C: Only valid for cold-formed version (see A1)

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Performances:**  
Characteristic values of resistance under tension and shear loads under seismic action

**Annex C 7**

**Table C10:** Displacements due to tension loads for **standard and reduced anchorage depth**  
(Design method A, according to **ETAG 001, Annex C** or **CEN/TS 1992-4:2009**)

| Type of anchor / size               |                    |      | FAZ II, FAZ II A4, FAZ II C |     |      |      |      |      |
|-------------------------------------|--------------------|------|-----------------------------|-----|------|------|------|------|
|                                     |                    |      | M8                          | M10 | M12  | M16  | M20  | M24  |
| Values for standard anchorage depth |                    |      |                             |     |      |      |      |      |
| Tension load in cracked concrete    | N                  | [kN] | 2,3                         | 4,2 | 7,5  | 13,2 | 16,4 | 22,9 |
| Displacement                        | $\delta_{N0}$      | [mm] | 0,5                         | 0,5 | 0,7  | 1,0  | 1,2  | 1,2  |
|                                     | $\delta_{N\infty}$ | [mm] | 1,8                         | 1,7 | 1,4  | 1,2  | 1,4  | 1,5  |
| Tension load in uncracked concrete  | N                  | [kN] | 4,2                         | 7,5 | 11,7 | 18,7 | 23,3 | 32,5 |
| Displacement                        | $\delta_{N0}$      | [mm] | 0,3                         | 0,3 | 0,5  | 0,7  | 1,2  | 1,2  |
|                                     | $\delta_{N\infty}$ | [mm] | 1,2                         |     |      |      | 1,4  | 1,5  |
| Values for reduced anchorage depth  |                    |      |                             |     |      |      |      |      |
| Tension load in cracked concrete    | N                  | [kN] | 2,3                         | 4,2 | 6,0  | 9,0  | -    | -    |
| Displacement                        | $\delta_{N0}$      | [mm] | 0,5                         | 0,5 | 0,7  | 1,0  |      |      |
|                                     | $\delta_{N\infty}$ | [mm] | 1,2                         |     |      |      |      |      |
| Tension load in uncracked concrete  | N                  | [kN] | 4,2                         | 5,7 | 8,5  | 12,6 | -    | -    |
| Displacement                        | $\delta_{N0}$      | [mm] | 0,3                         | 0,3 | 0,5  | 0,7  |      |      |
|                                     | $\delta_{N\infty}$ | [mm] | 1,2                         |     |      |      |      |      |

**Table C11:** Displacements due to shear loads for **standard and reduced anchorage depth**  
(Design method A, according to **ETAG 001, Annex C** or **CEN/TS 1992-4:2009**)

| Type of anchor / size                        |                    |      | FAZ II              |      |      |      |      |      |
|----------------------------------------------|--------------------|------|---------------------|------|------|------|------|------|
|                                              |                    |      | M8                  | M10  | M12  | M16  | M20  | M24  |
| Shear load in cracked and uncracked concrete | V                  | [kN] | 6,9                 | 11,4 | 16,9 | 31,4 | 39,4 | 48,5 |
| Displacement                                 | $\delta_{V0}$      | [mm] | 2,4                 | 4,2  | 4,5  | 3,0  | 3,6  | 3,6  |
|                                              | $\delta_{V\infty}$ | [mm] | 3,6                 | 6,3  | 6,8  | 4,5  | 5,4  | 5,4  |
| Type of anchor / size                        |                    |      | FAZ II A4, FAZ II C |      |      |      |      |      |
|                                              |                    |      | M8                  | M10  | M12  | M16  | M20  | M24  |
| Shear load in cracked and uncracked concrete | V                  | [kN] | 10,1                | 13,6 | 20,9 | 40,5 | 53,9 | 79,0 |
| Displacement                                 | $\delta_{V0}$      | [mm] | 1,8                 | 2,0  | 2,2  | 3,0  | 1,9  | 4,7  |
|                                              | $\delta_{V\infty}$ | [mm] | 2,7                 | 3,0  | 3,4  | 4,5  | 2,9  | 7,1  |

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Performances:**

Displacements under tension and shear loads

**Annex C 8**

**Table C12:** Displacements due to tension loads for **standard and reduced anchorage depth**  
(Design according to **TR 045: Performance category C2**)

| Type of anchor / size                               | FAZ II, FAZ II A4, FAZ II C |      |      |      |      |     |
|-----------------------------------------------------|-----------------------------|------|------|------|------|-----|
|                                                     | M8                          | M10  | M12  | M16  | M20  | M24 |
| <b>Values for standard anchorage depth</b>          |                             |      |      |      |      |     |
| Displacement DLS $\delta_{N,C2} \text{ (DLS)}$ [mm] | -                           | 2,7  | 4,4  | 4,4  | 5,6  | -   |
| Displacement ULS $\delta_{N,C2} \text{ (ULS)}$ [mm] | -                           | 11,5 | 13,0 | 12,3 | 14,4 | -   |
| <b>Values for reduced anchorage depth</b>           |                             |      |      |      |      |     |
| Displacement DLS $\delta_{N,C2} \text{ (DLS)}$ [mm] | -                           | 2,7  | 4,4  | 4,4  | -    | -   |
| Displacement ULS $\delta_{N,C2} \text{ (ULS)}$ [mm] | -                           | 11,5 | 13,0 | 12,3 | -    | -   |

**Table C13:** Displacements due to shear loads for **standard and reduced anchorage depth**  
(Design according to **TR 045: Performance category C2**)

| Type of anchor / size                               | FAZ II, FAZ II A4, FAZ II C |     |     |      |      |     |
|-----------------------------------------------------|-----------------------------|-----|-----|------|------|-----|
|                                                     | M8                          | M10 | M12 | M16  | M20  | M24 |
| <b>Values for standard anchorage depth</b>          |                             |     |     |      |      |     |
| Displacement DLS $\delta_{V,C2} \text{ (DLS)}$ [mm] | -                           | 4,1 | 4,4 | 4,3  | 4,8  | -   |
| Displacement ULS $\delta_{V,C2} \text{ (ULS)}$ [mm] | -                           | 6,2 | 7,8 | 8,1  | 11,2 | -   |
| <b>Values for reduced anchorage depth</b>           |                             |     |     |      |      |     |
| Displacement DLS $\delta_{V,C2} \text{ (DLS)}$ [mm] | -                           | 3,6 | 4,7 | 5,5  | -    | -   |
| Displacement ULS $\delta_{V,C2} \text{ (ULS)}$ [mm] | -                           | 5,0 | 7,5 | 10,1 | -    | -   |

fischer Bolt Anchor FAZ II, FAZ II A4, FAZ II C

**Performances:**  
Displacements under tension and shear loads under seismic action

**Annex C 9**