

**YDEEVNEDEKLARATION****DoP 0272**

til fischer injektionsmørtel FIS GREEN (Flydende fastgørelse til brug i beton)

DA

1. Varetypens unikke identifikationskode:**DoP 0272**2. Anvendelsesformål:

Eftermonteret befæstelse i ikke-revnet beton se appendiks, specifikt Bilage B1- B8.

3. Fabrikant:

fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Tyskland

4. Bemyndiget repræsentant:

-

5. System(er) til vurdering og kontrol af konstansen af ydeevnen:

1

6. Europæisk vurderingsdokument:

ETAG 001, Part 5, April 2013, anvendt som EAD

ETA-14/0408; 2014-12-19

DIBt- Deutsches Institut für Bautechnik

Notificeret organ(er)

2873 TU Darmstadt

7. Deklarereret ydeevne(r):**Mekanisk modstand og stabilitet (BWR 1)****Karakteristisk modstand for træklast (statisk og quasi-statisk belastning):**

Modstand overfor stålsvig: Bilag C2,C3 (TR 029); Bilag C6-C9 (CEN/TS 1992-4)

Modstand overfor kombineret udtræk og beton-kegle brud: Bilag C1-C3 (TR 029); Bilag C6-C9 (CEN/TS 1992-4)

 ψ_{sus}^0 = NPD

Modstand overfor svigt af beton-kegle: NPD (see TR 029); Bilag C6-C9 (CEN/TS 1992-4)

Kantafstand til forhindring af flækning under belastning: Bilag C1-C3 (TR 029); Bilag C6-C9 (CEN/TS 1992-4)

Robusthed: Bilag C1-C3 (TR 029); Bilag C6-C11 (CEN/TS 1992-4)

Maksimal kærv ved montering: Bilag B2,B3,B5

Min. kant og indbyrdes afstand: Bilag B2-B5

Karakteristisk modstand for tværlast (statisk og quasi-statisk belastning):

Modstand overfor stålsvig: Bilag C4,C5 (TR 029); Bilag C10,C11 (CEN/TS 1992-4)

Modstand overfor svigt ved udtrækning: Bilag C4,C5 (TR 029); Bilag C10,C11 (CEN/TS 1992-4)

Modstand overfor svigt af betonkant: NPD (see TR 029); Bilag C10, C11 (CEN/TS 1992-4)

Forskydnninger under kortvarig og langvarig belastning:

Forskydninger under kortvarig og langvarig belastning: Bilag C12,C13

Karakteristisk modstand og Forskydninger for seismiske ydelseskategorier C1 og C2:

Modstand overfor spændingslast, forskydninger, kategori C1: NPD

Modstand overfor spændingslast, forskydninger, kategori C2: NPD

Modstand overfor tværlast, forskydninger, kategori C1: NPD

Modstand overfor tværlast, forskydninger, kategori C2: NPD

Faktor ringhul: NPD

Hygiene, sundhed og miljø (BWR 3)

Indhold, emission og / eller udledning af farlige stoffer: NPD

8. Relevant teknisk dokumentation og/eller specifik teknisk dokumentation:

-

Ydeevnen for den vare, der er anført ovenfor, er i overensstemmelse med den deklarerede ydeevne. Denne ydeevnedeklaration er udarbejdet i overensstemmelse med forordning (EU) nr. 305/2011 på eneansvar af den fabrikant, der er anført ovenfor.

Underskrevet for fabrikanten og på dennes vegne af:

Dr.-Ing. Oliver Geibig, Administrerende direktør Forretningsenheder og ingenørarbejde
Tumlingen, 2021-01-11

Jürgen Grün, Administrerende direktør Kemi & Kvalitet

Denne DoP er tilgængelig i forskellige sprogversioner. I tilfælde af fortolkningsmæssig uoverensstemmelse, henvises der til den engelske version, som altid er gældende.

Appendikset indeholder frivillige og udvidede informationer på engelsk. Disse overgår de lokale (sprognegative) retslige krav.

Specific Part

1 Technical description of the product

The fischer injection system FIS GREEN is a bonded anchor consisting of a cartridge with injection mortar fischer FIS GREEN and a steel element. The steel element consist of

- a fischer threaded rod with washer and hexagon nut of sizes M8 to M20 or
- internal threaded anchor RG MI of sizes M8 to M16 or
- a deformed reinforcing bar of sizes $\phi = 8$ to 20 mm or
- a fischer rebar anchor FRA of sizes M12 to M20

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance for design according to TR 029	See Annex C 1 to C 5
Characteristic resistance for design according to CEN/TS 1992-4:2009	See Annex C 6 to C 11
Displacements under tension and shear loads	See Annex C 12 / C 13

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorages satisfy requirements for Class A1
Resistance to fire	No performance determined (NPD)

3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

3.4 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

3.5 Protection against noise (BWR 5)

Not applicable.

3.6 Energy economy and heat retention (BWR 6)

Not applicable.

3.7 Sustainable use of natural resources (BWR 7)

The sustainable use of natural resources was not investigated.

3.8 General aspects

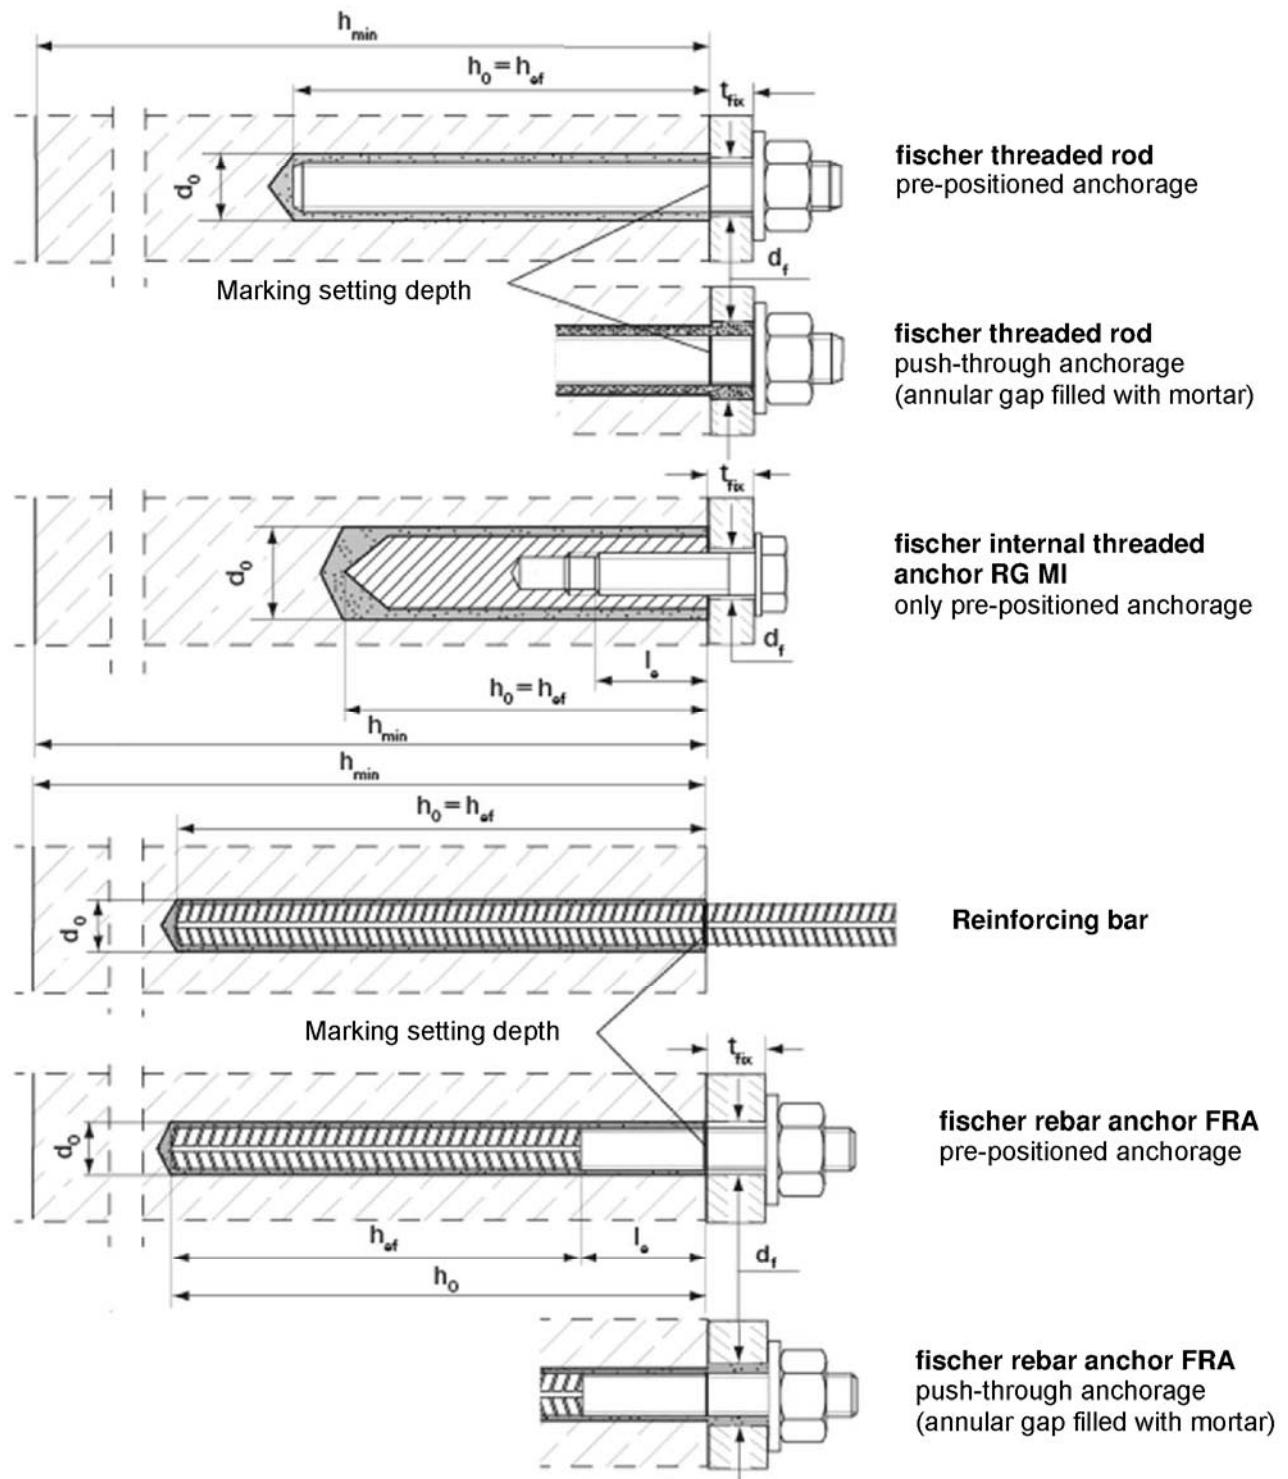
The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

According to Decision of the Commission of 24 June 1996 (96/582/EC) (OJ L 254 of 08.10.96 p. 62-65), the system of assessment and verification of constancy of performance (see Annex V and Article 65 Paragraph 2 to Regulation (EU) No 305/2011) given in the following table applies.

Product	Intended use	Level or class	System
Metal anchors for use in concrete (heavy-duty type)	For fixing and/or supporting concrete structural elements or heavy units such as cladding and suspended ceilings	—	1


Installed condition



fischer Injectionsystem FIS GREEN

Product description
Installed condition

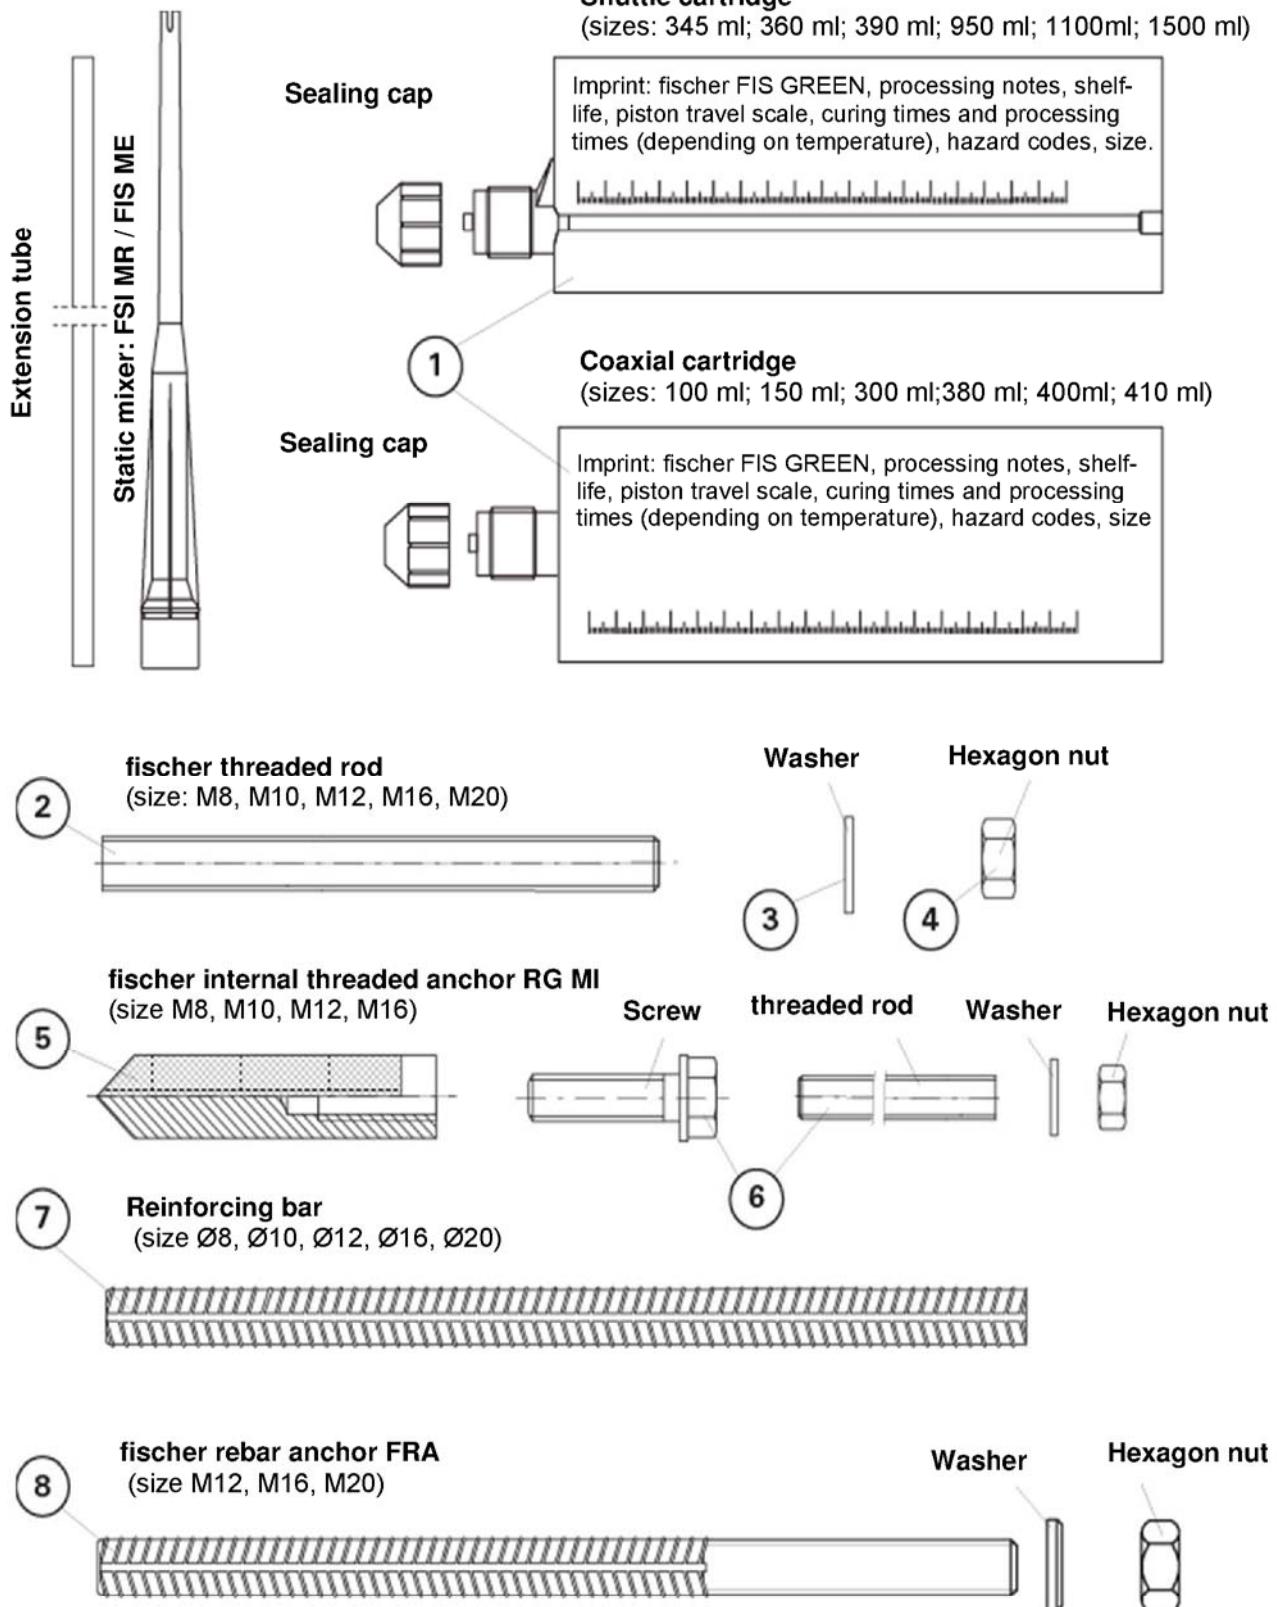Annex A 1



fischer Injectionsystem FIS GREEN

Product description

Cartridges, Static mixer, Steel elements

Annex A 2

Table A1: Materials

Part	Designation	Material		
1	Mortar cartridge	Bio based mortar, hardener; fillers		
		Steel, zinc plated	Stainless steel A4	High corrosion-resistant steel C
2	Threaded rod	Property class 5.8 or 8.8; ISO 898-1: 2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K or hot-dip galvanised ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$	Property class 50, 70 or 80 ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$	Property class 50 or 80 ISO 3506:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$
3	Washer ISO 7089:2000	zinc plated $\geq 5\mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanised ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	1.4565; 1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; ISO 898-2:2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K or hot-dip galvanised ISO 10684:2004	Property class 50, 70 or 80 ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 50, 70 or 80 ISO 3506:2009 1.4565; 1.4529 EN 10088-1:2014
5	Internal threaded anchor RG MI	Property class 5.8 or 8.8; EN 10277-1:2008-06 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K	Property class 70 ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 70 ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
6	Screw or threaded rod for internal threaded anchor	Property class 5.8 or 8.8; ISO 898-1:2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K	Property class 70 ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 70 ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
7	Rebar EN 1992-1-1:2004 + AC:2010, Annex C	Bars and decoiled rods class B or C with f_{yk} and k according to NDP or NCL of EN 1992-1-1/NA:2013 $f_{uk} = f_{tk} = k \cdot f_{yk}$		
8	Rebar anchor FRA	Bars and decoiled rods class B or C with f_{yk} and k according to NDP or NCL of EN 1992-1-1/NA:2013 $f_{uk} = f_{tk} = k \cdot f_{yk}$	Threaded part: Property class 70 ISO 3506:2009 1.4565; 1.4529 EN 10088-1:2014	

fischer Injectionsystem FIS GREEN

Product description
Materials

Annex A 3

Specifications of intended use

Anchorages subject to:

- Static and quasi-static loads.

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206:2013 .
- Strength classes C20/25 to C50/60 according to EN 206:2013.
- Non-cracked concrete.

Temperature ranges:

	Max. long term temperature	Max. short term temperature
Temperature range I -40°C to +40°C	+24°C	+40°C
Temperature range II -40°C to +80°C	+50°C	+80°C

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions (high corrosion resistant steel)
Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Design:

- Anchorages have to be designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings have to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions have to be designed in accordance with TR 029 "Design of bonded anchors", Edition September 2010 or CEN/TS 1992-4:2009

Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Dry or wet concrete.
- Hole drilling by hammer mode.
- In case of aborted hole: The hole shall be filled with mortar
- Marking and keeping the effective anchorage depth
- Cleaning the drill hole and installation in accordance with Annexes B 7 to B 8
- During curing of the mortar the temperature of the concrete must not fall below 0°C
- The curing time until the anchor may be loaded as given in Annex B 6 Table B6

fischer Injectionsystem FIS GREEN

Intended use
Specifications

Annex B 1


Appendix 6 / 26

Table B1: Installation parameters threaded rods

Anchor size			M8	M10	M12	M16	M20
Nominal drill hole diameter	d_0 [mm]	10	12	14	18	24	
Width across flat	SW [mm]	13	17	19	24	30	
Drill hole depth	h_0 [mm]			$h_0 = h_{\text{ef}}$			
Effective anchorage depth	$h_{\text{ef,min}}$ [mm]	60	60	70	80	90	
	$h_{\text{ef,max}}$ [mm]	160	200	240	320	400	
Maximum torque moment	$T_{\text{inst,max}}$ [Nm]	10	20	40	60	120	
Minimum spacing	s_{min} [mm]	40	45	55	65	85	
Minimum edge distance	c_{min} [mm]	40	45	55	65	85	
Diameter of clearance hole in the fixture ¹⁾	Pre-positioned anchorage	d_f [mm]	9	12	14	18	22
	Push-through anchorage	d_f [mm]	11	14	16	20	26
Minimum thickness of concrete member	h_{min} [mm]			$h_{\text{ef}} + 30 (\geq 100)$		$h_{\text{ef}} + 2d_0$	

¹⁾ For bigger clearance holes in fixture see TR 029, chapter 1.1 or CEN/TS 1992-4-1, chapter 1.2.3

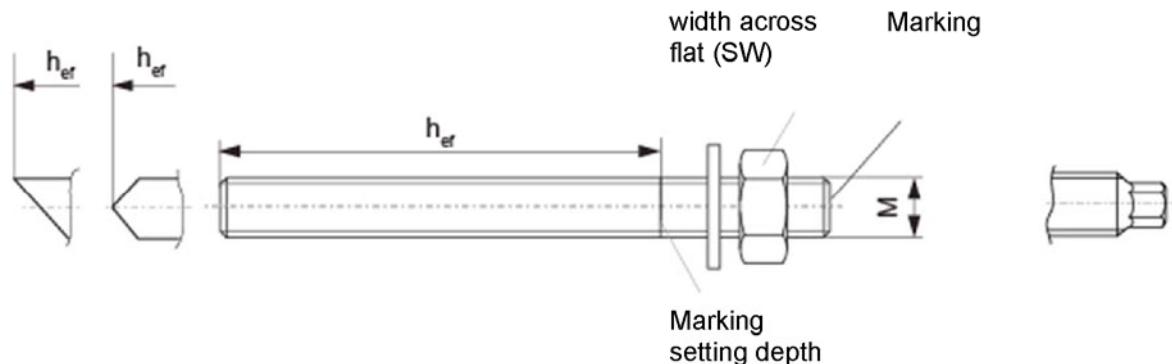fischer threaded rod FIS A and RGM



Marking:

Property class 8.8 or high corrosion-resistant steel C, property class 80: •

Stainless steel A4, property class 50 and high corrosion-resistant steel C, property class 50: ••

Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

- Materials, dimensions and mechanical properties according Annex A 3, Table A1
- Inspection certificate 3.1 according to EN 10204:2004, the documents should be stored
- Marking of embedment depth

fischer Injectionsystem FIS GREEN

Intended use

Installation parameters threaded rods


Annex B 2

Table B2: Installation parameters internal threaded anchors RG MI

Nominal size		M8	M10	M12	M16
Anchor size	d_H [mm]	12	16	18	22
Nominal drill hole diameter	d_0 [mm]	14	18	20	24
Drill hole depth	h_0 [mm]			$h_0 = h_{ef}$	
Effective anchorage depth	h_{ef} [mm]	90	90	125	160
Maximum torque moment	$T_{inst,max}$ [Nm]	10	20	40	80
Minimum spacing	s_{min} [mm]	55	65	75	95
Minimum edge distance	c_{min} [mm]	55	65	75	95
Diameter of clearance hole in the fixture ¹⁾	d_f [mm]	9	12	14	18
Minimum thickness of concrete member	h_{min} [mm]	120	126	165	208
Maximum screw-in depth	$l_{E,max}$ [mm]	18	23	26	35
Minimum screw-in depth	$l_{E,min}$ [mm]	8	10	12	16


¹⁾ For bigger clearance holes in fixture see TR 029, chapter 1.1 or CEN/TS 1992-4-1, chapter 1.2.3

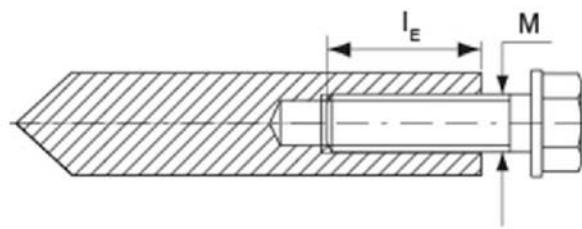fischer internal threaded anchor RG MI



Marking: anchor size e.g.: M10
Stainless steel in addition A4 e.g.: M10
A4High corrosion-resistant steel in addition C
e.g.: M10 C

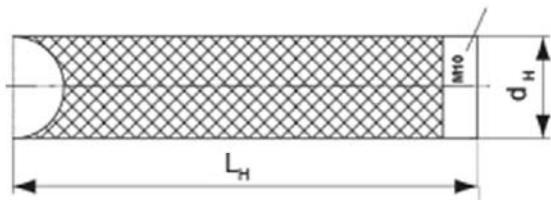Marking



Fastening screw or threaded rods including washer and nuts must comply with the appropriate material and strength class of table A1

fischer Injectionsystem FIS GREEN

Intended use


Installation parameters internal threaded anchors RG MI

Annex B 3

Rebar diameter		8 ^T	10 ^T	12 ^T	14	16	20
Nominal drill hole diameter	d ₀ [mm]	(10)12	(12)14	(14) 16	18	20	25
Drill hole depth	h ₀ [mm]			h ₀ = h _{ef}			
Effective anchorage depth	h _{ef,min} [mm]	60	60	70	75	80	90
	h _{ef,max} [mm]	160	200	240	280	320	400
Minimum spacing	s _{min} [mm]	40	45	55	60	65	85
Minimum edge distance	c _{min} [mm]	40	45	55	60	65	85
Minimum thickness of concrete member	h _{min} [mm]		h _{ef} + 30 ≥ 100		h _{ef} + 2d ₀		

1) Both drill bit diameters can be used.

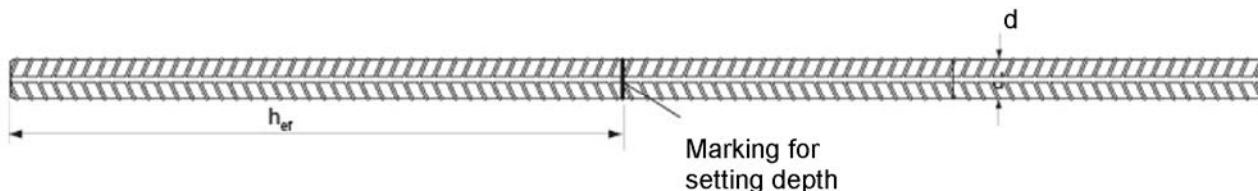Reinforcing bar



Properties of reinforcement: refer to EN 1992-1-1 Annex C, Table C.1 and C.2N

Product form	Non-zink-plated bars and decoiled rod	
	B	C
Class		
Characteristic yield strength f _{yk} or f _{0,2k} [MPa]	400 to 600	
Minimum value of k = (f _l /f _y) _k	≥ 1,08	≥ 1,15 < 1,35
Characteristic strain at maximum force ε _{uk} [%]	≥ 5,0	≥ 7,5
Bentability property	Bend / Rebendtest	
Maximum deviation from nominal mass (individual bar) [%]	Nominal bar size [mm]	≤ 8
		> 8
Bond: Minimum relative rib area, f _{R,min} (determination acc. to EN 15630)	Nominal bar size [mm]	8 to 12
		> 12
		0,040 0,056

Rib height h:

The rib height h must be: $0,05 * d \leq h \leq 0,07 * d$

d = nominal bar size

fischer Injectionsystem FIS GREEN

Intended use
Installation parameters reinforcing bars

Annex B 4


Table B4: Installation parameters rebar anchor FRA

Threaded diameter		M12 ¹⁾		M16	M20
Nominal bar size	d [mm]	12		16	20
Width across flat	SW [mm]	19		24	30
Nominal drill hole diameter	d ₀ [mm]	(14)	16	20	25
Drill hole depth	h ₀ [mm]			$h_{\text{ef}} + t_e$	
Distance concrete surface to welded join	t _e [mm]			100	
Effective anchorage depth	h _{ef,min} [mm]	70		80	90
	h _{ef,max} [mm]	140		220	300
Maximum torque moment	T _{inst,max} [Nm]	40		60	120
Minimum spacing	s _{min} [mm]	55		65	85
Minimum edge distance	c _{min} [mm]	55		65	85
Diameter of clearance hole in the fixture ²⁾	Pre-positioned anchorage	d _f [mm]	14	18	22
	Push-through anchorage	d _f [mm]	18	22	26
Minimum thickness of concrete member	h _{min} [mm]	h ₀ + 30		h ₀ + 2d ₀	

¹⁾ Both drill bit diameters can be used

²⁾ For bigger clearance holes in fixture see TR 029, chapter 1.1 or CEN/TS 1992-4-1, chapter 1.2.3

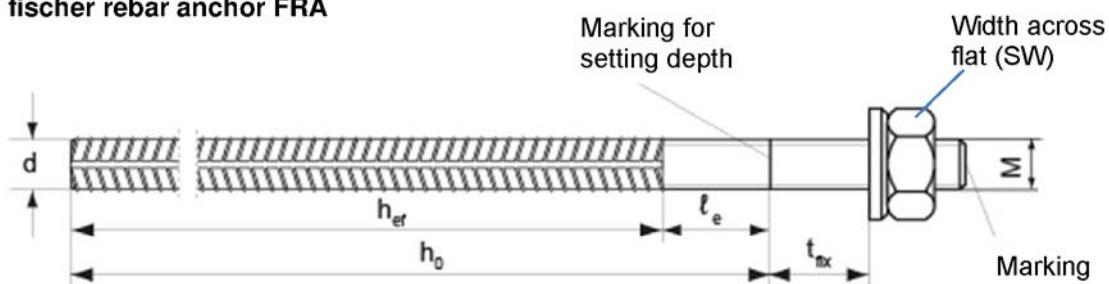fischer rebar anchor FRA



Marking: FRA (for stainless steel)
 FRA C (for high corrosion-resistant steel)

fischer Injectionsystem FIS GREEN



Intended use

Installation parameters rebar anchor FRA

Annex B 5

Table B5: Parameters of steel brush FIS BS

Drill bit diameter	[mm]	10	12	14	16	18	20	24	25
Steel brush diameter d_b	[mm]	11	14	16	20	20	25	26	27

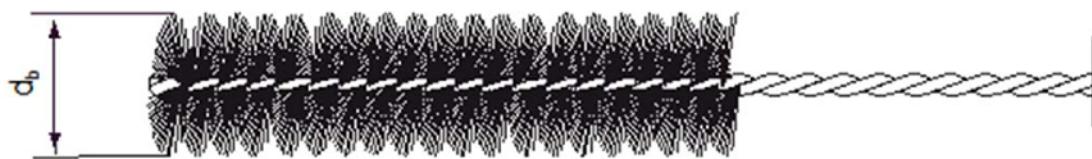**Cleaning nozzle****Table B6: Maximum processing time of the mortar and minimum curing time**

(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature).

Temperature at anchoring base [°C]	Minimum curing time ¹⁾ [minutes]
±0 to +5	6 hours
>+5 to +10	4 hours
>+10 to +20	90
>+20 to +30	60
>+30 to +40	30

System temperature (mortar) [°C]	Maximum processing time t_{work} [minutes]
+5	13
+10	9
+20	5
+30	4
+40	2

¹⁾ For wet concrete the curing time must be doubled.

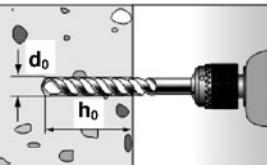
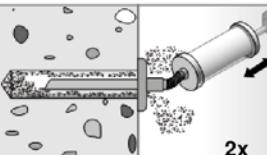
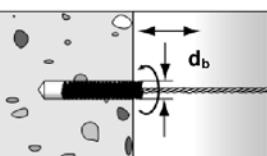
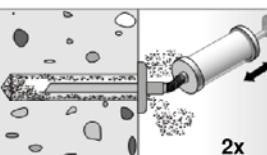
fischer Injectionsystem FIS GREEN

Intended Use
Cleaning tools
Processing times and curing times



Annex B 6

Installation instructions part 1

Drilling and cleaning the hole

1		Drill the hole. Drill hole diameter d_0 and drill hole depth h_0 see Tables B1, B2, B3, B4.
2		$h_{ef} \leq 10d$ and $d_0 < 18$ mm: Blow out the drill hole two times by hand.
3		Brush the drill hole two times using an adequate steel brush (see Table B5).
4		$h_{ef} \leq 10d$ and $d_0 < 18$ mm: Blow out the drill hole two times by hand.
		$h_{ef} > 10d$ and/or $d_0 \geq 18$ mm: Blow out the drill hole two times, using oil-free pressure air ($p > 6$ bar) with a cleaning nozzle.

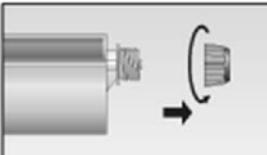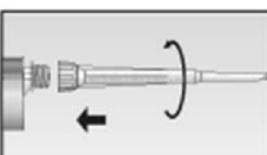Preparing the cartridge

5		Twist off the sealing cap.
6		Twist on the static mixer. The spiral in the static mixer must be clearly visible.
7		Place the cartridge into the dispenser.
8		Press out approx. 10cm of mortar until the resin is permanent grey in colour. Mortar which is not grey in colour will not cure and must be disposed of.

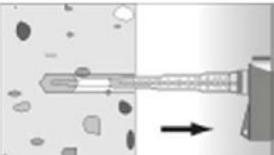
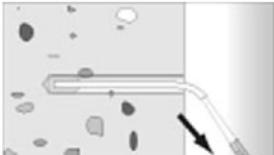
fischer Injectionsystem FIS GREEN

Intended Use
Installation instructions part 1






Annex B 7

Installation instructions part 2



Injection of the mortar

9		Fill approx.. 2/3 of the drill hole with mortar. Always begin from the bottom of the hole to eliminate voids.		For drill hole depth ≥ 150 mm use an extension tube.
---	---	---	--	---

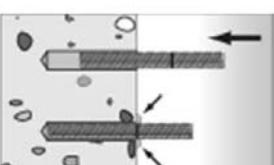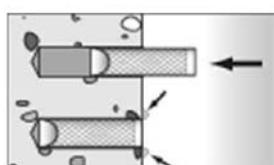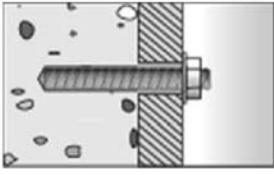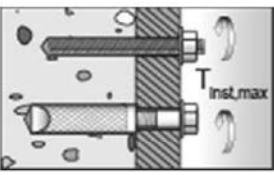Installation fischer anchor rods or internal threaded anchors RG MI

10	 	Only use clean and oil-free anchor elements. Press the anchor rod or internal threaded anchor RG MI down to the bottom of the hole, turning it slightly while doing so. After inserting the anchor element, excess mortar must emerge around the anchor element.
		For overhead installation support the anchor element with wedges.
		
11		Wait for the specified curing time t_{cure} see Table B6.
12		Mounting the fixture $T_{\text{inst,max}}$ see Tables B1 or B6

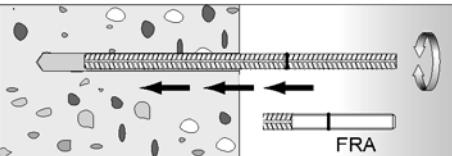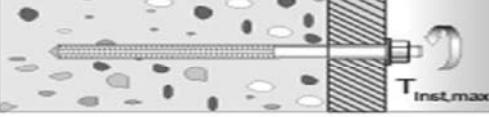Installing reinforcing bars and fischer rebar anchors FRA

10		Only use clean and oil-free rebars. Mark the reinforcing bar for setting depth. Using a turning movement, push the reinforcing bar or FRA vigorously into the filled hole up to the insertion depth marking. When reaching the setting depth marking surplus mortar must emerge around the anchor.
11		Wait for the specified curing time t_{cure} see Table B6.
12		Mounting the fixture $T_{\text{inst,max}}$ see Table B4

fischer Injectionsystem FIS GREEN

Intended Use

Installation instructions part 2

Annex B 8

Table C1: Characteristic values of resistance for threaded rods under tension loads in non-cracked concrete (Design according to TR 029)

Anchor size			M8	M10	M12	M16	M20
Installation safety factor	γ_2	[-]	1,2				
Combined pullout and concrete cone failure							
Diameter for calculation	d	[mm]	8	10	12	16	20
Characteristic bond resistance in non-cracked concrete C20/25							
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	10,5	10,0	9,5	8,5	7,5
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	9,5	9,0	8,5	7,5	6,5
Increasing factor Ψ_c	C25/30	[-]	1,02				
	C30/37	[-]	1,04				
	C35/45	[-]	1,07				
	C40/50	[-]	1,08				
	C45/55	[-]	1,09				
	C50/60	[-]	1,10				
Splitting failure							
Edge distance $c_{cr,sp}$	$h/h_{ef} \geq 2,0$	[mm]	1,0 h_{ef}				
	$2,0 > h/h_{ef} > 1,3$	[mm]	4,6 $h_{ef} - 1,8 \, h$				
	$h/h_{ef} \leq 1,3$	[mm]	2,26 h_{ef}				
Spacing	$s_{cr,sp}$	[mm]	2 $c_{cr,sp}$				

¹⁾ See Annex B1

Table C2: Characteristic values of resistance for internal threaded anchors RG MI under tension loads in non-cracked concrete (Design according to TR 029)

Anchor size			M8	M10	M12	M16			
Installation safety factor		γ_2	[-]	1,2					
Steel failure									
Characteristic resistance with screw $N_{Rk,s}$	Property class	5,8	[kN]	19	29	43			
		8,8	[kN]	29	47	68			
$\gamma_{Ms,N}^{1)}$	Property class 70	A4	[kN]	26	41	59			
		C	[kN]	26	41	59			
Partial safety factor	Property class	5,8	[-]	1,50					
		8,8	[-]	1,50					
Combined pullout and concrete cone failure									
Characteristic bond resistance in non-cracked concrete C20/25									
Temperature range I ²⁾		$N_{Rk,p}^0$	[kN]	32	38	56			
Temperature range II ²⁾		$N_{Rk,p}^0$	[kN]	30	35	51			
Increasing factor Ψ_c	C25/30	[-]	1,02						
	C30/37	[-]	1,04						
	C35/45	[-]	1,07						
	C40/50	[-]	1,08						
	C45/55	[-]	1,09						
	C50/60	[-]	1,10						
Splitting failure									
Edge distance $c_{cr,sp}$	$h/h_{ef} \geq 2,0$	[mm]	1,0 h_{ef}						
	$2,0 > h/h_{ef} > 1,3$	[mm]	4,6 $h_{ef} - 1,8 \text{ h}$						
	$h/h_{ef} \leq 1,3$	[mm]	2,26 h_{ef}						
Spacing	$s_{cr,sp}$	[mm]	2 $c_{cr,sp}$						

¹⁾ In absence of other national regulations

²⁾ See Annex B1

fischer Injectionsystem FIS GREEN

Performances

Characteristic values of resistance for internal threaded rods under tension load in non-cracked concrete. (Design according to TR 029)

Annex C 2

Table C3: Characteristic values of resistance for reinforcing bars under tension loads in non-cracked concrete (Design according to TR 029)

Size	\emptyset	[mm]	8	10	12	14	16	20
Installation safety factor	γ_2	[-]				1,2		
Combined pullout and concrete cone failure								
Diameter of calculation	d	[mm]	8	10	12	14	16	20
Characteristic bond resistance in non-cracked concrete C20/25								
Temperature range I ²⁾	$\tau_{Rk,ucr}$	[N/mm ²]	7,5	7,5	7,5	7,5	7,5	7,5
Temperature range II ²⁾	$\tau_{Rk,ucr}$	[N/mm ²]	6,5	6,5	6,5	6,5	6,5	6,5
Increasing factor Ψ_c	C25/30	[-]			1,02			
	C30/37	[-]			1,04			
	C35/45	[-]			1,07			
	C40/50	[-]			1,08			
	C45/55	[-]			1,09			
	C50/60	[-]			1,10			
Splitting failure								
Edge distance $c_{cr,sp}$	$h/h_{ef} \geq 2,0$	[mm]			1,0 h_{ef}			
	$2,0 > h/h_{ef} > 1,3$	[mm]			4,6 $h_{ef} - 1,8 h$			
	$h/h_{ef} \leq 1,3$	[mm]			2,26 h_{ef}			
Spacing	$s_{cr,sp}$	[mm]			2 $c_{cr,sp}$			

¹⁾ In absence of other national regulations

²⁾ See Annex B1

Table C4: Characteristic values of resistance for rebar anchors FRA under tension loads in non-cracked concrete (Design according to TR 029)

Size			M12	M16	M20
Installation safety factor	γ_2	[-]		1,2	
Steel failure					
Characteristic resistance	$N_{Rk,s}$	[kN]	63	111	173
Partial safety factor	$\gamma_{Ms,N}$ ¹⁾	[-]		1,40	
Combined pullout and concrete cone failure					
Diameter of calculation	d	[mm]	12	16	20
Characteristic bond resistance in non-cracked concrete C20/25					
Temperature range I ²⁾	$\tau_{Rk,ucr}$	[N/mm ²]	7,5	7,5	7,5
Temperature range II ²⁾	$\tau_{Rk,ucr}$	[N/mm ²]	6,5	6,5	6,5
Increasing factor Ψ_c	C25/30	[-]		1,02	
	C30/37	[-]		1,04	
	C35/45	[-]		1,07	
	C40/50	[-]		1,08	
	C45/55	[-]		1,09	
	C50/60	[-]		1,10	
Splitting failure					
Edge distance $c_{cr,sp}$	$h/h_{ef} \geq 2,0$	[mm]		1,0 h_{ef}	
	$2,0 > h/h_{ef} > 1,3$	[mm]		4,6 $h_{ef} - 1,8 h$	
	$h/h_{ef} \leq 1,3$	[mm]		2,26 h_{ef}	
Spacing	$s_{cr,sp}$	[mm]		2 $c_{cr,sp}$	

¹⁾ In absence of other national regulations

²⁾ See Annex B1

fischer Injectionsystem FIS GREEN

Performances

Characteristic values of resistance for reinforcing bars and rebar anchors FRA under tension load in non-cracked concrete. (Design according to TR 029)

Annex C 3

Table C5: Characteristic values of resistance for threaded rods under shear loads in non-cracked concrete (Design according to TR 029)

Size	M8	M10	M12	M16	M20
Concrete pryout failure					
Factor k in equation (5.7) of Technical Report TR 029, Section 5.2.3.3	k	[-]		2,0	

Table C6: Characteristic values of resistance for internal threaded rods RG MI under shear loads in non-cracked concrete (Design according to TR 029)

Size	M8	M10	M12	M16	
Steel failure without lever arm					
Characteristic resistance $V_{Rk,s}$	Property class 5.8	[kN]	9,2	14,5	21,1
	8.8	[kN]	14,6	23,2	33,7
	Property class 70	A4 [kN]	12,8	20,3	29,5
	C	[kN]	12,8	20,3	29,5
Steel failure with lever arm					
Characteristic resistance $M^0_{Rk,s}$	Property class 5.8	[Nm]	20	39	68
	8.8	[Nm]	30	60	105
	Property class 70	A4 [Nm]	26	52	92
	C	[Nm]	26	52	92
Concrete pryout failure					
Factor k in equation (5.7) of Technical Report TR 029, Section 5.2.3.3	k	[-]		2,0	

fischer Injectionsystem FIS GREEN

Performances

Characteristic values of resistance for threaded rods and internal threaded anchors RG MI under shear loads in non-cracked concrete (Design according to TR 029)

Annex C 4

Table C7: Characteristic values of resistance for reinforcing bars under shear loads in non-cracked concrete (Design according to TR 029)

Size	\emptyset	[mm]	8	10	12	14	16	20
Concrete prout failure								
Factor k in equation (5.7) of Technical Report TR 029, Section 5.2.3.3	k	[-]				2,0		

Table C8: Characteristic values of resistance rebar anchors FRA under shear loads in non-cracked concrete (Design according to TR 029)

Size	M12	M16	M20	
Steel failure without lever arm				
Characteristic resistance	$V_{Rk,s}$ [kN]	30	55	86
Steel failure with lever arm				
Characteristic resistance	$M_{Rk,s}^0$ [Nm]	92	233	454
Partial safety factor	$\gamma_{Ms,V}^{1)}$ [-]		1,56	
Concrete prout failure				
Factor k in equation (5.7) of Technical Report TR 029, Section 5.2.3.3	k	[-]	2,0	

¹⁾ In absence of other national regulations

fischer Injectionsystem FIS GREEN

Performances

Characteristic values of resistance for reinforcing bars and rebar anchors FRA under shear loads in non-cracked concrete (Design according to TR 029)

Annex C 5

Table C9: Characteristic values of resistance for threaded rods under tension loads in non-cracked concrete (Design according to CEN/TS 1992-4)

Anchor size				M8	M10	M12	M16	M20
Installation safety factor	γ_{inst}	[-]				1,2		
Steel failure								
Characteristic resistance	$N_{Rk,s}$	[kN]	$A_s \times f_{uk}$					
Combined pullout and concrete cone failure								
Diameter for calculation	d	[mm]	8	10	12	16	20	
Characteristic bond resistance in non-cracked concrete C20/25								
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	10,5	10,0	9,5	8,5	7,5	
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	9,5	9,0	8,5	7,5	6,5	
Increasing factor Ψ_c	C25/30	[-]			1,02			
	C30/37	[-]			1,04			
	C35/45	[-]			1,07			
	C40/50	[-]			1,08			
	C45/55	[-]			1,09			
	C50/60	[-]			1,10			
Factor acc. CEN/TS-1992-4 Section 6.2.2.3	k_8	[-]			10,1			
Splitting failure								
Factor acc. CEN/TS-1992-4 Section 6.2.3.1	k_{ucr}	[-]			10,1			
Edge distance $c_{cr,sp}$	$h/h_{ef} \geq 2,0$	[mm]			1,0 h_{ef}			
	$2,0 > h/h_{ef} > 1,3$	[mm]			4,6 $h_{ef} - 1,8 h$			
	$h/h_{ef} \leq 1,3$	[mm]			2,26 h_{ef}			
Spacing	$s_{cr,sp}$	[mm]			2 $c_{cr,sp}$			

¹⁾ See Annex B1

fischer Injectionsystem FIS GREEN

Performances

Characteristic values of resistance for threaded rods under tension load in non-cracked concrete. Design according to CEN/TS-1992-4

Annex C 6

Appendix 19 / 26

Table C10: Characteristic values of resistance for internal threaded anchors RG MI under tension loads in non-cracked concrete (Design according to CEN/TS 1992-4)

Anchor size			M8	M10	M12	M16
Installation safety factor		γ_{inst}	[-]		1,2	
Steel failure						
Characteristic resistance with screw $N_{Rk,s}$	Property class	5,8	[kN]	19	29	43
		8,8	[kN]	29	47	68
Partial safety factor $\gamma_{Ms,N}^{1)}$	Property class	A4	[kN]	26	41	59
		C	[kN]	26	41	59
Combined pullout and concrete cone failure	Property class	5,8	[-]	1,50		
		8,8	[-]	1,50		
Characteristic bond resistance in non-cracked concrete C20/25	Property class	A4	[-]	1,87		
		C	[-]	1,87		
Temperature range I ²⁾						
		$N_{Rk,p}^0$	[kN]	32	38	56
Temperature range II ²⁾		$N_{Rk,p}^0$	[kN]	30	35	51
Increasing factor Ψ_c		C25/30	[-]	1,02		
		C30/37	[-]	1,04		
		C35/45	[-]	1,07		
		C40/50	[-]	1,08		
		C45/55	[-]	1,09		
		C50/60	[-]	1,10		
Factor acc. CEN/TS-1992-4-5:2009 Section 6.2.2.3	k_g		[-]	10,1		
Splitting failure						
Factor acc. CEN/TS-1992-4-5:2009 Section 6.2.3.1	k_{ucr}		[-]	10,1		
Edge distance $c_{cr,sp}$		$h/h_{ef} \geq 2,0$	[mm]	1,0 h_{ef}		
		$2,0 > h/h_{ef} > 1,3$	[mm]	4,6 $h_{ef} - 1,8 h$		
		$h/h_{ef} \leq 1,3$	[mm]	2,26 h_{ef}		
Spacing		$s_{cr,sp}$	[mm]	2 $c_{cr,sp}$		

¹⁾ In absence of other national regulations

²⁾ See Annex B1

Table C11: Characteristic values of resistance for reinforcing bars under tension loads in non-cracked concrete (Design according to CEN/TS 1992-4)

Size	\emptyset	[mm]	8	10	12	14	16	20
Installation safety factor	γ_{inst}	[-]			1,2			
Steel failure								
Characteristic resistance								
	$N_{Rk,s}$	[kN]				$A_s \times f_{uk}$		
Combined pullout and concrete cone failure								
Diameter of calculation	d	[mm]	8	10	12	14	16	20
Characteristic bond resistance in non-cracked concrete C20/25								
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	7,5	7,5	7,5	7,5	7,5	7,5
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	6,5	6,5	6,5	6,5	6,5	6,5
Increasing factor Ψ_c	C25/30	[-]			1,02			
	C30/37	[-]			1,04			
	C35/45	[-]			1,07			
	C40/50	[-]			1,08			
	C45/55	[-]			1,09			
	C50/60	[-]			1,10			
Factor acc. CEN/TS-1992-4-5:2009 Section 6.2.2.3	k_8	[-]				10,1		
Splitting failure								
Factor acc. CEN/TS-1992-4-5:2009 Section 6.2.3.1	k_{ucr}	[-]				10,1		
Edge distance $c_{cr,sp}$	$h/h_{ef} \geq 2,0$	[mm]				1,0 h_{ef}		
	$2,0 > h/h_{ef} \geq 1,3$	[mm]				4,6 $h_{ef} - 1,8 h$		
	$h/h_{ef} \leq 1,3$	[mm]				2,26 h_{ef}		
Spacing	$s_{cr,sp}$	[mm]				2 $c_{cr,sp}$		

¹⁾ See Annex B1

fischer Injectionsystem FIS GREEN

Performances

Characteristic values of resistance for reinforcing bars under tension load in non-cracked concrete. Design according to CEN/TS-1992-4

Annex C 8

Table C12: Characteristic values of resistance for rebar anchors FRA under tension loads in non-cracked concrete (Design according to CEN/TS 1992-4)

Size		M12	M16	M20
Installation safety factor	γ_{inst} [-]		1,2	
Steel failure				
Characteristic resistance	$N_{Rk,s}$ [kN]	63	111	173
Partial safety factor	$\gamma_{MS,N}^{1)}$ [-]		1,40	
Combined pullout and concrete cone failure				
Diameter of calculation	d [mm]	12	16	20
Characteristic bond resistance in non-cracked concrete C20/25				
Temperature range I ²⁾	$\tau_{Rk,ucr}$ [N/mm ²]	7,5	7,5	7,5
Temperature range II ²⁾	$\tau_{Rk,ucr}$ [N/mm ²]	6,5	6,5	6,5
Increasing factor Ψ_c	C25/30 [-]		1,02	
	C30/37 [-]		1,04	
	C35/45 [-]		1,07	
	C40/50 [-]		1,08	
	C45/55 [-]		1,09	
	C50/60 [-]		1,10	
Factor acc. CEN/TS-1992-4-5:2009 Section 6.2.2.3	k_8 [-]		10,1	
Splitting failure				
Factor acc. CEN/TS-1992-4-5:2009 Section 6.2.3.1	k_{ucr} [-]		10,1	
Edge distance $c_{cr,sp}$	$h/h_{ef} \geq 2,0$ [mm]		1,0 h_{ef}	
	$2,0 > h/h_{ef} \geq 1,3$ [mm]		4,6 $h_{ef} - 1,8 h$	
	$h/h_{ef} \leq 1,3$ [mm]		2,26 h_{ef}	
Spacing	$s_{cr,sp}$ [mm]		2 $c_{cr,sp}$	

¹⁾ In absence of other national regulations

²⁾ See Annex B1

Table C13: Characteristic values of resistance for threaded rods under shear loads in non-cracked concrete (Design according to CEN/TS 1992-4)

Size			M8	M10	M12	M16	M20
Installation safety factor	γ_{inst}	[-]			1,0		
Steel failure without lever arm							
Characteristic resistance	$V_{Rk,s}$	[kN]			0,5 $A_s \times f_{uk}$		
Ductility factor acc. to CEN/TS 1992-4-5, Section 6.3.2.1	k_2	[-]			0,8		
Steel failure with lever arm							
Characteristic resistance	$M^0_{Rk,s}$	[Nm]			1,2 $\times W_{el} \times f_{uk}$		
Concrete prout failure							
Factor in equation of CEN/TS 1992-4-5, Section 6.3.3	k_3	[-]			2,0		
Concrete edge failure							
Effective length of anchor	l_f	[mm]			$l_f = \min(h_{ef}; 8 d_{nom})$		
Outside diameter of anchor	d_{nom}	[mm]	8	10	12	16	20

Table C14: Characteristic values of resistance for internal threaded rods RG MI under shear loads in non-cracked concrete (Design according to CEN/TS 1992-4)

Size			M8	M10	M12	M16
Installation safety factor	γ_{inst}	[-]			1,0	
Steel failure without lever arm						
Characteristic resistance $V_{Rk,s}$	Property class	5,8 [kN]	9,2	14,5	21,1	39,2
		8,8 [kN]	14,6	23,2	33,7	62,7
Characteristic resistance $M^0_{Rk,s}$	Property class 70	A4 [kN]	12,8	20,3	29,5	54,8
		C [kN]	12,8	20,3	29,5	54,8
Ductility factor acc. to CEN/TS 1992-4-5, Section 6.3.2.1	k_2	[-]			0,8	
Steel failure with lever arm						
Characteristic resistance $M^0_{Rk,s}$	Property class	5,8 [Nm]	20	39	68	173
		8,8 [Nm]	30	60	105	266
Characteristic resistance $M^0_{Rk,s}$	Property class 70	A4 [Nm]	26	52	92	232
		C [Nm]	26	52	92	232
Concrete prout failure						
Factor in equation of CEN/TS 1992-4-5, Section 6.3.3	k_3	[-]			2,0	
Concrete edge failure						
Effective length of anchor	l_f	[mm]	90	90	125	160
Outside diameter of anchor	d_{nom}	[mm]	12	16	18	22

fischer Injectionsystem FIS GREEN

Performances

Characteristic values of resistance for threaded rods and internal threaded anchors RG MI under shear loads in non-cracked concrete (Design according to CEN/TS

Annex C 10

Table C15: Characteristic values of resistance for reinforcing bars under shear loads in non-cracked concrete (Design according to CEN/TS 1992-4)

Size	$\emptyset d$	[mm]	8	10	12	14	16	20
Installation safety factor	γ_{inst}	[-]					1,0	
Steel failure without lever arm								
Characteristic resistance	$V_{Rk,s}$	[kN]					0,5 $A_s \times f_{uk}$	
Ductility factor acc. to CEN/TS 1992-4-5, Section 6.3.2.1	k_2	[-]					0,8	
Steel failure with lever arm								
Characteristic resistance	$M^0_{Rk,s}$	[Nm]					1,2 $\times W_{el} \times f_{uk}$	
Concrete prayout failure								
Factor in equation of CEN/TS 1992-4-5, Section 6.3.3	k_3	[-]					2,0	
Concrete edge failure								
Effective length of anchor	l_f	[mm]					$l_f = \min(h_{ef}; 8d_{nom})$	
Outside diameter of anchor	d_{nom}	[mm]	8	10	12	14	16	20

Table C16: Characteristic values of resistance rebar anchors FRA under shear loads in non-cracked concrete (Design according to CEN/TS 1992-4)

Size			M12	M16	M20
Installation safety factor	γ_{inst}	[-]		1,0	
Steel failure without lever arm					
Characteristic resistance	$V_{Rk,s}$	[kN]	30	55	86
Ductility factor acc. to CEN/TS 1992-4-5, Section 6.3.2.1	k_2	[-]		0,8	
Steel failure with lever arm					
Characteristic resistance	$M^0_{Rk,s}$	[Nm]	92	233	454
Partial safety factor	$\gamma_{Ms,V}^{1)}$	[-]		1,56	
Concrete prayout failure					
Factor in equation of CEN/TS 1992-4-5, Section 6.3.3	k_3	[-]		2,0	
Concrete edge failure					
Effective length of anchor	l_f	[mm]			
Outside diameter of anchor	d_{nom}	[mm]	12	16	20

¹⁾ In absence of other national regulations

Table C17: Displacements under tension load¹⁾ for threaded rods

Size	M8	M10	M12	M16	M20
Temperature range I and II					
δ_{N0} -Factor	[mm/(N/mm ²)]	0,09	0,09	0,10	0,11
$\delta_{N\infty}$ -Factor	[mm/(N/mm ²)]	0,14	0,14	0,15	0,17

¹⁾ Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau$$

Table C18: Displacements under shear load¹⁾ for threaded rods

Size	M8	M10	M12	M16	M20
Temperature range I and II					
δ_{V0} -Factor	[mm/kN]	0,18	0,15	0,12	0,09
$\delta_{V\infty}$ -Factor	[mm]	0,27	0,22	0,18	0,14

¹⁾ Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot V$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot V$$

Table C19: Displacements under tension load¹⁾ for internal threaded anchors RG MI

Size	M8	M10	M12	M16
Temperature range I and II				
δ_{N0} -Factor	[mm/(N/mm ²)]	0,10	0,11	0,12
$\delta_{N\infty}$ -Factor	[mm/(N/mm ²)]	0,15	0,17	0,18

¹⁾ Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau$$

Table C20: Displacements under shear load¹⁾ for internal threaded anchors RG MI

Size	M8	M10	M12	M16
Temperature range I and II				
δ_{V0} -Factor	[mm/kN]	0,18	0,15	0,12
$\delta_{V\infty}$ -Factor	[mm/kN]	0,27	0,22	0,18

¹⁾ Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot V$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot V$$

Table C21: Displacements under tension load¹⁾ for reinforcing bars

Size	\emptyset	[mm]	8	10	12	14	16	20
Temperature range I and II								
δ_{N0} -Factor		[mm/(N/mm ²)]	0,09	0,09	0,10	0,11	0,12	0,13
$\delta_{N\infty}$ -Factor		[mm/(N/mm ²)]	0,13	0,14	0,16	0,16	0,18	0,20

1) Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau$$

Table C22: Displacements under shear load¹⁾ for reinforcing bars

Size	\emptyset	[mm]	8	10	12	14	16	20
Temperature range I (-40°C / +40°C) and temperature range II (-40°C / +80°C)								
δ_{V0} -Factor		[mm/kN]	0,18	0,15	0,12	0,10	0,09	0,07
$\delta_{V\infty}$ -Factor		[mm/kN]	0,27	0,22	0,18	0,16	0,14	0,11

1) Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V$$

Table C23: Displacements under tension load¹⁾ for rebar anchor FRA

Size	\emptyset	[mm]	M10	M12	M16
Temperature range I and II					
δ_{N0} -Factor		[mm/(N/mm ²)]	0,09	0,10	0,12
$\delta_{N\infty}$ -Factor		[mm/(N/mm ²)]	0,14	0,16	0,18

1) Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau$$

Table C24: Displacements under shear load¹⁾ for rebar anchor FRA

Size	\emptyset	[mm]	M10	M12	M16
Temperature range I and II					
δ_{V0} -Factor		[mm/kN]	0,15	0,12	0,09
$\delta_{V\infty}$ -Factor		[mm/kN]	0,22	0,18	0,14

1) Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V$$