

ΔΗΛΩΣΗ ΕΠΙΔΟΣΕΩΝ

DoP 0313

for fischer Εκτονούμενο αγκύριο FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR (Εκτομούμενα αγκύρια για χρήση σε μπετόν)

EL

1. Μοναδικός κωδικός ταυτοποίησης του τύπου του προϊόντος: **DoP 0313**
2. Προβλεπόμενη(-ες) χρήση(-εις): **Μεταγενέστερη αγκύρωση σε ρηγματωμένο ή μη ρηγματωμένο σκυρόδεμα, δείτε το παράρτημα, ειδικά τα παραρτήματα B1 - B4.**
3. Κατασκευαστής: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Γερμανία**
4. Εξουσιοδοτημένος αντιπρόσωπος: **–**
5. Σύστημα/συστήματα AVCP (αξιολόγηση και επαλήθευση της σταθερότητας της επίδοσης): **1**
6. Ευρωπαϊκό έγγραφο αξιολόγησης: **EAD 330232-01-0601, Edition 05/2021**
Ευρωπαϊκή τεχνική αξιολόγηση: **ETA-19/0520; 2022-02-21**
Οργανισμός τεχνικής αξιολόγησης: **DIBt- Deutsches Institut für Bautechnik**
Κοινοποιημένος(-οι) οργανισμός(-οι): **2873 TU Darmstadt**
7. Δηλωθείσα(-ες) επίδοση(-εις):
Μηχανική αντίσταση και σταθερότητα (BWR1)
Χαρακτηριστική αντίσταση σε εφελκυστικό φορτίο (στατικό και σχεδόν στατικό) μέθοδος A:
 Αντίσταση σε αστοχία χάλυβα: Παράρτημα C1
 Αντίσταση σε αστοχία από εξόλκευση: Παράρτημα C1
 Αντίσταση σε αστοχία από κώνο σκυροδέματος: Παράρτημα C1
 Ανθεκτικότητα: Παράρτημα C1
 Ελάχιστη απόσταση από ακμή και μεταξύ αγκυρίων: Παραρτήματα C5, C6
 Απόσταση από ακμή για αποφυγή θραύσης από φορτίο: Παράρτημα C1

Χαρακτηριστική αντίσταση σε διατμητικό φορτίο (στατικό και σχεδόν στατικό) μέθοδος A:
 Αντίσταση σε αστοχία χάλυβα (διατμητικό φορτίο): Παράρτημα C2
 Αντίσταση σε ολίσθηση: Παράρτημα C2

Χαρακτηριστική αντίσταση για απλοποιημένο σχεδιασμό:
 Μέθοδος B: NPD
 Μέθοδος C: NPD

Μετατόπιση:
 Μετατοπίσεις υπό στατικό και σχεδόν στατικό φορτίο: Παράρτημα C9

Χαρακτηριστική αντίσταση και μετακινήσεις για τις σεισμικές κατηγορίες C1 και C2 (προαιρετικά):
 Αντίσταση σε εφελκυσμό, μετατόπιση, κατηγορία C1: Παράρτημα C7
 Αντίσταση σε εφελκυσμό, μετατόπιση, κατηγορία C2: Παραρτήματα C8, C9
 Αντίσταση σε διάτμηση, μετατόπιση, κατηγορία C1: Παράρτημα C7
 Αντίσταση σε διάτμηση, μετατόπιση, κατηγορία C2: Παραρτήματα C8, C9
 Παράμετρος περιμετρικού κενού: Παραρτήματα C7, C8

Ασφάλεια σε περίπτωση φωτιάς (BWR 2)
 Αντίδραση σε φωτιά: Κατηγορία (A1)
Αντίσταση στη φωτιά:
 Αντίσταση σε φωτιά για αστοχία χάλυβα (εφελκυστικό φορτίο): Παράρτημα C3
 Αντίσταση σε φωτιά για εξόλκευση (εφελκυστικό φορτίο): Παράρτημα C3
 Αντίσταση σε φωτιά για αστοχία χάλυβα (διατμητικό φορτίο): Παραρτήματα C3, C4

Διάρκεια:
 Διάρκεια: Παράρτημα A4, B1
8. Κατάλληλη τεχνική τεκμηρίωση και/ή ειδική τεχνική τεκμηρίωση: **–**

Η επίδοση του προϊόντος που ταυτοποιείται ανωτέρω είναι σύμφωνη με τη (τις) δηλωθείσα(-ες) επίδοση(-εις). Αυτή η δήλωση επιδόσεων εκδίδεται σύμφωνα με τον Κανονισμό (ΕΕ) Αρ. 305/2011 με αποκλειστική ευθύνη του κατασκευαστή που προσδιορίζεται παραπάνω.

Υπογραφή για λογαριασμό και εξ ονόματος του κατασκευαστή από:



Dr.-Ing. Oliver Geibig, Γενικός Διευθυντής Επιχειρηματικών Μονάδων & Μηχανικής
Tumlingen, 2023-01-31



Jürgen Grün, Γενικός Διευθυντής Χημικών & Ποιότητας

Αυτή η Δήλωση Επιδόσεων μεταφράστηκε σε διάφορες γλώσσες. Σε περίπτωση που υπάρχει αμφιβολία για τη μετάφραση, υπερισχύει πάντα η αγγλική έκδοση.

Το παράρτημα περιλαμβάνει προαιρετικές και συμπληρωματικές πληροφορίες στα αγγλικά, που ξεπερνούν τις (οριζόμενες σε άλλες γλώσσες) νόμιμες απαιτήσεις.

Specific Part

1 Technical description of the product

The fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR is an anchor made of galvanized steel (FAZ II Plus), stainless steel (FAZ II Plus R) or high corrosion resistant steel (FAZ II Plus HCR) which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading), Method A	See Annex C1, C5 and C6
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C2
Displacements and Durability	See Annex C9 and B1
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C7 to C9

3.2 Safety in case of fire (BWR 2)


Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C3 and C4

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with the European Assessment Document EAD 330232-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1



Cone bolt manufactured by cold - forming:

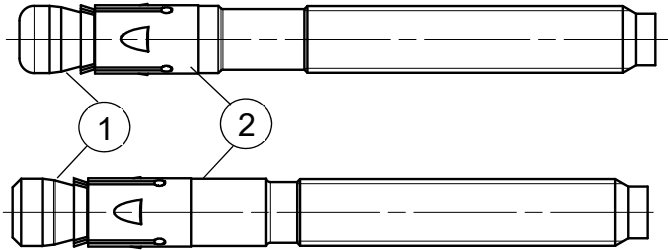

Cone bolt manufactured by turning:

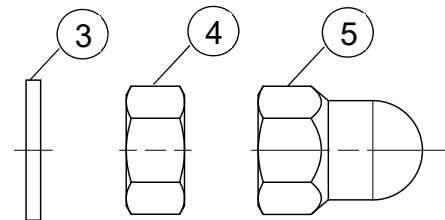


- ① Expansion sleeve
- ② Cone bolt (cold – formed or turned)
- ③ Washer
- ④ Hexagon nut
- ⑤ fischer FAZ II Plus dome nut

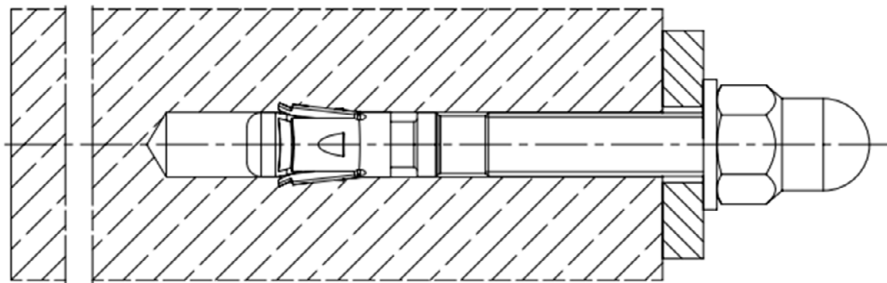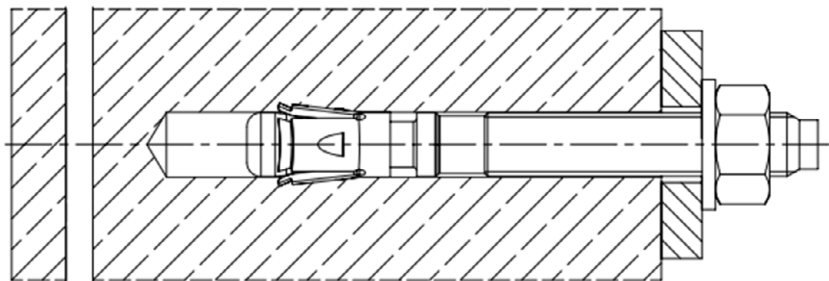

(Figure not to scale)

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR	
Product description Installed condition	Annex A1 Appendix 3 / 19

Product marking and letter-code:

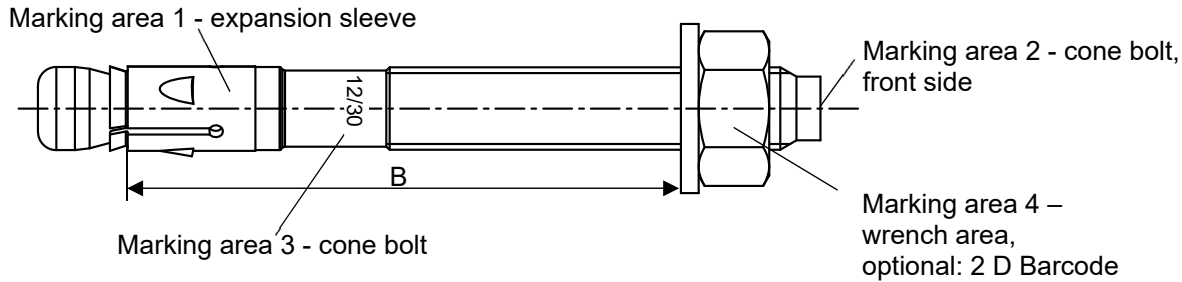

Product marking, example:



FAZ II + 12/30 R

Brand | type of fastener
placed at marking area 1 or 3

Thread size / max. thickness of the fixture (t_{fix})
identification R or HCR placed at marking area 1 or 3

FAZ II Plus: carbon steel, galvanised
FAZ II Plus R: stainless steel
FAZ II Plus HCR: high corrosion resistant steel

Table A2.1: Letter - code at marking area 2:

Marking	(a)	(b)	(c)	(d)	(A)	(B)	(C)	(D)	(E)	(F)	(G)	(H)	(I)	(K)
Max. t_{fix} [mm]	5	10	15	20	5	10	15	20	25	30	35	40	45	50
$B \geq$ [mm]	M6	-			45	50	55	60	65	70	75	80	85	90
	M8	40	45	-	50	55	60	65	70	75	80	85	90	95
	M10	45	50	55	60	65	70	75	80	85	90	95	100	105
	M12	55	60	65	70	75	80	85	90	95	100	105	110	115
	M16	70	75	80	85	90	95	100	105	110	115	120	125	130
	M20	-			105	110	115	120	125	130	135	140	145	150
	M24	-			130	135	140	145	150	155	160	165	170	175
Marking	(L)	(M)	(N)	(O)	(P)	(R)	(S)	(T)	(U)	(V)	(W)	(X)	(Y)	(Z)
Max. t_{fix} [mm]	60	70	80	90	100	120	140	160	180	200	250	300	350	400
$B \geq$ [mm]	M6	100	110	120	130	140	160	180	200	220	240	290	340	390
	M8	105	115	125	135	145	165	185	205	225	245	295	345	395
	M10	120	130	140	150	160	180	200	220	240	260	310	360	410
	M12	130	140	150	160	170	190	210	230	250	270	320	370	420
	M16	145	155	165	175	185	205	225	245	265	285	335	385	435
	M20	160	170	180	190	200	220	240	260	280	300	350	400	450
	M24	185	195	205	215	225	245	265	285	305	325	375	425	475

Calculation existing h_{ef} for installed fasteners:

existing $h_{ef} = B_{(according to table A2.1)} - existing t_{fix}$

Thickness of the fixture t_{fix} including thickness of filling conical washer t and e.g. thickness of grout layer t_{grout} or other non-structural layers

(Figure not to scale)

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Product description
Product marking and letter code

Annex A2

Appendix 4 / 19

Product dimensions

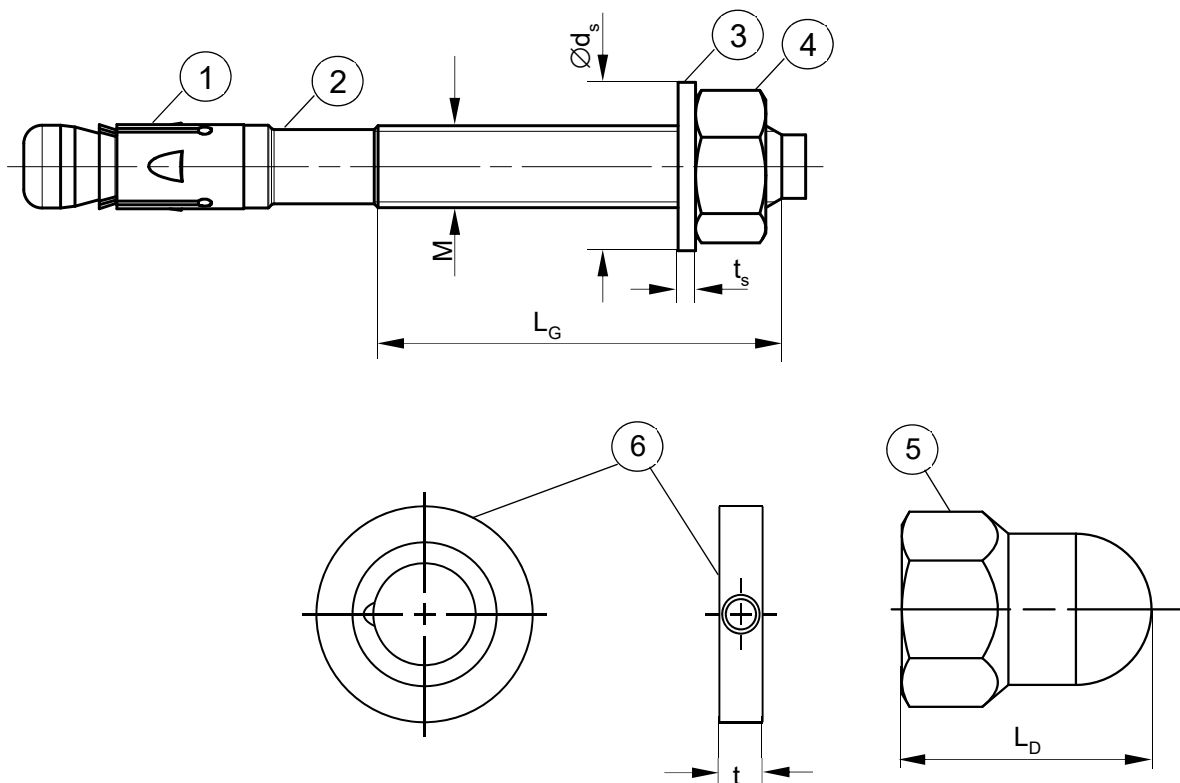


Table A3.1: Dimensions [mm]

Part	Designation		FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR						
			M6	M8	M10	M12	M16	M20	M24
1	Expansion sleeve	Sheet thickness	0,8	1,3	1,4	1,6	2,4		3,0
2	Cone bolt	Thread size M	6	8	10	12	16	20	24
		L _G	10	19	26	31	40	50	57
3	Washer	t _s	1,4	1,8	2,3	2,7	3,7	4,3	5,0
		Ø d _s							
4 & 5	Hexagon nut / fischer FAZ II Plus dome nut	Wrench size ¹⁾	10	13	17	19	24	30	36
5		L _D	- ²⁾		22	27	33	- ²⁾	
6	fischer filling conical washer FFD	t	6				7	8	10

¹⁾ Alternatively according to ISO 4032:2013 allowed

²⁾ Not part of the assessment

(Figure not to scale)

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Product description
Dimensions

Annex A3

Appendix 5 / 19

Table A4.1: Materials FAZ II Plus

Part	Designation	Material		
		FAZ II Plus	FAZ II Plus R	FAZ II Plus HCR
	Steel grade	Steel	Stainless steel R EN 10088:2014	High corrosion resistant steel HCR EN 10088:2014
		Zinc plated $\geq 5 \mu\text{m}$, ISO 4042:2018	Corrosion resistance class CRC III in accordance with EN 1993-1-4:2006+A1:2015	Corrosion resistance class CRC V in accordance with EN 1993-1-4:2006+A1:2015
1	Expansion sleeve	Cold strip, EN 10139:2016 or stainless steel EN 10088:2014	Stainless steel EN 10088:2014	
2	Cone bolt	Cold form steel or free cutting steel	Stainless steel EN 10088:2014	High corrosion resistant steel EN 10088:2014
3	Washer	Cold strip, EN 10139:2016		
4 / 5	Hexagon nut / fischer FAZ II Plus dome nut	Steel, property class min. 8, EN ISO 898-2:2012	Stainless steel EN 10088:2014; ISO 3506-2:2020; property class – min. 70	High corrosion resistant steel EN 10088:2014; ISO 3506-2:2020; property class – min. 70
6	fischer filling conical washer FFD	Cold form steel or free cutting steel	Stainless steel EN 10088:2014	High corrosion resistant steel EN 10088:2014

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Product description
Materials

Annex A4

Appendix 6 / 19

Specifications of intended use

Fastenings subject to:

Size		FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR						
		M6	M8	M10	M12	M16	M20	M24
Hammer drilling with standard drill bit		✓						
Hammer drilling with hollow drill bit with automatic cleaning		- ¹⁾	✓					
Diamond drilling		- ¹⁾	✓					(for non seismic applications only)
Static and quasi-static loads		✓						
Cracked and uncracked concrete								
Fire exposure								
Seismic performance category	C1	- ¹⁾	✓					
	C2	- ¹⁾		✓				

¹⁾ No performance assessed

Base materials:

- Compacted reinforced and unreinforced normal weight concrete without fibres (cracked or uncracked) according to EN 206-1:2013+A2:2021
- Strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR)
- For all other conditions according to EN 1993-1-4:2006 + A1:2015 corresponding to corrosion resistance class
 - CRC III: for FAZ II Plus R
 - CRC V: for FAZ II Plus HCR

Design:

- Fastenings are to be designed under the responsibility of an engineer experienced in fastenings and concrete work
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.)
- Fastenings in stand-off installation or with a grout layer under seismic action are not covered
- In case of seismic applications the fastener shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure
- Design of fastenings according to EN 1992-4:2018 and EOTA Technical Report TR 055:2018

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Intended Use
Specifications

Annex B1


Appendix 7 / 19

Table B2.1: Installation parameters

Size	FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR						
	M6	M8	M10	M12	M16	M20	M24
Nominal drill hole diameter $d_0 =$	6	8	10	12	16	20	24
Maximum bit diameter with hammer or hollow drilling $d_{cut,max}$ [mm]	6,40	8,45	10,45	12,5	16,5	20,55	24,55
Maximum bit diameter with diamond drilling	- ¹⁾	8,15		12,25	16,45	20,50	24,40
Effective embedment depth $h_{ef} \geq$	40-80	35-90	40-100	50-125	65-160	100-180	125
Length from h_{ef} to end of cone bolt L	6,5	9,5	11,5	13,5	17,5	20,0	23,5
Overall fastener embedment depth in the concrete $h_{nom} \geq$	$h_{ef} + L$						
Depth of drill hole to deepest point $h_1 \geq$	$h_{nom} + 3$			$h_{nom} + 5$		$h_{nom} + 10$	
Diameter of clearance hole in the fixture $d_f \leq$ [mm]	7	9	12	14	18	22	26
Required setting torque $T_{inst} =$ [Nm]	8	20	45	60	110	200	270
Excess length after hammering-in the cone bolt (for fischer dome nut applications according to Annex B4) $O =$ [mm]	- ¹⁾		12	16	20	- ¹⁾	

¹⁾ Not part of the assessment

Setting gauge FAZ II Plus SL-H
for fastener with fischer FAZ II Plus dome nut:

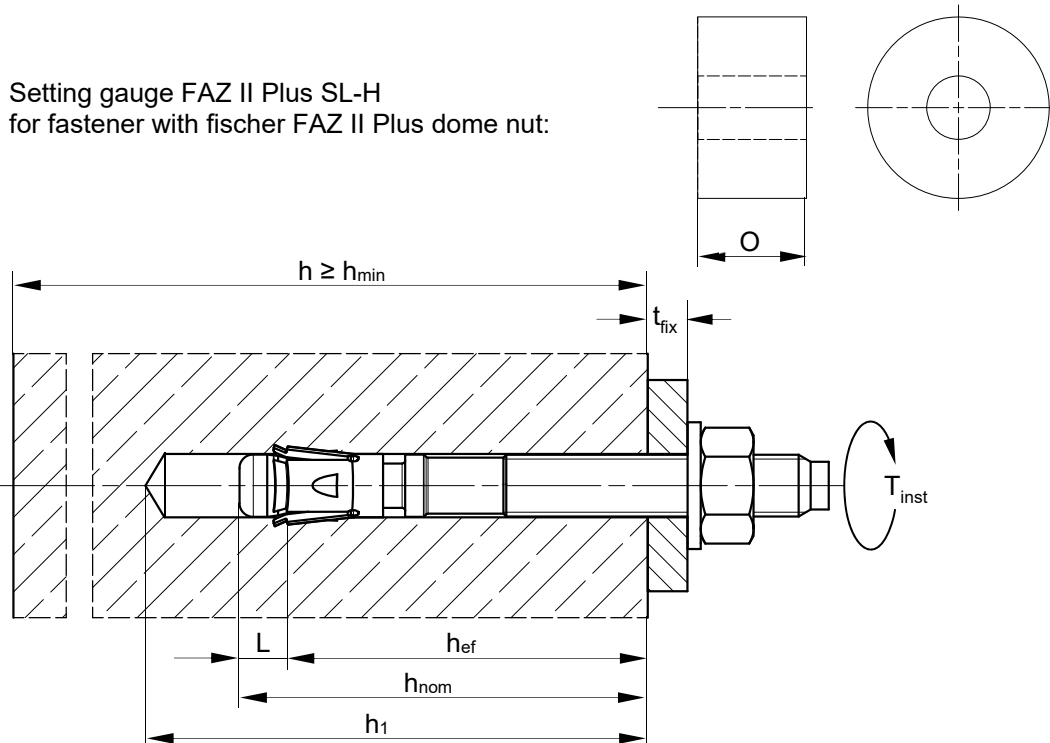

h_{ef} = Effective embedment depth
 t_{fix} = Thickness of the fixture
 h_1 = Depth of drill hole to deepest point
 h = Thickness of the concrete member
 h_{min} = Minimum thickness of concrete member
 h_{nom} = Overall fastener embedment depth in the concrete

O = Length of setting gauge
 L = Length from h_{ef} to end of cone bolt
 T_{inst} = Required setting torque

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Intended Use
Installation parameters

Annex B2








Appendix 8 / 19

Installation instructions:

- Fastener installation carried out by appropriately qualified personnel according to the design drawings and under the supervision of the person responsible for technical matters on the site
- Use of the fastener only as supplied by the manufacturer without exchanging the components of the fastener
Exception: fischer FAZ II Plus dome nut
- Hammer, hollow or diamond drilling according to Annex B1 + B2
- Drill hole created perpendicular +/- 5° to concrete surface, positioning without damaging the reinforcement
- In case of aborted hole: new drilling at a minimum distance twice the depth of the aborted drill hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application

Installation instructions: Drilling and cleaning the hole

Types of drills and cleaning


Hammer drill (e.g. fischer Quattric II)				Continue with step 5	
Hollow drill (e.g. fischer FHD)				Continue with step 5	
Diamond drill, for non seismic applications only					

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR	
---	--


Intended Use Installation instructions	Annex B3 Appendix 9 / 19
---	-----------------------------

Installation instructions: Installation of the fastener


HEXAGON NUT:




5.a: Set the fastener
e.g. with hammer



5.b: Set the fastener
e.g. fischer FA-ST II




6: Apply T_{inst}




7: Installed fastener

fischer FAZ II Plus DOME NUT:


Option 1: Push through installation with setting gauge SL-H:




5.1: Set the fastener
through the setting
gauge and
fixture




5.2: Check offset



5.3: Turn on the
fischer FAZ II
Plus dome nut




6: Apply T_{inst}




7: Installed fastener


Option 2: Push through installation with hexagon nut:



5.1: Check setting
position: Visible
one turn of a
thread



5.2: Set the fastener







5.3: Remove nut

fischer Filling conical washer FFD optional for seismic C2 application or minimising the annular gap:

Optional

The gap between bolt and fixture may be filled with mortar (compressive strength $\geq 50 \text{ N/mm}^2$ e.g. fischer FIS SB) after last step (for eliminating the annular gap). The FFD is additional to the standard washer. The thickness of the FFD must be considered for definition of t_{fix} . Countersunk of the FFD in direction to the anchor plate. Installation with hexagon nut or dome nut is permitted.



fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Intended Use
Installation instructions

Annex B4

Appendix 10 / 19

Table C1.1: Characteristic values of tension resistance under static and quasi-static action

Size				FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR							
				M6	M8		M10	M12	M16	M20	M24
Steel failure											
Characteristic resistance	FAZ II Plus	N _{Rk,s}	[kN]	11,3	19,9	32,7	49,3	78,7	108,4	180,0	
	FAZ II Plus R			12,1	21,0	34,5	52,0	83,0	127,6	187,0	
	FAZ II Plus HCR			11,3	17,6	29,1	43,8	69,9			
Partial factor for steel failure	FAZ II Plus	γ _{Ms} ¹⁾	[-]	1,4					1,4	1,5	
	FAZ II Plus R								1,45		
	FAZ II Plus HCR			1,5	1,45				1,4	1,5	
Pullout failure											
Effective embedment depth for calculation	h _{ef}	[mm]		40-80	40 ³⁾ - < 45	45-90	40-100	50-125	65-160	100-180	125
Characteristic resistance in cracked concrete C20/25	N _{Rk,p} (C20/25)	[kN]		1,5	5,5	8	13	20	27,0	34,4	48,1
Characteristic resistance in uncracked concrete C20/25			10,5	14		20	22	38,6	49,2	68,8	
Increasing factor ψ _c for cracked or uncracked concrete	C25/30	[-]		1,12							
	C30/37		1,22								
	C35/45		1,32								
	C40/50		1,41								
	C45/55		1,50								
	C50/60		1,58								
Installation sensitivity factor	γ _{inst}	[-]		1,0							
Concrete cone and splitting failure											
Factor for uncracked concrete	k _{ucr,N}	[-]		11,0 ²⁾							
Factor for cracked concrete	k _{cr,N}		7,7 ²⁾								
Characteristic spacing	s _{cr,N}	[mm]		3 · h _{ef}							
Characteristic edge distance	c _{cr,N}		1,5 · h _{ef}								
Characteristic spacing for splitting failure	s _{cr,sp}	[mm]		2 · c _{cr,sp}							
Characteristic edge distance for splitting failure h	≥ 80	c _{cr,sp}	[mm]	40	2,4·h _{ef}	2·h _{ef}	_ 5)				
	≥ 100				2·h _{ef}	2,4·h _{ef}					2·h _{ef}
	≥ 120					1,9·h _{ef}					2,1·h _{ef}
	≥ 140				1,5·h _{ef}		2·h _{ef}	2,4·h _{ef}	2,2·h _{ef}		
	≥ 160										
	≥ 200										
Characteristic resistance to splitting	N ⁰ _{Rk,sp}	[kN]		min {N ⁰ _{Rk,c,i} ; N _{Rk,p} } ⁴⁾							

¹⁾ In absence of other national regulations

²⁾ Based on concrete strength as cylinder strength

³⁾ For dry internal exposure and statically indeterminate redundant components, the minimum effective embedment depth can be reduced to 35 mm without reduction of $N_{Rk,p}$.

⁴⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018

⁵⁾ No performance assessed

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Performances

Characteristic values of tension resistance under static and quasi-static action

Annex C1

Appendix 11 / 19

Table C2.1: Characteristic values of **shear** resistance under static and quasi-static action

Size		FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR						
		M6	M8	M10	M12	M16	M20	M24
Steel failure without lever arm								
Characteristic resistance	FAZ II Plus without filling of the annular gap	7,5	16,3	26,2	37,0	68,4	82,9	128,3
	FAZ II Plus with filling		18,1	27,3	40,7	69,8	85,6	
	FAZ II Plus without filling R	8,8	17,6	26,5	42,1	71,1	107,9	158,1
	FAZ II Plus with filling R			27,6	44,3	73,6	117,9	
	FAZ II Plus without filling HCR		17,4	23,7	42,1	71,1	107,9	
	FAZ II Plus with filling HCR			27,9	73,6	117,9		
Partial factor for steel failure $\gamma_{Ms}^{1)}$		1,25						
Factor for ductility k_7 [-]		1,0						
Steel failure with lever arm and Concrete pryout failure								
Effective embedment depth for calculation h_{ef} [mm]		40-80	45-90	60-100	70-125	85-160	100-180	125
Characteristic bending resistance	FAZ II Plus	11	30	60	105	266	422	864
	FAZ II Plus R		29	59	100	256	519	898
	FAZ II Plus HCR							
Factor for pryout failure k_8 [-]		2,6	2,8	3,2				
Effective embedment depth for calculation h_{ef} [mm]		- ²⁾	40 ³⁾ - < 45	40 - < 60	50 - < 70	65 - < 85	- ²⁾	
Characteristic bending resistance	FAZ II Plus		27	56	105	251		
	FAZ II Plus R		29	59	100	256		
	FAZ II Plus HCR		24	50		223		
Factor for pryout failure k_8 [-]		2,5	2,6	3,1	3,2			
Partial factor for steel failure $\gamma_{Ms}^{1)}$		1,25						
Factor for ductility k_7 [-]		1,0						
Concrete edge failure								
Effective embedment depth for calculation l_f [mm]		h_{ef}						
Outside diameter of a fastener d_{nom}		6	8	10	12	16	20	24

¹⁾ In absence of other national regulations

2) No performance assessed

³⁾ For dry internal exposure and statically indeterminate redundant components, the minimum effective embedment depth can be reduced to 35 mm without reduction of $N_{Rk,p}$.

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Performances

Characteristic values of shear resistance under static and quasi-static action

Annex C2

Appendix 12 / 19

Table C3.1: Characteristic values of tension resistance under fire exposure

Size				FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR													
				M6		M8		M10		M12		M16		M20	M24		
h _{ef} ≥ [mm]				40		35	45	40	60	50	70	65	85	100	125		
Characteristic resistance steel failure	FAZ II Plus	N _{Rk,s,fi}	R30	0,6 ¹⁾ / 0,9 ²⁾		1,4		2,8		5,0		9,4		14,7	21,1		
			R60	0,4 ¹⁾ / 0,9 ²⁾		1,2		2,3		4,1		7,7		12,0	17,3		
			R90	0,3 ¹⁾ / 0,9 ²⁾		0,9		1,9		3,2		6,0		9,4	13,5		
			R120	0,2 ¹⁾ / 0,7 ²⁾		0,8		1,6		2,8		5,2		8,1	11,6		
	FAZ II Plus R / HCR	N _{Rk,s,fi}	R30	0,6 ¹⁾ / 0,9 ²⁾		3,6		7,8		11,5		21,8		34,3	49,4		
			R60	0,4 ¹⁾ / 0,9 ²⁾		2,3		4,8		7,1		13,2		20,7	29,3		
			R90	0,3 ¹⁾ / 0,9 ²⁾		1,9		3,8		5,7		10,5		18,3	26,4		
			R120 [kN]	0,2 ¹⁾ / 0,7 ²⁾		1,6		3,3		4,9		8,6		17,3	25,0		
			Characteristic resistance Concrete cone failure	N _{Rk,c,fi}	R30	7,7 · h _{ef} ^{1,5} · (20) ^{0,5} · h _{ef} / 200 / 1000											
					- R90												
Characteristic resistance pullout failure	N _{Rk,p,fi}	R120	7,7 · h _{ef} ^{1,5} · (20) ^{0,5} · h _{ef} / 200 / 1000 · 0,8														
		R30	0,4	0,9	2,0	2,2	3,3	3,0	5,0	4,5	6,8	8,6	12,0				
		R60		0,8													
		R90		0,5													
		R120	0,3		1,6	1,7	2,6	2,4	4,0	3,6	5,4	6,9	9,6				

Table C3.2: Characteristic values of shear resistance under fire exposure

FAZ II Plus			R30		R60		
			$V_{Rk,s,fi,30}$ [kN]	$M^0_{Rk,s,fi,30}$ [Nm]	$V_{Rk,s,fi,60}$ [kN]	$M^0_{Rk,s,fi,60}$ [Nm]	
M6	$h_{ef} \geq$	40	[mm]	0,6 ¹⁾ / 0,9 ²⁾	0,5 ¹⁾ / 0,2 ²⁾	0,4 ¹⁾ / 0,9 ²⁾	0,3 ¹⁾ / 0,1 ²⁾
M8		35		1,8	1,4	1,6	1,2
M10		40		3,6	3,6	2,9	3,0
M12		50		6,3	7,8	4,9	6,4
M16		65		11,7	19,9	9,1	16,3
M20		100		18,2	39,0	14,2	31,8
M24		125		26,3	67,3	20,5	55,0
FAZ II Plus			R90		R120		
			$V_{Rk,s,fi,90}$ [kN]	$M^0_{Rk,s,fi,90}$ [Nm]	$V_{Rk,s,fi,120}$ [kN]	$M^0_{Rk,s,fi,120}$ [Nm]	
M6	$h_{ef} \geq$	40	[mm]	0,3 ¹⁾ / 0,9 ²⁾	0,2 ¹⁾ / 0,1 ²⁾	0,2 ¹⁾ / 0,7 ²⁾	0,2 ¹⁾ / 0,1 ²⁾
M8		35		1,3	1,0	1,2	0,8
M10		40		2,2	2,4	1,9	2,1
M12		50		3,5	5,0	2,8	4,3
M16		65		6,6	12,6	5,3	11,0
M20		100		10,3	24,6	8,3	21,4
M24		125		14,8	42,6	11,9	37,0

Concrete pryout failure according to EN 1992-4:2018

1) FAZ II Plus

2) FAZ II Plus R / FAZ II Plus HCR

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Performances

Characteristic values of resistance under fire exposure

Annex C3

Appendix 13 / 19

Table C4.1: Characteristic values of shear resistance under fire exposure

FAZ II Plus R, FAZ II Plus HCR			R30		R60		
			V _{Rk,s,fi,30} [kN]	M ⁰ _{Rk,s,fi,30} [Nm]	V _{Rk,s,fi,60} [kN]	M ⁰ _{Rk,s,fi,60} [Nm]	
M6	h _{ef} ≥	40	[mm]	0,6 ¹⁾ / 0,9 ²⁾	0,5 ¹⁾ / 0,2 ²⁾	0,4 ¹⁾ / 0,9 ²⁾	0,3 ¹⁾ / 0,1 ²⁾
M8		35		3,6	3,7	2,3	2,4
M10		40		7,8	10,1	4,8	6,2
M12		50		11,5	17,9	7,1	11,1
M16		65		21,8	46,2	13,2	27,9
M20		100		34,3	90,9	20,7	54,9
M24		125		49,4	157,2	29,3	93,1
FAZ II Plus R, FAZ II Plus HCR			R90		R120		
			V _{Rk,s,fi,90} [kN]	M ⁰ _{Rk,s,fi,90} [Nm]	V _{Rk,s,fi,120} [kN]	M ⁰ _{Rk,s,fi,120} [Nm]	
M6	h _{ef} ≥	40	[mm]	0,3 ¹⁾ / 0,9 ²⁾	0,2 ¹⁾ / 0,1 ²⁾	0,2 ¹⁾ / 0,7 ²⁾	0,2 ¹⁾ / 0,1 ²⁾
M8		35		1,9	1,9	1,6	1,7
M10		40		3,8	4,9	3,3	4,3
M12		50		5,7	8,8	4,9	7,6
M16		65		10,5	22,1	8,6	18,3
M20		100		18,3	48,6	17,3	45,9
M24		125		26,4	84,0	25,0	79,4

1) FAZ II Plus

2) FAZ II Plus R / FAZ II Plus HCR

Concrete pryout failure according to EN 1992-4:2018

Table C4.2: Minimum spacings and minimum edge distances of fasteners under fire exposure for tension and shear load

Size		FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR						
		M6	M8	M10	M12	M16	M20	M24
Spacing	s_{min}	Annex C5						
Edge distance	c_{min}	$c_{min} = 2 \cdot h_{ef}$, for fire exposure from more than one side $c_{min} \geq 300$ mm						

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Performances

Characteristic values of resistance under fire exposure

Annex C4

Appendix 14 / 19

Table C5.1: Minimum thickness of concrete members, minimum spacing and minimum edge distance

Size		FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR						
		M6	M8	M10	M12	M16	M20	M24
Minimum edge distance								
Uncracked concrete	c _{min} [mm]	40	40	45	55	65	95	135
Cracked concrete							85	100
Corresponding		according to Annex C6						
Minimum thickness of concrete member		h _{min}	80		100	140	160	200
Thickness of concrete member		h ≥	max. {h _{min} ; 1,5 · h _{ef} }					
Minimum spacing								
Uncracked concrete	s _{min} [mm]	35	40	40	50	65	95	100
Cracked concrete			35					
Corresponding		according to Annex C6						
Minimum thickness of concrete member		h _{min}	80		100	140	160	200
Thickness of concrete member		h ≥	max. {h _{min} ; 1,5 · h _{ef} }					
Minimum splitting area								
Uncracked concrete	A _{sp,req} [·1000 mm²]	5,1	18	37	54	67	100	117,5
Cracked concrete		1,5	12	27	40	50	77	87,5

Table C5.2: Minimum spacing and minimum edge distances - calculated values for **cracked concrete with one edge** (c_2 and $c_3 \geq 1,5 c_1$)

Type of anchor / size		FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR										
		M6	M8		M10		M12		M16		M20	M24
Effective anchorage depth	$h_{ef} \geq [\text{mm}]$	40	35	45	40	60	50	70	65	85	100	125
Minimum thickness of concrete member	$h \geq [\text{mm}]$	80		85	80	120	100	140	140	180	160	200
Minimum spacing	$s_{min} [\text{mm}]$	35			40		50		65		95	100
	for $c \geq [\text{mm}]$	40			100	65	120	80	100	75	130	115
Minimum edge distance	$c_{min} [\text{mm}]$	40			60	45	70	55	65		85	100
	for $s \geq [\text{mm}]$	35			160	90	190	125	165	85	230	140

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Performances

Minimum thickness of member, minimum spacing and edge distances

Annex C5

Appendix 15 / 19

Determination of $A_{sp,ef}$ for each existing free edge

Splitting failure applied for minimum edge distance and spacing in depending on h_{ef}


Definition Index:

cal = calculatory

e.g.: $s_{x,y}$

x = load direction

y = number anchor plate

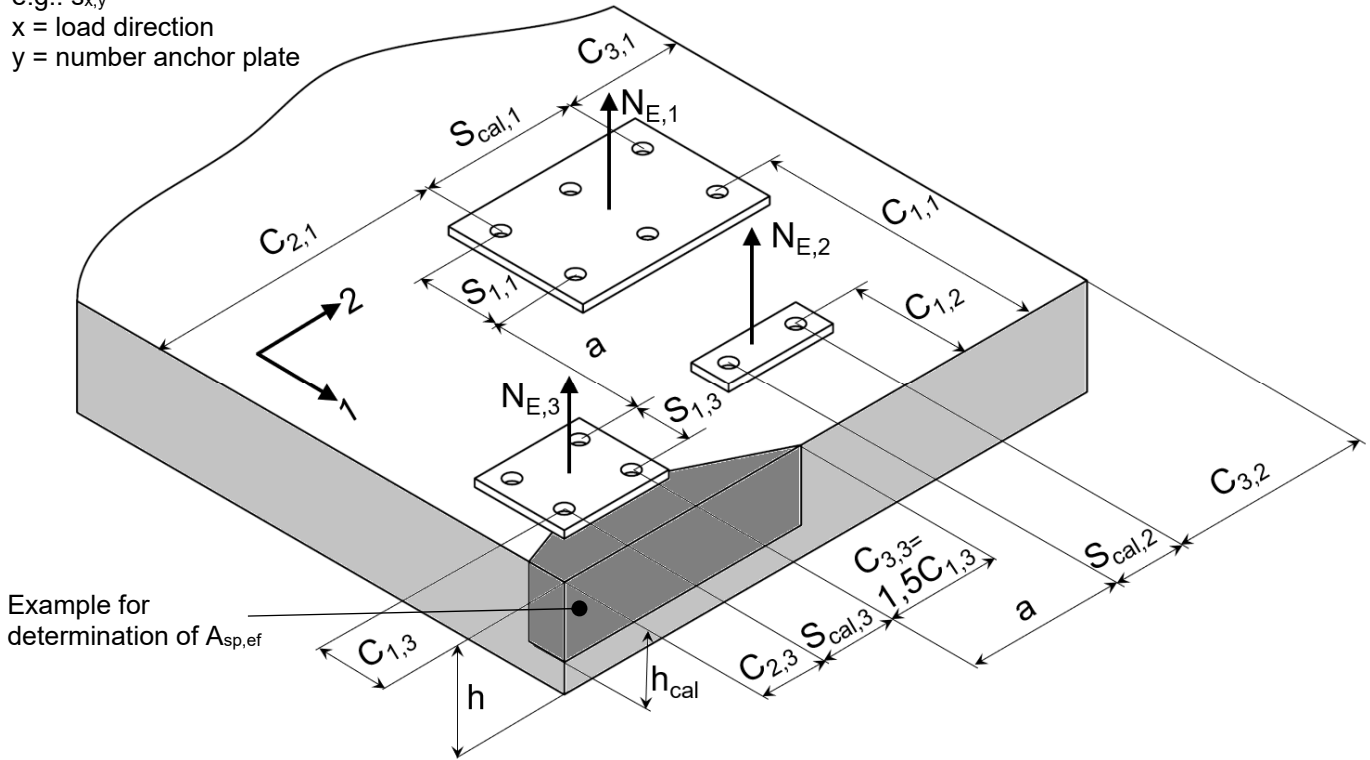

Example for different anchor plates: For considering all free edges the direction 1 and 2 must be swapped.

General formulation for each free edge: $A_{sp,ef} = (C_2 + s_{cal} + C_3) \cdot h_{cal} \geq (n/2) \cdot A_{sp,req}$

with:

Edge distance C_1 : $C_{min} \leq C_1$

Edge distance C_2 : $C_{min} \leq C_2 \leq 1,5 \cdot C_1$

Edge distance C_3 : $C_{min} \leq C_3 \leq 1,5 \cdot C_1$

Calculation spacing, distance between outer anchors s_{cal} : $s_{min} \leq s_{cal} \leq 3,0 \cdot C_1$

Distance between group of anchors a: For $a \geq 3,0 \cdot C_1$ no influence between the anchor groups is taken into account.

Number of anchors n of an anchor plate as well close and parallel to the edge

Effective member thickness h_{cal} : $h_{min} \leq h$; $h_{cal} \leq h$; $h_{cal} \leq (h_{ef} + 1,5 \cdot C_1)$

C_1 , C_2 , C_3 , h and s_{cal} have to be set in way that the requirement is fulfilled

For the calculation of minimum spacing and minimum edge distance of fasteners in combination with different embedment depths and thicknesses of concrete members the following equation shall be fulfilled:

$$A_{sp,req} < A_{sp,ef}$$

$A_{sp,req}$ = required splitting area (according to Annex C 5)

$A_{sp,ef}$ = effective splitting area

(Figure not to scale)

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Performances

Minimum thickness of member, minimum spacings and edge distances

Annex C6

Appendix 16 / 19

Table C7.1: Characteristic values of **tension and shear** resistance under **seismic action category C1**

Size		FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR								
		M6	M8		M10	M12	M16	M20	M24	
Effective embedment depth h_{ef} [mm]		- 2)	40 - <45	45- 90	40-100	50-125	85-160	100-180	125	
With filling of the annular gap α_{gap} [-]			1,0							
Without filling of the annular gap			0,5							
Steel failure $N_{Rk,s,C1} = N_{Rk,s}$; $\gamma_{Ms,C1} = \gamma_{Ms}$ (see Annex C1)										
Pullout failure										
Characteristic resistance in cracked concrete C1 $N_{Rk,p,C1}$ [kN]		-2)	5,1	7,4	11,6	20,0	27,0	34,4	48,1	
Installation sensitivity factor γ_{inst} [-]			1,0							
Concrete cone failure and splitting failure $N_{Rk,c,C1} = N_{Rk,c}$; $N_{Rk,sp,C1} = N_{Rk,sp}$ (see Annex C1)										
Steel failure without lever arm										
Characteristic resistance C1	FAZ II Plus									
	h_{ef} [mm]	-2)	45-90	60-100	70-125	85-160	100-180	125	102,6	
	Without filling $V_{Rk,s,C1}$ [kN]		14,8	23,6	33,3	58,1	71,2			
	With filling $V_{Rk,s,C1}$ [kN]		16,5	24,6	39,9	59,3	85,6			
	h_{ef} [mm]		40-<45	40-<60	50-<70	-2)			126,5	
	Without filling $V_{Rk,s,C1}$ [kN]		-2)		32,9					
	With filling $V_{Rk,s,C1}$ [kN]		15,6	19,7	39,9					
	FAZ II Plus R									
	h_{ef} [mm]	-2)	45-90	60-100	70-125	85-160	100-180	125	126,5	
	Without filling $V_{Rk,s,C1}$ [kN]		16,0	23,9	37,9	60,4	86,3			
	With filling $V_{Rk,s,C1}$ [kN]			24,8	43,4	62,6	94,3			
	h_{ef} [mm]		40-<45	40-<60	50-<70	-2)			126,5	
	Without filling $V_{Rk,s,C1}$ [kN]		-2)		37,5					
	With filling $V_{Rk,s,C1}$ [kN]		15,1	19,9	43,4					
	FAZ II Plus HCR									
	h_{ef} [mm]	-2)	45-90	60-100	70-125	85-160	100-180	125	126,5	
	Without filling $V_{Rk,s,C1}$ [kN]		15,8	21,3	37,9	60,4	86,3			
	With filling $V_{Rk,s,C1}$ [kN]			25,1	41,3	62,6	94,3			
	h_{ef} [mm]		40-<45	40-<60	50-<70	-2)			126,5	
	Without filling $V_{Rk,s,C1}$ [kN]		-2)		37,5					
	With filling $V_{Rk,s,C1}$ [kN]		15,0	20,1	41,3					
	Partial factor for steel failure $\gamma_{Ms,C1}^{1)}$ [-]		1,25							
	1) In absence of other national regulations 2) No performance assessed									
	fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR							Annex C7 Appendix 17 / 19		
Performances Characteristic values of tension and shear resistance under seismic action category C1										

Table C8.1: Characteristic values of tension and shear resistance under seismic action category C2

Size		FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR						
		M6	M8	M10	M12	M16	M20	M24
With filling of the annular gap		α_{gap} [-]	_2)	1,0				
Without filling of the annular gap				0,5				
Steel failure $N_{Rk,s,C2} = N_{Rk,s}$; $\gamma_{Ms,C2} = \gamma_{Ms}$ (see Annex C1)								
Pullout failure								
Characteristic resistance in cracked concrete C2	h_{ef} [mm]	_2)	60-100	70-125	85-160	100-180	125	
	$N_{Rk,p,C2}$ [kN]		5,1	7,4	21,5	30,7	39,6	
	h_{ef} [mm]		40 - <60	50 - <70	65 - <85	_2)		
	$N_{Rk,p,C2}$ [kN]		2,7	4,4	16,4			
Installation sensitivity factor		γ_{inst} [-]	1,0					
Concrete cone failure and splitting failure $N_{Rk,c,C2} = N_{Rk,c}$; $N_{Rk,sp,C2} = N_{Rk,sp}$ (see Annex C1)								
Steel failure without lever arm								
Characteristic resistance C2	FAZ II Plus							
	h_{ef} [mm]	_2)	60-100	70-125	85-160	100-180	125	
	Without filling $V_{Rk,s,C2}$ [kN]		17,6	27,8	37,6	62,2	70,6	
	With filling $V_{Rk,s,C2}$ [kN]		20,5	30,5	52,4	68,5	102,6	
	h_{ef} [mm]		40 - <60	50 - <70	65 - <85	_2)		
	Without filling $V_{Rk,s,C2}$ [kN]		14,1	24,4	31,2			
	With filling $V_{Rk,s,C2}$ [kN]		14,7	30,5	52,4			
	FAZ II Plus R							
	h_{ef} [mm]	_2)	60-100	70-125	85-160	100-180	125	
	Without filling $V_{Rk,s,C2}$ [kN]		17,8	31,6	39,1	70,5	87,0	
	With filling $V_{Rk,s,C2}$ [kN]		20,7	33,2	55,2	104,9	126,5	
	h_{ef} [mm]		40 - <60	50 - <70	65 - <85	_2)		
	Without filling $V_{Rk,s,C2}$ [kN]		14,3	27,8	32,4			
	With filling $V_{Rk,s,C2}$ [kN]		14,9	33,2	55,2			
	FAZ II Plus HCR							
	h_{ef} [mm]	_2)	60-100	70-125	85-160	100-180	125	
	Without filling $V_{Rk,s,C2}$ [kN]		15,9	31,6	39,1	70,5	87,0	
	With filling $V_{Rk,s,C2}$ [kN]		20,9		55,2	104,9	126,5	
	h_{ef} [mm]		40 - <60	50 - <70	65 - <85	_2)		
	Without filling $V_{Rk,s,C2}$ [kN]		12,8	27,8	32,4			
	With filling $V_{Rk,s,C2}$ [kN]		15,1	31,6	55,2			
Partial factor for steel		$\gamma_{Ms,C2}^{1)}$ [-]	1,25					

1) In absence of other national regulations

2) No performance assessed

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Performances

Characteristic values of resistance under tension and shear loads under seismic action category C2

Annex C8

Appendix 18 / 19

Table C9.1: Displacements under static and quasi static **tension** loads

Size	FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR						
	M6	M8	M10	M12	M16	M20	M24
Displacement – factor for tensile load¹⁾							
δ_{N0} - factor in cracked concrete	0,13	0,22	0,12	0,09	0,08	0,07	0,05
$\delta_{N\infty}$ - factor [mm/kN]	1,00	0,78	0,40	0,19	0,09		0,07
δ_{N0} - factor in uncracked concrete	0,16	0,07	0,05	0,06		0,05	0,04
$\delta_{N\infty}$ - factor	0,24	0,29	0,21	0,14	0,10	0,06	0,05

Table C9.2: Displacements under static and quasi static **shear** loads

Size	M6	M8	M10	M12	M16	M20	M24
Displacement – factor for shear load²⁾							
	FAZ II Plus						
δ_{V0} - factor	0,6	0,35	0,37	0,27	0,10	0,09	0,07
$\delta_{V\infty}$ - factor	0,9	0,52	0,55	0,40	0,14	0,15	0,11
δ_{V0} - factor in cracked or uncracked concrete [mm/kN]	FAZ II Plus R, FAZ II Plus HCR						
	0,6	0,23	0,19	0,18	0,10	0,11	0,07
	0,9	0,35	0,29	0,27	0,15	0,17	0,11

¹⁾ Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0} - \text{factor} \cdot N$$

$$\delta_{N\infty} = \delta_{N\infty} - \text{factor} \cdot N$$

N = Action tension loading

²⁾ Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0} - \text{factor} \cdot V$$

$$\delta_{V\infty} = \delta_{V\infty} - \text{factor} \cdot V$$

V = Action shear loading

Table C9.3: Displacements under **tension** loads for **category C2** for all embedment depths

Size	FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR						
	M6	M8	M10	M12	M16	M20	M24
DLS $\delta_{N,C2}$ (DLS) [mm]	- ¹⁾		2,7	4,4		5,6	4,8
ULS $\delta_{N,C2}$ (ULS)			11,5	13,0	12,3	14,4	15,2

¹⁾ No performance assessed

Table C9.4: Displacements under **shear** loads for **category C2** for all embedment depths

Size	FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR						
	M6	M8	M10	M12	M16	M20	M24
DLS without filling $\delta_{V,C2}$ (DLS) [mm]	- ¹⁾		5,0			4,8	4,2
ULS without filling $\delta_{V,C2}$ (ULS)			7,8	6,3	8,8	6,3	7,4
DLS with filling $\delta_{V,C2}$ (DLS)			1,2			2,0	4,2
ULS with filling $\delta_{V,C2}$ (ULS)			4,2	5,8	3,1	4,4	7,4

¹⁾ No performance assessed

fischer Bolt Anchor FAZ II Plus, FAZ II Plus R, FAZ II Plus HCR

Performances

Displacements under tension and shear loads

Annex C9

Appendix 19 / 19