



ΔΗΛΩΣΗ ΕΠΙΔΟΣΕΩΝ



DoP: 0034

για fischer Bolt anchor FXA (Εκτομούμενα αγκύρια για χρήση σε μπετόν (βαρέος τύπου)) – EL

1. Μοναδικός κωδικός ταυτοποίησης του τύπου του προϊόντος: **DoP: 0034**
2. Προβλεπόμενη(-ες) χρήση(-εις): **Εκ των υστέρων στερέωση σε μη ρηγματωμένο σκυρόδεμα, δείτε το προσάρτημα, ειδικά τα παραρτήματα B 1 - B 3**
3. Κατασκευαστής: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Straße 1, 72178 Waldachtal, Γερμανία**
4. Εξουσιοδοτημένος αντιπρόσωπος: --
5. Σύστημα/συστήματα AVCP (αξιολόγηση και επαλήθευση της σταθερότητας της επίδοσης): **1**
6. Ευρωπαϊκό έγγραφο αξιολόγησης: **EAD 330232-00-0601**

Ευρωπαϊκή τεχνική αξιολόγηση: **ETA-13/0772; 2017-09-27**

Οργανισμός τεχνικής αξιολόγησης: **DIBt**

Κοινοποιημένος(-οι) οργανισμός(-οι): **1343 – MPA Darmstadt**

7. Δηλωθείσα(-ες) επίδοση(-εις):

Μηχανική αντιστάση και σταθερότητα (BWR 1),

- Χαρακτηριστικές τιμές για εφελκυστική και διατμητική καταπόνηση σε σκυρόδεμα: δείτε το παράρτημα, συγκεκριμένα το παράρτημα C 1 - C 2
- μετατόπιση υπό εφελκυστική και διατμητική καταπόνηση: δείτε το παράρτημα, συγκεκριμένα τα παραρτήματα C 2

Ασφάλεια σε περίπτωση φωτιάς (BWR 2)

- Αντίδραση σε φωτιά : Το Αγκύριο καλύπτει τις απαιτήσεις της Κατηγορίας A 1
- Αντίσταση στη φωτιά: MKE

8. Κατάλληλη τεχνική τεκμηρίωση και/ή ειδική τεχνική τεκμηρίωση: ---

Η επίδοση του προϊόντος που ταυτοποιείται ανωτέρω είναι σύμφωνη με τη (τις) δηλωθείσα(-ες) επίδοση(-εις). Αυτή η δήλωση επιδόσεων εκδίδεται σύμφωνα με τον Κανονισμό (ΕΕ) Αρ. 305/2011 με αποκλειστική ευθύνη του κατασκευαστή που προσδιορίζεται παραπάνω.

Υπογραφή για λογαριασμό και εξ ονόματος του κατασκευαστή από:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

Tumlingen, 2017-10-06

- Αυτή η Δήλωση Απόδοσης μεταφράστηκε σε διάφορες γλώσσες. σε περίπτωση που υπάρχει αμφιβολία για τη μετάφραση η αγγλική έκδοση θα υπερισχύει πάντα.
- Το παράρτημα περιλαμβάνει προαιρετικές και συμπληρωματικές πληροφορίες στα αγγλικά. Αυτές ξεπερνούν τις προβλεπόμενες από το νόμο (γλώσσα ουδέτερη) .

Specific Part**1 Technical description of the product**

The fischer Bolt anchor FXA is an anchor made of zinc plated or stainless steel which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment**3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Characteristic resistance for tension and shear loads in concrete	See Annex C 1 and C 2
Displacements under tension and shear loads	See Annex C 2

3.2 Safety in case of fire (BWR 2)


Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base



In accordance with European Assessment Documents EAD No. 330232-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

Cone bolt manufactured by cold - forming:

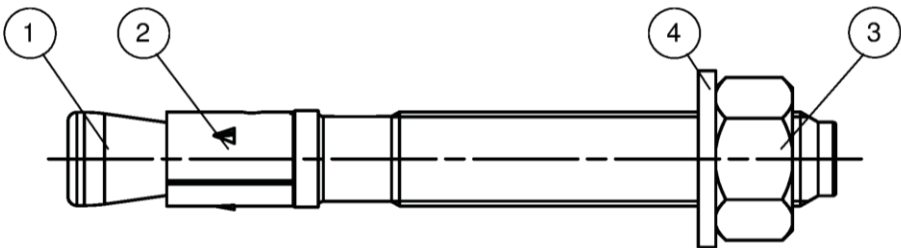

Cone bolt manufactured by turning:

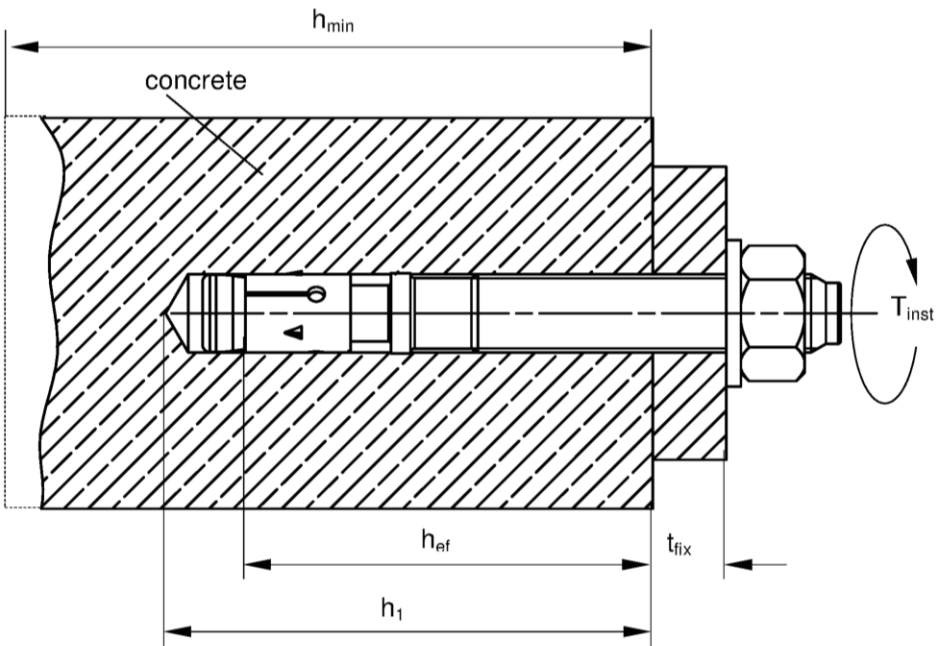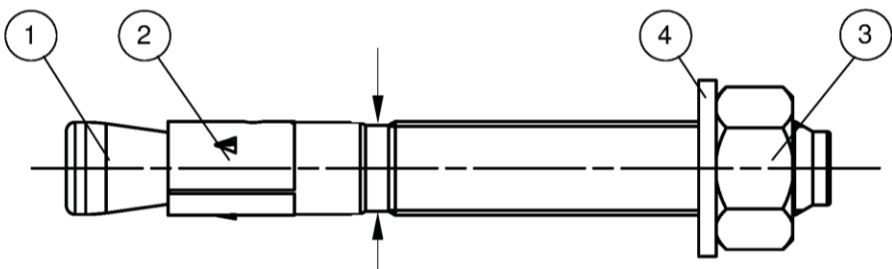


- ① Cone bolt (cold – formed or turned)
- ② Expansion sleeve
- ③ Hexagon nut
- ④ Washer

- h_{ef} = Effective anchorage depth
- t_{fix} = Thickness of fixture
- h_1 = Drill hole depth
- h_{min} = Thickness of concrete member
- T_{inst} = Required torque moment

fischer Bolt Anchor FXA, FXA A4

Product description
Installed condition

Annex A 1

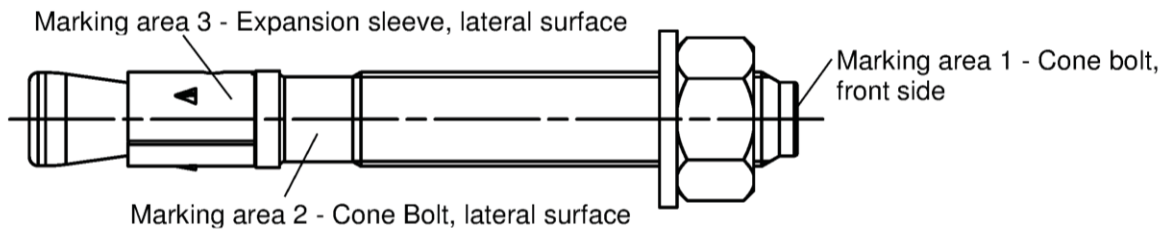

Product marking, example:

FXA 12/10 A4

works symbol | type of anchor

placed on marking area 2 or marking area 3

thread size / thickness of fixture (t_{fix})

identification A4

placed on marking area 2

Table A2.1: Letter-code on marking area 1 and maximum thickness of fixture t_{fix} :

Marking	A	B	C	D	E	F	G	H	I	K	L	M	N	O	P	R	S	T	U	V	W	X	Y	Z
Max. t_{fix}	5	10	15	20	25	30	35	40	45	50	60	70	80	90	100	120	140	160	180	200	250	300	350	400

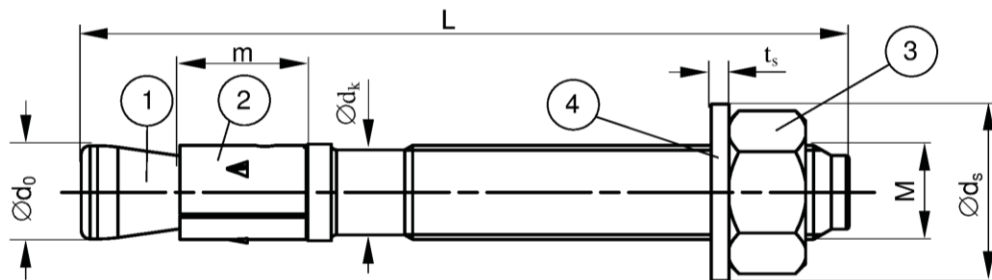


Table A2.2: Anchor dimensions [mm]

Part	Designation			FXA, FXA A4			
				M8	M10	M12	M16
1	Cone bolt	M	=	8	10	12	16
		Ø d ₀		7,9	9,9	11,9	15,9
		Ø d _k		7,1	8,9	10,8	14,5
2	Expansion sleeve	m	=	11,5	13,5	16,5	21,5
3	Hexagon nut	SW	=	13	17	19	24
4	Washer	t _s	≥	1,4	1,8	2,3	2,7
		Ø d _s		15	19	23	29
Thickness of fixture		t _{fix}	≥	0			
			≤	200	250	300	400
Length of anchor		L _{min}	-	56	71	86	120
		L _{max}		261	316	396	520

fischer Bolt Anchor FXA, FXA A4

Product description

Anchor Types and anchor dimensions

Annex A 2

Table A3.1: Materials FXA (zinc plated $\geq 5\mu\text{m}$, DIN EN ISO 4042: 2001-01)

Part	Designation	Material
1	Cone bolt	Cold form steel or free cutting steel
2	Expansion sleeve	Cold strip ¹⁾
3	Hexagon nut	Steel, property class 8
4	Washer	Cold strip

¹⁾ Optional stainless steel

Table A3.2: Materials FXA A4

Part	Designation	Material
1	Cone bolt	Stainless steel
2	Expansion sleeve	
3	Hexagon nut	Stainless steel, property class ≥ 70
4	Washer	Stainless steel

fischer Bolt Anchor FXA, FXA A4


Product description
Materials

Annex A 3

Specifications of intended use							
fischer Bolt Anchor FXA, FXA A4		M8	M10	M12	M16		
Material	Steel	Zinc plated	✓				
	Stainless steel	A4					
Static and quasi-static loads							
Uncracked concrete							
Base materials: • Reinforced and unreinforced normal weight concrete according to EN 206-1: 2000 • Strength classes C20/25 to C50/60 according to EN 206-1: 2000 Use conditions (Environmental conditions): • Structures subject to dry internal conditions (FXA, FXA A4) • Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (FXA A4) Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where deicing materials are used) Design: • Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work • Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.) • Design of fastenings according to FprEN 1992-4: 2016 and EOTA Technical Report TR 055 Installation: • Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site • Hammer or Hollow drilling according to Annex B3							
fischer Bolt Anchor FXA, FXA A4				Annex B 1			
Intended Use Specifications							

Table B2.1: Installation parameters

Type of anchor / size FXA, FXA A4		M8	M10	M12	M16
Nominal drill hole diameter	$d_0 =$	8	10	12	16
Cutting diameter of drill bit	$d_{cut} \leq$	8,45	10,45	12,5	16,5
Effective anchorage depth	$h_{ef} =$ [mm]	40	50	65	80
Depth of drill hole in concrete	$h_1 \geq$	56	68	85	104
Diameter of clearance hole in the fixture	$d_f \leq$	9	12	14	18
Required torque moment FXA (zinc plated)	$T_{inst} =$ [Nm]	15	30	50	100
Required torque moment FXA A4		10	20	35	80

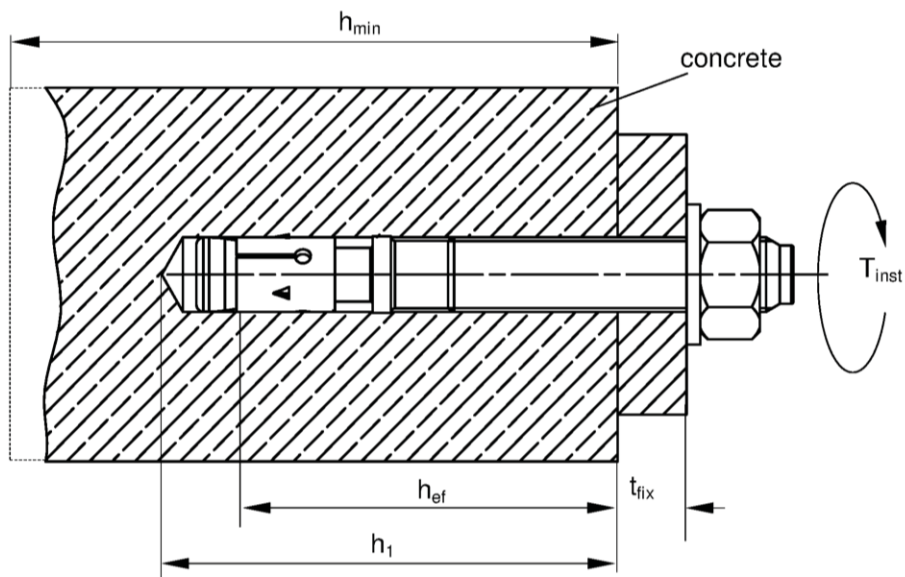

h_{ef} = Effective anchorage depth
 t_{fix} = Thickness of fixture
 h_1 = Drill hole depth
 h_{min} = Thickness of concrete member
 T_{inst} = Required torque moment

fischer Bolt Anchor FXA, FXA A4






Intended Use
 Installation instructions

Annex B 2

Table B3.1: Minimum thickness of concrete members, minimum spacing and minimum edge distances

Type of anchor / size FXA, FXA A4		M8	M10	M12	M16
Minimum thickness of member	h_{min}	100		120	160
Minimum spacing	s_{min} [mm]	40	70		120
Minimum edge distance	c_{min}	45	55	70	90

Installation instructions

Hollow drilling		Continue with step 3, 4 and 5			
					
	1	2	3	4	5

No.	Description	
1	Create drill hole with hammer drill	Create drill hole with hollow drill and vacuum cleaner
2	Clean bore hole	-
3	Set anchor	
4	Expand anchor with prescribed installation torque T_{inst}	
5	Finished installation	

Types of drills

Hammer drill



Hollow drill



fischer Bolt Anchor FXA, FXA A4

Intended Use
 Minimum spacing and edge distance
 Installation instructions
Annex B 3

Table C1.1: Characteristic values of tension resistance						
Type of anchor / size for FXA and FXA A4			M8	M10	M12	M16
Steel failure						
Characteristic resistance	$N_{Rk,s}$	[kN]	16	25	36	67
Partial factor for steel failure	$\gamma_{Ms}^{1)}$	[-]	1,4			1,5
Pullout failure						
Characteristic resistance C20/25	$N_{Rk,p}$	[kN]	12	16	25	35
Increasing factors for $N_{Rk,p}$	ψ_c	C25/30	1,12			
		C30/37	1,23			
		C35/45	1,32			
		C40/50	1,41			
		C45/55	1,50			
		C50/60	1,58			
Installation sensitivity factor	γ_{inst}	[-]	1,2			1,0
Concrete cone and splitting failure						
Effective anchorage depth	h_{ef}	[mm]	40	50	65	80
Factor k_1 for uncracked concrete	$k_{ucr,N}$	[-]	11,0			
Spacing	$s_{cr,N}$	[mm]	$3 h_{ef}$			
Edge distance	$c_{cr,N}$		$1,5 h_{ef}$			
Spacing (splitting failure)	$s_{cr,sp}$		190	200	290	350
Edge distance (splitting failure)	$c_{cr,sp}$		95	100	145	175
1) In absence of other national regulations						
fischer Bolt Anchor FXA, FXA A4					Annex C 1	
Performances Characteristic values of tension resistance						

Table C2.1: Characteristic values of **shear** resistance

Type of anchor / size		FXA, FXA A4				
		M8	M10	M12	M16	
Steel failure without lever arm						
Characteristic resistance	$V_{Rk,s}$	[kN]	11	17	25	47
Partial factor for steel failure	$\gamma_{Ms}^{1)}$	[-]	1,25			
Steel failure with lever arm and concrete pryout failure						
Characteristic bending moment	$M^0_{Rk,s}$	[Nm]	23	45	79	200
Partial factor for steel failure	$\gamma_{Ms}^{1)}$	[-]	1,25			
Factor for pryout	k_g	[-]	1		2	
Concrete edge failure						
Effective length of anchor	l_f	[mm]	40	50	65	80
Effective diameter of anchor	d_{nom}		8	10	12	16

¹⁾ In absence of other national regulations

Table C2.2: Displacements due to **tension** loads

Type of anchor / size	FXA, FXA A4	M8	M10	M12	M16
Tension load N [kN]		4,7	6,3	9,9	16,5
Displacements $\frac{\delta_{N0}}{\delta_{N\infty}}$ [mm]		0,6	0,9	1,9	1,8
		3,1			

Table C2.3: Displacements due to **shear** loads

Type of anchor / size	FXA, FXA A4	M8	M10	M12	M16
Shear load V [kN]		6,3	9,5	14,3	26,8
Displacements $\frac{\delta_{V0}}{\delta_{V\infty}}$ [mm]		1,8	2,4		2,6
		2,7	3,6		3,9

fischer Bolt Anchor FXA, FXA A4

Performances

Characteristic values of shear resistance
Displacement under tension and shear loads

Annex C 2