

DECLARATION OF PERFORMANCE

DoP 0375  
for fischer Ceiling Anchor FDZ (Mechanical fastener for use in concrete) EN

1. Unique identification code of the product-type:

2. Intended use/es:

3. Manufacturer:

4. Authorised representative:

5. System/s of AVCP:

6. European Assessment Document:  
European Technical Assessment:  
Technical Assessment Body:  
Notified body/ies:
- DoP 0375

Post-installed fastener for use in concrete for redundant non-structural systems, see appendix, especially annexes B1 - B3.

fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Germany

–

2+

EAD 330747-00-0601, Edition 06/2018  
ETA-17/0737; 2025-04-10  
DIBt- Deutsches Institut für Bautechnik  
2873 TU Darmstadt

7. Declared performance/s:  
Safety in use (BWR 4)  
**Characteristic resistance to tension load (static and quasi-static loading):**  
Resistance to steel failure: NPD  
Resistance to pull- out failure: NPD  
Resistance to concrete cone failure: NPD  
Robustness: Annex C1  
Minimum edge distance and spacing: Annexes B2, C1  
Edge distance to prevent splitting under load: NPD

**Characteristic resistance to shear load (static and quasi-static loading):**  
Resistance to steel failure (shear load): Annex C1  
Resistance to pry-out failure: NPD  
Resistance to concrete edge failure: NPD

**Characteristic resistance for all load directions and modes of failure for simplified design:**  
Characteristic resistance: Annex C1
- $E_s= 210\,000\text{ MPa}$

$V_{Rk,s}=NPD; k_7=NPD$


**Durability:**  
Durability: Annex A1


**Safety in case of fire (BWR 2)**  
Reaction to fire:Class (A1)  
**Resistance to fire:**  
Fire resistance to steel failure (tension load): Annex C1  
Fire resistance to pull-out failure (tension load): Annex C1  
Fire resistance to steel failure (shear load): Annex C1

8. Appropriate Technical Documentation and/or Specific  
Technical Documentation:
- 

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

  
Dr. Ronald Mihala, Head of Development and Production Management  
Tumlingen, 2025-05-19

  
Dieter Pfaff, Head of International Production Federation and Quality Management

This DoP has been prepared in different languages. In case there is a dispute on the interpretation the English version shall always prevail.  
The Appendix includes voluntary and complementary information in English language exceeding the (language-neutrally specified) legal requirements.

Safety in case of fire (BWR 2)		
1	Reaction to fire:	Class
Resistance to fire:		
2	Fire resistance to steel failure (tension load):	$N_{Rk,s,fi}$ [kN]
3	Fire resistance to pull-out failure (tension load):	$N_{Rk,p,fi}$ [kN]
4	Fire resistance to steel failure (shear load):	$V_{Rk,s,fi}$ [kN], $M^0_{Rk,s,fi}$ [Nm]
Safety and accessibility in use (BWR 4)		
Characteristic resistance to tension load (static and quasi-static loading):		
-		
6	Resistance to steel failure:	$N_{Rk,s}$ [kN], $E_s$ [N/mm <sup>2</sup> ]
7	Resistance to pull- out failure:	$N_{Rk,p}$ [kN], $\psi_c$ , $t_{Rk,p}$ [N/mm <sup>2</sup> ]
8	Resistance to concrete cone failure:	$k_{cr,N}$ , $k_{ucr,N}$ [-], $h_{ef}$ , $c_{cr,N}$ [mm]
9	Robustness:	$V_{inst}$ [-]
10	Minimum edge distance and spacing:	$c_{min}$ , $s_{min}$ , $h_{min}$ [mm]
11	Edge distance to prevent splitting under load:	$N^0_{Rk,sp}$ [kN], $c_{cr,sp}$ [mm]
Characteristic resistance to shear load (static and quasi-static loading):		
12	Resistance to steel failure (shear load):	$V_{Rk,s}$ [kN], $M^0_{Rk,s}$ [Nm], $k_7$ [-]
13	Resistance to pry-out failure:	$k_8$ [-]
14	Resistance to concrete edge failure:	$d_{nom}$ , $l_f$ [mm]
Characteristic resistance for all load directions and modes of failure for simplified design:		
15	Characteristic resistance:	$F^0_{Rk}$ [kN], $s_{cr}$ , $c_{cr}$ [mm]
Durability:		
-		
16	Durability:	Description

## Specific Part

### 1 Technical description of the product

The fischer Ceiling Anchor FDZ is an anchor made of galvanized steel which is placed into a drilled hole and anchored by deformation-controlled expansion.

Product and product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 1

#### 3.2 Safety in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance for all load directions and modes of failure for simplified design	See Annex C 1
Durability	See Annex B 1

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330747-00-0601, the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+

Product installation conditions, product marking and product dimensions


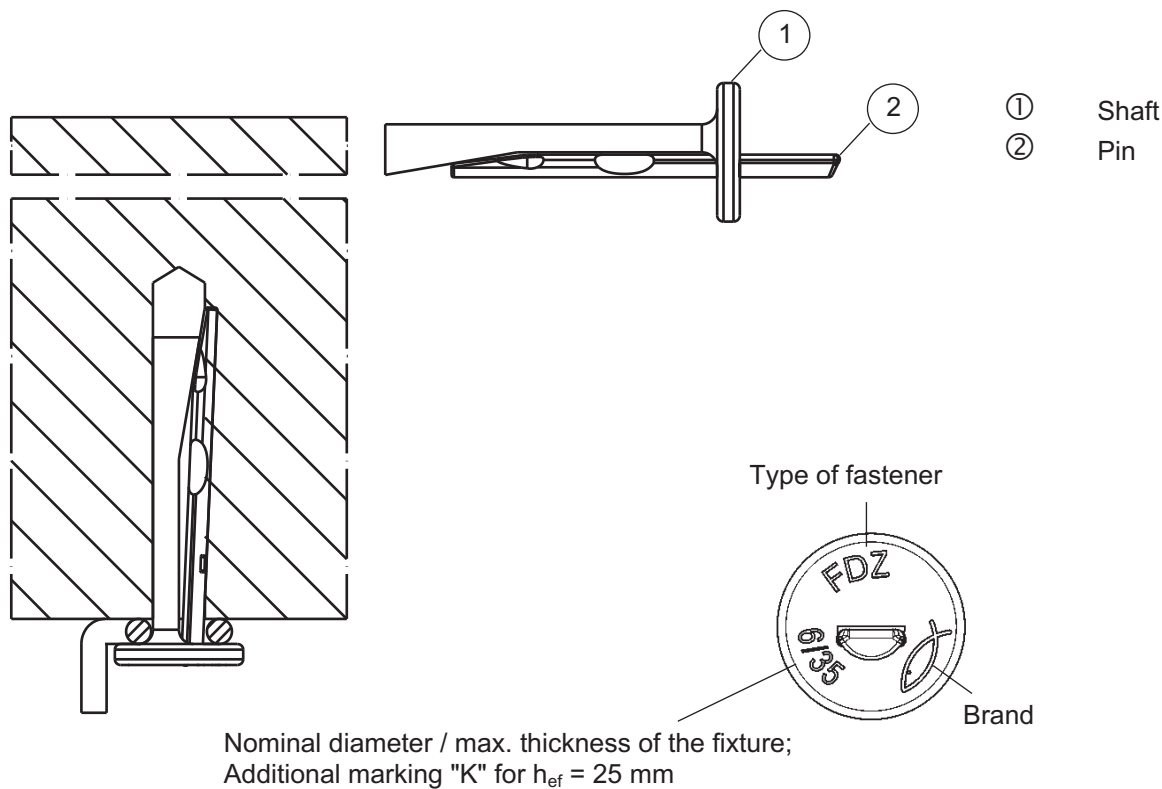


Tabelle A1.1: Materials

Part	Description	Material
1	Shaft	Steel, galvanised $\geq 5\mu\text{m}$ according to EN ISO 4042:2022
2	Pin	Steel, galvanised $\geq 5\mu\text{m}$ according to EN ISO 4042:2022

Table A1.2: Dimensions

		FDZ			
		6/5 K	6/5	6/35 K	6/35
Length of the	pin $L_1$	36	43	66	73
	shaft $L_2$ [mm]	30,5	37,5	60,5	67,5
Diameter of the head $D \geq$		13			

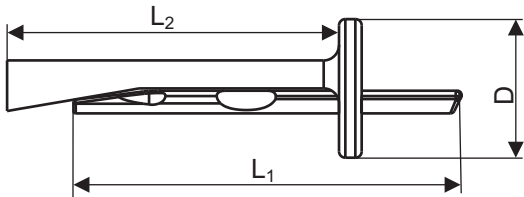

(Figures not to scale)

fischer Ceiling Anchor FDZ

Intended use

Product installation conditions, product marking and product dimensions

Annex A 1

Appendix 2 / 6

## Specifications of intended use

### Anchorage subject to:

Size	FDZ 6
Static and quasi-static loads	✓
Only for redundant non-structural systems according to EN 1992-4:2018	
Fire exposure	

### Base materials:

- Compacted reinforced and unreinforced normal weight concrete without fibres according to EN 206:2013+A2:2021.
- Strength classes C12/15 to C50/60 according to EN 206:2013+A2:2021.
- Cracked and uncracked concrete.

### Use conditions (Environmental conditions):

- Anchorage subject to dry internal conditions.

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings have to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static and quasi-static loading are designed in accordance with EN 1992-4:2018, Design Method C or Technical Report CEN/TR 17079.
- In case of requirements to resistance to fire local spalling of the concrete cover must be avoided.

### Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Use of the fastener only as supplied by the manufacturer without exchanging the components of the fastener.
- Anchor installation in accordance with the manufacturer's specifications and drawings and using the appropriate tools.
- Check of concrete being well compacted, e.g. without significant voids.
- Positioning of the drill holes without damaging the reinforcement.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of aborted hole or smaller distance if the aborted hole is filled with high strength mortar (e.g. FIS HB, FIS SB, FIS EM Plus, FIS V Plus) and if under shear or oblique tension load it is not on the direction of the load application.

fischer Ceiling Anchor FDZ


Intended use  
Specifications

**Annex B 1**

Appendix 3 / 6

**Table B2.1:** Installation parameters

Size			FDZ					
			6/5 K	6/5	6/35 K	6/35		
Thickness of the fixture	$t_{\text{fix}}$	$\leq$	5		35			
Nominal drill hole diameter	$d_0$	[mm]	6					
Diameter of clearance hole in the fixture	$d_f$		7					
Maximum drill bit diameter	$d_{\text{cut,max}}$		6,40					
Effective embedment depth	$h_{\text{ef}}$		25	32	25	32		
Depth of drill hole to deepest point	with hole cleaning without hole cleaning		$h_1$	$\geq$	30	37	30	37
					35	42	35	42
Minimum thickness of concrete member	$h_{\text{min}}$		80					

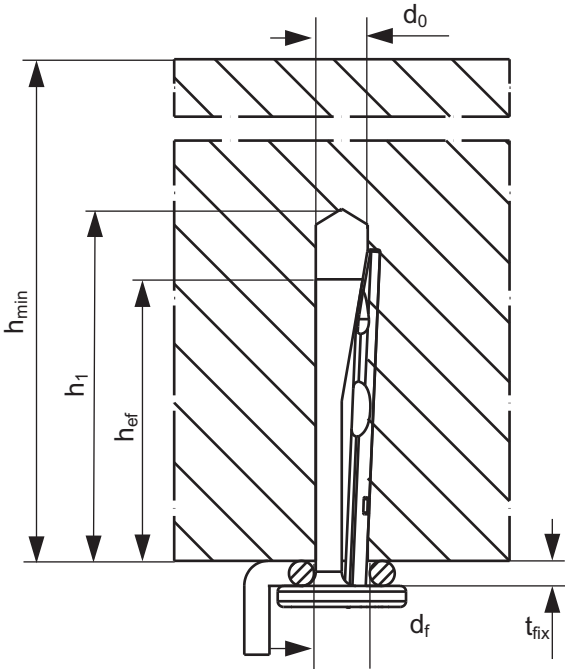


(Figure not to scale)


fischer Ceiling Anchor FDZ

Intended use  
Installation parameters


## Installation instructions




1. Drill the hole: hammer or hollow drilling only.




2. Clean the drill hole (only relates to hammer drilling).




3. Cleaning of the drill hole not necessary, if the drill hole is 5 mm deeper (only relates to hammer drilling).



4. Set the fastener: Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.



5. Set the pin, until flush to the surface: Positioning of the drill holes without damaging the reinforcement.



6. Installed fastener: In case of aborted hole: New drilling at a minimum distance twice the depth of aborted hole away of or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of the load application.

*(Figures not to scale)*

**fischer Ceiling Anchor FDZ**

**Intended use**

Installation instructions

**Annex B 3**

Appendix 5 / 6

**Table C1.1: Characteristic resistance for design method C**

Size			FDZ 6	
For all load directions and for all failures modes				
Effective embedment depth		$h_{ef}$ [mm]	25	32
Characteristic resistance in cracked and uncracked concrete	C12/15	$F_{Rk}$ [kN]	1,0	1,5
	C20/25 to C50/60		1,5	2,0
Characteristic	edge distance	$c_{cr,N} = c_{min}$	70	60
	spacing	$s_{cr,N} = s_{min}$	60	50
Partial safety factor		$\gamma_M^{(2)}$ [-]	1,5	
Shear load with lever arm				
Characteristic bending resistance		$M^0_{Rk,s}$ [Nm]	4,4	
Partial safety factor for steel failure		$\gamma_{Ms}^{(1)}$ [-]	1,25	

<sup>1)</sup> In absence of other national regulations.

<sup>2)</sup> The installation safety factor  $\gamma_2 = \gamma_{inst} = 1,0$  is included.

**Table C1.2: Characteristic resistance under fire exposure for all effective embedment depths**

Size			FDZ 6	
For all load directions				
R30	Characteristic resistance	$F_{Rk,fi30}$	[kN]	1,00
R60		$F_{Rk,fi60}$		0,50
R90		$F_{Rk,fi90}$		0,34
R120		$F_{Rk,fi120}$		0,26
R180		$F_{Rk,fi180}$		0,17
Spacing and edge distance				
R30 – R180		$s_{cr,fi}$	[mm]	200
		$c_{cr,fi}$		150
Shear load with lever arm				
R30	Characteristic bending resistance	$M^0_{Rk,s,fi30}$	[Nm]	0,67
R60		$M^0_{Rk,s,fi60}$		0,33
R90		$M^0_{Rk,s,fi90}$		0,22
R120		$M^0_{Rk,s,fi120}$		0,16
R180		$M^0_{Rk,s,fi180}$		0,11

For fire exposure from one side  $c_{min}$  and  $s_{min}$  see Table C1.1.

For fire exposure from more than one side  $c_{min} \geq 300$  mm.

**fischer Ceiling Anchor FDZ****Performances**

Characteristic resistance and  
characteristic resistance under fire exposure

**Annex C 1**

Appendix 6 / 6