

DECLARATION OF PERFORMANCE

DoP 0309

for fischer injection system FIS RC II (Bonded fastener for use in concrete)

EN

1. Unique identification code of the product-type: DoP 0309
2. Intended use/es: Post-installed fastening in cracked or uncracked concrete, see appendix, especially annexes B1 - B10.
3. Manufacturer: fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Germany
4. Authorised representative: –
5. System/s of AVCP: 1
6. European Assessment Document: EAD 330499-01-0601, Edition 04/2020
 European Technical Assessment: ETA-22/0501; 2022-09-20
 Technical Assessment Body: DIBt- Deutsches Institut für Bautechnik
 Notified body/ies: 2873 TU Darmstadt
7. Declared performance/s:
Mechanical resistance and stability (BWR 1)
Characteristic resistance to tension load (static and quasi-static loading):
 Resistance to steel failure: Annex C1
 Resistance to combined pull- out and concrete cone failure: Annexes C2 - C4
 Resistance to concrete cone failure: Annex C2
 Edge distance to prevent splitting under load: Annex C2
 Robustness: Annexes C2 - C4
 Maximum installation torque: Annexes B4
 Minimum edge distance and spacing: Annexes B3 - B5
Characteristic resistance to shear load (static and quasi-static loading):
 Resistance to steel failure: Annex C1
 Resistance to pry-out failure: Annex C2
 Resistance to concrete edge failure: Annex C2
Displacements under short-term and long-term loading:
 Displacements under short-term and long-term loading: Annex C5
Characteristic resistance and displacements for seismic performance categories C1 and C2:
 Resistance to tension load, displacements, category C1: NPD
 Resistance to tension load, displacements, category C2: NPD
 Resistance to shear load, displacements, category C1: NPD
 Resistance to shear load, displacements, category C2: NPD
 Factor annular gap: NPD
Hygiene, health and the environment (BWR 3)
 Content, emission and/or release of dangerous substances: NPD
8. Appropriate Technical Documentation and/or –
Specific Technical Documentation:

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:



Dr.-Ing. Oliver Geibig, Managing Director Business Units & Engineering
 Tümlingen, 2022-10-24



Jürgen Grün, Managing Director Chemistry & Quality

This DoP has been prepared in different languages. In case there is a dispute on the interpretation the English version shall always prevail.

The Appendix includes voluntary and complementary information in English language exceeding the (language-neutrally specified) legal requirements.

Specific Part

1 Technical description of the product

The "fischer injection system FIS RC II" is a bonded fastener consisting of a cartridge with injection mortar fischer FIS RC II and a steel element according to Annex A3.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B 3 to B 6, C 1 to C 4
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 1 and C 2
Displacements under short-term and long-term loading	See Annex C 5
Characteristic resistance and displacements for seismic performance categories C1 and C2	No performance assessed

3.2 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed


4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330499-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1


Installation conditions part 1

Reinforcing bar

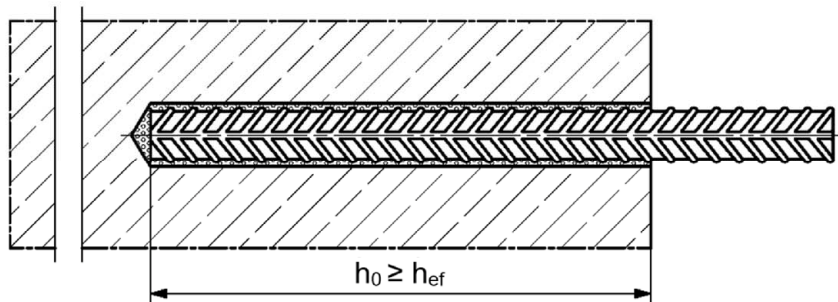


fischer rebar anchor FRA

Pre-positioned installation

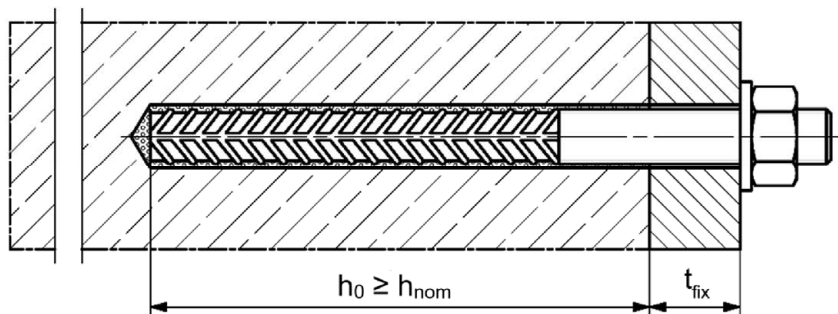

Push through installation (annular gap filled with mortar)

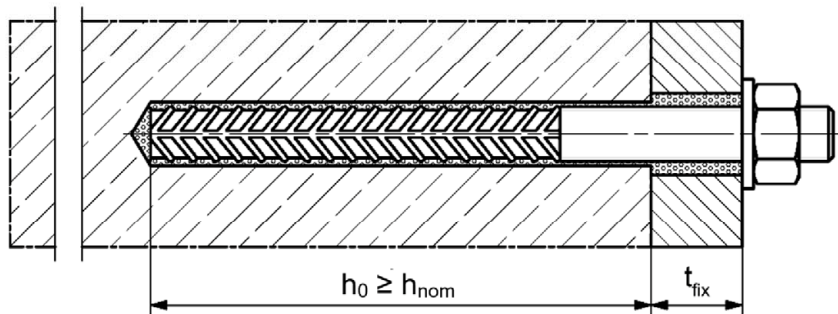

Figures not to scale

h_0 = drill hole depth

h_{ef} = effective embedment depth

t_{fix} = thickness of fixture

h_{nom} = overall fastener embedment depth in the concrete



fischer injection system FIS RC II

Product description
Installation conditions part 1


Annex A 1
Appendix 3 / 21

Overview system components part 1



Injection cartridge (shuttle cartridge) with sealing cap; Sizes: 360 ml, 825 ml



Imprint: fischer FIS RC II, processing notes, shelf-life, piston travel scale (optional), curing times and processing times (depending on temperature), hazard code, size, volume/weight




Injection cartridge (coaxial cartridge) with sealing cap; Sizes: 300 ml, 380 ml, 400 ml, 410 ml




Imprint: fischer FIS RC II, processing notes, shelf-life, piston travel scale (optional), curing times and processing times (depending on temperature), hazard code, size, volume/weight





Static mixer FIS MR Plus for injection cartridges up to 410 ml



Static mixer FIS JMR for injection cartridges with 825 ml



Injection adapter and extension tube Ø 9 for static mixer FIS MR Plus; Injection adapter and extension tube Ø 9 or Ø 15 for static mixer FIS JMR



fischer cleaning brush BS



Blow-out pump AB G



or

Compressed-air cleaning tool:



Figures not to scale

fischer injection system FIS RC II

System description

Overview system components part 1; cartridges / static mixer / accessories

Annex A 2

Appendix 4 / 21

Overview system components part 2

Reinforcing bar

Nominal diameter: $\phi 8$, $\phi 10$, $\phi 12$, $\phi 14$, $\phi 16$, $\phi 20$, $\phi 25$, $\phi 28$




fischer rebar anchor FRA

Size: M12, M16, M20, M24



washer / hexagon nut

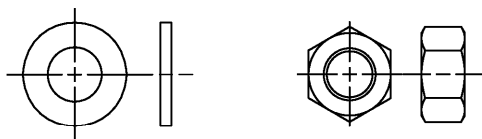

Figures not to scale

fischer injection system FIS RC II





System description
Overview system components part 2; steel components

Annex A 3
Appendix 5 / 21

Table A4.1: Materials			
Part	Designation	Material	
1	Injection cartridge	Mortar, hardener, filler	
	Steel grade	Stainless steel R	High corrosion resistant steel HCR
		acc. to EN 10088-1:2014 Corrosion resistance class CRC III acc. to EN 1993-1-4: 2006+A1:2015	acc. to EN 10088-1:2014 Corrosion resistance class CRC V acc. to EN 1993-1-4: 2006+A1:2015
2	Washer ISO 7089:2000 for fischer rebar anchor FRA	1.4401; 1.4404; 1.4578;1.4571; 1.4439; 1.4362; EN 10088-1:2014	1.4565; 1.4529; EN 10088-1:2014
3	Hexagon nut for fischer rebar anchor FRA	Property class 80 acc. to fischer specification for fischer rebar anchor FRA or EN ISO 3506-2:2020 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 80 acc. to fischer specification for fischer rebar anchor FRA or EN ISO 3506-2:2020 1.4565; 1.4529 EN 10088-1:2014
4	Reinforcing bar EN 1992-1-1:2004 and AC:2010, Annex C	Bars and de-coiled rods, class B or C with f_{yk} and k according to NDP or NCI according to EN 1992-1-1/NA $f_{uk} = f_{tk} = k \cdot f_{yk}$	
5	fischer rebar anchor FRA	Rebar part: Bars and de-coiled rods class B or C with f_{yk} and k according to NDP or NCI of EN 1992-1-1:2004+AC:2010 $f_{uk} = f_{tk} = k \cdot f_{yk}$	Threaded part: Property class PC 80, EN ISO 3506-1:2020 1.4401, 1.4404, 1.4571, 1.4578, 1.4439, 1.4362, 1.4062 acc. to EN 10088-1:2014 Corrosion resistance class CRC III acc. to EN 1993-1-4:2006+A1:2015 1.4565; 1.4529 acc. to EN 10088-1:2014 Corrosion resistance class CRC V acc. to EN 1993-1-4: 2006+A1:2015
fischer injection system FIS RC II			Annex A 4 Appendix 6 / 21
Product description Materials			

Specifications of intended use part 1

Table B1.1: Overview use and performance categories

Anchorages subject to		FIS RC II with ...			
		Reinforcing bar 		fischer rebar anchor FRA 	
Hammer drilling with standard drill bit 		all sizes			
Hammer drilling with hollow drill bit (fischer „FHD“, Heller „Duster Expert“; Bosch „Speed Clean“, Hilti „TE-CD, TE-YD“, DreBo „D-Plus“, DreBo „D-Max“) 		Nominal drill bit diameter (d ₀) 12 mm to 35 mm			
Static and quasi static loading, in	uncracked concrete	all sizes	Tables: C1.1 C2.1 C3.1 C5.1	all sizes	Tables: C1.2 C2.1 C4.1 C5.2
	cracked concrete				
Use category	I1 dry or wet concrete	all sizes			
	I2 water filled hole	_1)		_1)	
Seismic performance category	C1 ¹⁾	_1)		_1)	
	C2 ¹⁾				
Installation direction		D3 (downward and horizontal and upwards installation)			
Installation temperature		T _{i,min} = -5 °C to T _{i,max} = +40 °C			
In-service temperature	Temperature range I	-40 °C to +80 °C		(max. short term temperature +80 °C ; max. long term temperature +50 °C)	
	Temperature range II	-40 °C to +120°C		(max. short term temperature +120 °C ; max. long term temperature +72 °C)	

¹⁾ Performance not assessed

fischer injection system FIS RC II

Intended use
Specifications part 1

Annex B 1

Appendix 7 / 21

Specifications of intended use part 2

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres of strength classes C20/25 to C50/60 according to EN 206:2013+A1:2016.

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (stainless steel or high corrosion resistant steel).
- For all other conditions according to EN1993-1-4:2015 corresponding to corrosion resistance classes to Annex A 5 table 5.1.

Design:

- Fastenings have to be designed under the responsibility of an engineer with experienced in fastenings and concrete work.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Fastenings are designed in accordance with:
EN 1992-4:2018 and EOTA Technical Report TR 055, Edition February 2018.

Installation:

- Fastener installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Fastenings depth should be marked and adhered to installation.

fischer injection system FIS RC II

Intended use
Specifications part 2

Annex B 2
Appendix 8 / 21

Table B3.1: Installation parameters for reinforcing bars

Nominal diameter of the bar		ϕ	8 ¹⁾		10 ¹⁾		12 ¹⁾		14	16	20	25	28
Nominal drill hole diameter	d ₀	[mm]	10	12	12	14	14	16	18	20	25	30	35
Drill hole depth	h ₀		h ₀ = h _{ef}										
Effective	h _{ef,min}		60		60		70		75	80	90	100	112
embedment depth	h _{ef,max}		160		200		240		280	320	400	500	560
Simplified spacing and edge distance ²⁾	s = c		40		45		55		60	65	85	110	130
Minimum thickness of concrete member	h _{min}		h _{ef} + 30 (≥ 100)					h _{ef} + 2d ₀					


1) Both drill hole diameters can be used
2) Detailed calculation according to Annex B 5 and B 6

Reinforcing bar



- The minimum value of related rib area $f_{R,min}$ must fulfil the requirements of EN 1992-1-1:2004+AC:2010
- The rib height must be within the range: $0,05 \cdot \phi \leq h_{rib} \leq 0,07 \cdot \phi$
(ϕ = Nominal diameter of the bar, h_{rib} = rib height)

Installation conditions:

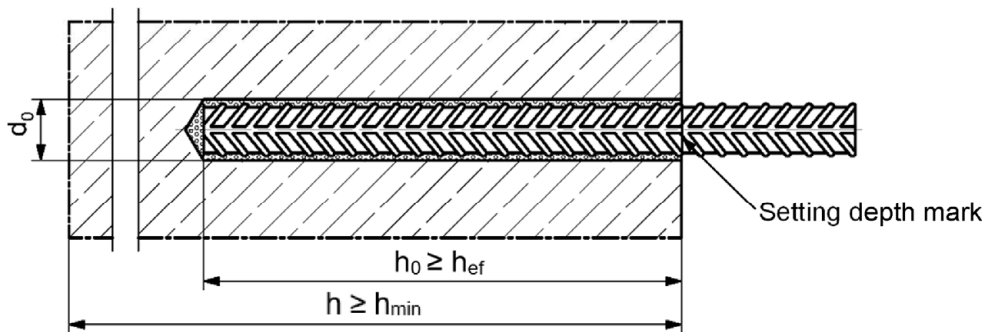

Figures not to scale



fischer injection system FIS RC II

Intended use
Installation parameters reinforcing bars

Table B4.1: Installation parameters for fischer rebar anchor FRA

Rebar anchor FRA			Thread	M12 ¹⁾		M16	M20	M24	
Nominal diameter of the bar		ϕ	[mm]	12		16	20	25	
Nominal drill hole diameter		d ₀		14	16	20	25	30	35
Drill hole depth		h ₀		h _{ef} + l _e					
Effective embedment depth	h _{ef,min}			70		80	90	96	
	h _{ef,max}			140		220	300	380	
Distance concrete surface to welded joint		l _e		100					
Simplified spacing and edge distance ²⁾		s = c		55		65	85	105	
Maximum Diameter of clearance hole in the fixture	pre-positioned anchorage	d _f		14		18	22	26	
	push through anchorage	d _f	18		22	26	32	- ³⁾	
Minimum thickness of concrete member		h _{min}	h ₀ + 30	h ₀ + 2d ₀					
Maximum torque moment for attachment of the fixture		max T _{inst}	[Nm]	40		60	120	150	

- 1) Both drill hole diameters can be used
2) Detailed calculation according to Annex B 5 and B 6
3) Performance not assessed

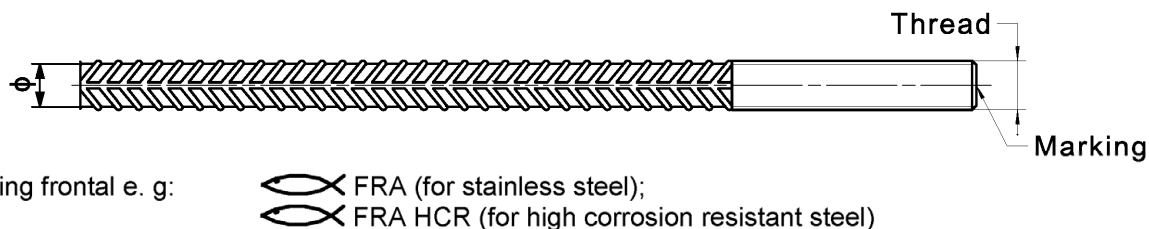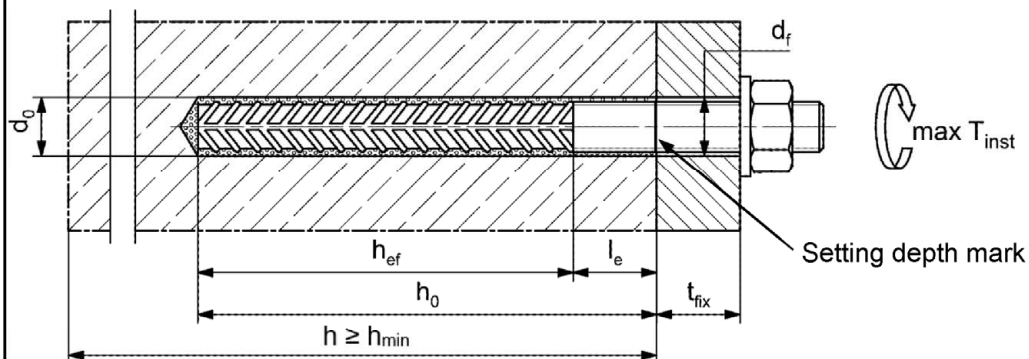fischer rebar anchor FRA**Installation conditions:**

Figures not to scale


fischer injection system FIS RC II

Intended use
Installation parameters rebar anchor FRA

Annex B 4


Appendix 10 / 21

Table B6.1: Effective projecting area $A_{sp,t}$ with concrete member thickness $h > h_{ef} + 1,5 \cdot c$ and $h \geq h_{min}$

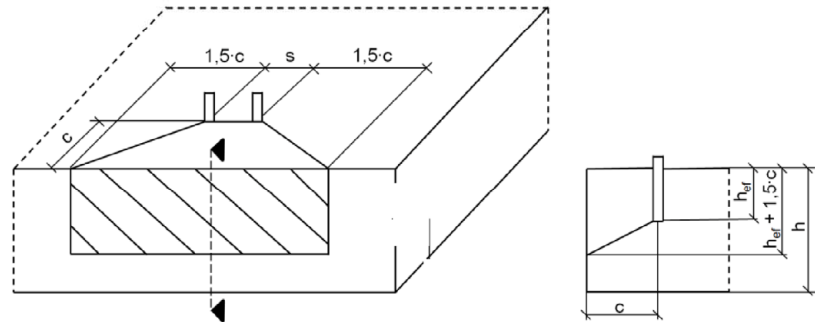

Single anchor	$A_{sp,t} = (3 \cdot c) \cdot (h_{ef} + 1,5 \cdot c)$	[mm ²]	with $c \geq c_{min}$
Group of anchors with $s > 3 \cdot c$	$A_{sp,t} = (6 \cdot c) \cdot (h_{ef} + 1,5 \cdot c)$	[mm ²]	
Group of anchors with $s \leq 3 \cdot c$	$A_{sp,t} = (3 \cdot c + s) \cdot (h_{ef} + 1,5 \cdot c)$	[mm ²]	with $c \geq c_{min}$ and $s \geq s_{min}$

Table B6.2: Effective projecting area $A_{sp,t}$ with concrete member thickness $h \leq h_{ef} + 1,5 \cdot c$ and $h \geq h_{min}$

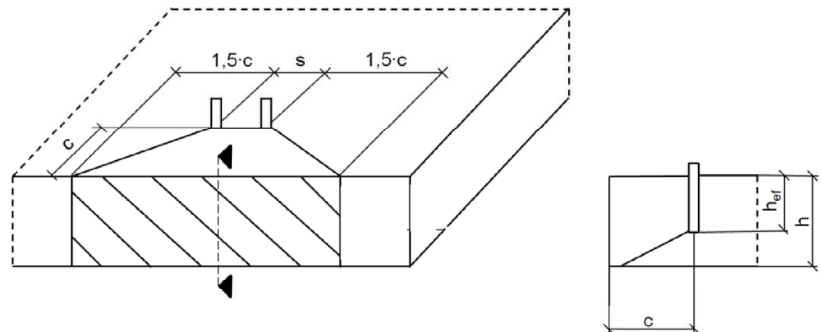

Single anchor	$A_{sp,t} = 3 \cdot c \cdot \text{existing } h$	[mm ²]	with $c \geq c_{min}$
Group of anchors with $s > 3 \cdot c$	$A_{sp,t} = 6 \cdot c \cdot \text{existing } h$	[mm ²]	
Group of anchors with $s \leq 3 \cdot c$	$A_{sp,t} = (3 \cdot c + s) \cdot \text{existing } h$	[mm ²]	with $c \geq c_{min}$ and $s \geq s_{min}$


Edge distance and axial spacing shall be rounded up to at least smooth 5 mm-steps

Figures not to scale

Table B7.1: Parameters of the cleaning brush BS (steel brush with steel bristles)

The size of the cleaning brush refers to the drill hole diameter

Nominal drill hole diameter	d_0	[mm]	10	12	14	16	18	20	25	35
Steel brush diameter BS	d_b		11	14	16	20		25	27	40

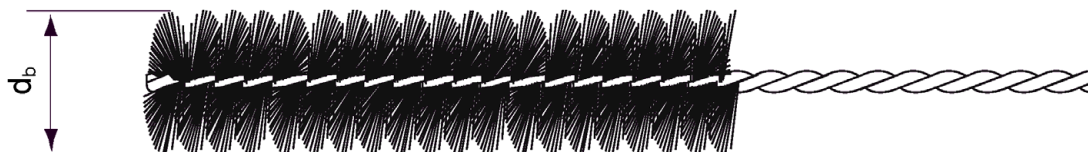**Table B7.2: Conditions for use static mixer without an extension tube**

Nominal drill hole diameter	d_0	[mm]	10	12	14	16	18	20	25	30	35
Drill hole depth h_0 by using	FIS MR Plus		≤ 90		≤ 120	≤ 140	≤ 150	≤ 160	≤ 210		
	FIS JMR		-	-	≤ 90	≤ 160	≤ 180	≤ 190	≤ 220	≤ 250	

Table B7.3 Maximum processing time of the mortar and minimum curing time
(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature)

Temperature at anchoring base [°C]	Maximum processing time t_{work}	Minimum curing time ¹⁾ t_{cure}
	FIS RC II	FIS RC II
-5 to 0 ²⁾	-	24 h
> 0 to 5 ²⁾	13 min	3 h
> 5 to 10	9 min	90 min
> 10 to 20	5 min	60 min
> 20 to 30	4 min	45 min
> 30 to 40	2 min	35 min

1) In wet concrete or water filled holes the curing times must be doubled

2) Minimal cartridge temperature +5°C

fischer injection system FIS RC II

Intended use







Cleaning brush (steel brush)
Processing time and curing time

Annex B 7

Appendix 13 / 21



Installation instructions part 1

Drilling and cleaning the hole (hammer drilling with standard drill bit)

1		Drill the hole. Nominal drill hole diameter d_0 and drill hole depth h_0 see tables B3.1, B4.1.	
2		Clean the drill hole: For $h_{ef} \leq 12d$ and $d_0 < 18$ mm blow out the hole four times by hand.	 For $h_{ef} > 12d$ and / or $d_0 \geq 18$ mm blow out the hole four times with oil-free compressed air ($p \geq 6$ bar). Use suitable compressed-air nozzle.
3		Brush the drill hole four times. For drill hole diameter ≥ 30 mm use a power drill. For deep holes use an extension. Use suitable brushes (see table B7.1)	
4		Clean the drill hole: For $h_{ef} \leq 12d$ and $d_0 < 18$ mm blow out the hole four times by hand.	 For $h_{ef} > 12d$ and / or $d_0 \geq 18$ mm blow out the hole four times with oil-free compressed air ($p \geq 6$ bar). Use suitable compressed-air nozzle.

Go to step 5

Drilling and cleaning the hole (hammer drilling with hollow drill bit)

1		Check a suitable hollow drill (see table B1.1) for correct operation of the dust extraction.	
2		Use a suitable dust extraction system, e.g. fischer FVC 35 M or a comparable dust extraction system with equivalent performance data. Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Nominal drill hole diameter d_0 and drill hole depth h_0 see tables B3.1, B4.1.	

Go to step 5

fischer injection system FIS RC II







Intended use
Installation instructions part 1

Annex B 8

Appendix 14 / 21




Installation instructions part 2

Preparing the cartridge

5		Mark the setting depth of the steel element.
6		Remove the sealing cap. Screw on the static mixer (the spiral in the static mixer must be clearly visible).
7	 	Place the cartridge into the dispenser.
8	 	Extrude approximately 10 cm of material out until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey.

Go to step 9

Injection of the mortar

9	 <p>For $h_0 = h_{ef}$ fill approximately 2/3 of the drill hole with mortar. For $h_0 > h_{ef}$ more mortar is needed. Always begin from the bottom of the hole and avoid bubbles.</p>	 <p>The conditions for mortar injection without extension tube can be found in table B7.2. For deeper drill holes, than those mentioned in table B7.2, use a suitable extension tube.</p>	 <p>For deep holes ($h_0 > 250$ mm) use an injection adapter.</p>
---	---	---	---

Go to step 10

fischer injection system FIS RC II

Intended use
Installation instructions part 2

Annex B 9

Appendix 15 / 21

Installation instructions part 3

Installation reinforcing bars and fischer rebar anchor FRA





10		<p>Only use clean and oil-free reinforcing bars or fischer FRA. Insert the rebar / fischer rebar anchor FRA slowly twisted into the borehole until the embedment mark is reached.</p> <p>Recommendation: Rotation back and forth of the reinforcement bar or the fischer rebar anchor FRA makes pushing easy.</p>		
		<p>When the setting depth mark is reached, excess mortar must be emerged from the mouth of the drill hole.</p>		
11		Wait for the specified curing time t_{cure} see table B7.3	12	 <p>Mounting the fixture $max T_{inst}$ for fischer rebar anchor FRA see table B4.1</p>

Table C1.1: Characteristic resistance to **steel failure** under **tension / shear loading** of **reinforcing bars**

Nominal diameter of the bar	ϕ	8	10	12	14	16	20	25	28
Characteristic resistance to steel failure under tension loading									
Characteristic resistance	$N_{Rk,s}$	[kN]	$A_s \cdot f_{uk}^{(2)}$						
Characteristic resistance to steel failure under shear loading									
Without lever arm									
Characteristic resistance	$V_{Rk,s}^0$	[kN]	$k_6^{(1)} \cdot A_s \cdot f_{uk}^{(2)}$						
Ductility factor	k_7	[-]	1,0						
With lever arm									
Characteristic resistance	$M_{Rk,s}^0$	[Nm]	$1,2 \cdot W_{el} \cdot f_{uk}^{(2)}$						
<p>1) In accordance with EN 1992-4:2018 section 7.2.2.3.1 $k_6 = 0,6$ for fasteners made of carbon steel with $f_{uk} \leq 500 \text{ N/mm}^2$ $= 0,5$ for fasteners made of carbon steel with $500 < f_{uk} \leq 1000 \text{ N/mm}^2$</p> <p>2) f_{uk} respectively must be taken from the specifications of the reinforcing bar</p>									

Table C1.2: Characteristic resistance to **steel failure** under **tension / shear loading** of **fischer rebar anchors FRA**

fischer rebar anchor FRA			M12	M16	M20	M24
Characteristic resistance to steel failure under tension loading						
Characteristic resistance	N _{Rk,s}	[kN]	62	111	173	263
Partial factor ¹⁾						
Partial factor	γ _{Ms,N}	[-]	1,4			
Characteristic resistance to steel failure under shear loading						
Without lever arm						
Characteristic resistance	V ⁰ _{Rk,s}	[kN]	34	63	98	141
Ductility factor	k ₇	[-]	1,0			
With lever arm						
Characteristic resistance	M ⁰ _{Rk,s}	[Nm]	105	266	519	898
Partial factor ¹⁾						
Partial factor	γ _{Ms,V}	[-]	1,25			

¹⁾ In absence of other national regulations

fischer injection system FIS RC II

Performance

Characteristic resistance to steel failure under tension / shear loading of reinforcing bars and fischer rebar anchors FRA

Annex C 1

Appendix 17 / 21

Table C2.1: Characteristic resistance to **concrete failure** under **tension / shear loading**

Size			All sizes									
Characteristic resistance to concrete failure under tension loading												
Installation factor		γ_{inst}	[-]	See annex C 3 to C 4								
Factors for the compressive strength of concrete > C20/25												
Increasing factor ψ_c for cracked or uncracked concrete $\tau_{RK}(X,Y) = \psi_c \cdot \tau_{RK}(C20/25)$	C25/30		[-]	1,05								
	C30/37			1,10								
	C35/45			1,15								
	C40/50			1,19								
	C45/55			1,22								
	C50/60			1,26								
Splitting failure												
Edge distance	$h / h_{ef} \geq 2,0$		[mm]	1,0 h_{ef}								
	$2,0 > h / h_{ef} > 1,3$			4,6 h_{ef} - 1,8 h								
	$h / h_{ef} \leq 1,3$			2,26 h_{ef}								
Spacing		$s_{cr,sp}$		2 $c_{cr,sp}$								
Concrete cone failure												
Uncracked concrete		$k_{ucr,N}$	[-]	11,0								
Cracked concrete		$k_{cr,N}$		7,7								
Edge distance		$c_{cr,N}$	[mm]	1,5 h_{ef}								
Spacing		$s_{cr,N}$		2 $c_{cr,N}$								
Factors for sustained tension loading												
Temperature range			[°C]	50 / 80				72 / 120				
Factor		Ψ_{sus}^0	[-]	0,74				0,87				
Characteristic resistance to concrete failure under shear loading												
Installation factor		γ_{inst}	[-]	1,0								
Concrete pry-out failure												
Factor for pry-out failure		k_8	[-]	2,0								
Concrete edge failure												
Effective length of fastener in shear loading		l_f	[mm]	for $d_{nom} \leq 24$ mm: min (h_{ef} ; 12 d_{nom}) for $d_{nom} > 24$ mm: min (h_{ef} ; 8 d_{nom} ; 300 mm)								
Calculation diameters												
Size				M12		M16		M20		M24		
fischer rebar anchor FRA		d_{nom}	[mm]	12		16		20		25		
Size (nominal diameter of the bar)			ϕ	[mm]	8	10	12	14	16	20	25	28
Reinforcing bar		d_{nom}	8		10	12	14	16	20	25	28	

¹⁾ Anchor type not part of the assessment

fischer injection system FIS RC II

Performance

Characteristic resistance to concrete failure under tension / shear loading

Annex C 2

Appendix 18 / 21

Table C3.1: Characteristic resistance to **combined pull-out and concrete failure** for **reinforcing bars** in hammer drilled holes; **uncracked or cracked concrete**

Nominal diameter of the bar			ϕ	8	10	12	14	16	20	25	28	
Combined pull-out and concrete cone failure												
Calculation diameter			d	[mm]	8	10	12	14	16	20	25	28
Uncracked concrete												
Characteristic bond resistance in uncracked concrete C20/25												
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)												
Temperature range	I: 50 °C / 80 °C		$\tau_{Rk,ucr}$	[N/mm ²]	11,0	11,0	11,0	10,0	10,0	9,5	9,0	8,5
	II: 72 °C / 120 °C				9,5	9,5	9,0	8,5	8,5	8,0	7,5	7,0
Installation factor												
Dry or wet concrete			γ_{inst}	[-]	1,0							
Cracked concrete												
Characteristic bond resistance in cracked concrete C20/25												
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)												
Temperature range	I: 50 °C / 80 °C		$\tau_{Rk,cr}$	[N/mm ²]	- ¹⁾	3,0	5,0	5,0	5,0	4,5	4,0	4,0
	II: 72 °C / 120 °C				- ¹⁾	3,0	4,5	4,5	4,5	4,0	3,5	3,5
Installation factor												
Dry or wet concrete			γ_{inst}	[-]	1,0							

1) Performance not assessed

fischer injection system FIS RC II

Performance

Characteristic resistance to combined pull-out and concrete failure for reinforcing bars

Annex C 3

Appendix 19 / 21

Table C4.1: Characteristic resistance to combined pull-out and concrete failure for fischer rebar anchors FRA in hammer drilled holes; uncracked or cracked concrete

fischer rebar anchor FRA			M12	M16	M20	M24	
Combined pull-out and concrete cone failure							
Calculation diameter		d	[mm]	12	16	20	25
Uncracked concrete							
Characteristic bond resistance in uncracked concrete C20/25							
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)							
Temperature range	I: 50 °C / 80 °C		$\tau_{Rk,ucr}$ [N/mm ²]	11,0	10,0	9,5	9,5
	II: 72 °C / 120 °C			9,0	8,5	8,0	7,5
Installation factors							
Dry or wet concrete		γ_{inst}	[-]	1,0			
Cracked concrete							
Characteristic bond resistance in cracked concrete C20/25							
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)							
Temperature range	I: 50 °C / 80 °C		$\tau_{Rk,cr}$ [N/mm ²]	5,0	5,0	4,5	4,0
	II: 72 °C / 120 °C			4,5	4,5	4,0	3,5
Installation factors							
Dry or wet concrete		γ_{inst}	[-]	1,0			

fischer injection system FIS RC II

Performance

Characteristic resistance to combined pull-out and concrete failure for fischer rebar anchor FRA

Annex C 4

Appendix 20 / 21

Table C5.1: Displacements for reinforcing bars									
Nominal diameter of the bar	ϕ	8	10	12	14	16	20	25	28
Displacement-Factors for tension loading ¹⁾									
Uncracked concrete; Temperature range I, II									
δ_{N0} -Factor	[mm/(N/mm ²)]	0,09	0,09	0,10	0,10	0,10	0,10	0,10	0,11
$\delta_{N\infty}$ -Factor		0,10	0,10	0,12	0,12	0,12	0,12	0,12	0,13
Cracked concrete; Temperature range I, II									
δ_{N0} -Factor	[mm/(N/mm ²)]	– ³⁾	0,12	0,13	0,13	0,13	0,13	0,13	0,14
$\delta_{N\infty}$ -Factor		– ³⁾	0,27	0,30	0,30	0,30	0,30	0,30	0,35
Displacement-Factors for shear loading ²⁾									
Uncracked or cracked concrete; Temperature range I, II									
δ_{V0} -Factor	[mm/kN]	0,11	0,11	0,10	0,10	0,10	0,09	0,09	0,08
$\delta_{V\infty}$ -Factor		0,12	0,12	0,11	0,11	0,11	0,11	0,10	0,10
1) Calculation of effective displacement: $\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau$ $\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau$ τ : acting bond strength under tension loading					2) Calculation of effective displacement: $\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V$ $\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V$ V : acting shear loading				
3) Performance not assessed									
Table C5.2: Displacements for fischer rebar anchors FRA									

Table C5.2: Displacements for fischer rebar anchors FRA

fischer rebar anchor FRA		M12	M16	M20	M24
Displacement-Factors for tension loading ¹⁾					
Uncracked concrete; Temperature range I, II					
δ _{N0} -Factor	[mm/(N/mm ²)]	0,10	0,10	0,10	0,10
δ _{N∞} -Factor		0,12	0,12	0,12	0,13
Cracked concrete; Temperature range I, II					
δ _{N0} -Factor	[mm/(N/mm ²)]	0,12	0,13	0,13	0,13
δ _{N∞} -Factor		0,30	0,30	0,30	0,35
Displacement-Factors for shear loading ²⁾					
Uncracked or cracked concrete; Temperature range I, II					
δ _{V0} -Factor	[mm/kN]	0,10	0,10	0,09	0,09
δ _{V∞} -Factor		0,11	0,11	0,10	0,10
<div>1) Calculation of effective displacement: $\delta_{N0} = \delta_{N0\text{-Factor}} \cdot \tau$ $\delta_{N\infty} = \delta_{N\infty\text{-Factor}} \cdot \tau$ τ: acting bond strength under tension loading</div> <div>2) Calculation of effective displacement: $\delta_{V0} = \delta_{V0\text{-Factor}} \cdot V$ $\delta_{V\infty} = \delta_{V\infty\text{-Factor}} \cdot V$ V: acting shear loading</div>					
fischer injection system FIS RC II					Annex C 5 Appendix 21 / 21
Performance Displacements for reinforcing bars and fischer rebar anchors FRA					