



PRESTATIEVERKLARING



Nr. 0012 – NL

1. Unieke identificatiecode van het producttype: **fischer injectiesysteem fischer FIS EM**

2. Beoogd(e) gebruik(en):

Product	Beoogd gebruik
Metalen ankers voor gebruik in beton (zware lasten)	Voor bevestigen van constructieve elementen of veiligheidsrelevante onderdelen zoals verlaagde plafonds aan beton, zie bijlage, in het bijzonder bijlages B 1 tot en met B 10

3. Fabrikant: **fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Duitsland**

4. Gemachtigde: --

5. Het systeem of de systemen voor de beoordeling en verificatie van de prestatiebestendigheid: **1**

6a. Geharmoniseerde norm: ---

Aangemelde instantie(s): ---

6b. Europees beoordelingsdocument: **ETAG 001; 2013-04**

Europese technische beoordeling: **ETA-10/0012; 2015-03-19**

Technische beoordelingsinstantie: **DIBt**

Aangemelde instantie(s): **1343 – MPA Darmstadt**

7. Aangegeven prestatie(s):

Mechanische weerstand en stabiliteit (BWR 1)

Essentieel kenmerk	Prestatie
Karakteristieke waarden voor statische en quasi statische belastingen voor ontwerp volgens TR 029 of of CEN/TS 1992-4:2009, Verplaatsingen	Zie bijlage, in het bijzonder bijlages C 1 tot en met C 14
Karakteristieke weerstand voor seismische categorie C1 en C2 voor ontwerp volgens TR 045, verplaatsingen	Zie bijlage, in het bijzonder bijlages C 15 tot en met C 18

Veiligheid bij brand (BWR 2)

Essentieel kenmerk	Prestatie
Brandgedrag	Verankeringen voldoen aan de vereisten voor klasse A1
Brand weerstand	Geen prestatie bepaald (NPD)

8. Geëigende technische documentatie en/of specifieke technische documentatie: ---

De prestaties van het hierboven omschreven product zijn conform de aangegeven prestaties. Deze prestatieverklaring wordt in overeenstemming met Verordening (EU) nr. 305/2011 onder de exclusieve verantwoordelijkheid van de hierboven vermelde fabrikant verstrekt.

Ondertekend voor en namens de fabrikant door:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

i.V. A. Bucher

i.V. W. Hengesbach

Tumlingen, 2015-03-12

- Deze prestatieverklaring is opgesteld in verschillende talen. Bij een geschil over de interpretatie prevaleert de engelse versie.

- De bijlage bevat vrijwillige en aanvullende informatie in de Engelse taal boven op de (taal-neutraal gespecificeerde) wettelijke voorschriften.

Specific Part

1 Technical description of the product

The fischer injection system FIS EM is a bonded anchor consisting of a cartridge with injection mortar fischer FIS EM and a steel element. The steel element consist of

- a commercial threaded rod with washer and hexagon nut of sizes M8 to M30 or
- a fischer internal threaded anchor RG MI of sizes M8 to M20 or
- a deformed reinforcing bar of sizes $\phi = 8$ to 40 mm or
- a fischer rebar anchor FRA of sizes M12 to M24

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic values under static and quasi-static action for design according to TR 029 or CEN/TS 1992-4:2009, Displacements	See Annex C 1 to C 14
Characteristic values for seismic performance categories C1 and C2 for design according to Technical Report TR 045, Displacements	See Annex C 15 to C 18

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance determined (NPD)

3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

3.4 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

3.5 Protection against noise (BWR 5)

Not applicable.

3.6 Energy economy and heat retention (BWR 6)

Not applicable.

3.7 Sustainable use of natural resources (BWR 7)

The sustainable use of natural resources was not investigated.

3.8 General aspects

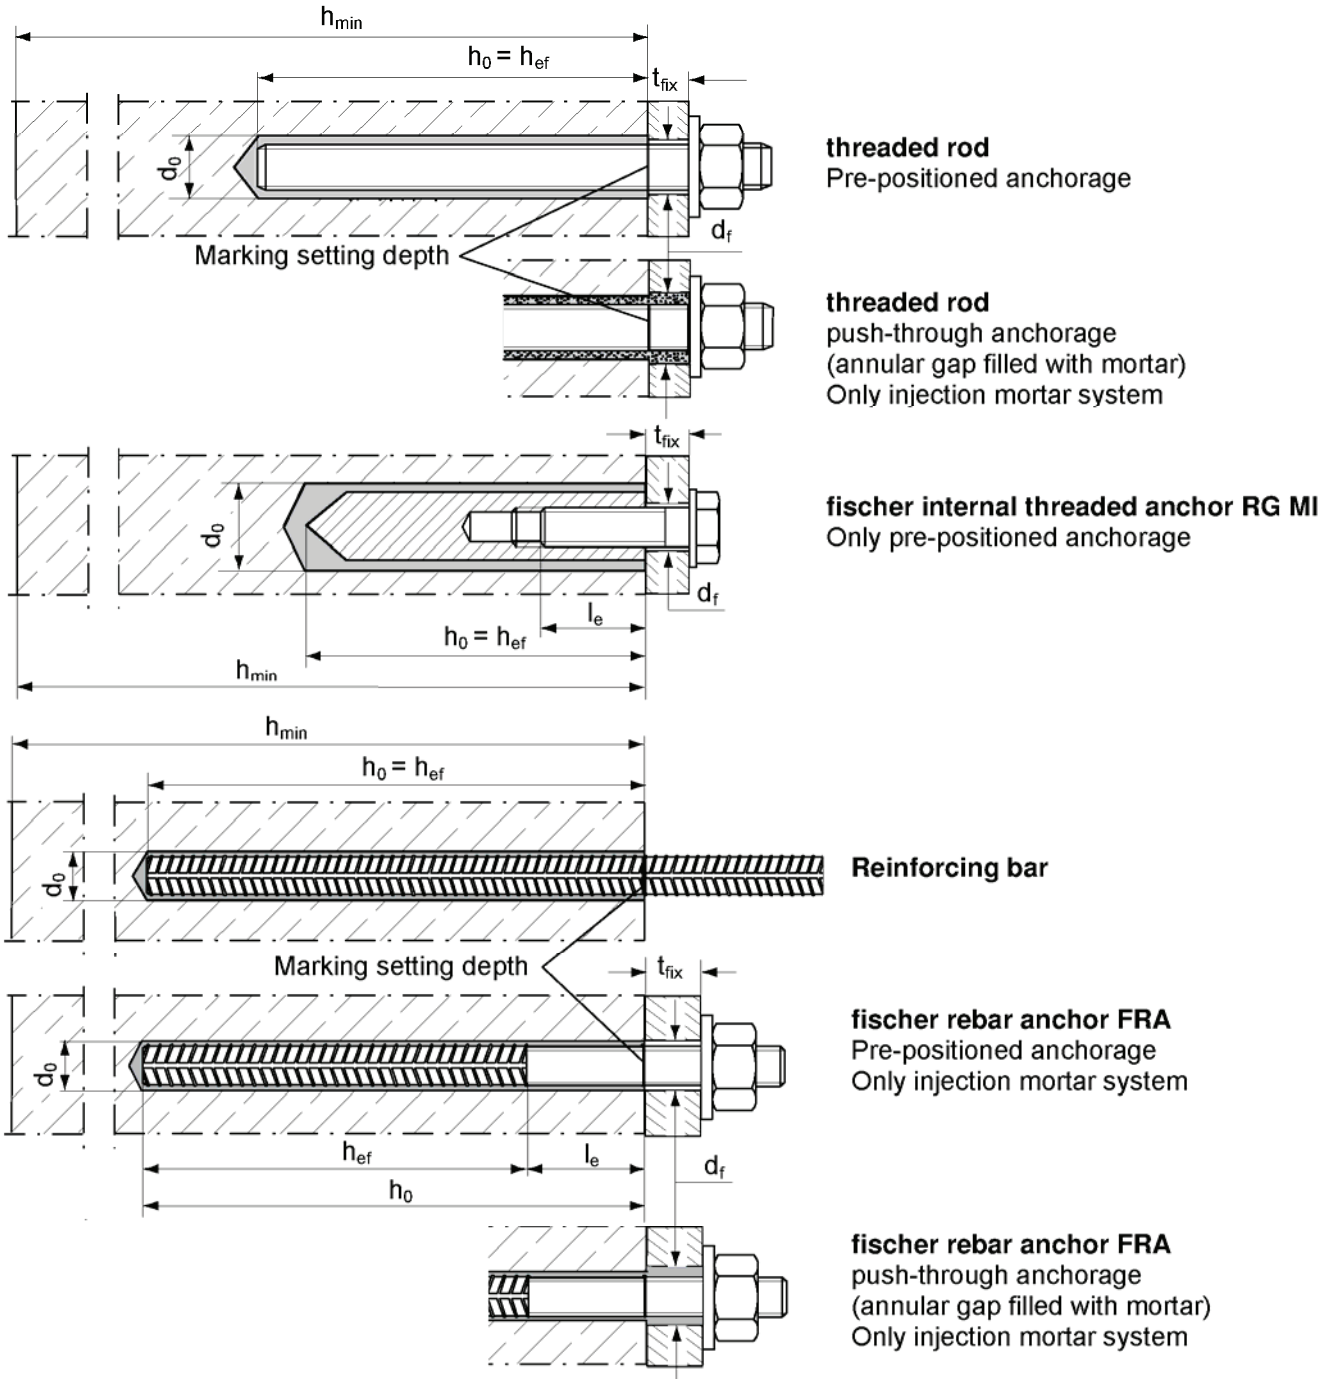
The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

According to Decision of the Commission of 24 June 1996 (96/582/EC) (OJ L 254 of 08.10.96 p. 62-65), the system of assessment and verification of constancy of performance (see Annex V and Article 65 Paragraph 2 to Regulation (EU) No 305/2011) given in the following table applies.

Product	Intended use	Level or class	System
Metal anchors for use in concrete (heavy-duty type)	For fixing and/or supporting concrete structural elements or heavy units such as cladding and suspended ceilings	—	1

Installation conditions



fischer injection system FIS EM

Product description
Installation conditions

Annex A 1

Sealing cap Injection-adapter threaded rod Size: M8, M10, M12, M14, M16, M20, M22, M24, M27, M30 fischer internal threaded anchor RG MI Size: M8, M10, M12, M16, M20 Reinforcing bar Size: Ø8, Ø10, Ø12, Ø14, Ø16, Ø18, Ø20, Ø22, Ø24, Ø25, Ø26, Ø28, Ø30, Ø32, Ø34, Ø36, Ø40 fischer rebar anchor FRA Size: M12, M16, M20, M24 Mortar cartridge (390 ml, 585 ml, 1100 ml, 1500 ml) Imprint: fischer FIS EM, processing notes, shelf-life, piston travel scale, curing times and processing times (depending on temperature), hazard code, size Static mixer FIS MR or UMR Extension tube Washer Hexagon nut Screw Threaded rod Washer Hexagon nut Marking setting depth Washer Hexagon nut Marking setting depth	fischer injection system FIS EM Product description Cartridges/Static mixer/ Steel elements Annex A 2
---	---

Table A1: Materials

Part	Designation	Material		
1	Mortar cartridge	Mortar, hardener, filler		
		Steel, zinc plated	Stainless steel A4	High corrosion-resistant steel C
2	Threaded rod	Property class 5.8 or 8.8; EN ISO 898-1: 2013 zinc plated $\geq 5\mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12\%$ fracture elongation	Property class 50, 70 or 80 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12\%$ fracture elongation	Property class 50 or 80 EN ISO 3506:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12\%$ fracture elongation
3	Washer ISO 7089:2000	zinc plated $\geq 5\mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	1.4565; 1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506:2009 1.4565; 1.4529 EN 10088-1:2014
5	fischer internal threaded anchor RG MI	Property class 5.8 or 8.8; ISO 898-1:2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K	Property class 70 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
6	Screw or threaded rod for fischer internal threaded anchor	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K	Property class 70 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
7	Reinforcing bar EN 1992-1-1:2004 and AC:2010, Annex C	Bars and de-coiled rods class B or C with f_{yk} and k according to NDP or NCL of EN 1992-1-1/NA:2013 $f_{uk} = f_{tk} = k \cdot f_{yk}$ (k see Annex B 5)		
8	Rebar anchor FRA	Rebar part: Bars and de-coiled rods class B or C with f_{yk} and k according to NDP or NCL of EN 1992-1-1/NA:2013 $f_{uk} = f_{tk} = k \cdot f_{yk}$ (k see Annex B 5) Threaded part: Property class 70 ISO 3506:2009 1.4565; 1.4529 EN 10088-1:2014		

fischer injection system FIS EM

Product description
 Materials
Annex A 3

Specifications of intended use (part 2)

Design:

- Anchorages have to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages under static or quasi-static actions are designed in accordance with TR 029 or CEN/TS 1992-4:2009
- Anchorages under seismic actions have to be designed in accordance with TR 045

Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: The hole shall be filled with mortar
- Marking and keeping the effective anchorage depth

Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

- Materials, dimensions and mechanical properties according to Annex A 3, Table A1
- Inspection certificate 3.1 according to EN 10204:2004, the documents should be stored
- Marking of embedment depth

fischer injection system FIS EM

Intended Use
Specifications (part 2)

Annex B 2

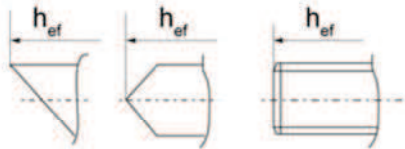
Table B2: Installation parameters for threaded rods

Size	[-]	M8	M10	M12	M14	M16	M20	M22	M24	M27	M30
Width across flat	SW	13	17	19	22	24	30	32	36	41	46
Nominal drill bit diameter	d_0 [mm]	12	14	14	16	18	24	25	28	30	35
Depth of drill hole	h_0 [mm]	$h_0 = h_{ef}$									
Effective anchorage depth	$h_{ef,min}$ [mm]	60	60	70	75	80	90	93	96	108	120
	$h_{ef,max}$ [mm]	160	200	240	280	320	400	440	480	540	600
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$ [mm]	40	45	55	60	65	85	95	105	120	140
Diameter of clearance hole in the fixture ¹⁾	pre-positioned anchorage d_f [mm]	9	12	14	16	18	22	24	26	30	33
	Push through anchorage d_f [mm]	14	16	16	18	20	26	28	30	33	40
Minimum thickness of concrete member	h_{min} [mm]	$h_{ef} + 30 \geq 100$				$h_{ef} + 2d_0$					
Maximum torque moment	$T_{inst,max}$ [Nm]	10	20	40	50	60	120	135	150	200	300


¹⁾ For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

fischer threaded rod:

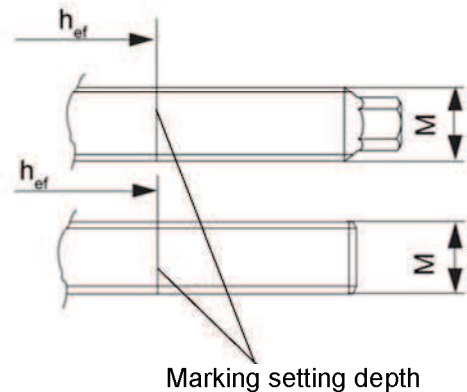
Alternative point geometry threaded rod FIS A



Alternative point geometry threaded rod RGM



Alternative head geometry threaded rod FIS A and RGM



Marking (on random place):

Property class 8.8 or high corrosion-resistant steel, property class 80: •

Stainless steel A4, property class 50 and high corrosion-resistant steel, property class 50: ••

fischer injection system FIS EM

Intended Use

Installation parameters threaded rods

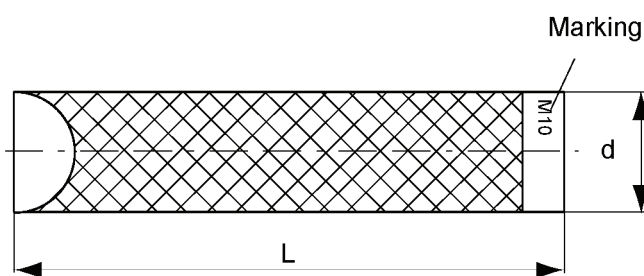
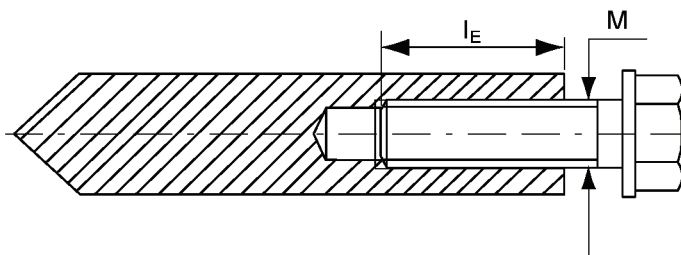
Annex B 3

Table B3: Installation parameters fischer internal threaded anchors RG MI

Size		M8	M10	M12	M16	M20
Diameter of anchor	d_H [mm]	12	16	18	22	28
Nominal drill bit diameter	d_0 [mm]	14	18	20	24	32
Drill hole depth	h_0 [mm]	$h_0 = h_{ef}$				
Effective anchorage depth ($h_{ef} = L_H$)	h_{ef} [mm]	90	90	125	160	200
Maximum torque moment	$T_{inst,max}$ [Nm]	10	20	40	80	120
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$ [mm]	55	65	75	95	125
Diameter of clearance hole in the fixture ¹⁾	d_f [mm]	9	12	14	18	22
Minimum thickness of concrete member	h_{min} [mm]	120	125	165	205	260
Maximum screw-in depth	$l_{E,max}$ [mm]	18	23	26	35	45
Minimum screw-in depth	$l_{E,min}$ [mm]	8	10	12	16	20

¹⁾ For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

fischer internal threaded anchor RG MI



Marking: Anchor size

e.g.: **M10**

Stainless steel additional **A4**

e.g.: **M10 A4**

High corrosion-resistant steel additional **C**

e.g.: **M10 C**

Fastening screw or threaded rods (including nut and washer) must comply with the appropriate material and strength class of Table A1

fischer injection system FIS EM

Intended Use

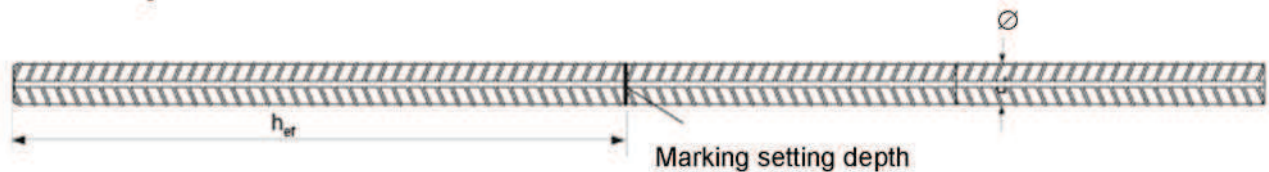
Installation parameters fischer internal threaded anchors RG MI

Annex B 4

Table B4: Installation parameters reinforcing bars

Reinforcing bar $\varnothing$		8	10	12	14	16	18	20	22	24
Nominal drill bit diameter	d_0 [mm]	12	14	16	18	20	25	25	30	30
Drill hole depth	h_0 [mm]	$h_0 = h_{ef}$								
Effective anchorage depth	$h_{ef,min}$ [mm]	60	60	70	75	80	85	90	94	98
	$h_{ef,max}$ [mm]	160	200	240	280	320	360	400	440	480
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$ [mm]	40	45	55	60	65	75	85	95	105
Minimum thickness of concrete member	h_{min} [mm]	$h_{ef} + 30$ ≥ 100		$h_{ef} + 2d_0$						

Reinforcing bar $\varnothing$		25	26	28	30	32	34	36	40	
Nominal drill bit diameter	d_0 [mm]	30	35	35	40	40	40	45	55	
Drill hole depth	h_0 [mm]	$h_0 = h_{ef}$								
Effective anchorage depth	$h_{ef,min}$ [mm]	100	104	112	120	128	136	144	160	
	$h_{ef,max}$ [mm]	500	520	560	600	640	680	720	800	
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$ [mm]	110	120	130	140	160	170	180	200	
Minimum thickness of concrete member	h_{min} [mm]	$h_{ef} + 2d_0$								

Reinforcing bar

Properties of reinforcement: refer to EN 1992-1-1 Annex C, Table C.1 and C.2N

Product form			Non-zinc-plated bars and de-coiled rod	
Class			B	C
Characteristic yield strength f_{yk} or $f_{0,2k}$ [MPa]			400 to 600	
Minimum value of $k = (f_t / f_y)_k$			$\geq 1,08$	$\geq 1,15$ $< 1,35$
Characteristic strain at maximum force ε_{uk} [%]			$\geq 5,0$	$\geq 7,5$
Bentability			Bend / Rebend test	
Maximum deviation from nominal mass (individual bar) [%]	Nominal bar size [mm]	≤ 8	$\pm 6,0$	
		> 8	$\pm 4,5$	
Bond: Minimum relative rib area, $f_{R,min}$ (determination acc. to EN 15630)	Nominal bar size [mm]	8 to 12	0,040	
		> 12	0,056	

Rib height h:

The rib height h must be $0,05 \cdot \varnothing \leq h \leq 0,07 \cdot \varnothing$
 $\varnothing$ = nominal bar size

fischer injection system FIS EM

Intended Use

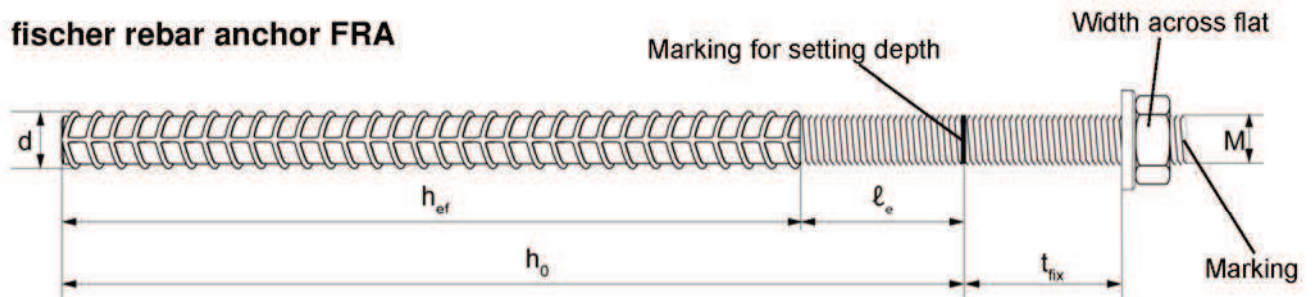
Installation parameters reinforcing bars

Annex B 5

Table B5: Installation parameters fischer rebar anchor FRA

Thread diameter		M12	M16	M20	M24
Nominal bar size	$\varnothing$ [mm]	12	16	20	25
Width across flat	SW [mm]	19	24	30	36
Nominal drill bit diameter	d_0 [mm]	16	20	25	30
Depth of drill hole ($h_0 = l_{ges}$)	h_0 [mm]	$h_{ef} + l_e$			
Effective anchorage depth	$h_{ef,min}$ [mm]	70	80	90	96
	$h_{ef,max}$ [mm]	140	220	300	380
Distance concrete surface to welded join	l_e [mm]	100			
Minimum spacing and minimum edge distance	$s_{min}=c_{min}$ [mm]	55	65	85	105
Diameter of clearance hole in the fixture ¹⁾	pre-positioned anchorage $\leq d_f$ [mm]	14	18	22	26
	push through anchorage $\leq d_f$ [mm]	18	22	26	32
Minimum thickness of concrete member	h_{min} [mm]	$h_0 + 30$ ≥ 100	$h_0 + 2d_0$		
Maximum torque moment	$T_{inst,max}$ [Nm]	40	60	120	150

¹⁾ For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

fischer rebar anchor FRA


Marking: on head e.g.:  FRA (for stainless steel);
 FRA C (for high corrosion-resistant steel)

fischer injection system FIS EM

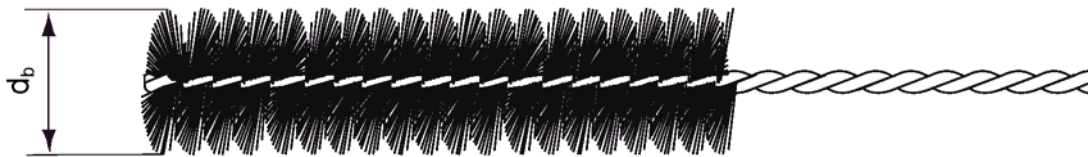
Intended Use

Installation parameters rebar anchor FRA

Annex B 6

Table B6: Parameters of steel brush FIS BS Ø

Drill bit diameter	[mm]	12	14	16	18	20	24	25	28	30	32	35	40	45	55
Steel brush diameter d_b	[mm]	14	16	20		25	26	27	30	40			42	47	58

**Table B7:** Maximum processing time of the mortar and minimum curing time

System temperature [°C]	Maximum processing time [minutes]	Minimum curing time ¹⁾ [hours]
+5 to +10	120	40
≥ +10 to +20	30	18
≥ +20 to +30	14	10
≥ +30 to +40	7	5

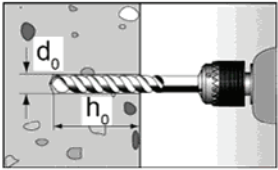
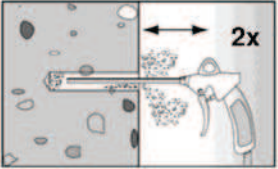
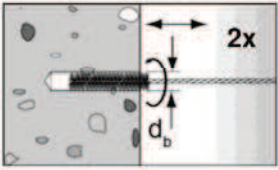
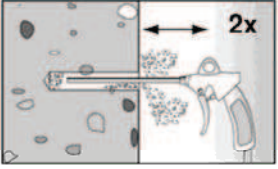
¹⁾ In wet concrete or flooded holes the curing times must be doublet.

fischer injection system FIS EM

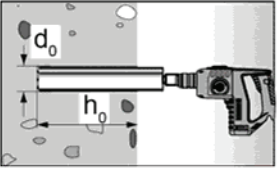
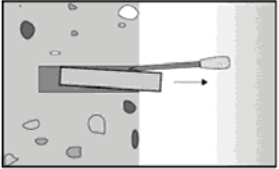
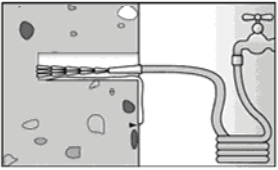
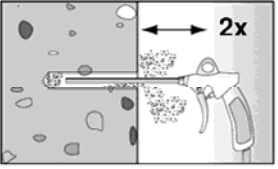
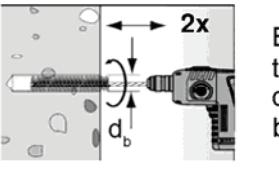
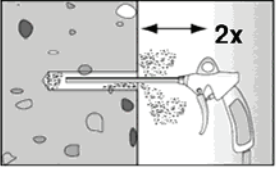
Intended Use
Cleaning tools
Processing times and curing times

Annex B 7

Installation instructions part 1**Drilling and cleaning the hole (hammer-drilling)**

1		Drill the hole. Drill hole diameter d_0 and drill hole depth h_0 see Tables B2, B3, B4, B5 .	
2		Clean the drill hole: Blow out the drill hole two times, using oil-free compressed air ($p \geq 6$ bar)	
3		Brush the drill hole two times. For drill hole diameter ≥ 30 mm use a power drill. For deep holes use an extension. Corresponding brushes see Table B6	
4		Clean the drill hole: Blow out the drill hole two times, using oil-free compressed air ($p \geq 6$ bar)	

Drilling and cleaning the hole (diamond-drilling)

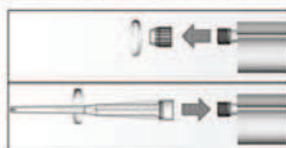
1		Drill the hole. Drill hole diameter d_0 and drill hole depth h_0 see Tables B2, B3, B4, B5 .		Break the drill core and draw it out.
2		Flush the drill hole until the water comes clear.		
3		Blow out the drill hole two times, using oil-free compressed air ($p > 6$ bar)		Brush the drill hole two times using a power drill. Corresponding brushes see Table B6
4		Blow out the drill hole two times, using oil-free compressed air ($p > 6$ bar)		

fischer injection system FIS EM

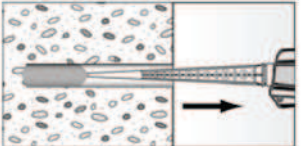
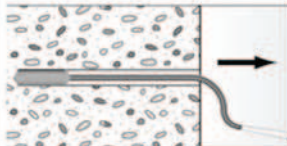
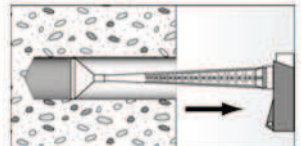
Intended use
Installation instructions part 1

Annex B 8

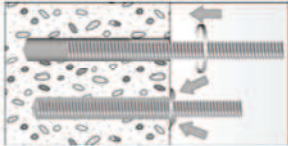
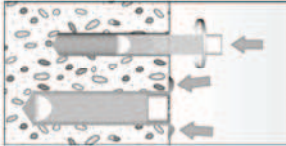
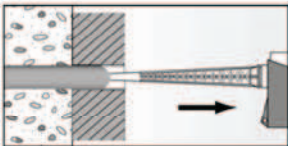
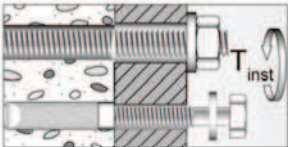
Installation instructions part 2**Preparing the cartridge**

5		Twist off the sealing cap Twist on the static mixer (the spiral in the static mixer must be clearly visible).
6		 Place the cartridge into the dispenser.
7		 Press approx. 10 cm of material out until the resin is evenly grey in colour. Don't use mortar that is not uniformly grey.

Injection of the mortar

8	 Fill approx. 2/3 of the drill hole with mortar. Always begin from the bottom of the hole and avoid bubbles.	 For drill hole depth ≥ 150 mm use an extension tube.	 For overhead installation, deep holes $h_0 > 250$ mm or drill hole diameter $d_0 \geq 40$ mm use an injection-adaptor.
---	---	--	---

Installation threaded rods or fischer internal threaded anchors RG MI

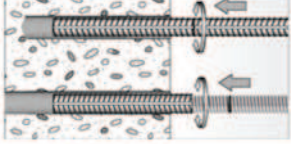
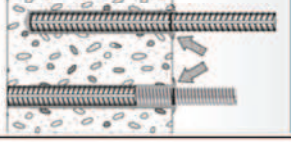
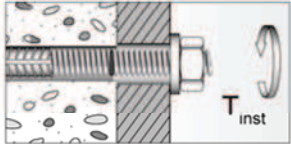
9	 	Only use clean and oil-free anchor elements. Mark the setting depth of the anchor. Press the threaded rod or internal threaded anchor down to the bottom of the hole, turning it slightly while doing so. After inserting the anchor element, excess mortar must emerge around the anchor element.
	 For overhead installations support the threaded rod with wedges.	 For push through installation fill the annular clearance with mortar.
10	 Wait for the specified curing time, t_{cure} see Table B7.	 Mounting the fixture $T_{inst,max}$ see Tables B2, B3.

fischer injection system FIS EM

Intended use
Installation instructions part 2

Annex B 9

Installation instructions part 3**Installation reinforcing bars and fischer FRA**

9		Only use clean and oil-free reinforcing bars. Mark the setting depth of the reinforcing bar. Using a turning movement, push the reinforcement bar or the FRA vigorously into the filled hole up to the insertion depth marking.
		When reaching the setting depth mark, excess mortar must emerge from the mouth of the drill hole.
10	 Wait for the specified curing time t_{cure} see Table B7.	 Mounting the fixture $T_{\text{inst,max}}$ see Table B5.

fischer injection system FIS EM

Intended use

Installation instructions part 3

Annex B 10

Table C1: Characteristic values of resistance for threaded rods under tension

Size				M8	M10	M12	M14	M16	M20	M22	M24	M27	M30
Installation safety factor	dry and wet concrete	γ_2 =	[-]	1,0						1,2			
	flooded hole	γ_{inst}	[-]	1,4									
Steel failure													
Characteristic resistance		$N_{Rk,s}$	[kN]	$A_s \times f_{uk}$									
Combined pullout and concrete cone failure													
Diameter of calculation		d	[mm]	8	10	12	14	16	20	22	24	27	30
Characteristic bond resistance in un-cracked concrete C20/25													
hammer-drilling (dry and wet concrete)													
Temperature range I ¹⁾		$\tau_{Rk,ucr}$	[N/mm ²]	16	16	15	14	14	13	13	13	12	12
Temperature range II ¹⁾		$\tau_{Rk,ucr}$	[N/mm ²]	15	14	14	13	13	12	12	12	11	11
hammer-drilling (flooded hole)													
Temperature range I ¹⁾		$\tau_{Rk,ucr}$	[N/mm ²]	16	16	15	13	13	11	11	10	10	9
Temperature range II ¹⁾		$\tau_{Rk,ucr}$	[N/mm ²]	15	14	14	13	12	11	10	10	9	9
diamond-drilling (dry and wet concrete)													
Temperature range I ¹⁾		$\tau_{Rk,ucr}$	[N/mm ²]	16	15	13	12	12	10	10	10	9	9
Temperature range II ¹⁾		$\tau_{Rk,ucr}$	[N/mm ²]	15	14	12	11	11	10	9	9	8	8
diamond-drilling (flooded hole)													
Temperature range I ¹⁾		$\tau_{Rk,ucr}$	[N/mm ²]	16	15	13	12	12	10	10	10	9	9
Temperature range II ¹⁾		$\tau_{Rk,ucr}$	[N/mm ²]	15	14	12	11	11	10	9	9	8	8
Factor for un-cracked		k_{ucr}	[-]	10,1									
1) See Annex B 1													
fischer injection system FIS EM										Annex C 1			
Performances Design of bonded anchors Static or quasi-static action in tension													

Table C1.1: Characteristic values of resistance for threaded rods under tension

Size				M8	M10	M12	M14	M16	M20	M22	M24	M27	M30
Installation safety factor	dry and wet concrete	$\gamma_2 =$	[-]	1,0						1,2			
	flooded hole	γ_{inst}	[-]	1,2						1,4			
Characteristic bond resistance in cracked concrete C20/25													
hammer and diamond drilling (dry and wet concrete)													
Temperature range I ¹⁾		$\tau_{Rk,cr}$	[N/mm ²]	7	7	7	7	6	6	7	7	7	7
Temperature range II ¹⁾		$\tau_{Rk,cr}$	[N/mm ²]	7	7	7	7	6	6	7	7	7	7
hammer and diamond drilling (flooded hole)													
Temperature range I ¹⁾		$\tau_{Rk,cr}$	[N/mm ²]	6	7,5	7,5	7	6	6	6	6	6	6
Temperature range II ¹⁾		$\tau_{Rk,cr}$	[N/mm ²]	6	7	7	7	6	6	6	6	6	6
Factor for un-cracked		k_{cr}	[-]	7,2									
Increasing factor for τ_{Rk}	Ψ_c	C25/30	[-]	1,02									
		C30/37	[-]	1,04									
		C35/45	[-]	1,06									
		C40/50	[-]	1,07									
		C45/55	[-]	1,08									
		C50/60	[-]	1,09									
		Splitting failure											
Edge distance	$c_{cr,sp}$	$h / h_{ef} \geq 2,0$	[mm]	1,0 h_{ef}									
		$2,0 h / h_{ef}$	[mm]	$4,6 h_{ef} - 1,8 h$									
		$h / h_{ef} \leq 1,3$	[mm]	$2,26 h_{ef}$									
Axial distance	$s_{cr,sp}$		[mm]	$2 c_{cr,sp}$									

¹⁾ See Annex B 1**Table C2:** Characteristic values of resistance for threaded rods under shear

Size			M8	M10	M12	M14	M16	M20	M22	M24	M27	M30
Installation safety factor	$\gamma_2 = \gamma_{inst}$	[-]	1,0									
Steel failure without lever arm												
Characteristic resistance	$V_{Rk,s}$	[kN]	0,5 $A_s \times f_{uk}$									
Ductility factor acc. to CEN/TS 1992-4-5:2009 Section 6.3.2.1	k_2	[-]	0,8									
Steel failure with lever arm												
Characteristic resistance	$M^0_{Rk,s}$	[Nm]	1,2 x $W_{el} \times f_{uk}$									
Concrete pryout failure												
Factor k acc. to TR029 Section 5.2.3.3 resp. k_3 acc. to CEN/TS 1992-4-5:2009 Section 6.3.3	$k_{(3)}$	[-]	2,0									
Concrete edge failure												
Effective length of anchor	l_f	[mm]	$l_f = \min (h_{ef}; 8 d)$									
Diameter of calculation	d	[mm]	8	10	12	14	16	20	22	24	27	30

fischer injection system FIS EM

Performances

Design of bonded anchors
 Static or quasi-static action in tension and under shear loads

Annex C 2

Table C3: Characteristic values of resistance for fischer internal threaded anchors
RG MI under tension load

Size				M8	M10	M12	M16	M20
Installation safety factor	dry and wet concrete	$\gamma_2 =$	[-]	1,0			1,2	
	flooded hole	γ_{inst}	[-]	1,2			1,4	
Steel failure								
Characteristic resistance with screw	$N_{Rk,s}$	Property class 5.8	[kN]	19	29	43	79	123
		Property class 8.8	[kN]	29	47	68	108	179
		Property class A4	[kN]	26	41	59	110	172
		Property class 70 C	[kN]	26	41	59	110	172
Combined pullout and concrete cone failure								
Diameter of calculation			d [mm]	12	16	18	22	28
Characteristic bond resistance in un-cracked concrete C20/25								
hammer-drilling (dry and wet concrete)								
Temperature range I ¹⁾		$\tau_{Rk,ucr}$	[N/mm²]	15	14	14	13	12
Temperature range II ¹⁾		$\tau_{Rk,ucr}$	[N/mm²]	14	13	13	12	11
hammer-drilling (flooded hole)								
Temperature range I ¹⁾		$\tau_{Rk,ucr}$	[N/mm²]	14	12	12	11	10
Temperature range II ¹⁾		$\tau_{Rk,ucr}$	[N/mm²]	13	12	11	10	9
diamond-drilling (dry and wet concrete)								
Temperature range I ¹⁾		$\tau_{Rk,ucr}$	[N/mm²]	13	12	11	10	9
Temperature range II ¹⁾		$\tau_{Rk,ucr}$	[N/mm²]	12	11	10	9	8
diamond-drilling (flooded hole)								
Temperature range I ¹⁾		$\tau_{Rk,ucr}$	[N/mm²]	13	12	11	10	9
Temperature range II ¹⁾		$\tau_{Rk,ucr}$	[N/mm²]	12	11	10	9	8
Factor for un-cracked concrete			k_{ucr} [-]	10,1				

¹⁾ See Annex B 1

fischer injection system FIS EM

Performances

Design of bonded anchors
Static or quasi-static action in tension

Annex C 3

Table C3.1: Characteristic values of resistance for fischer internal threaded anchors
RG MI under tension load

Size			M8	M10	M12	M16	M20
Characteristic bond resistance in cracked concrete C20/25							
hammer and diamond drilling (dry and wet concrete)							
Temperature range I ¹⁾	$\tau_{Rk,cr}$	[N/mm²]	7	6	6	7	7
Temperature range II ¹⁾	$\tau_{Rk,cr}$	[N/mm²]	7	6	6	7	7
hammer and diamond drilling (dry and wet concrete)							
Temperature range I ¹⁾	$\tau_{Rk,cr}$	[N/mm²]	7	6,5	6	6	6
Temperature range II ¹⁾	$\tau_{Rk,cr}$	[N/mm²]	7	6	6	6	6
Factor for cracked concrete	k_{cr}	[-]	7,2				
Increasing factor for τ_{Rk}	Ψ_c	C25/30	[-]	1,02			
		C30/37	[-]	1,04			
		C35/45	[-]	1,06			
		C40/50	[-]	1,07			
		C45/55	[-]	1,08			
		C50/60	[-]	1,09			
Splitting failure							
Edge distance	$c_{cr,sp}$	$h/h_{ef} \geq 2,0$	[mm]	1,0 h_{ef}			
		$2,0 > h/h_{ef} > 1,3$	[mm]	4,6 $h_{ef} - 1,8 h$			
		$h/h_{ef} \leq 1,3$	[mm]	2,26 h_{ef}			
Axial distance	$s_{cr,sp}$		[mm]	2 $c_{cr,sp}$			

¹⁾ See Annex B 1

fischer injection system FIS EM

PerformancesDesign of bonded anchors
Static or quasi-static action in tension**Annex C 4**

Table C4: Characteristic values of resistance for fischer internal threaded anchors
RG MI under shear load

Size				M8	M10	M12	M16	M20	
Installation safety factor			$\gamma_2 = \gamma_{inst}$	[-]	1,0				
Steel failure without lever arm									
Characteristic resistance	$V_{Rk,s}$	Property class	5.8	[kN]	9,2	14,5	21,1	39,2	62,0
			8.8	[kN]	14,6	23,2	33,7	54,0	90,0
		Property class 70	A4	[kN]	12,8	20,3	29,5	54,8	86,0
			C	[kN]	12,8	20,3	29,5	54,8	86,0
Ductility factor acc. to CEN/TS 1992-4-5: 2009 Section 6.3.2.1			k_2	[-]	0,8				
Steel failure with lever arm									
Characteristic resistance	$M^0_{Rk,s}$	Property class	5.8	[Nm]	20	39	68	173	337
			8.8	[Nm]	30	60	105	266	519
		Property class 70	A4	[Nm]	26	52	92	232	454
			C	[Nm]	26	52	92	232	454
Concrete pryout failure									
Factor k acc. to TR029 Section 5.2.3.3 resp. k_3 acc. to CEN/TS 1992-4-5:2009 Section 6.3.3			$k_{(3)}$	[-]	2,0				
Concrete edge failure									
Effective length of anchor			l_f	[mm]	$l_f = \min (h_{ef}, 8 d)$				
Diameter of calculation			d	[mm]	8	10	12	16	20

fischer injection system FIS EM

Performances

Design of bonded anchors

Static or quasi-static action under shear loads

Annex C 5

Table C5: Characteristic values of resistance for reinforcing bars under tension loads
Hammer-drilling

Reinforcing bar			Ø	8	10	12	14	16	18	20	22	24
Installation safety factor	dry and wet concrete	$\gamma_2 =$	[-]	1,0							1,2	
	flooded hole	γ_{inst}	[-]	1,4								
Combined pullout and concrete cone failure												
Diameter of calculation d			[mm]	8	10	12	14	16	18	20	22	24
Characteristic bond resistance in un-cracked concrete												
hammer-drilling (dry and wet concrete)												
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		16	16	15	14	14	14	13	13	13
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		15	14	14	13	13	13	12	12	12
hammer-drilling (flooded hole)												
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		16	16	14	13	12	12	11	11	10
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		15	14	13	12	11	12	11	10	10
Reinforcing bar			Ø	25	26	28	30	32	34	36	40	
Installation safety factor	dry and wet concrete	$\gamma_2 =$	[-]	1,2								
	flooded hole	γ_{inst}	[-]	1,4								
Combined pullout and concrete cone failure												
Diameter of calculation d			[mm]	25	26	28	30	32	34	36	40	
Characteristic bond resistance in un-cracked concrete												
hammer-drilling (dry and wet concrete)												
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		13	13	13	12	12	12	12	12	
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		12	11	11	11	11	11	11	10	
hammer-drilling (flooded hole)												
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		10	10	10	9	9	9	8	8	
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		9	9	9	9	8	8	8	8	
1) See Annex B 1												
fischer injection system FIS EM									Annex C 6			
Performances												
Design of bonded anchors Static or quasi-static action in tension												

Table C5.1: Characteristic values of resistance for reinforcing bars under tension loads

Reinforcing bar				Ø	8	10	12	14	16	18	20	22	24
Installation safety factor	dry and wet concrete	$\gamma_2 =$	[-]	1,0								1,2	
	flooded hole	γ_{inst}	[-]	1,4									
Characteristic bond resistance in un-cracked concrete C20/25													
diamond-drilling (dry and wet concrete)													
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		16	15	13	12	12	10	10	10	10	10
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		15	14	12	11	11	10	10	9	9	9
diamond-drilling (flooded hole)													
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		16	15	13	12	12	11	10	10	10	10
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		15	14	12	11	11	10	10	9	9	9
Reinforcing bar				Ø	25	26	28	30	32	34	36	40	
Installation safety factor	dry and wet concrete	$\gamma_2 =$	[-]	1,2									
	flooded hole	γ_{inst}	[-]	1,4									
Characteristic bond resistance in un-cracked concrete C20/25													
diamond-drilling (dry and wet concrete)													
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		9	9	9	9	8	8	8	7		
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		9	8	8	8	8	7	7	7		
diamond-drilling (flooded hole)													
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		9	9	9	9	8	8	8	7		
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm²]		9	8	8	8	8	7	7	7		
Factor for un-cracked concrete	k_{ucr}	[-]		10,1									
1) See Annex B 1													
fischer injection system FIS EM										Annex C 7			
Performances Design of bonded anchors Static or quasi-static action in tension													

Table C7: Characteristic values of resistance for fischer rebar anchors FRA under tension loads

Size				M12	M16	M20	M24
Installation safety factor	dry and wet concrete	$\gamma_2 =$	[-]	1,0			1,2
	flooded hole	γ_{inst}	[-]	1,2			1,4
Steel failure							
Characteristic resistance	$N_{Rk,S}$	[kN]	63	111	173	270	
Partial safety factor	$\gamma_{Ms,N}^{2)}$	[-]	1,4				
Combined pullout and concrete cone failure							
Diameter of calculation	d	[mm]	12	16	20	25	
Characteristic bond resistance in un-cracked concrete C20/25							
hammer-drilling (dry and wet concrete)							
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	15	14	13	13	
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	14	13	12	12	
hammer-drilling (flooded hole)							
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	15	13	11	10	
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	14	12	11	10	
diamond-drilling (dry and wet concrete)							
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	13	12	10	10	
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	12	11	10	9	
diamond-drilling (flooded hole)							
Temperature range I ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	13	12	10	10	
Temperature range II ¹⁾	$\tau_{Rk,ucr}$	[N/mm ²]	12	11	10	9	
Factor for un-cracked concrete	k_{ucr}	[-]	10,1				

¹⁾ See Annex B 1²⁾ In absence of other national regulations

fischer injection system FIS EM

Performances

Design of bonded anchors
 Static or quasi-static action in tension

Annex C 10

Table C7.1: Characteristic values of resistance for fischer rebar anchors FRA under tension loads

Size				M12	M16	M20	M24
Installation safety factor	dry and wet concrete	$\gamma_2 =$	[-]	1,0			1,2
	flooded hole	γ_{inst}	[-]	1,2			1,4
Characteristic bond resistance in cracked concrete C20/25							
hammer-drilling (dry and wet concrete)							
Temperature range I ¹⁾		$\tau_{Rk,cr}$	[N/mm ²]	7	6	6	7
Temperature range II ¹⁾		$\tau_{Rk,cr}$	[N/mm ²]	7	6	6	7
hammer-drilling (flooded hole)							
Temperature range I ¹⁾		$\tau_{Rk,cr}$	[N/mm ²]	7	6	6	6
Temperature range II ¹⁾		$\tau_{Rk,cr}$	[N/mm ²]	7	6	6	6
Factor for cracked concrete		k_{cr}	[-]	7,2			
Increasing factor for τ_{Rk}	ψ_c	C25/30	[-]	1,02			
		C30/37	[-]	1,04			
		C35/45	[-]	1,06			
		C40/50	[-]	1,07			
		C45/55	[-]	1,08			
		C50/60	[-]	1,09			
Splitting failure							
Edge distance	$c_{cr,sp}$	$h/h_{ef} \geq 2,0$	[mm]	$1,0 h_{ef}$			
		$2,0 > h/h_{ef} > 1,3$	[mm]	$4,6 h_{ef} - 1,8 h$			
		$h/h_{ef} \leq 1,3$	[mm]	$2,26 h_{ef}$			
Axial distance	$s_{cr,sp}$		[mm]	$2 c_{cr,sp}$			

¹⁾ See Annex B 1

fischer injection system FIS EM

Performances

Design of bonded anchors
 Static or quasi-static action in tension

Annex C 11

Table C8: Characteristic values of resistance for fischer rebar anchors FRA under shear load

Size			M12	M16	M20	M24
Installation safety factor	$\gamma_2 = \gamma_{inst}$	[-]	1,0			
Steel failure without lever arm						
Characteristic resistance	$V_{Rk,s}$	[kN]	30	55	86	124
Partial safety factor	$\gamma_{Ms,V}^{1)}$	[-]	1,56			
Ductility factor acc. to CEN/TS 1992-4-5:2009 Section 6.3.2.1	k_2	[-]	0,8			
Steel failure with lever arm						
Characteristic resistance	$M^0_{Rk,s}$	[Nm]	92	233	454	785
Partial safety factor	$\gamma_{Ms,V}^{1)}$	[-]	1,56			
Concrete pryout failure						
Factor k acc. to TR029 Section 5.2.3.3 resp. k_3 acc. to CEN/TS 1992-4-5:2009 Section 6.3.3	$k_{(3)}$	[-]	2,0			
Concrete edge failure						
Effective length of anchor	l_f	[mm]	$l_f = \min(h_{ef}; 8 d)$			
Diameter of calculation	d	[mm]	12	16	20	24

¹⁾ In absence of other national regulations

fischer injection system FIS EM

Performances

Design of bonded anchors
Static or quasi-static action under shear loads

Annex C 12

Table C9: Displacements under tension load for threaded rods¹⁾

Size		M8	M10	M12	M16	M20	M24	M27	M30
Un-cracked and cracked concrete; temperature range I, II									
Displacement	δ_{N0}	[mm/(N/mm ²)]	0,07	0,08	0,09	0,10	0,11	0,12	0,13
Displacement	$\delta_{N\infty}$	[mm/(N/mm ²)]	0,13	0,14	0,15	0,17	0,17	0,18	0,19

¹⁾ Calculation of the displacement for design load

Displacement for short term load = $\delta_{N0} \cdot \tau_{sd} / 1,4$

Displacement for long term load = $\delta_{N\infty} \cdot \tau_{sd} / 1,4$

(τ_{sd} : design bond strength)

Table C10: Displacements under shear load for threaded rods¹⁾

Size		M8	M10	M12	M16	M20	M24	M27	M30
Un-cracked and cracked concrete; temperature range I, II									
Displacement	δ_{V0}	[mm/kN]	0,18	0,15	0,12	0,09	0,07	0,06	0,05
Displacement	$\delta_{V\infty}$	[mm/kN]	0,27	0,22	0,18	0,14	0,11	0,09	0,07

¹⁾ Calculation of the displacement for design load

Displacement for short term load = $\delta_{V0} \cdot V_d / 1,4$

Displacement for long term load = $\delta_{V\infty} \cdot V_d / 1,4$

(V_d : design shear resistance)

Table C11: Displacements under tension load for fischer internal threaded anchors RG MI¹⁾

Size		M8	M10	M12	M16	M20
Un-cracked and cracked concrete; temperature range I, II						
Displacement	δ_{N0}	[mm/(N/mm ²)]	0,09	0,10	0,10	0,11
Displacement	$\delta_{N\infty}$	[mm/(N/mm ²)]	0,13	0,15	0,15	0,17

¹⁾ Calculation of the displacement for design load

Displacement for short term load = $\delta_{N0} \cdot \tau_{sd} / 1,4$

Displacement for long term load = $\delta_{N\infty} \cdot \tau_{sd} / 1,4$

(τ_{sd} : design bond strength)

Table C12: Displacements under shear load for fischer internal threaded anchors RG MI¹⁾

Size		M8	M10	M12	M16	M20
Un-cracked and cracked concrete; temperature range I, II						
Displacement	δ_{V0}	[mm/kN]	0,12	0,09	0,08	0,07
Displacement	$\delta_{V\infty}$	[mm/kN]	0,18	0,14	0,12	0,10

¹⁾ Calculation of the displacement for design load

Displacement for short term load = $\delta_{V0} \cdot V_d / 1,4$

Displacement for long term load = $\delta_{V\infty} \cdot V_d / 1,4$

(V_d : design shear resistance)

fischer injection system FIS EM

Performances

Displacements threaded rods and fischer internal threaded anchor RG MI

Annex C 13

Table C13: Displacements under tension load for reinforcing bars ¹⁾

Size	Ø d	8	10	12	14	16	20	25	28	32
Un-cracked and cracked concrete; temperature range I, II										
Displacement	δ_{N0}	[mm/(N/mm ²)]	0,07	0,08	0,09	0,09	0,10	0,11	0,12	0,13
Displacement	$\delta_{N\infty}$	[mm/(N/mm ²)]	0,12	0,13	0,13	0,15	0,16	0,16	0,18	0,20

¹⁾ Calculation of the displacement for design load
Displacement for short term load = $\delta_{N0} \cdot \tau_{sd} / 1,4$
Displacement for long term load = $\delta_{N\infty} \cdot \tau_{sd} / 1,4$
(τ_{sd} : design bond strength)

Table C14: Displacements under shear load for reinforcing bars ¹⁾

Size	Ø d	8	10	12	14	16	20	25	28	32
Un-cracked and cracked concrete; temperature range I, II										
Displacement	δ_{V0}	[mm/kN]	0,18	0,15	0,12	0,10	0,09	0,07	0,06	0,05
Displacement	$\delta_{V\infty}$	[mm/kN]	0,27	0,22	0,18	0,16	0,14	0,11	0,09	0,06

¹⁾ Calculation of the displacement for design load
Displacement for short term load = $\delta_{V0} \cdot V_d / 1,4$
Displacement for long term load = $\delta_{V\infty} \cdot V_d / 1,4$
(V_d : design shear resistance)

Table C15: Displacements under tension load for fischer rebar anchors FRA ¹⁾

Size	Ø	12	16	20	24
Un-cracked and cracked concrete; temperature range I, II					
Displacement	δ_{N0}	[mm/(N/mm ²)]	0,09	0,10	0,11
Displacement	$\delta_{N\infty}$	[mm/(N/mm ²)]	0,13	0,16	0,16

¹⁾ Calculation of the displacement for design load
Displacement for short term load = $\delta_{N0} \cdot \tau_{sd} / 1,4$
Displacement for long term load = $\delta_{N\infty} \cdot \tau_{sd} / 1,4$
(τ_{sd} : design bond strength)

Table C16: Displacements under shear load for fischer rebar anchors FRA ¹⁾

Size	Ø	12	16	20	24
Un-cracked and cracked concrete; temperature range I, II					
Displacement	δ_{V0}	[mm/kN]	0,12	0,09	0,07
Displacement	$\delta_{V\infty}$	[mm/kN]	0,18	0,14	0,11

¹⁾ Calculation of the displacement for design load
Displacement for short term load = $\delta_{V0} \cdot V_d / 1,4$
Displacement for long term load = $\delta_{V\infty} \cdot V_d / 1,4$
(V_d : design shear resistance)

fischer injection system FIS EM

Performances

Displacements reinforcing bars and fischer rebar anchor FRA

Annex C 14

Table C17A: Characteristic values of resistance for fischer threaded rods FIS A and RGM under seismic action performance category C1 in hammer drilled hole

Size				M8	M10	M12	M14	M16	M20	M22	M24	M27	M30
Characteristic resistance tension load, steel failure													
N _{Rk,s,C1}	Zinc plated steel	Property class	5.8	-	29	43	58	79	123	152	177	230	281
			8.8	-	47	68	92	126	196	243	282	368	449
[kN]	Stainless steel A4 and steel C	Property class	50	-	29	43	58	79	123	152	177	230	281
			70	-	41	59	81	110	172	212	247	322	393
			80	-	47	68	92	126	196	243	282	368	449
γ _{M,s,C1} ¹⁾	Zinc plated steel	Property class	5.8	1,50									
			8.8	1,50									
[-]	Stainless steel A4 and steel C	Property class	50	2,86									
			70	1,50 ²⁾ / 1,87									
			80	1,6									
Characteristic bond resistance, combined pullout and concrete cone failure													
(dry and wet concrete)													
Temperature range I ³⁾		τ _{Rk,C1}	[N/mm²]	-	7,0	7,0	6,7	5,7	5,7	6,7	6,7	6,7	6,7
Temperature range II ³⁾		τ _{Rk,C1}	[N/mm²]	-	7,0	7,0	6,7	5,7	5,7	6,7	6,7	6,7	6,7
(flooded hole)													
Temperature range I ³⁾		τ _{Rk,C1}	[N/mm²]	-	7,5	7,5	6,5	6,5	5,7	6,7	5,7	5,7	5,7
Temperature range II ³⁾		τ _{Rk,C1}	[N/mm²]	-	6,8	6,8	6,5	5,7	5,7	5,7	5,7	5,7	5,7
Characteristic resistance shear load, steel failure without lever arm													
V _{Rk,s,C1}	Zinc plated steel	Property class	5.8	-	15	21	29	39	61	76	89	115	141
			8.8	-	23	34	46	63	98	122	141	184	225
[kN]	Stainless steel A4 and steel C	Property class	50	-	15	21	29	39	61	76	89	115	141
			70	-	20	30	40	55	86	107	124	161	197
			80	-	23	34	46	63	98	122	141	184	225

¹⁾ For fischer threaded rods FIS A / RGM the factor for steel ductility is 1,0

²⁾ $f_{uk} = 700 \text{ N/mm}^2$; $f_{yk} = 560 \text{ N/mm}^2$

³⁾ See Annex B 1

fischer injection system FIS EM

Performances

Design of bonded anchors
Seismic performances C1

Annex C 15

Table C17B: Characteristic values of resistance for standard threaded rods under seismic action performance category C1 in hammer drilled hole

Size				M8	M10	M12	M14	M16	M20	M22	M24	M27	M30
Characteristic resistance tension load, steel failure													
Steel failure				See Table 17A									
Characteristic bond resistance, combined pullout and concrete cone failure				See Table 17A									
Characteristic resistance shear load, steel failure without lever arm													
V _{Rk,s,C1}	Zinc plated steel	Property class	5.8	-	11	15	20	27	43	53	62	81	99
			8.8	-	16	24	32	44	69	85	99	129	158
[kN]	Stainless steel A4 and steel C	Property class	50	-	11	15	20	27	43	53	62	81	99
			70	-	14	21	28	39	60	75	87	113	138
			80	-	16	24	32	44	69	85	99	129	158

fischer injection system FIS EM

PerformancesDesign of bonded anchors
Seismic performances C1**Annex C 16**

Table C18: Characteristic values of resistance for reinforcing bars under seismic action performance category C1 in hammer drilled hole

Reinforcing bar	size	8	10	12	14	16	18	20	22	24
Characteristic resistance tension load, steel failure										
$N_{Rk,s,C1}$	[kN]	-	44	63	85	111	140	173	209	249
Characteristic bond resistance, combined pullout and concrete cone failure										
(dry and wet concrete)										
Temperature range I ¹⁾	$\tau_{Rk,C1}$ [N/mm ²]	-	7,0	7,0	6,7	5,7	5,7	5,7	6,7	6,7
Temperature range II ¹⁾	$\tau_{Rk,C1}$ [N/mm ²]	-	7,0	7,0	6,7	5,7	5,7	5,7	6,7	6,7
(flooded hole)										
Temperature range I ¹⁾	$\tau_{Rk,C1}$ [N/mm ²]	-	7,5	7,0	6,5	5,7	5,7	5,7	6,7	5,7
Temperature range II ¹⁾	$\tau_{Rk,C1}$ [N/mm ²]	-	6,8	6,8	5,8	5,8	5,7	5,7	5,7	5,7
Characteristic resistance shear load, steel failure without lever arm										
$V_{Rk,s,C1}$	[kN]	-	15	22	30	39	49	61	74	88
Reinforcing bar	size	25	26	28	30	32	34	36	40	
Characteristic resistance tension load, steel failure										
$N_{Rk,s,C1}$	[kN]	270	292	339	389	443	-	-	-	
Characteristic bond resistance, combined pullout and concrete cone failure										
(dry and wet concrete)										
Temperature range I ¹⁾	$\tau_{Rk,s,C1}$ [N/mm ²]	6,7	6,7	6,7	6,7	4,8	-	-	-	
Temperature range II ¹⁾	$\tau_{Rk,s,C1}$ [N/mm ²]	6,7	6,7	6,7	6,7	4,8	-	-	-	
(flooded hole)										
Temperature range I ¹⁾	$\tau_{Rk,s,C1}$ [N/mm ²]	5,7	5,7	5,7	5,7	5,7	-	-	-	
Temperature range II ¹⁾	$\tau_{Rk,s,C1}$ [N/mm ²]	5,7	5,7	5,7	5,7	4,8	-	-	-	
Characteristic resistance shear load, steel failure without lever arm										
$V_{Rk,s,C1}$	[kN]	95	102	119	137	155	-	-	-	

¹⁾ See Annex B 1

fischer injection system FIS EM

PerformancesDesign of bonded anchors
Seismic performances C1**Annex C 17**

Table C19: Characteristic values of resistance for fischer threaded rods FIS A, RGM and standard threaded rods under seismic action performance category C2 in hammer drilled hole

Size				M8	M10	M12	M14	M16	M20	M22	M24	M27	M30
Characteristic resistance tension load, steel failure													
N _{Rk,S, C2}	Zinc plated steel	Property class	5.8	-	-	39	--	72	108	-	177	-	-
			8.8	-	-	61	-	116	173	-	282	-	-
[kN]	Stainless steel A4 and steel C	Property class	50	-	-	39	-	72	108	-	177	-	-
			70	-	-	53	-	101	152	-	247	-	-
			80	-	-	61	-	116	173	-	282	-	-
Characteristic bond resistance, combined pullout and concrete cone failure (dry and wet concrete)													
Temperature range I ¹⁾			τ _{Rk, C2} [N/mm²]	-	-	2,2	-	3,5	1,8	-	2,4	-	-
Temperature range II ¹⁾			τ _{Rk, C2} [N/mm²]	-	-	2,2	-	3,5	1,8	-	2,4	-	-
Characteristic bond resistance, combined pullout and concrete cone failure (flooded hole)													
Temperature range I ¹⁾			τ _{Rk, C2} [N/mm²]	-	-	2,3	-	3,5	1,8	-	2,1	-	-
Temperature range II ¹⁾			τ _{Rk, C2} [N/mm²]	-	-	2,3	-	3,5	1,8	-	2,1	-	-
δ _{N,(DLS)} ³⁾		[mm/(N/mm²)]		-	-	0,09	-	0,10	0,11	-	0,12	-	-
δ _{N,(ULS)} ³⁾		[mm/(N/mm²)]		-	-	0,15	-	0,17	0,17	-	0,18	-	-
Characteristic resistance shear load, steel failure without lever arm													
V _{Rk,S, C2} ²⁾	Zinc plated steel	Property class	5.8	-	-	14	-	27	43	-	62	-	-
			8.8	-	-	22	-	44	69	-	99	-	-
[kN]	Stainless steel A4 and steel C	Property class	50	-	-	14	-	27	43	-	62	-	-
			70	-	-	20	-	39	60	-	87	-	-
			80	-	-	22	-	44	69	-	99	-	-
δ _{V,(DLS)} ⁴⁾		[mm/kN]		-	-	0,18	-	0,10	0,07	-	0,06	-	-
δ _{V,(ULS)} ⁴⁾		[mm/kN]		-	-	0,25	-	0,14	0,11	-	0,09	-	-

¹⁾ See Annex B 1²⁾ For fischer threaded rods FIS A / RGM the factor for steel ductility is 1,0³⁾ Calculation for displacement

$$\delta_{N0} = \delta_{N0\text{-Faktor}} \cdot \tau;$$

$$\delta_{N\infty} = \delta_{N\infty\text{-Faktor}} \cdot \tau;$$

⁴⁾ Calculation for displacement

$$\delta_{V0} = \delta_{V0\text{-Faktor}} \cdot V;$$

$$\delta_{V\infty} = \delta_{V\infty\text{-Faktor}} \cdot V;$$

fischer injection system FIS EM

PerformancesDesign of bonded anchors
Seismic performances C2**Annex C 18**