

## SUORITUSTASOILMOITUS

### DoP 0292

fischer Drop-in Anchor EA II (mekaaninen kiinnitin betoniin)

FI

- Tuotetyypin yksilöllinen tunniste: DoP 0292
- Aiottu käyttötarkoitus (aiotut käyttötarkoitukset): Jälkiasennettu kiinnitin käytettäväksi betonissa tarpeettomille ei-rakenteellisille järjestelmille, katso lisäys, erityisesti liitteet B1- B3.
- Valmistaja: fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Saksa
- Valtuutettu edustaja: -
- Suoritustason pysyvyyden arvioinnissa ja varmentamisessa käytetty järjestelmä/käytetyt järjestelmät: 2+
- Eurooppalainen arviointiasiakirja: EAD 330747-00-0601  
Eurooppalainen tekninen arviointi: ETA-07/0142; 2021-09-24  
Teknisestä arvioinnista vastaava laitos: DIBt- Deutsches Institut für Bautechnik  
Ilmoitettu laitos/ilmoitetut laitokset: 2873 TU Darmstadt
- Ilmoitettu suoritustaso/ilmoitetut suoritustasot:  
**Käyttöturvallisuus (BWR 4)**  
**Tyypillinen kestävyys kuormitukselle (staattinen ja lähes staattinen kuormitus):**  
Teräksen murtokuorma: NPD  
Ulosvetoarvon murtokuorma: NPD  
Betonimassan murtokuorma: NPD  
Kestävyys: Liitteet C1, C2  
Pienin reuna- ja keskinäis etäisyys: Liitteet B2, C2  
Reunaetäisyys halkeamien estämiseksi kuormituksessa: NPD  
  
**Tyypillinen kestävyys leikkauskuormalle (staattinen ja näennäisstaattinen kuormitus):**  
Teräksen murtokuorma (leikkauskuorma): Liitteet C1, C2  $V_{Rk,s}=NPD; k_7=NPD$   
Taivutusvoiman murtokuorma: NPD  
Betonireunan murtokuorma: NPD  
  
**Ominaisvastus kaikille kuorman suunnille ja vikatiloille yksinkertaistettua suunnittelua varten:**  
Ominaisarvo: Liitteet C1, C2  
  
**Kestävyys:**  
Kestävyys: Liitteet A3, B1  
  
**Turvallisuus tulipalon sattuessa (BWR 2)**  
Reaktio paloon: Luokka (A1)  
**Tulenkestävyys:**  
Teräksen murtokuorma tulipalossa (vetokuorma): Liite C3  
Ulosvedon murtokuorma tulipalossa (vetokuorma): Liite C3  
Teräksen murtokuorma tulipalossa (leikkauskuorma): Liite C3
- Asiainmukainen tekninen asiakirja ja/tai tekninen erityisasiakirja: -

Edellä yksilöidyn tuotteen suoritustaso on ilmoitettujen suoritustasojen joukon mukainen. Tämä suoritustasoilmoitus on asetuksen (EU) N:o 305/2011 mukaisesti annettu edellä ilmoitetun valmistajan yksinomaisella vastuulla.

Valmistajan puolesta allekirjoittanut:

Dr.-Ing. Oliver Geibig, Toimitusjohtaja Liiketoimintayksikkö & Suunnittelu  
Tumlingen, 2021-09-30

Jürgen Grün, Toimitusjohtaja Kemia & Laatu

Tämä suoritustasoilmoitus on laadittu useilla kielillä. Jos tulkinnasta syntyy erimielisyyttä, englanninkielinen versio on aina katsottava ensisijaiseksi.

Lisäys sisältää vapaaehtoisesti ilmoitettua ja täydentävää englanninkielistä tietoa, joka ylittää (kielestä riippumatta määritellyt) lakisäätöiset vaatimukset.

## Specific Part

### 1 Technical description of the product

The fischer drop-in anchor EA II is an anchor made of galvanised or stainless steel which is placed into a drilled hole and anchored by deformation-controlled expansion.

The fixture shall be anchored with a fastening screw or threaded rod according to Annex B 5.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 3

#### 3.2 Safety and accessibility in use (BWR 4)



Essential characteristic	Performance
Characteristic resistance for all load directions and modes of failure for simplified design	See Annex C 1 and C 2
Durability	See Annex B 1

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with European Assessment Document EAD No. 330747-00-0601, the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+


**Only for use for redundant non-structural systems according to EN 1992-4:2018**

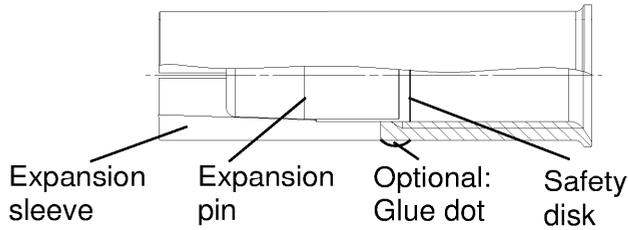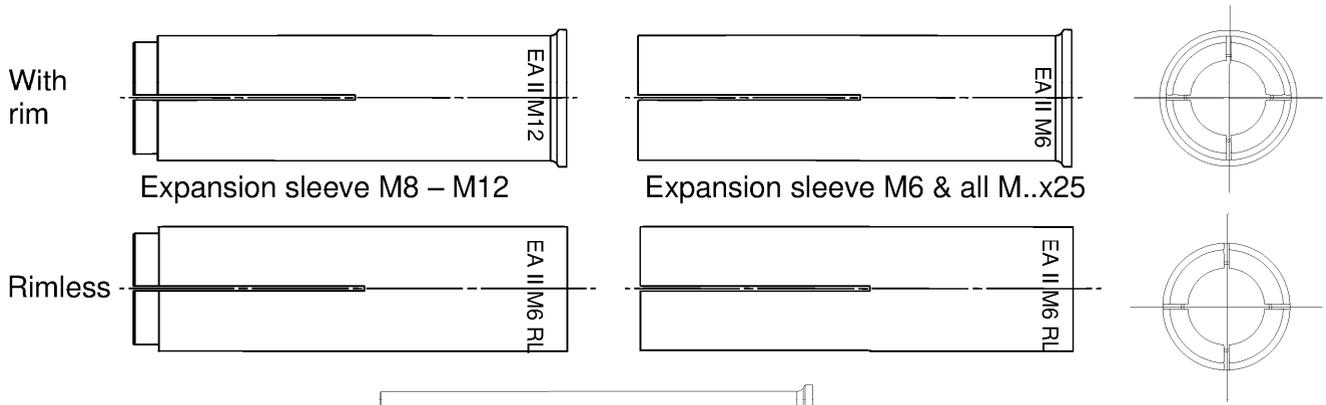

**Intended use in concrete**

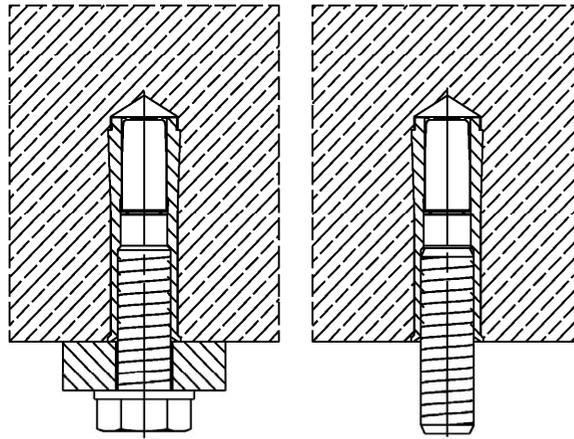

**Intended use in precast pre-stressed hollow concrete slabs ( $w/e \leq 4,2$ ) with a flange thickness  $d_b \geq 35$  mm (or 30 mm → see Annex C2) and only for  $h_{ef} = 25$  mm**

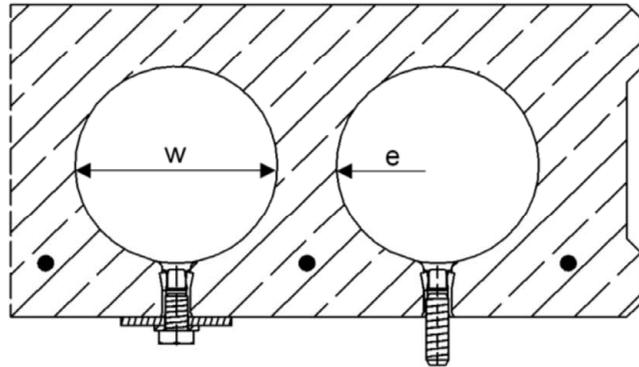


*(Fig. not to scale)*

fischer drop-in anchor EA II


**Product description**  
 Installed condition  
 Anchor types

**Annex A 1**

### Expansion sleeve

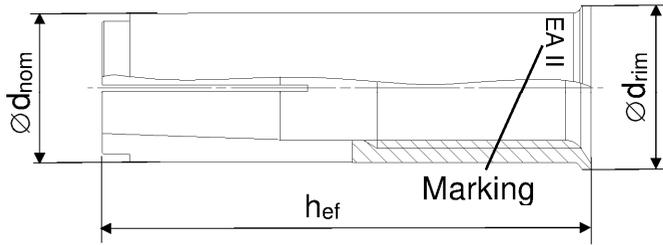


### Expansion pin



**Table A2.1: Anchor size**

Anchor size EA II [mm]	M6x25	M6x30	M8x25	M8x30	M8x40	M10x25	M10x30	M10x40	M12x25	M12x50	M12 D
hef	25	30	25	30	40	25	30	40	25	50	50
Ø d <sub>nom</sub>	8		10			12			15		16
Ø d <sub>rim</sub> (not applicable for EA II RL)	9,5		11,5			13,5			16,5		17,5
Ø d <sub>1</sub>	5		6,5			8,5	8		10		
l <sub>1</sub>	9	14	8	13,5		9	13,5	18,5	10,5	18,5	

### Distinctive feature

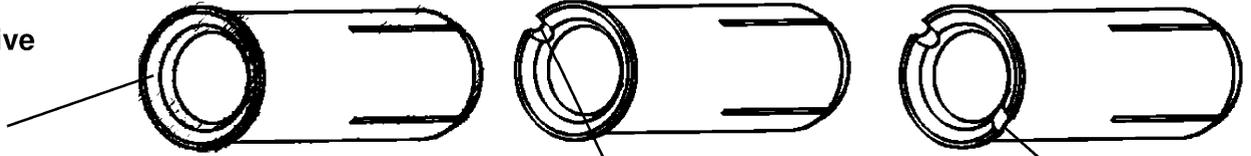

No groove for:

- EA II M6x30..
- EA II M8x30..
- EA II M10x40..
- EA II M12x50..

1 groove for:

- EA II M6x25..
- EA II M8x25..
- EA II M10x25..
- EA II M12x25..

2 grooves for:

- EA II M8x40..
- EA II M10x30..

**Table A2.2: Marking on anchor body**

galvanised steel (gvz)		stainless steel (R)	
with rim	rimless	with rim	rimless
EA II M6x25	EA II M6x25 RL	EA II M6x30 R	EA II M6x30 RL R
EA II M6x30	EA II M6x30 RL	EA II M8x30 R	EA II M8x30 RL R
EA II M8x25	EA II M8x25 RL	EA II M8x40 R	EA II M8x40 RL R
EA II M8x30	EA II M8x30 RL	EA II M10x30 R	EA II M10x30 RL R
EA II M8x40	EA II M8x40 RL	EA II M10x40 R	EA II M10x40 RL R
EA II M10x25	EA II M10x25 RL	EA II M12x50 R	EA II M12x50 RL R
EA II M10x30	EA II M10x30 RL	EA II M12x50 D R	EA II M12x50 RL D R
EA II M10x40	EA II M10x40 RL		
EA II M12x25	EA II M12x25 RL		
EA II M12x50	EA II M12x50 RL		
EA II M12x50 D	EA II M12x50 RL D		

(Fig. not to scale)


fischer drop-in anchor EA II

**Product description**  
Anchor types


**Annex A 2**

Appendix 3 / 12

Expansion sleeve

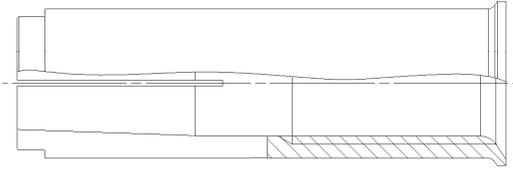

Expansion pin

**Table A3.1: Materials**

Designation	Material	
	galvanised steel ( $\geq 5 \mu\text{m}$ )	stainless steel (R)
Expansion sleeve	EN 10277:2018 or EN 10084:2008 or EN 10111:2008 or EN 10263:2018 or EN 10087:1999 or ASTM A29/A29M	EN 10088:2014
Expansion pin		
Fastening screw or threaded rod	steel, property class 4.6, 5.6, 5.8 or 8.8 according to EN ISO 898-1:2013	property class 50, 70 or 80 according EN ISO 3506:2020





fischer drop-in anchor EA II

**Product description**  
Materials


**Annex A 3**

Appendix 4 / 12

## Setting & drilling tools

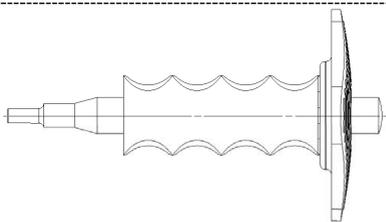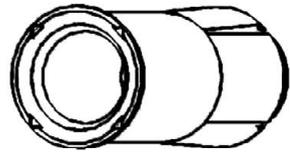Setting tools	Marking	Description	Marking on EA II with rim and rimless
	EHS Plus M..x hef	Manual setting tool with hand guard	
	EHS M..x hef	Manual setting tool basic format	
	EMS M..x hef	Machine setting tool with SDS Plus	No marking


## Drilling tools

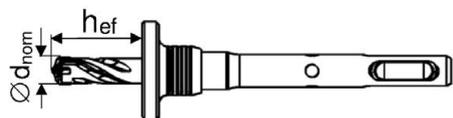

EBB  
 $\varnothing d_{nom} \times h_{ef}$

Stop drill

Or other usual drillers

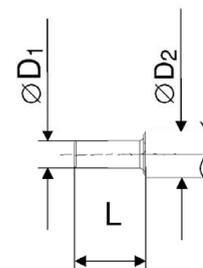

**Table A4.1:** Corresponding drill bits and parameters of setting tools

Manual setting tool	Machine setting tool	Stop drill	For anchor size	$\varnothing D1$ [mm]	$\varnothing D2$ [mm]	L [mm]
EHS (Plus) M6x25/30	EMS M6x25/30	EBB 8x25 EBB 8x30	EA II M6x25 EA II M6x30	4,8	9,0	17,0
EHS (Plus) M8x25/30	EMS M8x25/30	EBB 10x25 EBB 10x30	EA II M8x25 EA II M8x30	6,4	11,0	18,0
EHS (Plus) M8x40	EMS M8x40	EBB 10x40	EA II M8x40			28,0
EHS (Plus) M10x25/30	EMS M10x25/30	EBB 12x25 EBB 12x30	EA II M10x25 EA II M10x30	7,9	13,0	18,0
EHS (Plus) M10x40	EMS M10x40	EBB 12x40	EA II M10x40			24,0
EHS (Plus) M12x25	EMS M12x25	EBB 15x25	EA II M12x25	10,2	16,5	15,2
EHS (Plus) M12x50	EMS M12x50	EBB 15x50	EA II M12x50	10,2	16,5	30,0
EHS (Plus) M12x50	EMS M12x50	EBB 16x50	EA II M12x50 D			

(Fig. not to scale)

fischer drop-in anchor EA II

**Intended Use**  
Setting & Drilling tools

**Annex A 4**

Appendix 5 / 12

## Specifications of intended use

### Anchorage subject to:

fischer drop-in anchor EA II (all versions)	M6	M8	M10	M12
Hammer drilling with standard drill bit 	All types			
Hammer drilling with hollow drill bit with automatic cleaning 				
Material	Steel	Zinc plated		
	Stainless steel	R		
Static and quasi-static loads	✓			
Cracked and uncracked concrete				
Fire exposure in concrete C12/15 to C50/60				
Fire exposure in prestressed hollow concrete slabs	No performance assessed			

#### Base materials:

- Compacted reinforced and unreinforced normal weight concrete without fibres (cracked and uncracked) according to EN 206:2013+A1:2016
- Strength classes C12/15 to C50/60 according to EN 206:2013+A1:2016
- Precast prestressed hollow concrete slabs with  $w/e \leq 4,2$  and strength classes C30/37 to C50/60: M6x25, M8x25, M10x25 and M12x25

#### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions: **EA II, EA II R**
- For all other conditions according to EN 1993-1-4:2006 + A1:2015 corresponding to corrosion resistance class CRC III **EA II R with  $h_{ef} \geq 30$  mm**

#### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.)
- Only for use for redundant non-structural system according to EN 1992-4:2018, Chapter 7.3. Design Method B according to EN 1992-4:2018.
- Anchorages under fire exposure are designed according to EN 1992-4:2018 Annex D

#### Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Create drill hole with hammer drill or with hollow drill and vacuum cleaner
- The anchor may only be used once
- In case of aborted hole: New hole must be drilled at a minimum distance of twice the depth of the aborted hole or closer, if the hole is filled with a high strength mortar (e.g. FIS EM Plus, FIS SB or FIS V Plus) and only if the hole is not in the direction of the oblique tensile or shear load
- Anchor expansion by impact using the setting tools given in Annex A 4. The anchor is properly set, if the stop of the setting tool reaches the expansion sleeve. The manual setting tool with installation control leaves a visible mark on the sleeve, as illustrated in Annex A 4 and B 4

fischer drop-in anchor EA II


**Intended Use**  
Specifications

**Annex B 1**

Appendix 6 / 12

**Table B2.1:** Installation parameters for concrete C12/15 to C50/60

Anchor size (all versions)			M6		M8			M10			M12		M12D
Nominal drill hole diameter	$d_0$	[mm]	8		10			12			15		16
Effective anchorage depth	$h_{ef}$	[mm]	25	30	25	30	40	25	30	40	25	50	50
Maximum installation torque	$T_{inst,max}$	[Nm]	4		8			15			35		
Minimum drill hole depth	$h_1$	[mm]	27	32	27	33	43	27	33	43	27	54	54
Minimum screw-in depth	$l_{s,min}$	[mm]	6		8			10			12		
Maximum screw-in depth	$l_{s,max}$	[mm]	14		14			14	15	17	14	22	
Clearance hole diameter	$\varnothing d_f \leq$	[mm]	7		9			12			14		
<b><math>h_{min} = 80 \text{ mm}</math></b>													
Minimum spacing	$S_{min}$	[mm]	30	70	70	110	200	80	200		100	-	-
Minimum edge distance	$C_{min}$	[mm]	60	150	100	150		120	150		130	-	-
<b><math>h_{min} = 100 \text{ mm}</math></b>													
Minimum spacing	$S_{min}$	[mm]	30	65	50	70		60	90	150	100	200	
Minimum edge distance	$C_{min}$	[mm]	60	115	100	115		100	160	180	110	200	
<b><math>h_{min} = 120 \text{ mm}</math></b>													
Minimum spacing	$S_{min}$	[mm]	30	65	50	70		60	85	95	100	145	
Minimum edge distance	$C_{min}$	[mm]	60	115	100	115		100	140	150	110	200	

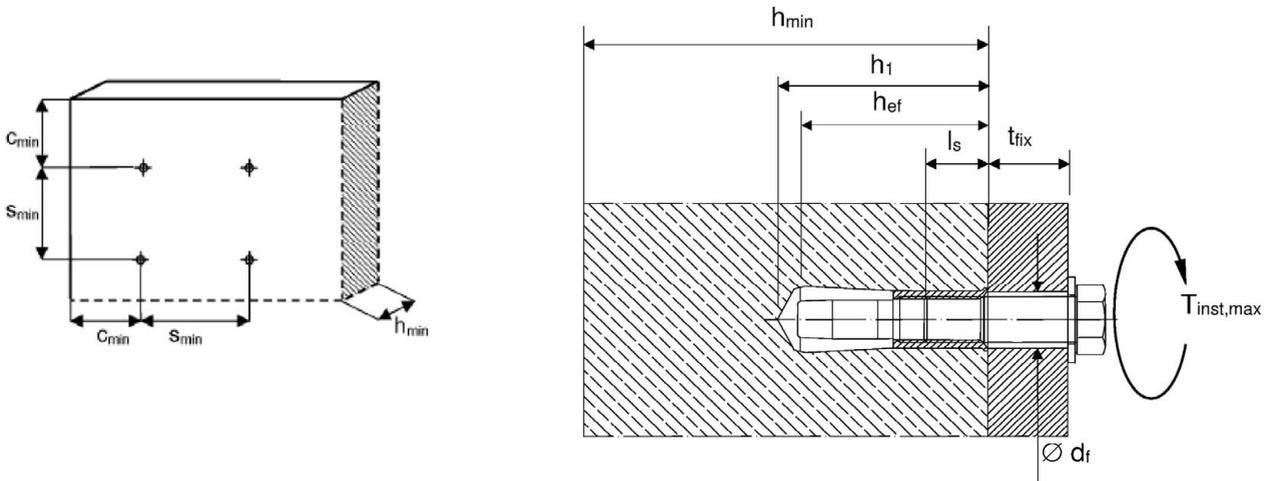

Fastening screw or threaded rod:

- Minimum property class and materials according to table A3.1
- The length of the fastening screw or threaded rod shall be determined depending on thickness of fixture  $t_{fix}$ , admissible tolerances and maximum screw-in depth  $l_{s,max}$  as well as minimum screw-in depth  $l_{s,min}$ .

(Fig. not to scale)

fischer drop-in anchor EA II


**Intended Use**  
Installation parameters

**Annex B 2**

Appendix 7 / 12

**Table B3.1:** Installation parameters for precast pre-stressed hollow concrete slabs

Anchor size (all versions)			M6	M8	M10	M12
Nominal drill hole diameter	$d_0$	[mm]	8	10	12	15
Effective anchorage depth	$h_{ef}$	[mm]	25			
Maximum installation torque	$T_{inst,max}$	[Nm]	4	8	15	35
Minimum drill hole depth	$h_1$	[mm]	27			
Minimum screw-in depth	$l_{s,min}$	[mm]	6	8	10	12
Maximum screw-in depth	$l_{s,max}$	[mm]	14			
Clearance hole diameter	$\varnothing d_f$	[mm]	7	9	12	14
Minimum spacing	$s_{min} = s_{cr}$	[mm]	200			
Minimum edge distance	$c_{min} = c_{cr}$	[mm]	150			

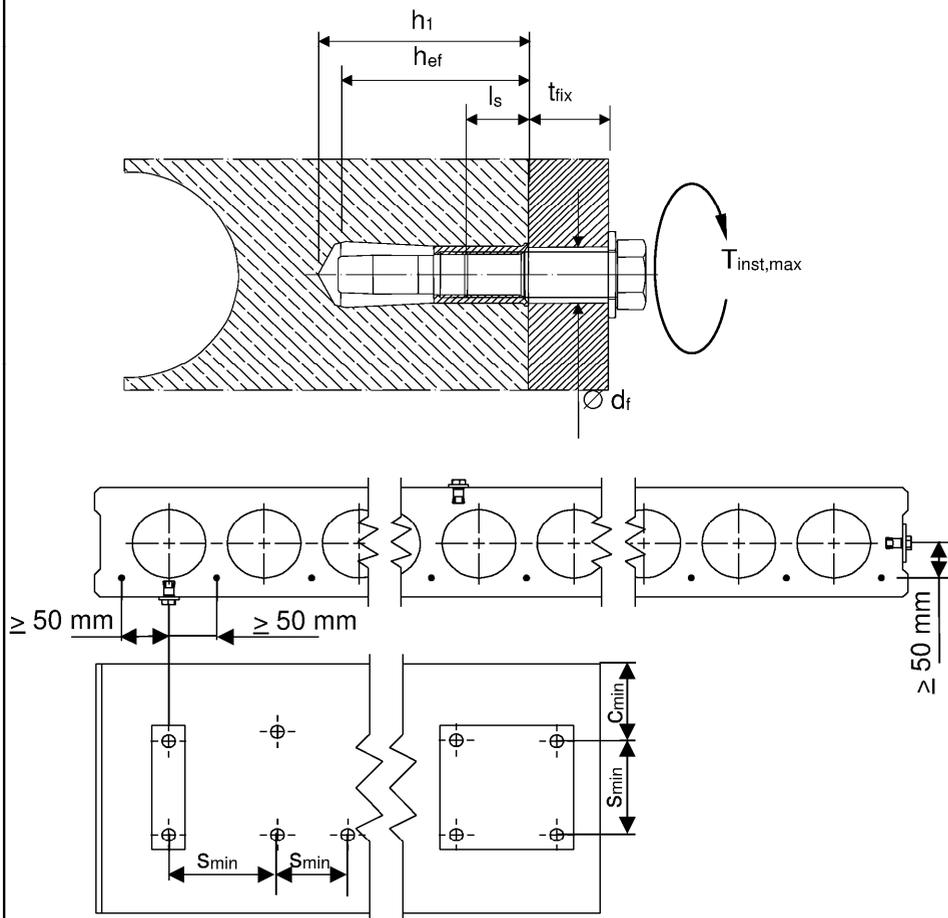

Fastening screw or threaded rod:

- Minimum property class and materials according to table A3.1
- The length of the fastening screw or threaded rod shall be determined depending on thickness of fixture  $t_{fix}$ , admissible tolerances and maximum screw-in depth  $l_{s,max}$  as well as minimum screw-in depth  $l_{s,min}$ .

(Fig. not to scale)


fischer drop-in anchor EA II

**Intended Use**  
Installation parameters

**Annex B 3**

Appendix 8 / 12

# Installation instructions

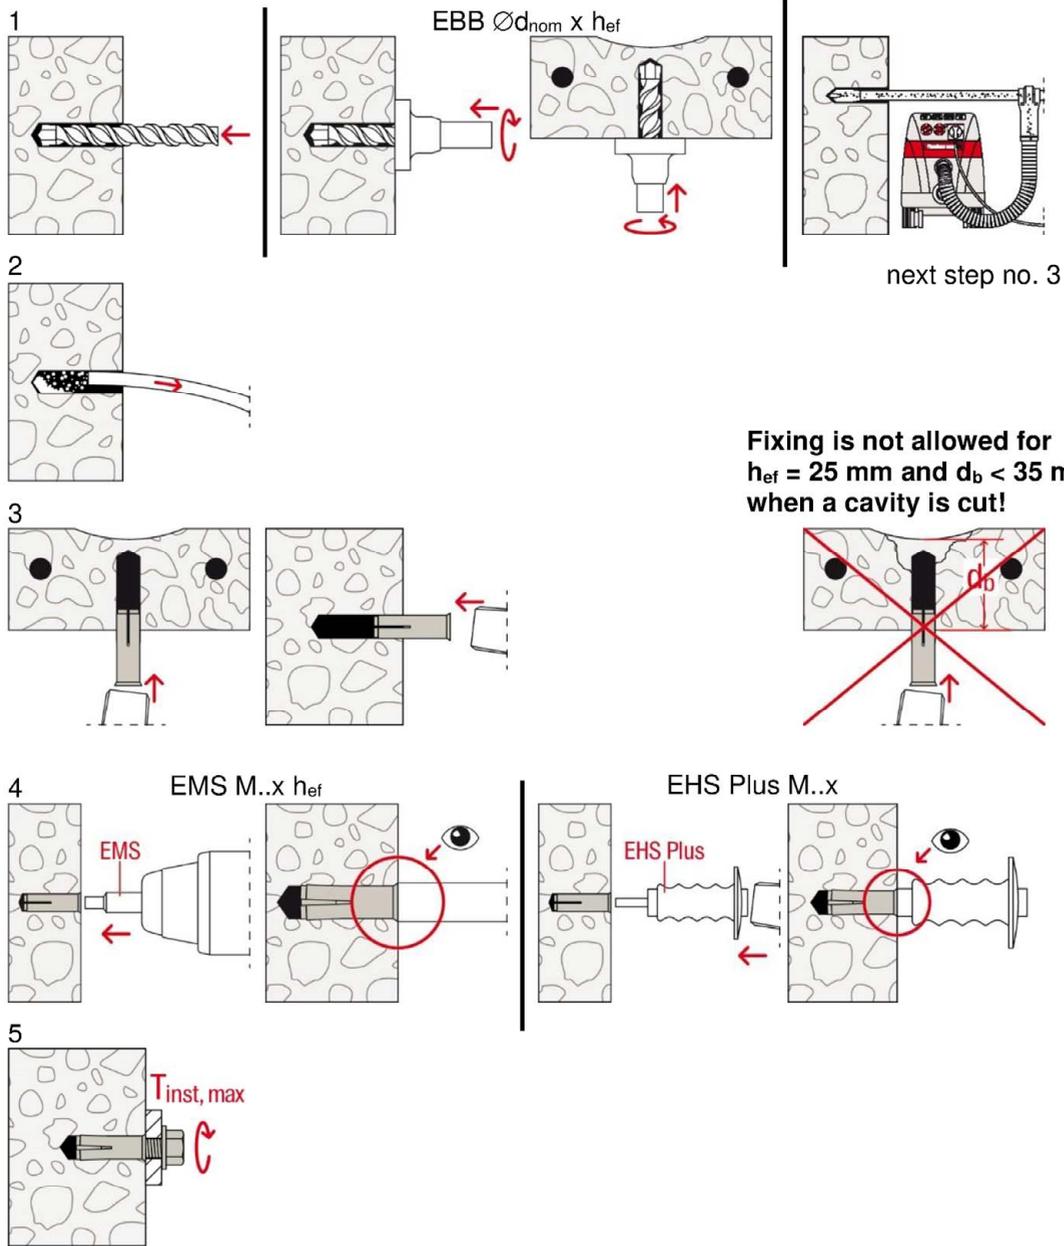

No.	Description
1	Create drill hole with hammer drill or stop drill or with hollow drill and vacuum cleaner
2	Clean from drill-dust
3	Set anchor till anchor is flush with surface of concrete
4	Expand the sleeve by driving the pin with the corresponding setting tool into the sleeve and control the correct setting
5	Fixation of fixture. Maximum installation torque $T_{inst,max}$ must not be exceeded

(Fig. not to scale)

fischer drop-in anchor EA II

**Intended Use**  
Installation instructions

**Annex B 4**

Appendix 9 / 12

**Table C1.1:** Characteristic resistance of a fixing point<sup>1)</sup> for all load directions

Anchor size		property class of the fastening screw or threaded rod	M6		M8			M10			M12/ M12D		
Effective anchorage depth	$h_{ef}$ [mm]		25	30	25	30	40	25	30	40	25	50	
<b>All load directions</b>													
Characteristic resistance C12/15	$F^{0}_{RK}$ [kN]	$\geq$ A4-50	-2)	2	-2)	3		-2)	3	5		-2)	6
		$\geq$ steel 4.6	1,5		2			3			3		
Characteristic resistance C20/25 to C50/60	$F^{0}_{RK}$ [kN]	$\geq$ A4-50	-2)	3	-2)	5		-2)	5	7,5		-2)	9
		$\geq$ steel 4.6	2		3			4			4		
Installation factor	$\gamma_{inst}$ [-]		1,0	1,2	1,0	1,2		1,0	1,2		1,0		
Characteristic spacing	$s_{cr}$ [mm]		75	90	75	90	120	75	90	200	75	300	
Characteristic edge distance	$c_{cr}$ [mm]		38	45	38	45	60	38	45	100	38	150	
<b>Steel failure with lever arm</b>													
Characteristic resistance	$M^{0}_{RK,s}$ [Nm]	A4-50	-2)	8	-2)	19		-2)	37		-2)	66	
Partial factor	$\gamma_{Ms^{3)}$ [-]		2,38										
Characteristic resistance	$M^{0}_{RK,s}$ [Nm]	A4-70	-2)	11	-2)	26		-2)	52		-2)	92	
Partial factor	$\gamma_{Ms^{3)}$ [-]		1,56										
Characteristic resistance	$M^{0}_{RK,s}$ [Nm]	A4-80	-2)	12	-2)	30		-2)	60		-2)	105	
Partial factor	$\gamma_{Ms^{3)}$ [-]		1,33										
Characteristic resistance	$M^{0}_{RK,s}$ [Nm]	steel 4.6	6,1		15		30		52				
Partial factor	$\gamma_{Ms^{3)}$ [-]		1,67										
Characteristic resistance	$M^{0}_{RK,s}$ [Nm]	steel 5.6	7,6		19		37		66				
Partial factor	$\gamma_{Ms^{3)}$ [-]		1,67										
Characteristic resistance	$M^{0}_{RK,s}$ [Nm]	steel 5.8	7,6		19		37		66				
Partial factor	$\gamma_{Ms^{3)}$ [-]		1,25										
Characteristic resistance	$M^{0}_{RK,s}$ [Nm]	steel 8.8	12		30		60		105				
Partial factor	$\gamma_{Ms^{3)}$ [-]		1,25										

1) For definition see EN 1992-4:2018, Picture 3.4

2) No performance assessed

3) In absence of other national regulations

fischer drop-in anchor EA II

**Performances**

Characteristic values for tension loads in concrete according to design method B

**Annex C 1**


Appendix 10 / 12

**Table C2.1:** Characteristic values for  $h_{ef} = 25$  mm in precast pre-stressed hollow concrete slabs according to design method C with C30/37 to C50/60

Anchor size		property class of the fastening screw or threaded rod	M6	M8	M10	M12
Effective anchorage depth	$h_{ef}$ [mm]			25		
<b>All Load directions</b>			galvanised steel; with rim			
Flange thickness	$d_b$ [mm]		$\geq 35$ (or 30 <sup>1)</sup> )			
Characteristic resistance C30/37 to C50/60	$F^{0}_{RK}$ [kN]		2	3	4	
Installation factor	$\gamma_{inst}$ [-]		1,0			
Characteristic spacing	$s_{cr} = s_{min}$ [mm]		200			
Characteristic edge distance	$c_{cr} = c_{min}$ [mm]		150			
<b>Steel failure with lever arm</b>						
Characteristic resistance	$M^{0}_{RK,s}$ [Nm]	steel 4.6	6,1	15	30	52
Partial factor	$\gamma_{Ms^{2)}$ [-]		1,67			
Characteristic resistance	$M^{0}_{RK,s}$ [Nm]	steel 5.6	7,6	19	37	66
Partial factor	$\gamma_{Ms^{2)}$ [-]		1,67			
Characteristic resistance	$M^{0}_{RK,s}$ [Nm]	steel 5.8	7,6	19	37	66
Partial factor	$\gamma_{Ms^{2)}$ [-]		1,25			
Characteristic resistance	$M^{0}_{RK,s}$ [Nm]	steel 8.8	12	30	60	105
Partial factor	$\gamma_{Ms^{2)}$ [-]		1,25			

<sup>1)</sup> The anchor may be used in a flange thickness  $d_b$  of minimum 30 mm with the same characteristic resistance, but the drill hole is not allowed to cut a cavity (see Annex B 4 Point 3). The use of the fischer stop drill EBB is recommended

<sup>2)</sup> In absence of other national regulations

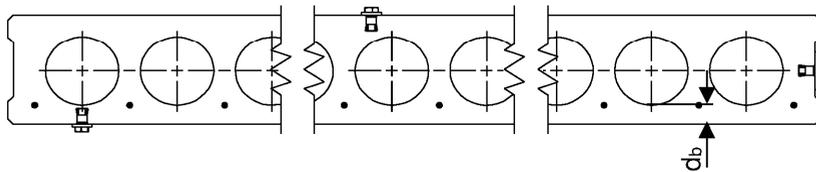

(Fig. not to scale)

fischer drop-in anchor EA II

**Performances**

Characteristic values for tension loads in hollow core slabs according to design method C with C30/37 to C50/60

**Annex C 2**

Appendix 11 / 12

**Table C3.1:** Characteristic resistance under fire exposure<sup>3)</sup> in concrete C20/25 to C50/60

fire resistance class	EA II	property class of the fastening screw or threaded rod	M6x25	M6x30	M8x25	M8x30	M8x40	M10x25	M10x30	M10x40	M12x25	M12x50/ M12x50D
			<b>All load directions</b>									
R 30	Characteristic resistance C20/25 to C50/60	F <sub>RK,fi</sub> <sup>1)</sup> [kN]	steel ≥ 4.6 or ≥ A4-50 <sup>2)</sup>	0,5	0,6	0,9	1,3	0,6	0,9	1,8	0,6	2,3
R 60				0,5	0,6	0,9	1,5					
R 90				0,4	0,6			0,9	2,0			
R 120				0,3	0,5			0,6	0,5	1,3		
R 30 – R 120	Characteristic spacing	S <sub>cr,fi</sub> [mm]	100	120	100	120	160	100	120	160	100	200
	Characteristic edge distance	C <sub>cr,fi</sub> [mm]	50	115	50	140	140	50	140	160	50	

<sup>1)</sup> In absence of other national regulations, a partial factor for the resistance of  $\gamma_{m,fi} = 1,0$  under fire impact is recommended.

<sup>2)</sup> Not for M..x25

<sup>3)</sup> Not valid for precast pre-stressed hollow core slabs

**Table C3.2:** Characteristic resistance under fire exposure<sup>3)</sup> for shear load with level arm in concrete C20/25 to C50/60

fire resistance class	EA II	property class of the fastening screw or threaded rod	M6x25	M6x30	M8x25	M8x30	M8x40	M10x25	M10x30	M10x40	M12x25	M12x50/ M12x50D
			R 30	Characteristic resistance M <sup>0</sup> <sub>RK,s,fi</sub> <sup>1)</sup> [Nm]	steel ≥ 4.6 or ≥ A4-5 <sup>2)</sup>	0,65	0,5	1,30	1,7	1,7	2,4	4,4
R 60	0,50	0,4	0,95			1,3	1,3	1,7	3,2	3,2	5,0	6,7
R 90	0,35	0,3	0,60			0,8	0,8	1,0	1,9	1,9	2,9	3,9
R 120	0,30	0,2	0,45			0,6	0,6	0,7	1,3	1,3	1,8	2,4

<sup>1)</sup> In absence of other national regulations, a partial factor for the resistance of  $\gamma_{m,fi} = 1,0$  under fire impact is recommended.

<sup>2)</sup> Not for M..x25

<sup>3)</sup> Not valid for precast pre-stressed hollow core slabs

In case of fire attack from more than one side, the edge distance shall be  $c_{fi,min} \geq 300$  mm

fischer drop-in anchor EA II

**Performances**  
Characteristic loads for fire resistances

**Annex C 3**

Appendix 12 / 12