



SUORITUSTASOILMOITUS



Nro 0005 – FI

1. Tuotetyypin yksilöllinen tunniste: **fischer lyöntiankkuri EA II**

2. Aiottu käyttötarkoitus (aiotut käyttötarkoitukset):

Tuote	Käyttötarkoitus/tarkoitukset
Metalliankurit käytettäväksi betonissa (raskaille kuormille)	Käytettäväksi betonisten rakenneosien tai raskaiden yksiköiden, kuten julkisivupaneeleiden ja alaslaskettujen kattojen kiinnitykseen ja/tai kannatteluun, katso lisäys, erityisesti liitteet B 1 - B 4

3. Valmistaja: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Straße 1, 72178 Waldachtal, Saksa**

4. Valtuutettu edustaja: --

5. Suoritusason pysyvyyden arvioinnissa ja varmentamisessa käytetty järjestelmä/käytetyt järjestelmät: **1**

6a. Yhdenmukaistettu standardi: ---

Ilmoitettu laitos/ilmoitetut laitokset: ---

6b. Eurooppalainen arviointiasiakirja: **ETAG 001; 2013-04**

Eurooppalainen tekninen arviointi: **ETA-07/0135; 2015-01-28**

Teknisestä arvioinnista vastaava laitos: **DIBt**

Ilmoitettu laitos/ilmoitetut laitokset: **1343 – MPA Darmstadt**

7. Ilmoitettu suoritusaso/ilmoitetut suoritusasot:

Mekaaninen lujuus ja vakaus (BWR 1)

Olennaiset ominaisuudet	Suoritusaso
Tunnusarvot	Katso liite, erityisesti Lisäykset C

Paloturvallisuus (BWR 2)

Olennaiset ominaisuudet	Suoritusaso
Reagointi tuleen	Kiinnitykset ankkureilla täyttävät luokan A1 vaatimukset
Palonkestävyys	Suoritusasoa ei määritelty (NPD)

8. Asianmukainen tekninen asiakirja ja/tai tekninen erityisasiakirja: ---

Edellä yksilöidyn tuotteen suoritusaso on ilmoitettujen suoritusasojen joukon mukainen. Tämä suoritusasoilmoitus on asetuksen (EU) N:o 305/2011 mukaisesti annettu edellä ilmoitetun valmistajan yksinomaisella vastuulla.

Valmistajan puolesta allekirjoittanut:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

i.V. A. Bucher

i.V. W. Hengesbach

Tumlingen, 2015-02-03

- Tämä suoritusasoilmoitus on laadittu useilla kielillä. Jos tulkinnasta syntyy erimielisyyttä, englanninkielinen versio on aina katsottava ensisijaiseksi.

- Lisäys sisältää vapaaehtoisesti ilmoitettua ja täydentävää englanninkielistä tietoa, joka ylittää (kielestä riippumatta määritellyt) lakisääteiset vaatimukset.

Specific Part**1 Technical description of the product**

The fischer drop-in anchor EA II is an anchor made of galvanized or stainless steel which is placed into a drilled hole and anchored by deformation-controlled expansion.

The fixture shall be anchored with a fastening screw or threaded rod according to Annex 4.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment**3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Characteristic values	See Annex C

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance determined (NPD)

3.3 Hygiene, health and the environment (BWR 3)

Not applicable.

3.4 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

3.5 Protection against noise (BWR 5)

Not applicable.

3.6 Energy economy and heat retention (BWR 6)

Not applicable.

3.7 Sustainable use of natural resources (BWR 7)

The sustainable use of natural resources was not investigated.


3.8 General aspects

The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.


4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

According to Decision of the Commission of 24 June 1996 (96/582/EC) (OJ L 254 of 08.10.96 p. 62-65), the system of assessment and verification of constancy of performance (see Annex V and Article 65 Paragraph 2 to Regulation (EU) No 305/2011) given in the following table applies.

Product	Intended use(s)	Level or class	System
Metal anchors for use in concrete (heavy-duty type)	For fixing and/or supporting concrete structural elements or heavy units such as cladding and suspended ceilings	—	1

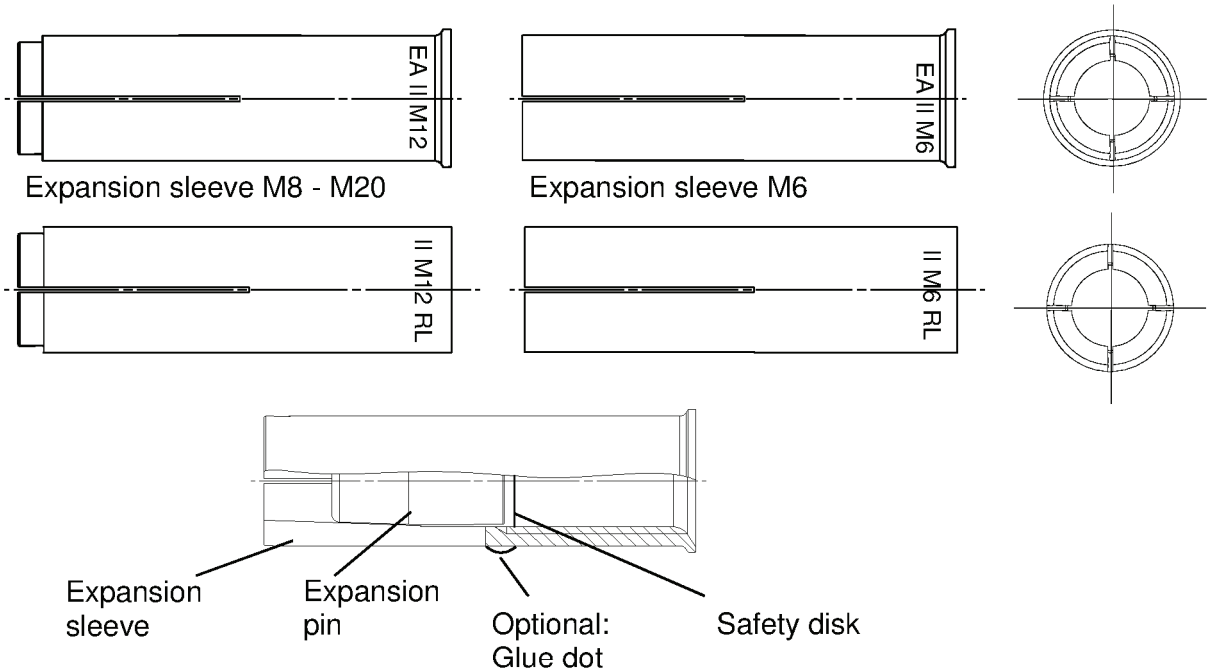


Intended use in concrete

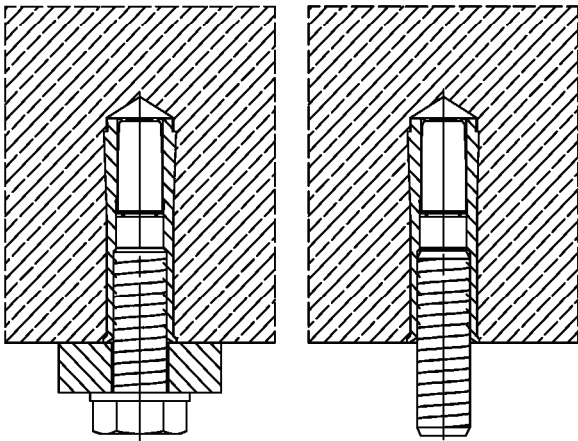

fischer drop-in anchor EA II

Annex A 1

Product description
Anchor types
Installed condition

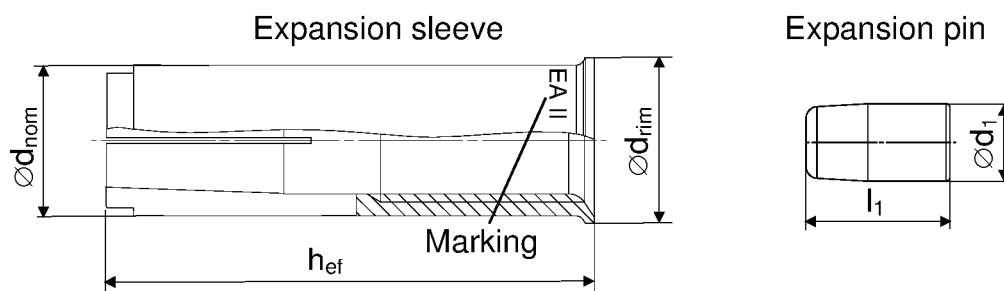


Anchor size EA II	M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x50 D	M16x65	M20x80
h_{ef} [mm]	30	30	40	30	40	50		65	80
$\varnothing d_{nom}$ [mm]	8	10		12		15	16	20	25
$\varnothing d_{rim}$ [mm]	9,5	11,5		13,5		16,5	17,5	21,5	27,0
$\varnothing d_1$ [mm]	5	6,5		8		10		13,5	17,5
l_1 [mm]	14	13,5		13,5	18,5	18,5		25	26

Distinctive feature



0× groove for:

- EA II M6x30..
- EA II M8x30..
- EA II M10x40..
- EA II M12x50..
- EA II M16x65..
- EA II M20x80..



2× groove for:

- EA II M8x40..
- EA II M10x30..

Marking on anchor body

galvanized steel (gvz)		stainless steel (A4)	
with rim	rimless	with rim	rimless
EA II M6x30	EA II M6x30 RL	EA II M6x30 A4	EA II M6x30 RL A4
EA II M8x30	EA II M8x30 RL	EA II M8x30 A4	EA II M8x30 RL A4
EA II M8x40	EA II M8x40 RL	EA II M8x40 A4	EA II M8x40 RL A4
EA II M10x30	EA II M10x30 RL	EA II M10x30 A4	EA II M10x30 RL A4
EA II M10x40	EA II M10x40 RL	EA II M10x40 A4	EA II M10x40 RL A4
EA II M12x50	EA II M12x50 RL	EA II M12x50 A4	EA II M12x50 RL A4
EA II M12x50 D	EA II M12x50 RLD	EA II M12x50 DA4	EA II M12x50 RL DA4
EA II M16x65	EA II M16x65 RL	EA II M16x65 A4	EA II M16x65 RL A4
EA II M20x80	EA II M20x80 RL	EA II M20x80 A4	EA II M20x80 RL A4

fischer drop-in anchor EA II

Product description
Anchor types

Annex A 2

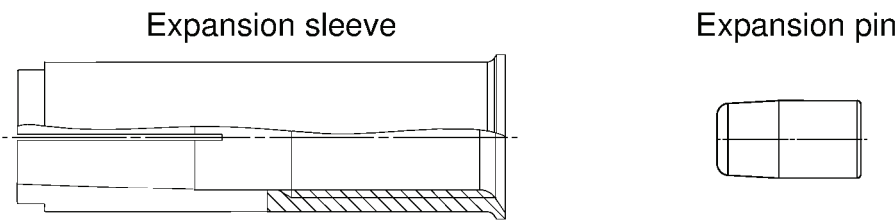


Table A1: Materials

Designation	Material	
	galvanised steel ($\geq 5\text{ }\mu\text{m}$)	stainless steel
Expansion sleeve	EN 10277:2008 or EN 10084:2008 or EN 10111:2008 or EN 10263:2001 or EN 10087:1998 or ASTM A29/A29M	EN 10088:2005
Expansion pin		
Fastening screw or threaded rod	steel, property class 4.6, 5.6, 5.8 or 8.8 according to EN ISO 898-1:2012	property class 50, 70 or 80 according to EN ISO 3506:2009

fischer drop-in anchor EA II

Product description
Material

Annex A 3

Specifications of intended use

Anchorage subject to:

- Static and quasi-static loads.

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000.
- Strength classes C20/25 to C50/60 according to EN 206-1:2000.
- Non-cracked concrete: all sizes.

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel or stainless steel).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking into account the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed in accordance with: ETAG 001, Annex C, design method A, Edition August 2010.

Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application.
- Anchor expansion by impact using the setting tools given in Annex B 4. The anchor is properly set if the stop of the setting tool reaches the expansion sleeve. The manual setting tool with installation control leaves a visible mark on the sleeve, as illustrated in Annex B 4.



fischer drop-in anchor EA II

Intended Use
Specifications

Annex B 1

Table B2: Installation parameters for concrete C20/25 to C50/60

Anchor size			M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x50 D	M16x65	M20x80
Nominal drill hole diameter	d ₀	[mm]	8	10		12		15	16	20	25
Effective anchorage depth	h _{ef}	[mm]	30	30	40	30	40	50		65	80
Maximum installation torque	max. T _{inst}	[Nm]	4	8		15		35		60	120
Minimum drill hole depth	h ₁	[mm]	32	33	43	33	43	54		70	85
Minimum screw-in depth	l _{s,min}	[mm]	6	8		10		12		16	20
Maximum screw-in depth	l _{s,max}	[mm]	14	14		14	17	22		28	34
Clearance hole diameter	Ø d _f	[mm]	7	9		12		14		18	22
h _{min} = 80 mm											
Minimum spacing	s _{min}	[mm]	70	110	200	200		-	-	-	-
Minimum edge distance	c _{min}	[mm]	150	150		150		-	-	-	-
h _{min} = 100 mm											
Minimum spacing	s _{min}	[mm]	65	70		90	150	200		-	-
Minimum edge distance	c _{min}	[mm]	115	115		160	180	200		-	-
h _{min} = 120 mm											
Minimum spacing	s _{min}	[mm]	65	70		85	95	145		-	-
Minimum edge distance	c _{min}	[mm]	115	115		140	150	200		-	-
h _{min} = 160 mm											
Minimum spacing	s _{min}	[mm]	65	70		85	95	145		180	-
Minimum edge distance	c _{min}	[mm]	115	115		140	150	200		240	-
h _{min} = 200 mm											
Minimum spacing	s _{min}	[mm]	65	70		85	95	145		180	190
Minimum edge distance	c _{min}	[mm]	115	115		140	150	200		240	280

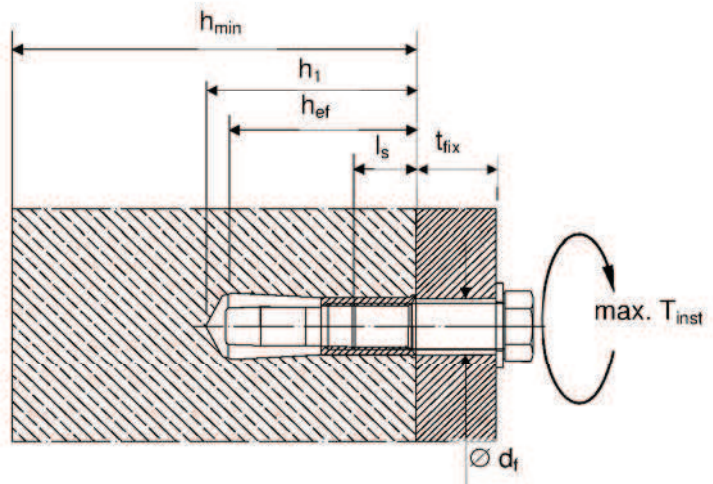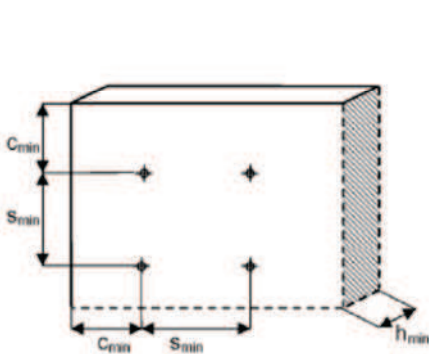







Fastening screw or threaded rod:

- Minimum property class and materials according to table A1.
- The length of the fastening screw or threaded rod shall be determined depending on thickness of fixture t_{fix} , admissible tolerances and maximum screw length $l_{s,max}$ as well as minimum screw-in depth $l_{s,min}$.

fischer drop-in anchor EA II

Intended Use
Installation parameters


Annex B 2

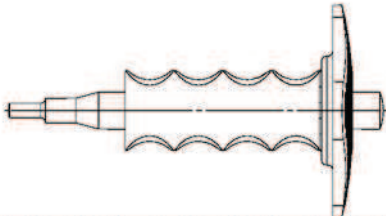Setting & drilling tools			
Setting tools	Marking	Description	Marking on EA II with rim and rimless
	EHS Plus M..x h _{ef}	Manual setting tool with hand guard	
	EHS M..x h _{ef}	Manual setting tool basic format	
	EMS M..x h _{ef}	Machine setting tool with SDS Plus	No marking
	EAS M..x h _{ef}	Slip-on setting tool for stop drill	
Drilling tools			
	EBB ØD x l	Stop drill	
Or other usual drill			

Manual setting tool	Machine setting tool	Slip-on setting tool	Stop drill	For anchor size EA II	Ø D ₁	Ø D ₂	L
EHS M6x25/30	EMS M6x25/30	EAS M6x25/30	EBB 8x30	EA II M6x30	4,8	9,0	17,0
EHS M8x25/30	EMS M8x25/30	EAS M8x25/30	EBB 10x30	EA II M8x30	6,4	11,0	18,0
EHS M8x40	EMS M8x40	EAS M8x40	EBB 10x40	EA II M8x40	6,4	11,0	28,0
EHS M10x25/30	EMS M10x25/30	EAS M10x25/30	EBB 12x30	EA II M10x30	7,9	13,0	18,0
EHS M10x40	EMS M10x40	EAS M10x40	EBB 12x40	EA II M10x40	7,9	13,0	24,0
EHS M12x50	EMS M12x50	EAS M12x50	EBB 15x50	EA II M12x50	10,2	16,5	30,0
EHS M16x65	EMS M16x65	EAS M16x65	EBB 20x65	EA II M16x65	13,5	22	36,0
EHS M20x80	EMS M20x80	EAS M20x80	EBB 25x80	EA II M20x80	16,4	27	50,0

fischer drop-in anchor EA II		Annex B 3
Intended Use Setting & drilling tools		

Installation instructions

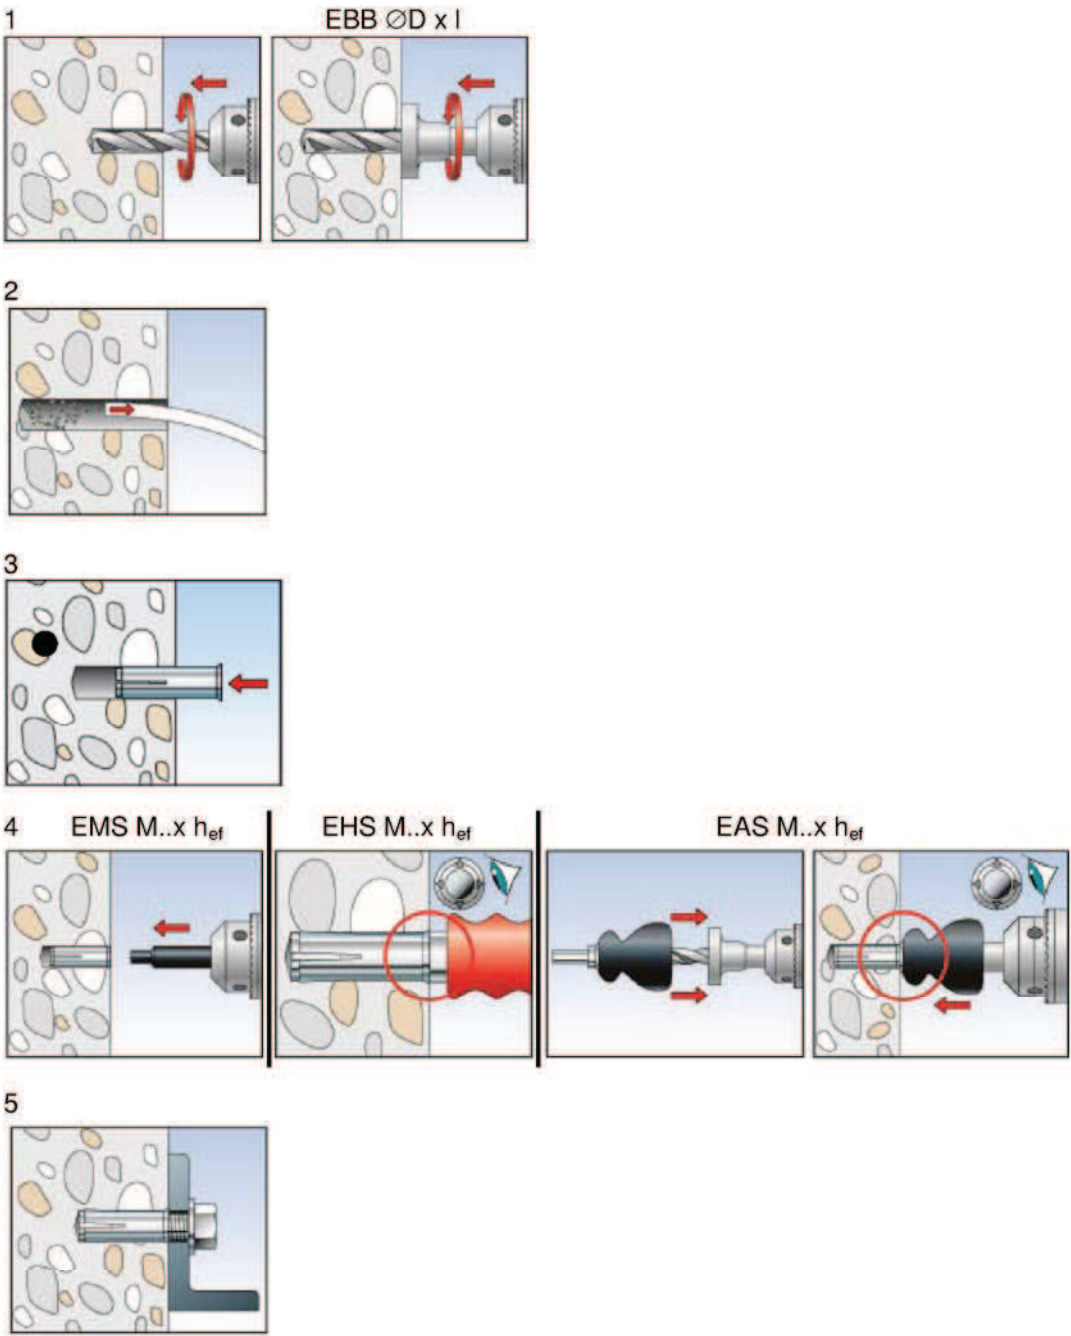

No.	Description
1	Create drill hole.
2	Clean from drill-dust.
3	Set anchor till anchor is flush with surface of concrete.
4	Expand the sleeve by driving the pin into the sleeve and control the correct setting.
5	Fixation of fixture with max. T _{inst.}

fischer drop-in anchor EA II

Intended Use
Installation instructions

Annex B 4

Table C1: Design method A - Characteristic resistance to tension loads

EA II			property class	M6x30 ²⁾	M8x30 ²⁾	M8x40	M10x30 ²⁾	M10x40	M12x50	M12x50 D	M16x65	M20x80
Steel failure												
Characteristic resistance	N _{Rk,s} [kN]	A4-50	10,1	18,3	29,0	42,1	78,3	122,4				
Partial safety factor	γ _{Ms} ¹⁾		2,86									
Characteristic resistance	N _{Rk,s} [kN]	A4-70	14,1	19,6	24,9	45,1	59,0	73,8	117,2			
Partial safety factor	γ _{Ms} ¹⁾		1,87	1,5				1,87	1,5			
Characteristic resistance	N _{Rk,s} [kN]	A4-80	16,1	19,6	24,9	45,1	59,0	73,8	117,2			
Partial safety factor	γ _{Ms} ¹⁾		1,6	1,5								
Characteristic resistance	N _{Rk,s} [kN]	steel 4.6	8,0	14,6	23,2	33,7	62,7	97,9				
Partial safety factor	γ _{Ms} ¹⁾		2,0									
Characteristic resistance	N _{Rk,s} [kN]	steel 5.6	10,1	18,3	29,0	42,1	78,3	122,4				
Partial safety factor	γ _{Ms} ¹⁾		2,0									
Characteristic resistance	N _{Rk,s} [kN]	steel 5.8	10,1	17,2	21,8	39,6	42,1	64,7	102,8			
Partial safety factor	γ _{Ms} ¹⁾		1,5									
Characteristic resistance	N _{Rk,s} [kN]	steel 8.8	13,5	17,2	21,8	39,6	53,3	64,7	102,8			
Partial safety factor	γ _{Ms} ¹⁾		1,5									
Pull-out failure not decisive												
Concrete cone failure												
Effective anchorage depth	h _{ef}	[mm]	30	30	40	30	40	50	65	80		
Partial safety factor	γ _{Mc} ¹⁾		1,5 ³⁾									
Characteristic spacing	s _{cr,N}	[mm]	90	90	120	90	120	150	195	240		
Characteristic edge distance	c _{cr,N}	[mm]	45	45	60	45	60	75	97	120		
Splitting failure												
Partial safety factor	γ _{M,sp} ¹⁾		1,5 ³⁾									
Characteristic spacing	s _{cr,sp}	[mm]	210	210	280	210	320	350	455	560		
Characteristic edge distance	c _{cr,sp}	[mm]	105	105	140	105	160	175	227	280		

¹⁾ In absence of other national regulations.

²⁾ Only for application with statically indeterminate structural components.

³⁾ The installation safety factor $\gamma_2=1,0$ is included.

fischer drop-in anchor EA II

Performances

Design method A
Characteristic resistance to tension loads

Annex C 1

Table C2: Design method A - Characteristic resistance to shear loads

EA II			property class	M6x30 ²⁾	M8x30 ²⁾	M8x40	M10x30 ²⁾	M10x40	M12x50	M12x50 D	M16x65	M20x80
Steel failure without lever arm												
Characteristic resistance	V _{Rk,s} [kN]	A4-50	5,0	9,2	14,5	21,1	39,2	61,2				
Partial safety factor	γ _{Ms} ¹⁾		2,38									
Characteristic resistance	V _{Rk,s} [kN]	A4-70	7,0	9,8	12,4	22,6	29,5	37	59			
Partial safety factor	γ _{Ms} ¹⁾		1,56	1,25					1,56	1,25		
Characteristic resistance	V _{Rk,s} [kN]	A4-80	8,0	9,8	12,4	22,6	30,4	36,9	58,6			
Partial safety factor	γ _{Ms} ¹⁾		1,33	1,25								
Characteristic resistance	V _{Rk,s} [kN]	steel 4.6	4,0	7,3	11,6	16,9	31	49				
Partial safety factor	γ _{Ms} ¹⁾		1,67									
Characteristic resistance	V _{Rk,s} [kN]	steel 5.6	5,0	9,2	14,5	21,1	39	61				
Partial safety factor	γ _{Ms} ¹⁾		1,67									
Characteristic resistance	V _{Rk,s} [kN]	steel 5.8	5,0	8,6	10,9	19,8	21,1	32	51			
Partial safety factor	γ _{Ms} ¹⁾		1,25									
Characteristic resistance	V _{Rk,s} [kN]	steel 8.8	6,8	8,6	10,9	19,8	27	32	51			
Partial safety factor	γ _{Ms} ¹⁾		1,25									
Steel failure with lever arm												
Characteristic resistance	M ⁰ _{Rk,s} [Nm]	A4-50	8	19	37	66	166	324				
Partial safety factor	γ _{Ms} ¹⁾		2,38									
Characteristic resistance	M ⁰ _{Rk,s} [Nm]	A4-70	11	26	52	92	232	454				
Partial safety factor	γ _{Ms} ¹⁾		1,56									
Characteristic resistance	M ⁰ _{Rk,s} [Nm]	A4-80	12	30	60	105	266	519				
Partial safety factor	γ _{Ms} ¹⁾		1,33									
Characteristic resistance	M ⁰ _{Rk,s} [Nm]	steel 4.6	6,1	15	30	52	133	259				
Partial safety factor	γ _{Ms} ¹⁾		1,67									
Characteristic resistance	M ⁰ _{Rk,s} [Nm]	steel 5.6	7,6	19	37	66	166	324				
Partial safety factor	γ _{Ms} ¹⁾		1,67									
Characteristic resistance	M ⁰ _{Rk,s} [Nm]	steel 5.8	7,6	19	37	66	166	324				
Partial safety factor	γ _{Ms} ¹⁾		1,25									
Characteristic resistance	M ⁰ _{Rk,s} [Nm]	steel 8.8	12	30	60	105	266	517				
Partial safety factor	γ _{Ms} ¹⁾		1,25									

¹⁾ In absence of other national regulations.²⁾ Only for application with statically indeterminate structural components.

fischer drop-in anchor EA II

Performances
 Design method A
 Characteristic resistance to shear loads

Annex C 2

Table C3: Design method A - Characteristic resistance to shear loads

EA II	M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x50 D	M16x65	M20x80
Concrete pryout failure									
Factor in equation (5.6) of ETAG 001 Annex C, 5.2.3.3 k	1,74	1,88	1,74	1,88	2,0				
Partial safety factor $\gamma_{Mcp}^{1)}$	1,5 ²⁾								
Concrete edge failure									
Effective length of anchor in shear loading l_f [mm]	30	30	40	30	40	50		65	80
Effective diameter of anchor $\varnothing d_{nom}$ [mm]	8	10		12		15	16	20	25
Partial safety factor $\gamma_{Mc}^{1)}$	1,5 ²⁾								

¹⁾ In absence of other national regulations.

²⁾ The installation safety factor $\gamma_2=1,0$ is included.

fischer drop-in anchor EA II

Performances
Design method A
Characteristic resistance to shear loads

Annex C 3

Table C4.1: Displacements under tension and shear loads for EA II in galvanised steel

EA II			M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x50 D	M16x65	M20x80
Tension load in C20/25 to C50/60	N	[kN]	4,0	4,0	6,1	4,0	6,1	8,5		12,6	17,2
Displacement	δ_{No}	[mm]	0,1								
	$\delta_{No\infty}$	[mm]	0,2								
Shear load in C20/25 to C50/60	V	[kN]	3,9	4,9	6,2	6,2		11,3	15,2	18,5	29,4
Displacement	δ_{Vo}	[mm]	0,95	1,00		1,05		1,10		1,40	1,80
	$\delta_{Vo\infty}$	[mm]	1,40	1,50		1,60		1,70		2,10	2,70

Table C4.2: Displacements under tension and shear loads for EA II in stainless steel

EA II A4			M6x30	M8x30	M8x40	M10x30	M10x40	M12x50	M12x50 D	M16x65	M20x80
Tension load in C20/25 to C50/60	N	[kN]	4,0	4,0	6,1	4,0	6,1	8,5	8,5	12,6	17,2
Displacement	δ_{No}	[mm]	0,1								
	$\delta_{No\infty}$	[mm]	0,2								
Shear load in C20/25 to C50/60	V	[kN]	3,2	5,6	7,1	7,1		12,9	13,5	21,1	33,5
Displacement	δ_{Vo}	[mm]	0,95	1,00		1,05		1,10		1,40	1,80
	$\delta_{Vo\infty}$	[mm]	1,40	1,50		1,60		1,70		2,10	2,70

fischer drop-in anchor EA II

Performances
 Displacements
Annex C 4