

SUORITUSTASOILMOITUS**DoP 0380**

fischer Zykロン-paneelikurille FZP II

FI

1. Tuotetyypin yksilöllinen tunniste:**DoP 0380**2. Aiottu käyttötarkoitus (aiotut käyttötarkoitukset):**Kiinnike valikoiduista luonnonkivistä valmistettujen julkisivupaneeleiden kiinnitykseen takapuolelta EN 1469 mukaisesti, katso lisäys, erityisesti liitteet B1 - B7.**3. Valmistaja:**fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Saksa**4. Valtuutettu edustaja:

-

5. Suoritustason pysyvyyden arvioinnissa ja varmentamisessa käytetty järjestelmä/käytetyt järjestelmät:**2+**6. Eurooppalainen arvointiasiakirja:**EAD 330030-00-0601, Edition 10/2018**

Eurooppalainen tekninen arvointi:

ETA-11/0145; 2024-08-22

Teknisestä arvionnistä vastaava laitos:

DIBt- Deutsches Institut für Bautechnik

Ilmoitettu laitos/ilmoitetut laitokset:

2873 TU Darmstadt7. Ilmoitettu suoritustaso/ilmoitetut suoritustasot:**Mekaaninen kestävyys ja vakaus (BWR 1)**

Ominainen vastustus vetokuorman johdosta aiheutuvaan rikkoutumiseen tai irtoamiseen: Liite C1

 α_{TR} = NPD

Ominainen vastustus leikkauskruuman johdosta aiheutuvaan rikkoutumiseen tai irtoamiseen: Liite C1

Ominainen vastustus yhdistetyn vetro- ja leikkauskruuman johdosta aiheutuvaan rikkoutumiseen tai irtoamiseen: Liite C1

Y=NPD; F_{RK}=NPD

Reuna- ja välietäisyys: Liitteet B3, C1

Kestävyys: Liite A3, ((CRC) III - EN 1993-1-4:2015)

Ominainen vastustus vetro- ja leikkauskruuman johdosta aiheutuviin metallivauroihin: Liite C1

Paloturvallisuus (BWR 2)

Reagointi tuleen: Class (A1)

8. Asianmukainen tekninen asiakirja ja/tai tekninen erityisasiakirja:

-

Edellä yksilöidyn tuotteen suoritustaso on ilmoitettujen suoritustasojen joukon mukainen. Tämä suoritustasoilmoitus on asetuksen (EU) N:o 305/2011 mukaisesti annettu edellä ilmoitetun valmistajan yksinomaисella vastuulla.

Valmistajan puolesta allekirjoittanut:

Dr. Ronald Mihala, Kehitys- ja tuotantojohtaja
Tumlingen, 2025-02-05

Dieter Pfaff, Kansainväisen tuotantoliiton ja laadunhallinnan johtaja

Tämä suoritustasoilmoitus on laadittu useilla kielillä. Jos tulkinnasta syntyy erimielisyttä, englanninkielinen versio on aina katsottava ensisijaiseksi.

Lisäys sisältää vapaaehtoisesti ilmoitettua ja täydentävää englanninkielistä tietoa, joka ylittää (kielestä riippumatta määritellyt) lakisääteiset vaatimukset.



Translation guidance Essential Characteristics and Performance Parameters for Annexes

Käännösopas oleellisten piirteiden ja suorituskyvyn parametrien liitteille

| Mechanical resistance and stability (BWR 1) | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| Mekaaninen kestävyys ja vakaus (BWR 1) | |
| 1 Characteristic resistance to breakout or pull-out failure under tension load: Ominainen vastustus vetokuorman johdosta aiheutuvaan rikkoutumiseen tai irtoamiseen: | N _{Rk} [kN], For natural stone: α _{TR} [-] |
| 2 Characteristic resistance to breakout or pull-out failure under shear load: Ominainen vastustus leikkauskkuorman johdosta aiheutuvaan rikkoutumiseen tai irtoamiseen: | V _{Rk} [kN] |
| 3 Characteristic resistance to breakout or pull-out failure under combined tension and shear load: Ominainen vastustus yhdistetyn vетo- ja leikkauskkuorman johdosta aiheutuvaan rikkoutumiseen tai irtoamiseen: | X [-], Y [-], F _{Rk} [kN], β |
| 4 Edge distance and spacing: Reuna- ja välietäisyys: | a _r [mm], a [mm] |
| 5 Durability: Kestävyys: | CRC |
| 6 Characteristic resistance to steel failure under tension and shear load: Ominainen vastustus vетo- ja leikkauskkuorman johdosta aiheutuviin metallivaurioihin: | N _{Rk,s} [kN], V _{Rk,s} [kN] |
| Safety in case of fire (BWR 2) | |
| Paloturvallisuus (BWR 2) | |
| 7 Reaction to fire: Reagointi tuleen: | Class Class (A1) |

Specific Part

1 Technical description of the product

The fischer-Zykon-panel anchor FZP II is a special anchor of sizes M 6, M 8 and M 10 which consists of a cone bolt (with external thread or internal thread), an expansion part, a sleeve and, if need be, a nut. Cone bolt and expansion part are made of stainless steel. The sleeve is made of stainless steel or carbon. The nut is made of stainless steel or aluminium. The anchor is put into an undercut drill hole and by driving-in of the sleeve it is placed form-fit.

The product description is given in Annex A. The material values, dimensions and tolerances of the components of the fastener not indicated in the annexes shall correspond to the values laid down in the technical documentation.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchors of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

| Essential characteristic | Performance |
|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| Characteristic resistance to breakout or pull-out failure under tension load | See Annex C 1 |
| Characteristic resistance to breakout or pull-out failure under shear load | See Annex C 1 |
| Characteristic resistance to breakout or pull-out failure under combined tension and shear load | See Annex C 1 |
| Edge distance and spacing | See Annex B 3 and Annex C 1 |
| Durability | Corrosion Resistance Class (CRC) III in accordance with EN 1993-1-4:2015 |
| Characteristic resistance to steel failure under tension and shear loads | See Annex C 1 |

3.2 Safety in case of fire (BWR 2)


| Essential characteristic | Performance |
|---------------------------------|--------------------|
| Reaction to fire | Class A1 |

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330030-00-0601 the applicable European legal act is: [97/161/EG].
The system to be applied is: 2+


Installed fastener

Figure A1:

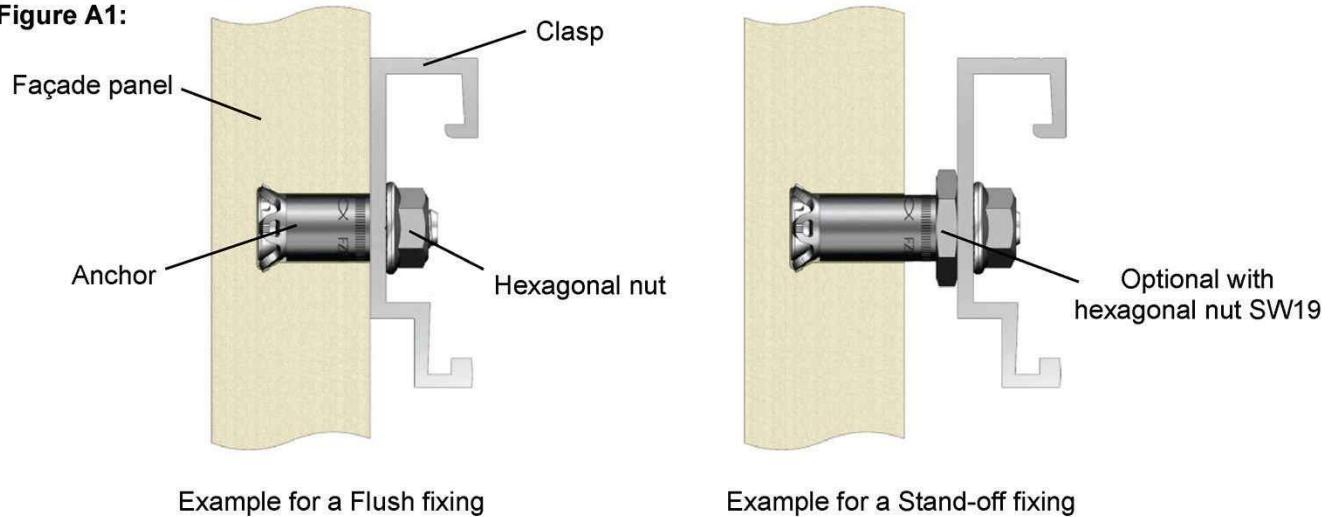

Example of façade panel on substructure

Figure A2:

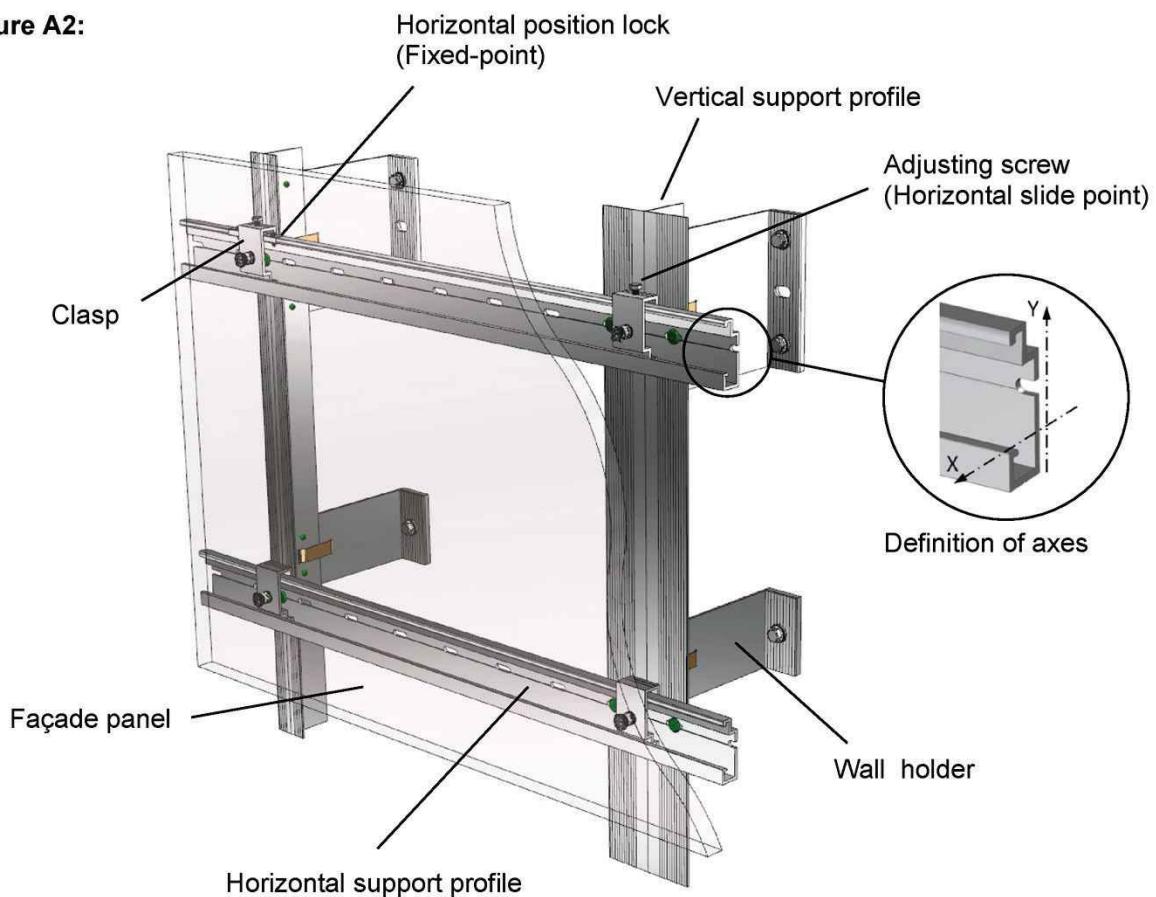

fischer Zykron panel anchor FZP

Product description

Installed anchoring and fixing example

Annex A 1

Appendix 3 / 13

Type of anchor

Anchor with external thread

Figure A3:

With carbon fibre sleeve



With steel sleeve



Optionally with expansion part HP¹⁾



With carbon fibre sleeve and sleeve flange



With Steel sleeve and hex nut SW19



With steel sleeve and hex nut ES²⁾



Anchor with internal thread

Figure A4:

With carbon fibre sleeve



With steel sleeve




¹⁾ HP anchor (High Performance anchor for applications in high-strength rock)

²⁾ Hex nut ES for suspension systems

Identification system

Example. FZP II 13 x 26 M8 / SO / 17 Al

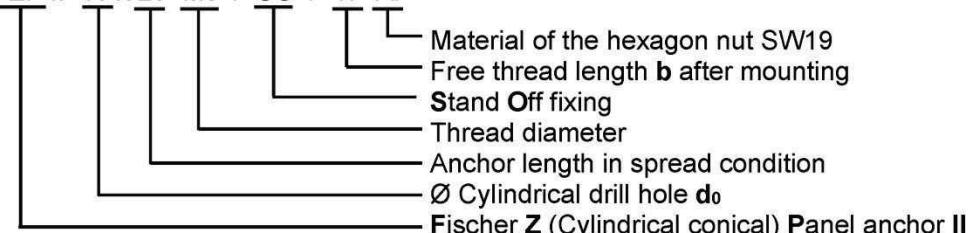

fischer Zykron panel anchor FZP

Product description

Type of anchor and identification system


Annex A 2

Appendix 4 / 13

Parts of anchor and materials

Cone bolt

Figure A6:

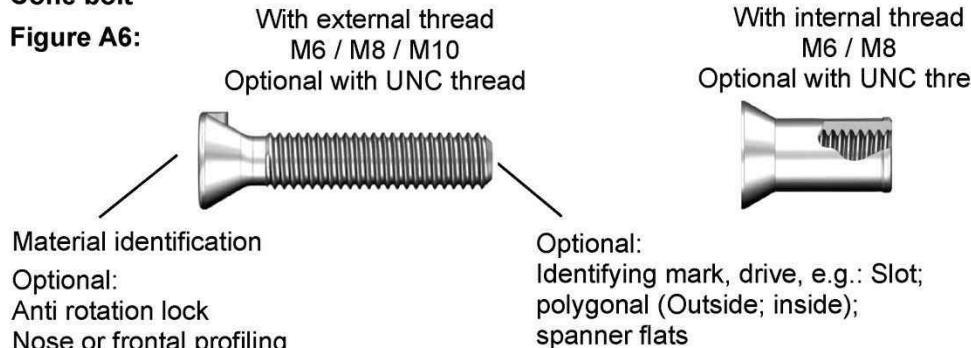


Expansion part

Figure A7:



Sleeve

Figure A8:

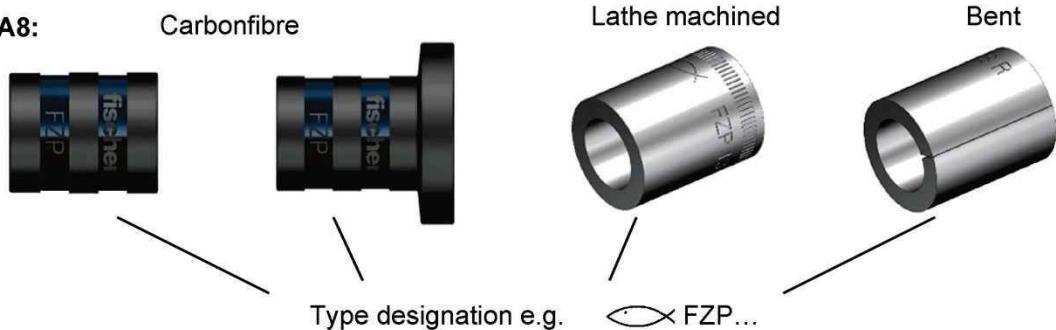

Supplementary components

Figure A9:

Hex nut SW 19



Hex nut ES



Identifying mark of producer

Marking: Al = Aluminium

Optional: R = stainless steel

Table A1: Material of anchor parts

| Anchor parts | Material |
|--------------------|----------------------------------------------------------|
| Cone bolt | Stainless steel, EN 10088 :2014 |
| Expansion part | Stainless steel, EN 10088 :2014 |
| Sleeve | Stainless steel, EN 10088 :2014 |
| Carbonsleeve | Polyamide 6.6 CF |
| Hexagonal nut SW19 | Aluminium, EN 755 :2016, Stainless steel, EN 10088 :2014 |
| Hexagonal nut ES | Aluminium, EN 755 :2016, Stainless steel, EN 10088 :2014 |

fischer Zykron panel anchor FZP

Product description

Parts of anchor and material

Annex A 3

Appendix 5 / 13

Specifications of intended use

Anchorage subject to:

- Static and quasi-static loads.

Anchorage ground:

- Natural stone facade panels according to EN 1469:2015.
- The used material is free of crevices and mechanically effective cracks and alterations.
- Natural stone classified in accordance with Table B1.
- Characteristic values of the panels correspond to Annex B 3, Table B2.

Table B1: Stone groups for façade panels made of natural stone

| Stone group | | Natural stone type | Boundary conditions |
|-------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| I | High quality intrusive rocks (plutonic rocks) | Granite, granitite, tonalite, diorite, monzonite, gabbro, other magmatic plutonic rocks | None |
| II | Metamorphic rocks with „hard stone characteristics“ | Quartzite, granulite, gneiss, migmatite, slate ²⁾ | None |
| III | High quality extrusive rocks (volcanic rocks) | Basalt and basaltic lava without harmful ingredients (like sun burner basalt) | Minimum density ρ : basalt: 2,7 kg/dm ³ basaltic lava: 2,2 kg/dm ³ |
| IV | Sedimentary rocks with „hard stone characteristics“ ¹⁾ | Sandstone, limestone and marble | Minimum density ρ : sandstone: 2,1 kg/dm ³ |

¹⁾ For façade panels made of natural stones with planes of anisotropies, the difference between the flexural strength determined parallel to the planes of anisotropy and perpendicular to the edges of the planes of anisotropy shall not be more than 50 %.

²⁾ Slate is only covered by EAD if the mean value of tensile bond strength is larger than 0,5 N/mm² and the minimum value of tensile bond strength is larger than 0,25 N/mm²

Use conditions (Environmental conditions):

- In accordance with EN 1993-1-4:2015 dependent on Corrosion Resistancy Class (CRC) (ETA Section 3.1)

fischer Zykron panel anchor FZP

Intended use
Specifications

Annex B 1

Appendix 6 / 13

Design:

- The design of anchorages under static and quasistatic load is carried out in accordance with: EOTA Technical Report TR 062:2024 "Design of fasteners for façade panels made of natural stone".
- The façade panels, their fixings as well as the substructure including its connection to wall brackets and their connection to the construction works are designed for the respective case of application under the responsibility of an engineer skilled in the field of façade construction.
- Verifiable calculation notes and drawings shall be prepared taking account of the loads to be anchored, the nature and strength of the base materials and the dimensions of the anchorage members as well as of the relevant tolerances. The position of the anchor is indicated on the design drawings.

Installation:

- The drillings are done at the factory or on site under workshop conditions; when drilling on site the execution is supervised by the responsible project supervisor or a skilled representative of the project supervisor.
- Making of the undercut drilling is done with a special drill bit or a special CNC drill bit according to Annex B 4 and a special drilling device in accordance with the information deposited with Deutsches Institut für Bautechnik.
- The drilling residues are removed from the drill hole.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole.
- The geometry of the drill hole is checked on 1 % of all drillings. The following dimensions shall be checked and documented according to manufacturer's information and testing instructions by means of a control aids according to Annex B 5, Figure B5, B6 and B7.
 - Diameter of the cylindrical drill hole.
 - Diameter of the undercut.
 - Remaining panel thickness (drill hole depth and panel thickness respectively).
- If the tolerance given in Annex B 4, Table B3 is exceeded, the geometry of the drill hole shall be checked on 25 % of the drillings performed. No further drill hole should exceed the tolerances otherwise all the drill holes have to be controlled. Drill holes falling below or exceeding the tolerances shall be rejected.

Note: Checking the geometry of drill hole on 1 % of all drillings means that on one of 25 panels (this corresponds to 100 drillings for panels with 4 undercut anchors) one drilling shall be checked. If the tolerances given in Annex B 4, Table B3 are exceeded, the control shall be increased to 25 % of the drillings, i.e. one drilling shall be checked on all the 25 panels.

- The anchors are installed in a deformation controlled manner. For this purpose suitable installation tools per Annex B 5, Figure B4 shall be used. The anchor is set correctly if the bolt projection "b" in accordance to Annex A 2 (designation system) according to Annex B 6 Figure B10 and B11 is observed. For flush mounting, the sleeve must not project beyond the plate surface. Internal thread anchors are mounted flush or recessed according to Annex B 6. The dimension "b" is indicated in the anchor designation.
- During transport and storage on site the façade panels are protected from damages; the façade panels are not to be hung up jerkily (if need be lifters shall be used for hanging up the façade panels); façade panels and reveal panels respectively with incipient cracks are not be installed.
- The façade panels are arranged in a "reclined" or "upright" position.
- Overhead installation is allowed (e.g.: fastening cladding of ceilings)
- The façade are installed by skilled specialists and the laying instructions of the manufacturer shall be paid attention to.
- The façade panels must not be used for the transmission of scheduled impact loads and for the protection against falling.

Table B2: Characteristic values of façade panels made of nature stones

| Façade panels | | | |
|----------------------------------------------------------------------------------|------------------------|------------------------------------------|---------------------------------------------|
| Nominal panel thickness | h_{nom} | [mm] | 20 (30) ¹⁾ $\leq h_{\text{nom}}$ |
| Number of anchors (rectangular arrangement) ⁵⁾ | N | [-] | ≥ 4 |
| Embedment depth ²⁾ | h_s | [mm] | $12 \leq h_s \leq 38$ |
| Minimum edge distance ³⁾ | a_{rl} bzw. a_{rh} | [mm] | 50 |
| Minimum spacing ³⁾ | a_L bzw. a_H | [mm] | $8 h_s$ |
| Minimum residual panel thickness ⁴⁾ | h_r | [mm] | ≥ 8 |
| Minimum characteristic flexural strength in accordance with EN 12372:2007 | | | |
| Padang Cristallo G603, China | Stone group I | $\sigma_{5\%} \geq$ [N/mm ²] | 13,4 |
| Jura Limestone (yellow), Germany | Stone group IV | $\sigma_{5\%} \geq$ [N/mm ²] | 12,4 |

¹⁾ For sandstone, limestone and basaltlava: panel thickness $h \geq 30$ mm, if the bending strength of the material $\sigma_{5\%} < 8$ N/mm².


²⁾ $h_s = h_1 = h_v$ in 1 mm steps only (12, 13, 14 mm ... 38 mm) - tolerances see Annex B 4, Table B3, footnote³⁾

³⁾ For small fitting, differential or fill in pieces, the minimum edge distance or spacing shall be chosen constructively. In case of design under static loading using FEM, smaller edge distances and spacings are allowed.

⁴⁾ Only for stand-off fixing. For h_r less than $0,85 \cdot h_1$, the permissible pressure load must be reduced in accordance with TR 062:2024.

⁵⁾ In accordance with TR 062:2024 3.2.1, fewer anchor points are also possible.

Figure B1: Definition of edge distances and spacing

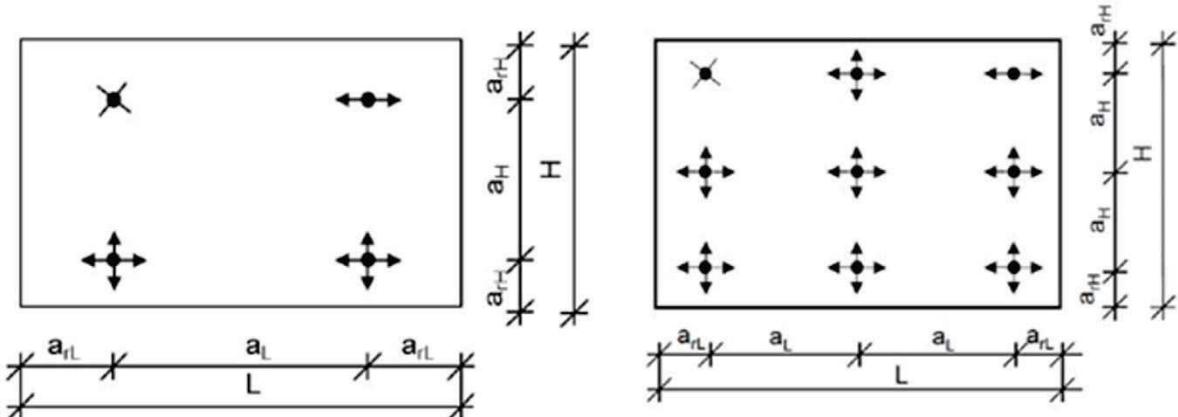

Legend:

- a_{rl}, a_{rh} = edge distance – distance of an fastener to the panel edge
- a_L, a_H = spacing – distance between fasteners
- L = greater length of the façade panel
- H = smaller length of the façade panel

= fixed point (fixed bearing)

= horizontal slide (loose bearing)

= horizontal and vertical slide (loose bearing)

fischer Zykron panel anchor FZP

Intended use

Requirements of façade panels

Annex B 3

Table B3: Drill hole dimensions

| Drill hole | | | | | | |
|-----------------------------------------|--------------------------------------|--------------------------------------|-----------|-------------|-----------------------------|--------------------------|
| Drill bit $\varnothing f$ ¹⁾ | $\varnothing d_0$ [mm] ²⁾ | $\varnothing d_1$ [mm] ²⁾ | FZPII | n | h_1 [mm] ^{2) 3)} | h_r [mm] ⁴⁾ |
| FZPB 9 | 11 ^{+0,4} -0,2 | 13,5 $\pm 0,3$ | M6 | ≈ 4 | $12 \leq h_1 \leq 38$ | ≥ 8 |
| FZPB 11 | | 15,5 $\pm 0,3$ | M8 / M6i | | | |
| FZPB 13 | | 17,5 $\pm 0,3$ | M10 / M8i | | | |
| FZPB 13 | | 17,5 $\pm 0,3$ | | | | |
| FZPB 15 | | | | | | |
| | | | | | | |

¹⁾ Drill bits for various drilling methods.

²⁾ Dimensions can be checked with the appropriate control equipment in accordance with (Annex B 5).


³⁾ Tolerances flush mounting: $h_1 = h_v$ $^{+0,4}_{-0,1}$

⁴⁾ Only for stand off fixing. For h_r less than $0,85 \cdot h_1$, the permissible pressure load must be reduced in accordance with TR 062:2024.

Figure B2: Drill bit example



Figure B3: Drill hole geometry

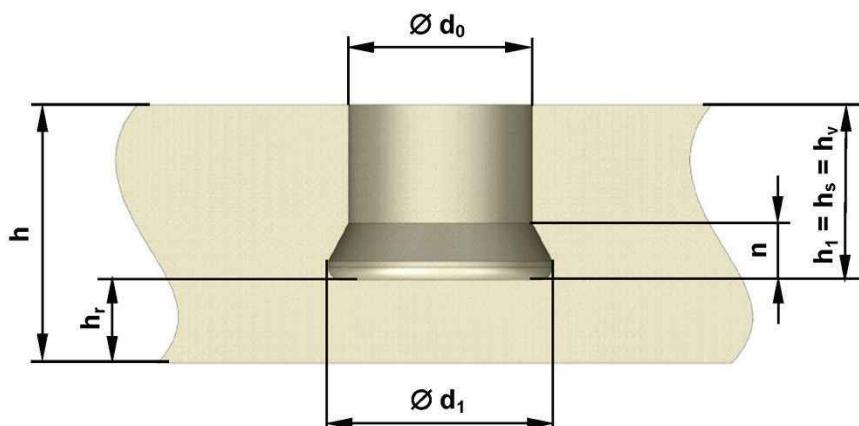

fischer Zykron panel anchor FZP

Intended use

Drill bit, geometry of the drill hole and installation parameters

Annex B 4


Setting tools

Figure B4:



Means for undercut control $\varnothing d_1$

Figure B5:

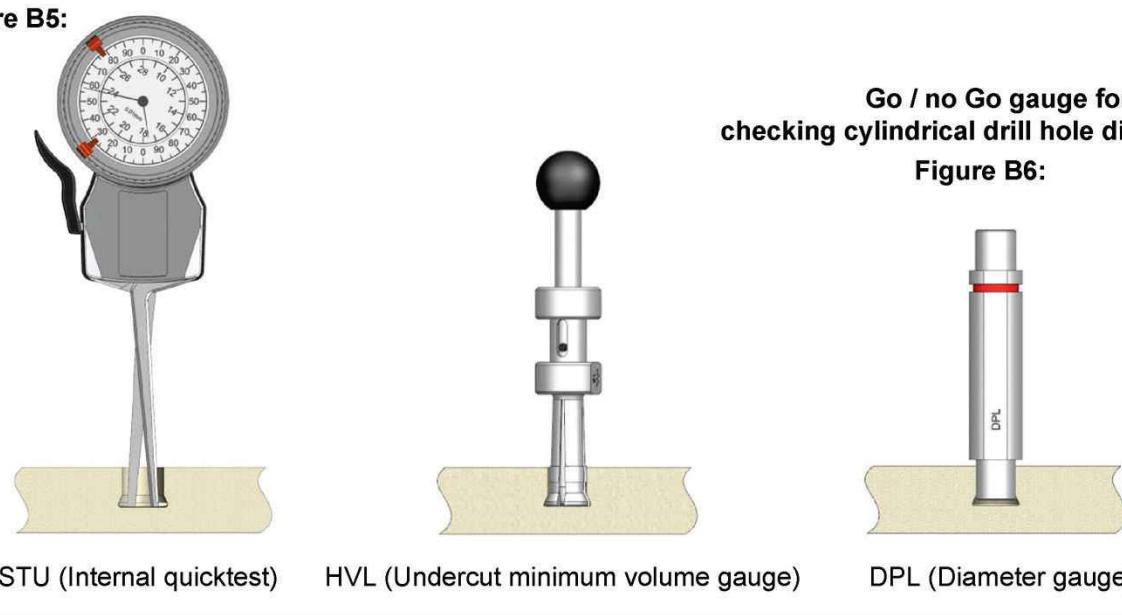


Go / no Go gauge for
checking cylindrical drill hole diameter $\varnothing d_0$

Figure B6:

Means for measuring borehole depth h_1 and borehole diameter d_0

Figure B7:

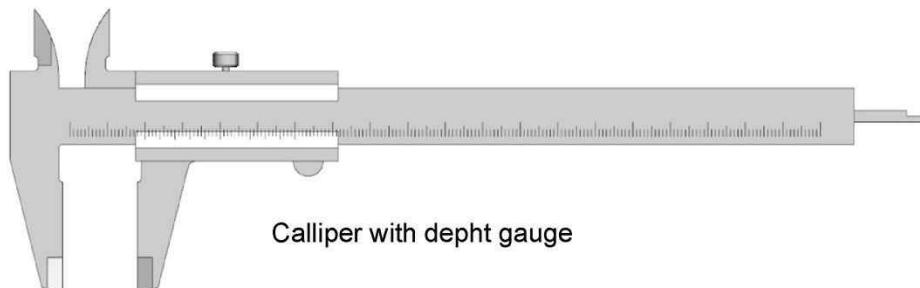

fischer Zykron panel anchor FZP

Intended use

Setting devices and testing equipment


Annex B 5

Appendix 10 / 13

Type of mounting and dimensional definition


Recessed fixing

Figure B8:

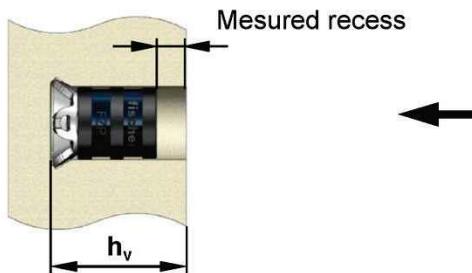


Example of an adaptation for stand off fixing

Figure B9:

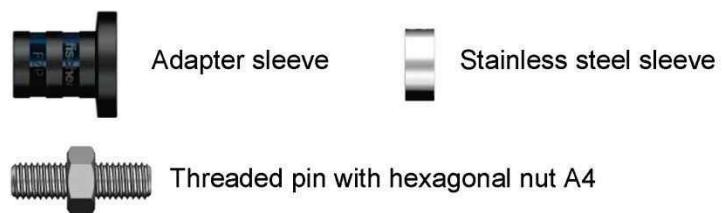


Flush fixing

Figure B10:

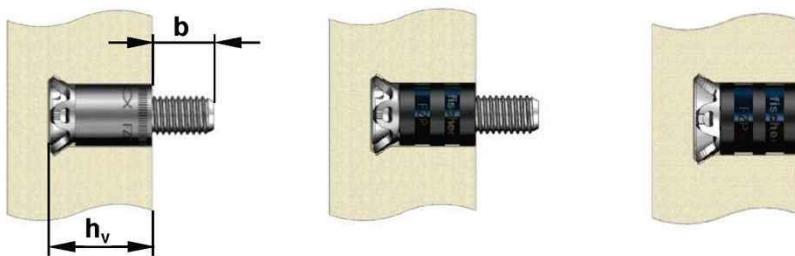

Stand off fixing

Figure B11:

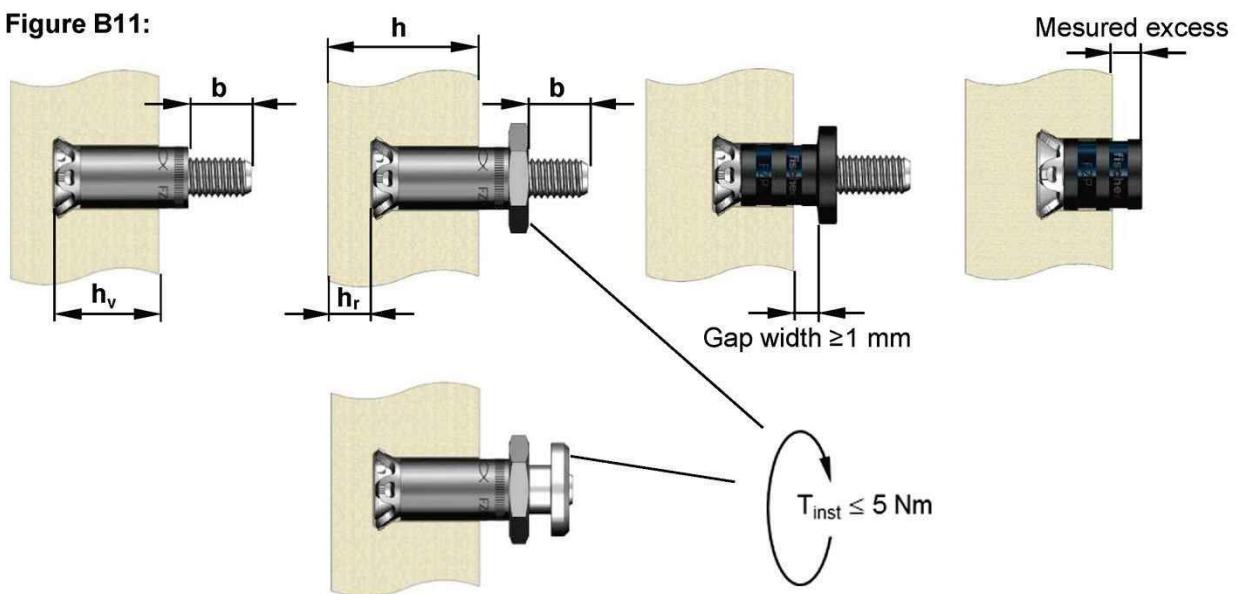

fischer Zykron panel anchor FZP

Intended use

Mounting types and dimension definitions

Annex B 6


Installation instructions

Example: Anchor installation with SGA


1.)




2.)

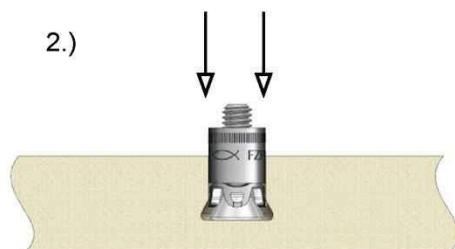


3.)

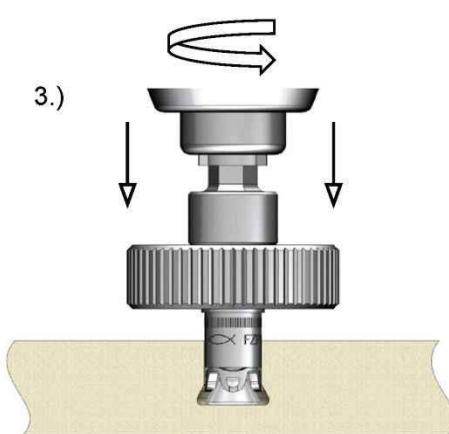


4.)

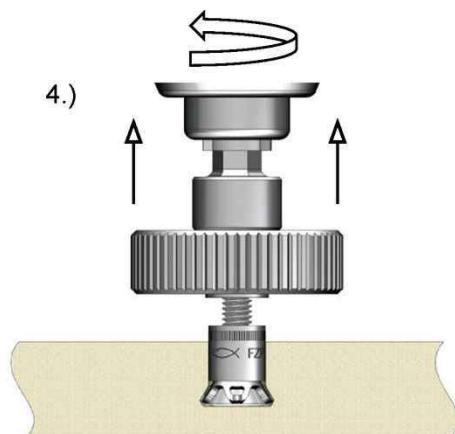

5.1)

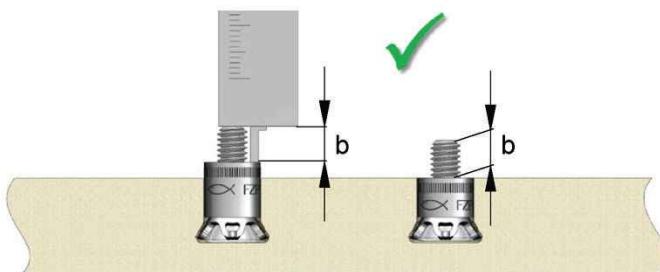

5.2)

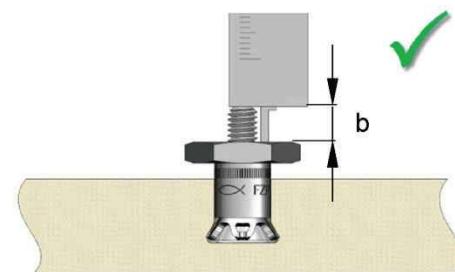

fischer Zykron panel anchor FZP

Intended use
Installation instructions

Annex B 7

Appendix 12 / 13

Table C1: Characteristic resistance

| Diameter of drill hole | $\emptyset d_0$ [mm] | 11 (FZP M6) | | 13 (FZP M8 / M6i) | |
|----------------------------------------|----------------------|-----------------------------|-------------------------------|-----------------------------|-------------------------------|
| Designation of natural stone | | Padang Cristallo G603 | Jura Limestone (yellow) | Padang Cristallo G603 | Jura Limestone (yellow) |
| Country of origin | | China | Germany | China | Germany |
| Petrographic description | | Granite | Limestone | Granite | Limestone |
| Panel thickness | h [mm] | 30 | 40 | 30 | 40 |
| Edge distance | a_r [mm] | 100 | 100 | 100 | 100 |
| Embedment depth | h_s [mm] | 15 | 17 | 17 | 25 |
| Characteristic resistance | | | | | |
| Tension load | $N_{RK}^{1)}$ [kN] | 6,2 | 4,8 | 7,8 | 8,0 |
| Shear load | $V_{RK}^{1)}$ [kN] | 7,8 | 7,9 | 7,0 | 9,1 |
| Partial safety factor | γ_M [-] | 1,8 | | | |
| Combined tension and shear load | | | | | |
| Trilinear limit value | X [-] | 1,2 | | | |
| Stone group | | I | II | III | IV |
| α_{TR} | [-] | 1,0 | | | |

¹⁾ For other natural stones according to Table B1, the resistance is determined in accordance with Technical Report 062:2024 "Design of fasteners for façade panels made of natural stone".

Table C2: Characteristic resistance for steel failure

| Diameter of drill hole and Anchor | $\emptyset d_0$ [mm] | 11 FZP M6 | 13 FZP M8 | 15 FZP M10 | 13 ²⁾ FZP M6i | 15 ²⁾ FZP M8i |
|----------------------------------------------|------------------------|--------------|--------------|---------------|-----------------------------|-----------------------------|
| Characteristic resistance under tension load | $N_{RK,s}$ [kN] | 14,1 | 25,6 | 40,6 | 14,1 | 19,7 |
| Partial safety factor | $\gamma_{Ms}^{1)}$ [-] | 1,87 | | | | |
| Characteristic resistance under shear load | $V_{RK,s}$ [kN] | 7,0 | 12,8 | 20,3 | 7,0 | 9,8 |
| Partial safety factor | $\gamma_{Ms}^{1)}$ [-] | 1,56 | | | | |
| Cone bolt with UNC thread | UNC [Inch] | FZP 1/4 | FZP 5/16 | FZP 3/8 | FZP 1/4i | FZP 5/16i |
| Characteristic resistance under tension load | $N_{RK,s}$ [kN] | 14,3 | 23,6 | 35,0 | 13,0 | 20,3 |
| Partial safety factor | $\gamma_{Ms}^{1)}$ [-] | 1,87 | | | | |
| Characteristic resistance under shear load | $V_{RK,s}$ [kN] | 7,1 | 11,8 | 17,5 | 6,5 | 10,1 |
| Partial safety factor | $\gamma_{Ms}^{1)}$ [-] | 1,56 | | | | |

¹⁾ In absence of national regulations

²⁾ For the anchor with internal thread only a fixing screw of size M6, UNC1/4 or M8, UNC5/16 made of stainless steel 1.4401 or 1.4571 EN ISO 10088-3:2014 with a minimum strength class 70 in accordance with EN ISO 3506-1:2009 ($f_{uk} = 700 \text{ N/mm}^2$, $f_{yk} = 450 \text{ N/mm}^2$) can be used. The screw-in depth of the fastening screw is at least 6 mm from the back of the panel.

fischer Zykron panel anchor FZP

Performances

Characteristic resistance in natural stone and steel resistance

Annex C 1

Appendix 13 / 13