



## DÉCLARATION DES PERFORMANCES

### DoP 0258

pour goujon d'ancre fischer EXA (fixation mécanique pour utilisation dans le béton)

FR

1. Code d'identification unique du type de produit: **DoP 0258**
2. Usage(s) prévu(s): **Fixation dans du béton non fissuré, voir annexes, en particulier les annexes B1 - B3.**
3. Fabricant: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Allemagne**
4. Mandataire: **-**
5. Système(s) d'évaluation et de vérification de la constance des performances: **1**
6. Document d'évaluation européen: **EAD 330232-00-0601**  
Evaluation Technique Européenne: **ETA-05/0185; 2018-06-19**  
Organisme d'évaluation technique: **CSTB - Centre Scientifique et Technique du Bâtiment**  
Organisme(s) notifié(s): **2873 TU Darmstadt**

#### 7. Performance(s) déclarée(s):

##### Résistance mécanique et stabilité (BWR 1)

###### Résistance caractéristique à la charge de traction (charge statique et quasi-statique):

Résistance à la rupture de l'acier (charge de traction) : Annexe C1

$E_s = 210\,000 \text{ MPa}$

Résistance à l'extraction glissement: Annexe C1

Résistance à la rupture du cône béton: Annexe C1

Robustesse: Annexe C1

Distance au bord et entraxe mini.: Annexe B2

Distance au bord pour éviter la rupture par fendage sous charge: Annexe C1

$N_{Rk,sp}^0 = NPD$

###### Résistance caractéristique à la charge de cisaillement (charge statique et quasi-statique):

Résistance à la rupture de l'acier: Annexe C1

Résistance à la rupture par effet de levier: Annexe C1

Résistance à la rupture du béton en bord de dalle: Annexe C1

Déplacements sous charge statique et quasi-statique: Annexe C2

Durabilité: Annexes A2, B1

###### Résistance caractéristique et déplacements pour les catégories de performance sismique C1 et C2:

Résistance à la rupture de l'acier: NPD

Résistance à l'extraction glissement : NPD

Allongement à la rupture: NPD

Facteur espace annulaire : NPD

Déplacements: NPD

##### Sécurité en cas d'incendie (BWR 2)

Réaction au feu: Classe (A1)

###### Résistance au feu:

Résistance en cas d'incendie, rupture de l'acier (charge de traction): NPD

Résistance en cas d'incendie, extraction glissement (charge de traction) : NPD

Résistance en cas d'incendie, rupture de l'acier (charge de cisaillement) : NPD

8. Documentation technique appropriée et/ou documentation technique spécifique: **-**

Les performances du produit identifié ci-dessus sont conformes aux performances déclarées. Conformément au règlement (UE) no 305/2011, la présente déclaration des performances est établie sous la seule responsabilité du fabricant mentionné ci-dessus.

Signé pour le fabricant et en son nom par:

Dr.-Ing. Oliver Geibig, Directeur Général Business Units & Ingénierie  
Tumlingen, 2021-01-15

Jürgen Grün, Directeur Général Chimie & Qualité

Cette DoP a été préparée en plusieurs langues. En cas de différend relatif à l'interprétation, la version anglaise prévaudra.

L'annexe comprend des informations volontaires et complémentaires en langue anglaise dépassant les exigences légales (spécifiées de manière neutre).

## **Specific Part**

### **1 Technical description of the product**

The fischer Anchor bolt EXA anchor is an anchor made of zinc electroplated steel, with two expansion sleeves in the range of sizes M8, M10, M12, M16 and M20.

The anchor is placed into a drilled hole and anchored by torque-controlled expansion.

The illustration and the description of the product are given in Annexes A.

### **2 Specification of the intended use**

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annexes B.

The provisions made in this European technical assessment are based on an assumed working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### **3 Performance of the product**

#### **3.1 Mechanical resistance and stability (BWR 1)**

<b>Essential characteristic</b>	<b>Performance</b>
Characteristic tension resistance acc. EN 1992-4	See Annex C1
Characteristic shear resistance acc. EN 1992-4	See Annex C1
Displacements	See Annex C2

#### **3.2 Safety in case of fire (BWR 2)**

<b>Essential characteristic</b>	<b>Performance</b>
Reaction to fire	Anchorages satisfy requirements for Class A1

#### **3.3 Hygiene, health and the environment (BWR 3)**

Regarding dangerous substances contained in this European technical approval, there may be requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Directive, these requirements need also to be complied with, when and where they apply.

#### **3.4 Safety in use (BWR 4)**

For Basic requirement Safety in use the same criteria are valid as for Basic Requirement Mechanical resistance and stability.

#### **3.5 Protection against noise (BWR 5)**

Not relevant.

#### **3.6 Energy economy and heat retention (BWR 6)**

Not relevant.

### **3.7 Sustainable use of natural resources (BWR 7)**

For the sustainable use of natural resources no performance was determined for this product.

### **3.8 General aspects relating to fitness for use**


Durability and Serviceability are only ensured if the specifications of intended use according to Annex B1 are kept.

## **4 Assessment and verification of constancy of performance (AVCP)**


According to the Decision 96/582/EC of the European Commission<sup>1</sup>, as amended, the system of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) given in the following table apply.

<b>Product</b>	<b>Intended use</b>	<b>Level or class</b>	<b>System</b>
Metal anchors for use in concrete	For fixing and/or supporting to concrete, structural elements (which contributes to the stability of the works) or heavy units	—	1

M8, M10 and M12: Cone bolt manufactured by cold - forming:

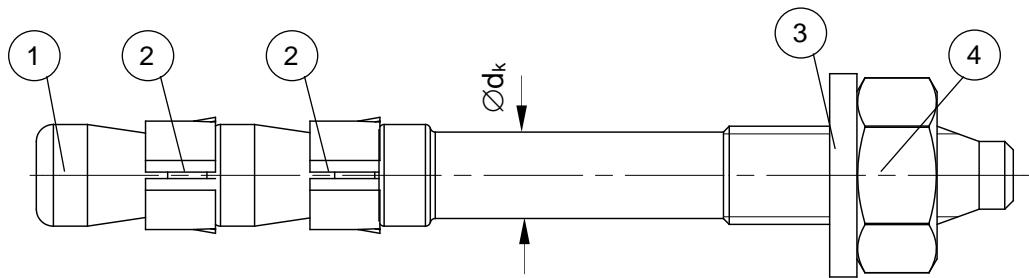

M12, M16 and M20: Cone bolt manufactured by metal - cutting:

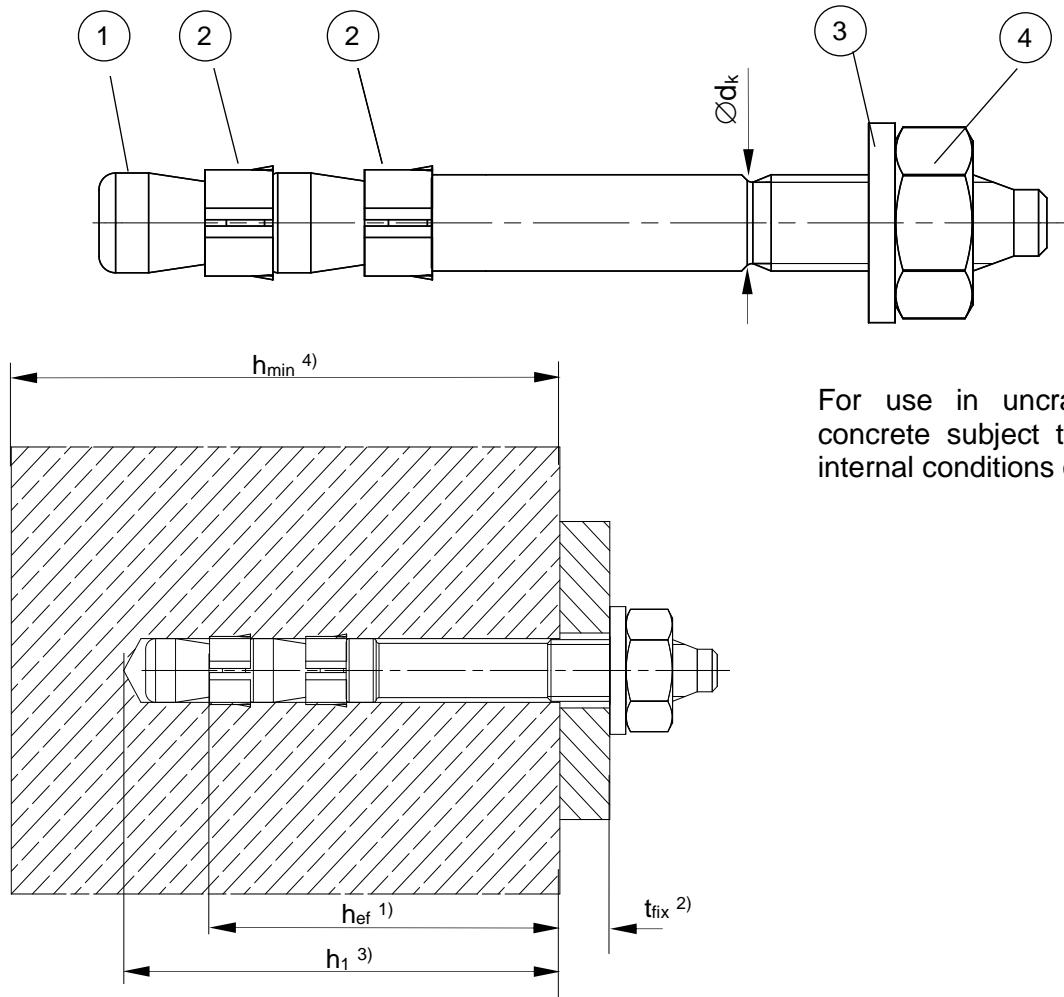

- ① Cone bolt (cold – formed or metal - cut)
- ② Expansion sleeve
- ③ Washer
- ④ Hexagon nut

- <sup>1)</sup> effective anchorage depth
- <sup>2)</sup> thickness of fixture
- <sup>3)</sup> drill hole depth
- <sup>4)</sup> min. thickness of concrete member


## fischer Anchor bolt EXA

### Product description

Installation condition

### Annex A1

Appendix 3 / 9

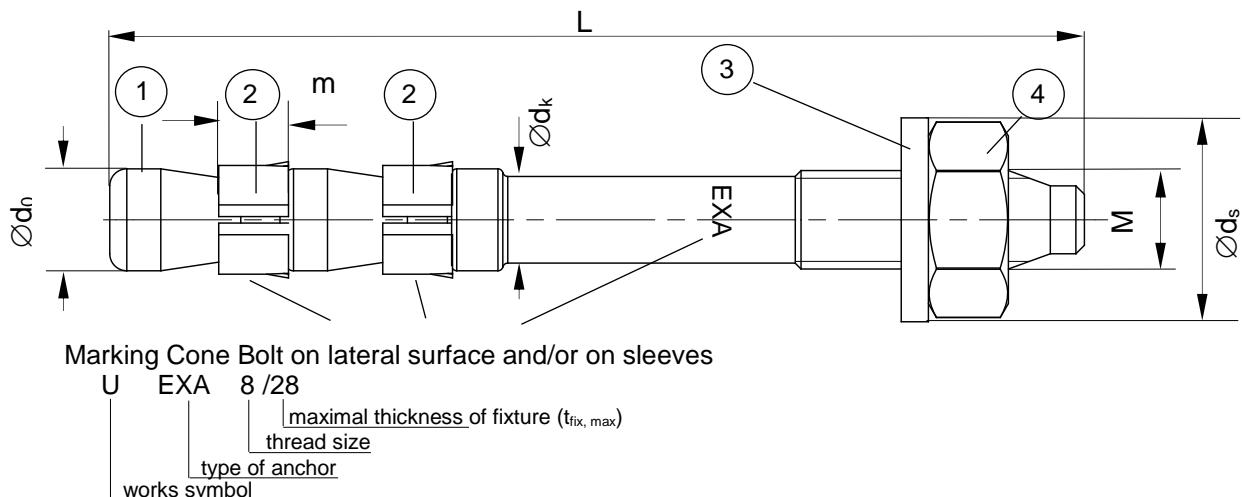

**Table A2.1:** Anchor dimensions [mm]

Part	Designation	Dimensions	EXA M8	EXA M10	EXA M12	EXA M16	EXA M20
1	Cone bolt	M	8	10	12	16	20
		$\emptyset d_0$	= 7,9	= 9,9	= 11,9	= 16,0	= 20,0
		$\emptyset d_k$	= 7,1	= 8,9	= 10,8	= 15,5	= 18,2
2	Expansion sleeve	m	= 5,3	= 6,4	= 7,2	= 10,3	= 12
3	Washer	ts	$\geq 1,4$	$\geq 1,8$	$\geq 2,3$	$\geq 2,7$	$\geq 2,7$
		$\emptyset d_s$	$\geq 15$	$\geq 19$	$\geq 23$	$\geq 29$	$\geq 36$
4	Hexagon nut	SW	13	17	19	24	30
	Thickness of fixture $t_{fix}$	min	$\geq 0$				
		max	$\leq 200$	$\leq 250$	$\leq 350$	$\leq 400$	$\leq 500$
	Length of anchor	$L_{min}$	68	73	97	122	146
		$L_{max}$	267	323	446	522	646

**Table A2.2:** Materials

Part	Designation	Material	Treatment
1	Cone bolt	Cold form steel or free cutting steel	Zinc plated $\geq 5 \mu\text{m}$ according to EN ISO 4042
2	Expansion sleeve	Cold strip, EN 10088-2 or EN 10139	EN 10088-2: --- EN 10139: Zinc plated $\geq 5 \mu\text{m}$ according to EN ISO 4042
3	Washer	Cold strip, EN 10139	Zinc plated $\geq 5 \mu\text{m}$ according to EN ISO 4042;
4	Hexagon nut	Steel, property class 8, EN 20898-2	Nuts M8 and M10 with coating

## fischer Anchor bolt EXA

### Product description

Dimensions and materials

### Annex A2

Appendix 4 / 9

## **Specifications of intended use**

### **Anchorage subject to:**

- Static and quasi-static loads

### **Base materials:**

- Uncracked concrete
- Reinforced or unreinforced normal weight concrete of strength classes C20/25 at least to C50/60 at most according to EN 206.

### **Use conditions (Environmental conditions):**

- Structures subject to dry internal conditions.

### **Design:**

- The anchorages are designed in accordance with the EN 1992-4 "Design of fastenings for use in concrete" or with ETAG001 Annex C "Design Method for Anchorages" under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings.

### **Installation:**

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Use of the anchor only as supplied by the manufacturer without exchanging the components of an anchor.
- Anchor installation in accordance with the manufacturer's specifications and drawings and using the appropriate tools.
- Effective anchorage depth, edge distances and spacing not less than the specified values without minus tolerances.
- Hole drilling by hammer drill with conventional bit or hollow drill bit.
- Cleaning of the hole of drilling dust.
- Application of specified torque moment using a calibrated torque wrench.
- In case of aborted hole, drilling of new hole at a minimum distance of twice the depth of the aborted hole, or smaller distance provided the aborted drill hole is filled with high strength mortar and no shear or oblique tension loads in the direction of aborted hole

**fischer Anchor bolt EXA**

**Product description**


Specification

**Annex B1**

Appendix 5 / 9

**Table B2.1:** Installation parameters

Type of anchor / size		EXA M8	EXA M10	EXA M12	EXA M16	EXA M20
Nominal drill hole diameter	$d_0 = [\text{mm}]$	8	10	12	16	20
Cutting diameter of drill bit	$d_{\text{cut}} \leq [\text{mm}]$	8,45	10,45	12,5	16,5	20,55
Effective anchorage depth	$h_{\text{ef}} \geq [\text{mm}]$	47	49	67	85	103
Depth of drill hole in concrete	$h_1 \geq [\text{mm}]$	60	65	85	110	130
Minimum thickness of concrete member	$h_{\min} \geq [\text{mm}]$	100	100	135	170	205
Diameter of clearance hole in the fixture	$d_f \leq [\text{mm}]$	9	12	14	18	22
Required torque moment	$T_{\text{inst}} = [\text{Nm}]$	14	30	60	80	140

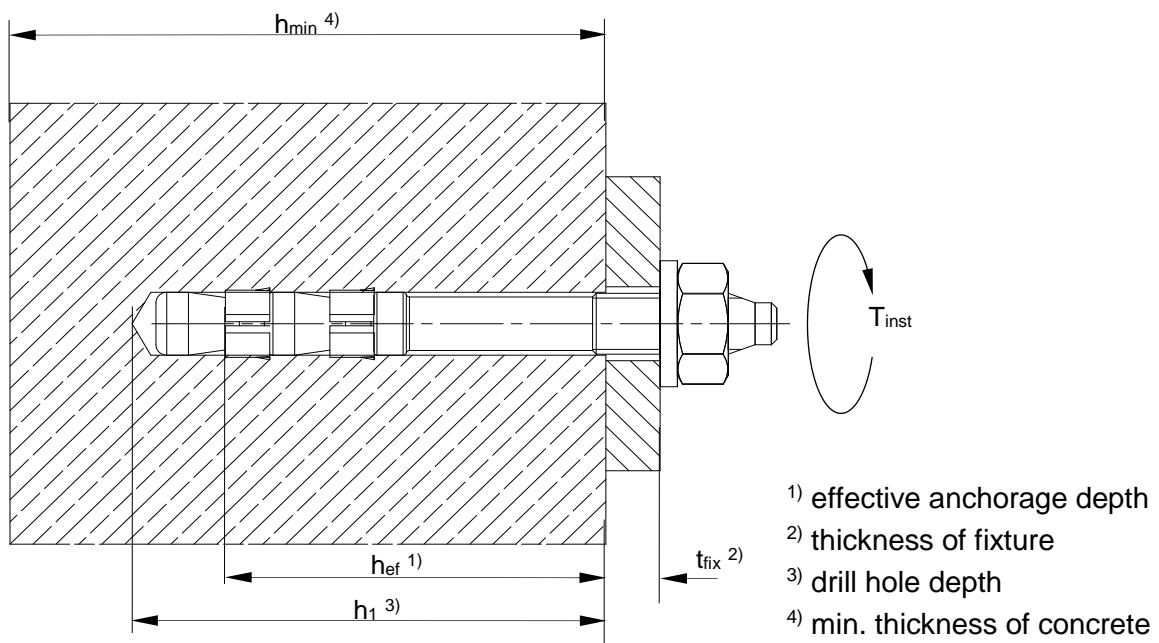

**Table B2.2:** Minimum spacing and minimum edge distances of anchors

Type of anchor / size		EXA M8	EXA M10	EXA M12	EXA M16	EXA M20
Minimum spacing	$s_{\min} [\text{mm}]$	45	50	75	85	105
	for $c \geq [\text{mm}]$	60	85	90	145	170
Minimum edge distance	$c_{\min} [\text{mm}]$	40	65	90	90	100
	for $s \geq [\text{mm}]$	100	100	75	145	170

**fischer Anchor bolt EXA**






**Intended Use**

Installation parameters, minimum spacing and edge distance

**Annex B2**

Appendix 6 / 9

**Installation instructions:**

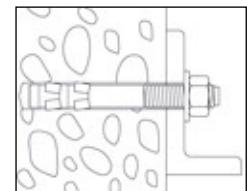

**fischer Anchor bolt EXA**

**Intended Use**

Installation instructions

**Annex B3**

Appendix 7 / 9

**Table C1.1: Characteristic resistance to tension and shear load**

				EXA M8	EXA M10	EXA M12	EXA M16	EXA M20
<b>Steel failure</b>								
Characteristic Resistance in <b>tension</b>	$N_{Rk,s}$	[kN]	23	35	48	62	108	
Partial safety factor	$\gamma_{Ms,N}^{1)}$	[-]	1,48	1,44	1,40	1,57	1,57	
Characteristic resistance in <b>shear without lever arm</b>	$V_{Rk,s}$	[kN]	13	19	23 <sup>2)</sup>	51 <sup>2)</sup>	75 <sup>2)</sup>	
Partial safety factor	$\gamma_{Ms,V}^{1)}$	[-]	1,50	1,50	1,50	1,31	1,31	
$k_7$ Factor	$k_7$	[-]	1,0	1,0	1,0	1,0	1,0	
Characteristic resistance in <b>bending</b>	$M_{Rk,s}^0$	[Nm]	27	50	85	183	357	
<b>Pullout failure</b>								
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	12	16	25	35	52	
Increasing factor for $N_{Rk}$	C25/30	[-]			1,10			
	C30/37	[-]			1,22			
	C35/45	[-]			1,34			
	C40/50	[-]			1,41			
	C45/55	[-]			1,48			
	C50/60	[-]			1,55			
<b>Concrete cone failure and splitting failure</b>								
Effective embedment depth	$h_{ef}$	[mm]	47	49	67	85	103	
Factor uncracked concrete	$k_{ucr,N}$	[-]			10,1			
Installation safety factor	$\gamma_2 = \gamma_{Inst}$				1,0			
Increasing factor for $N_{Rk}$	C30/37	[-]			1,22		1,12	1,00
	C40/50	[-]			1,41		1,23	1,00
	C50/60	[-]			1,55		1,30	1,00
Characteristic spacing concrete cone failure	$s_{cr,N}$	[mm]	140	150	200	260	310	
Characteristic spacing splitting failure	$s_{cr,sp}$	[mm]	330	340	425	425	515	
Characteristic edge distance concrete cone failure	$c_{cr,N}$	[mm]	70	75	100	130	155	
Characteristic edge distance splitting failure	$c_{cr,sp}$	[mm]	165	170	215	215	260	
<b>Concrete pryout failure</b>								
$k_8$ factor	$k_8$	[-]	1,0	1,0	2,0	2,0	2,0	
<b>Concrete edge failure</b>								
Effective length of anchor	$l_f = h_{ef}$	[mm]	47	49	67	85	103	
Outside diameter of anchor	$d_{nom}$	[mm]	8	10	12	16	20	

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> Values issued from the test series because the failure does not occur in the threaded part.

## fischer Anchor bolt EXA

### Performances

Characteristic Resistances of tension and shear load

### Annex C1

Appendix 8 / 9

**Table C2.1: Displacements under tension loads**

		<b>EXA M8</b>	<b>EXA M10</b>	<b>EXA M12</b>	<b>EXA M16</b>	<b>EXA M20</b>
<b>Tension load in uncracked concrete C20/25 to C50/60</b>	[kN]	3,4	5,3	8,3	13,9	20,6
<b>Displacement</b>	$\delta_{N0}$ [mm]	0,1	0,1	0,1	0,2	0,3
	$\delta_{N\infty}$ [mm]	0,3	0,3	0,3	0,3	0,6

**Table C2.2: Displacements under shear loads**

		<b>EXA M8</b>	<b>EXA M10</b>	<b>EXA M12</b>	<b>EXA M16</b>	<b>EXAM 20</b>
<b>Shear load in uncracked concrete C20/25 to C50/60</b>	[kN]	6,2	9,1	11,0	27,8	40,9
<b>Displacement</b>	$\delta_{v0}$ [mm]	2,7 <sup>1)</sup>	4,5 <sup>1)</sup>	2,5 <sup>1)</sup>	3,2 <sup>1)</sup>	5,5 <sup>1)</sup>
	$\delta_{v\infty}$ [mm]	3,8 <sup>1)</sup>	6,1 <sup>1)</sup>	3,1 <sup>1)</sup>	4,3 <sup>1)</sup>	7,6 <sup>1)</sup>

<sup>1)</sup> All values including axial clearance from anchor and attachment part.

Displacement under shear loading: additional displacements due to through hole in the fixture shall be considered

**fischer Anchor bolt EXA**

**Performances**

Displacements

**Annex C2**

Appendix 9 / 9