



DÉCLARATION DES PERFORMANCES

DoP 0320

pour le système d'injection fischer FIS P Plus (cheville à scellement pour utilisation dans la maçonnerie)

FR

1. Code d'identification unique du type de produit: **DoP 0320**
2. Usage(s) prévu(s): Fixation dans la maçonnerie voir annexes, en particulier les annexes B1 - B10.
3. Fabricant: fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Allemagne
4. Mandataire: -
5. Système(s) d'évaluation et de vérification de la constance des performances: 1
6. Document d'évaluation européen: ETAG 029, April 2013, utilisé en tant que DEE
Evaluation Technique Européenne: ETA-11/0419; 2015-10-30
Organisme d'évaluation technique: DIBt- Deutsches Institut für Bautechnik
Organisme(s) notifié(s): 2873 TU Darmstadt
7. Performance(s) déclarée(s):
Résistance mécanique et stabilité (BWR 1)
Valeurs caractéristiques de résistance:
Facteur de réduction: voir annexes, en particulier annexe C6
Résistance caractéristique d'une cheville isolée sous charge de traction: voir annexes, en particulier les annexes B2, C1-C4
Résistance caractéristique d'un groupe de chevilles sous charge de traction: voir annexes, en particulier annexe C8
Résistance caractéristique d'une cheville isolée sous charge de cisaillement: voir annexes, en particulier les annexes B2, C1-C4
Résistance caractéristique d'un groupe de chevilles sous charge de cisaillement avec ou sans influence du bord: voir annexes, en particulier annexe C8
Distance au bord et entraxe caractéristiques: voir annexes, en particulier les annexes C7, C8
Distance au bord et entraxe mini.: voir annexes, en particulier les annexes C7, C8
Facteur de groupe sous charges de traction et de cisaillement: voir annexes, en particulier les annexes C7, C8
Epaisseur mini. du support: voir annexes, en particulier annexe B3, B4, C1-C4
Durabilité: voir annexes, en particulier les annexes A4, B1, B2
Déplacements: voir annexes, en particulier annexe C5
- Sécurité en cas d'incendie (BWR 2)**
Réaction au feu: Classe (A1)
-
- Hygiène, santé et environnement (BWR 3)**
Contenu, émission et/ou rejet de substances dangereuses: NPD
8. Documentation technique appropriée et/ou documentation technique spécifique: -

Les performances du produit identifié ci-dessus sont conformes aux performances déclarées. Conformément au règlement (UE) no 305/2011, la présente déclaration des performances est établie sous la seule responsabilité du fabricant mentionné ci-dessus.

Signé pour le fabricant et en son nom par:

Dr. Oliver Geibig, Directeur Général Business Units & Ingénierie
Tumlingen, 2024-01-21

Jürgen Grün, Directeur Général Chimie & Qualité

Cette DoP a été préparée en plusieurs langues. En cas de différend relatif à l'interprétation, la version anglaise prévaudra.

L'annexe comprend des informations volontaires et complémentaires en langue anglaise dépassant les exigences légales (spécifiées de manière neutre).

Specific Part

1 Technical description of the product

The fischer injectionsystem FIS P Plus for masonry is a bonded anchor (injection type) consisting of a mortar cartridge with injection mortar fischer FIS P Plus, FIS P Plus Low Speed and FIS P Plus High Speed, a perforated sieve sleeve and an anchor rod with hexagon nut and washer or an internal threaded rod. The steel elements are made of zinc coated steel, stainless steel or high corrosion resistant steel.

The anchor rod is placed into a drilled hole filled with injection mortar and is anchored via the bond between steel element, injection mortar and masonry and mechanical interlock.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

| Essential characteristic | Performance |
|--|---------------------|
| Characteristic resistance for tension and shear loads | See Annex C 1 – C 4 |
| Characteristic resistance for bending moments | See Annex C 5 |
| Displacements under shear and tension loads | See Annex C 5 |
| Reduction Factor for job site tests (β -Factor) | See Annex C 6 |
| Edge distances and spacing | See Annex C 7 – C8 |

3.2 Safety in case of fire (BWR 2)

| Essential characteristic | Performance |
|---------------------------------|--|
| Reaction to fire | Anchorages satisfy requirements for Class A1 |
| Resistance to fire | No performance assessed |

3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

3.4 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

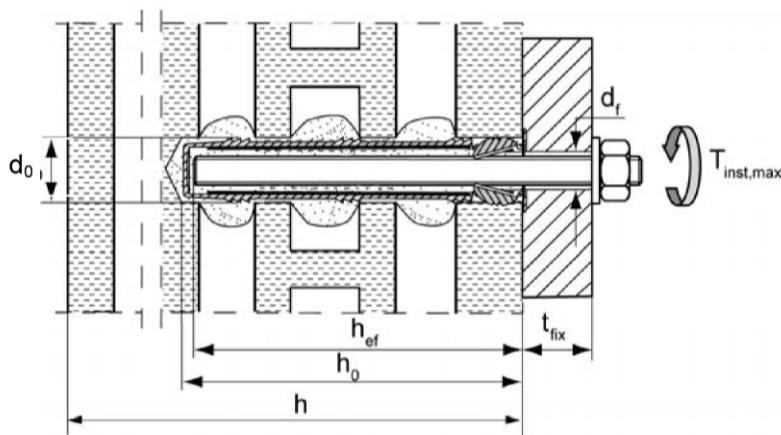
4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with guideline for European technical approval ETAG 029, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [97/177/EC].

The system to be applied is: 1

Installation conditions part 1;


Threaded rods with perforated sleeve FIS H K; Installation in perforated and solid brick masonry



Pre-positioned installation

FIS H 12x85 K
FIS H 16x85 K
FIS H 16x130 K
FIS H 20x85 K
FIS H 20x130 K
FIS H 20x200 K

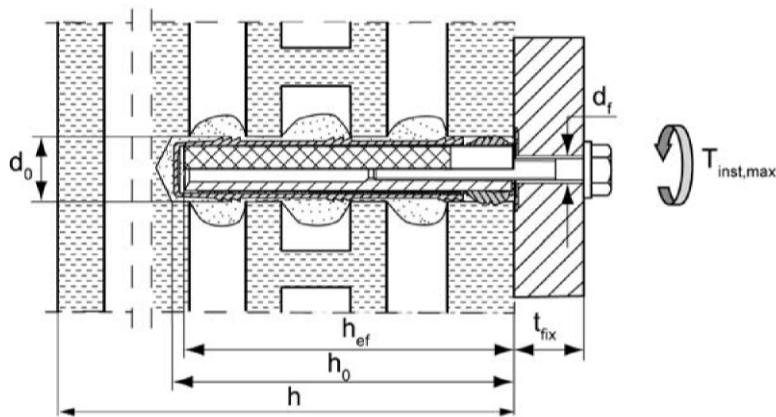Internal threaded anchors FIS E with perforated sleeve FIS H K; Installation in perforated and solid brick masonry



Pre-positioned installation

FIS H 16x85 K – FIS E 11x85 M6 and M8
FIS H 20x85 K- FIS E 15x85 M10 and M12

h_{ef} = effective anchorage depth

h_0 = depth of drill hole

t_{fix} = thickness of fixture

h = thickness of masonry

d_0 = nominal drill bit diameter

d_f = diameter of clearance hole in the fixture

$T_{inst,max}$ = maximum torque moment

fischer Injectionsystem FIS P Plus for masonry

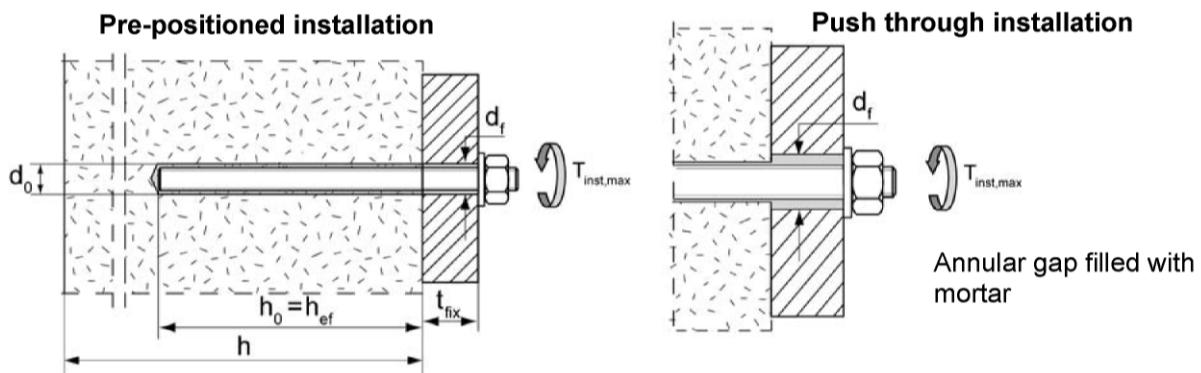
Product description

Installation condition, part 1: in perforated and solid brick masonry


Annex A 1

Installation conditions part 2;

Threaded rods without perforated sleeve FIS H K; Installation in solid brick masonry and autoclaved aerated concrete



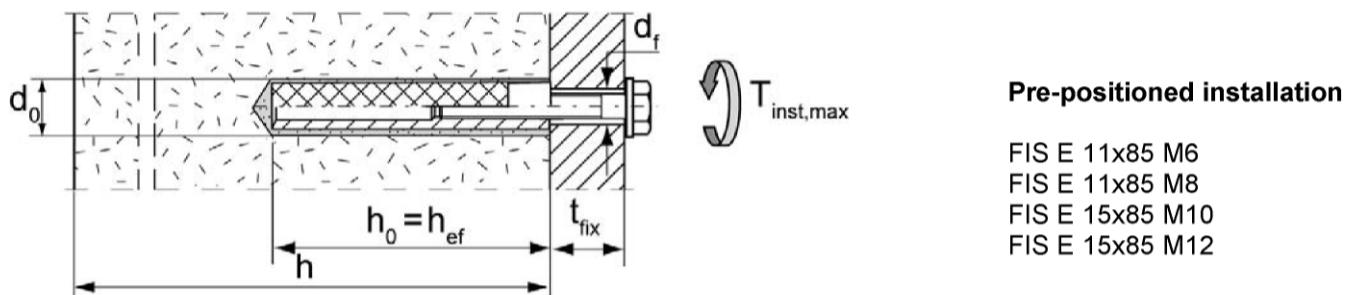Internal threaded anchors FIS E without perforated sleeve FIS H K; Installation in solid brick masonry and autoclaved aerated concrete



h_{ef} = effective anchorage depth

h_0 = depth of drill hole

t_{fix} = thickness of fixture

h = thickness of masonry

d_0 = nominal drill bit diameter

d_f = diameter of clearance hole in the fixture

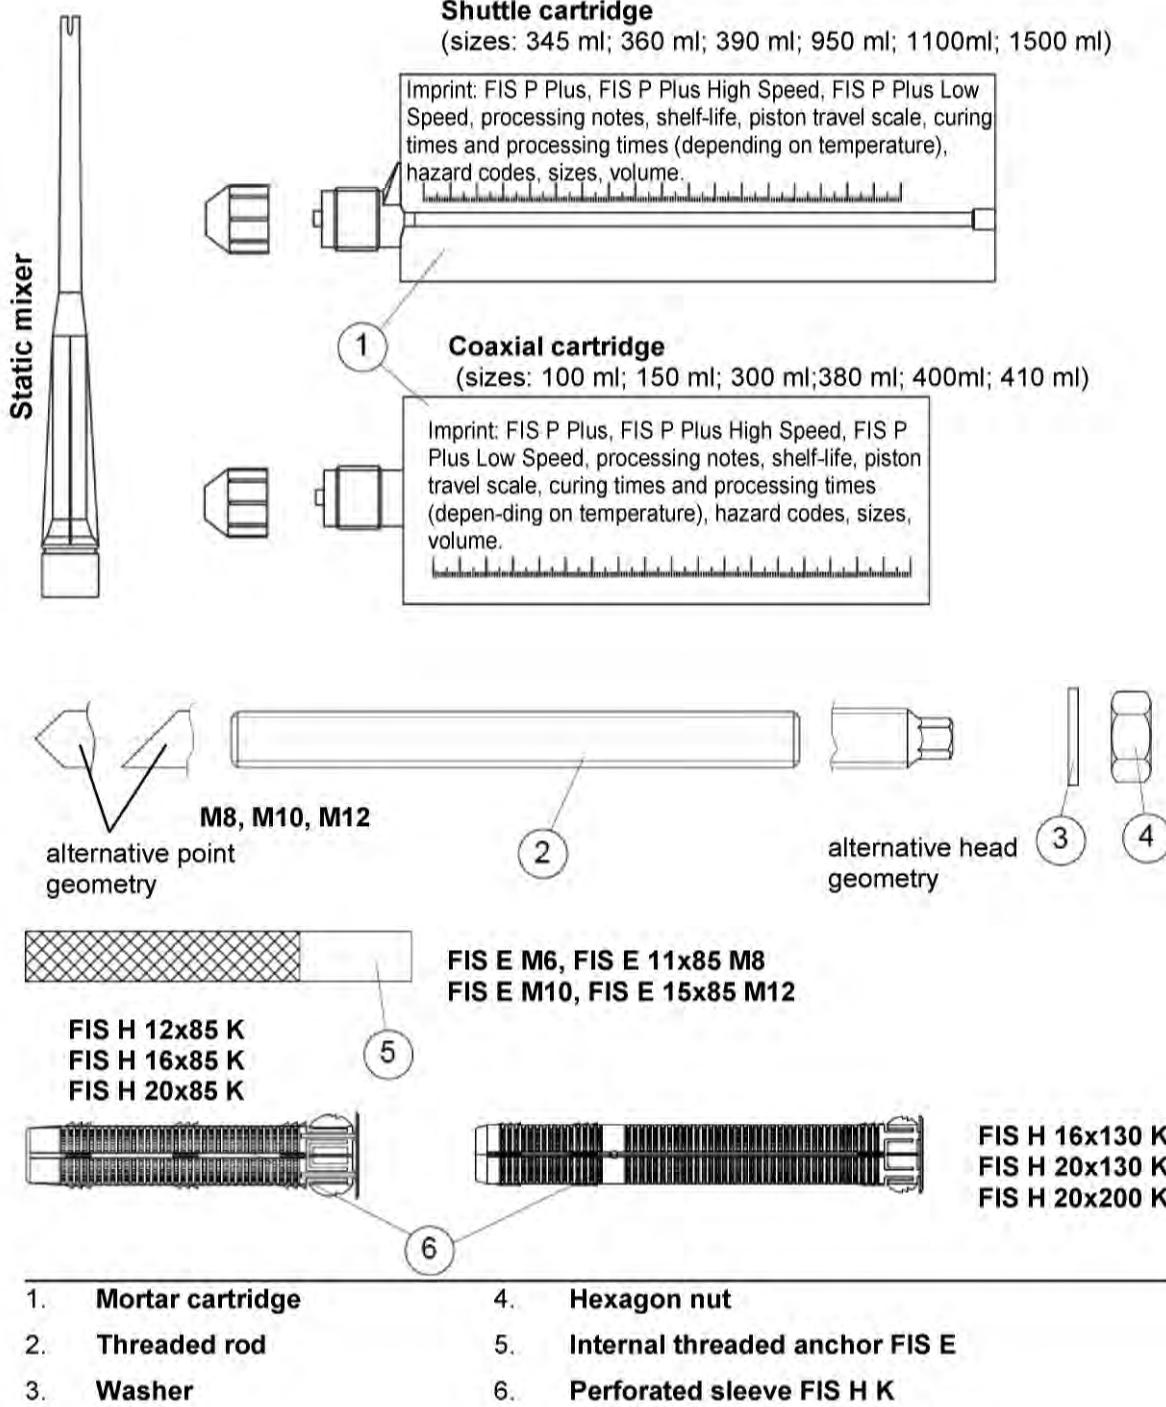
$T_{inst,max}$ = maximum torque moment

fischer Injectionsystem FIS P Plus for masonry

Product description

Installation condition, part 2: in solid brick masonry and aerated concrete

Annex A 2



fischer Injectionsystem FIS P Plus for masonry

Product description

Cartridges, anchor rods, internal threaded anchors, perforated sleeves

Annex A 3

Table A1: Materials

| Part | Designation | Material | | |
|------|--|--|--|--|
| 1 | Mortar cartridge | mortar, hardener; filler | | |
| | | Steel, zinc plated | Stainless steel A4 | High corrosion-resistant steel C |
| 2 | Threaded rod | Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5\mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ | Property class 50, 70 or 80 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ | Property class 50 or 80 EN ISO 3506:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ |
| 3 | Washer ISO 7089:2000 | zinc plated $\geq 5\mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanised ISO 10684:2004 | 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014 | 1.4565; 1.4529 EN 10088-1:2014 |
| 4 | Hexagon nut | Property class 5 or 8; EN ISO 898-2:2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K or hot-dip galvanised ISO 10684:2004 | Property class 50, 70 or 80 ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014 | Property class 50, 70 or 80 ISO 3506:2009 1.4565; 1.4529 EN 10088-1:2014 |
| 5 | Internal threaded anchor FIS E | Property class 5.8; EN 10277-1:2008 zinc plated $\geq 5\mu\text{m}$, EN ISO 4042:1999 A2K | Property class 70 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014 | Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014 |
| | Screw or threaded rod for internal threaded anchor FIS E | Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K | Property class 70 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014 | Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014 |
| 6 | Perforated sleeve FIS H K | PP / PE | | |

fischer Injectionsystem FIS P Plus for masonry

Product description
Materials

Annex A 4

Specifications of intended use part 1

Anchors subject to:

- Static and quasi-static loads

Base materials:

- Solid brick masonry (Use category b) and autoclaved aerated concrete (Use category d), acc. to Annex B8.
Note: The characteristic resistance is also valid for larger brick sizes and higher compressive strength of the masonry unit.
- Hollow brick masonry (use category c), according to Annex B8
- Mortar strength class of the masonry M2,5 at minimum according to EN 998-2:2010
- For other bricks in solid masonry, hollow or perforated masonry and autoclaved aerated concrete, the characteristic resistance of the anchor may be determined by job site tests according to ETAG 029, Annex B under consideration of the β -factor according to Annex C6, Table C4

Temperature Range:

- I: From - 40°C to +80°C (max. short term temperature +80°C and max. long term temperature +50°C)

Use conditions (Environmental conditions):

- Dry and wet structure (regarding injection mortar)
- Structures subject to dry internal conditions exist
(zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure including industrial and marine environment or exposure to permanently damp internal condition, if no particular aggressive conditions exist
(stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

fischer Injectionsystem FIS P Plus for masonry

Intended Use
Specifications part 1

Annex B 1

Appendix 7 / 24

Specifications of intended use part 2

Design:

- The anchorages have to be designed in accordance with the ETAG 029, Annex C, Design method A under the responsibility of an engineer experienced in anchorages and masonry work

Applies to all bricks, if no other values are specified:

$$N_{Rk} = N_{Rk,s} = N_{Rk,p} = N_{Rk,b} = N_{Rk,pb}$$

$$V_{Rk} = V_{Rk,s} = V_{Rk,b} = V_{Rk,c} = V_{Rk,pb}$$

- Verifiable calculation notes and drawings have to be prepared taking account the relevant masonry in the region of the anchorage, the loads to be transmitted and their transmission to the supports of the structure. The position of the anchor is indicated on the design drawings

Installation:

- Category d/d: -Installation and use in dry structures
- Category w/w: -Installation and use in dry and wet structures
- Hole drilling by hammer drill mode
- In case of aborted hole: The hole shall be filled with mortar
- Bridging of unbearing layer (e.g. plaster) see Annex B 4 (Table B1.3)
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Fastening screws or threaded rods (including nut and washer) must comply with the appropriate material and property class of the fischer internal threaded anchor FIS E
- minimum curing time see Annex B5. Table B3
- Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

Material dimensions and mechanical properties of the metal parts according to the specifications are given in Annex A4, Table A1

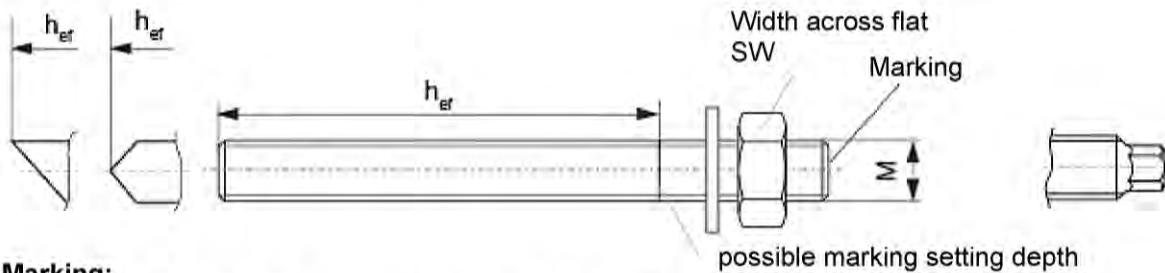
Conformation of material and mechanical properties of the metal parts by inspection certificate 3.1 according to EN 10204:2004, the documents shall be stored

Marking of the threaded rod with the envisaged embedment depth. This may be done by the manufacturer of the rod **or** by a person on job site

fischer Injectionsystem FIS P Plus for masonry

Intended Use
Specifications part 2

Annex B 2



Marking:

Property class 8.8 or high corrosion-resistant steel C, property class 80: •

Stainless steel A4, property class 50 and high corrosion-resistant steel C, property class 50: ••


Table B1.1: Installation parameters for threaded rod without perforated sleeve

| Size | M8 | M10 | M12 |
|---|--|------------------------|-----|
| Nominal drill hole diameter $d_{\text{nom}} = d_0$ [mm] | 10 | 12 | 14 |
| Width across flat SW [mm] | 13 | 17 | 19 |
| Effective anchorage depth $h_{\text{ef,min}}$ [mm] | 50 | | |
| Depth of drill hole $h_0 = h_{\text{ef}}$ | $h_{\text{ef,max}}$ [mm] | h-30 and ≤ 200 mm | |
| Effective anchorage depth AAC | $h_{\text{ef,min}}$ mm | 100 | |
| | $h_{\text{ef,max}}$ [mm] | 120 | |
| Maximum torque moment | $T_{\text{inst,max}}$ [Nm] | 10 | |
| Max. torque moment for autoclaved aerated concrete | $T_{\text{inst,max}}$ [Nm] | 1 | 2 |
| Diameter of clearance hole in the fixture | Pre-position anchorage $d_f \leq$ [mm] | 9 | 12 |
| | Push through anchorage $d_f \leq$ [mm] | 11 | 14 |
| | | | 16 |


¹⁾ $h_{\text{ef,min}} \leq h_{\text{ef}} \leq h_{\text{ef,max}}$ is possible.

fischer internal threaded anchor FIS E

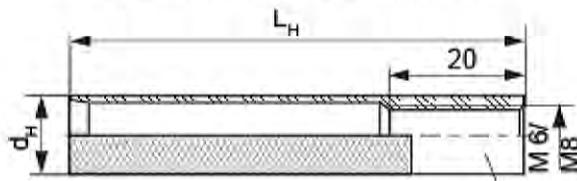FIS E 11x85 M6, FIS E 11x85 M8



FIS E 15x85 M10, FIS E 15x85 M12

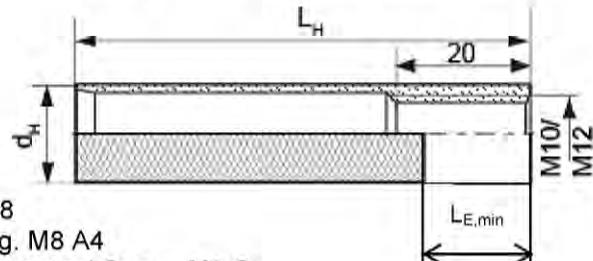

Marking: size, e.g. M8
stainless steel A4: e.g. M8 A4
high corrosion-resistant steel C: e.g. M8 C

Table B1.2: Installation parameters for internal threaded anchor FIS E without perforated sleeve

| Size FIS E | M6 | M8 | M10 | M12 |
|---|----|----|-----|-----|
| diameter of internal threaded anchor d_H [mm] | 11 | | 15 | |
| Nominal drill hole diameter $d_{\text{nom}} = d_0$ [mm] | 14 | | 18 | |
| Depth of drill hole h_0 [mm] | | | 85 | |
| Effective anchorage depth $L_H = h_{\text{ef}}$ [mm] | | | 85 | |
| Maximum torque moment $T_{\text{inst,max}}$ [Nm] | 4 | | 10 | |
| Max. torque moment for autoclaved aerated concrete $T_{\text{inst,max}}$ [Nm] | | 1 | | 2 |
| Diameter of clearance hole in the fixture $d_f \leq$ [mm] | 7 | 9 | 12 | 14 |
| Screw-in depth L_E,min [mm] | 6 | 8 | 10 | 12 |

fischer Injectionsystem FIS P Plus for masonry

Intended Use

Installation parameters, part 1

Annex B 3

Perforated sleeves FIS H 12x85; 16x85; 16x130; 20x85; 20x130; 20x200 K

Marking size
 $D_{Sleeve} \times L_{Sleeve}$
e.g. 16x85

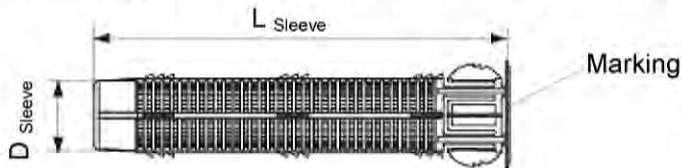



Table B1.3: Installation parameters (threaded rod and internal threaded anchor with perforated sleeve; only pre-positioned anchorage)

| Size FIS H...K | | 12x85 | 16x85 | 16x130 ²⁾ | 20x85 | 20x130 ²⁾ | 20x200 ²⁾ |
|---|---------------------|-------|-------------------------|----------------------|---------------------------|----------------------|----------------------|
| Nominal drill hole diameter ($d_0 = D_{Sleeve}$) | $d_{nom}=d_0$ [mm] | 12 | | 16 | | 20 | |
| Depth of drill hole | h_0 [mm] | 90 | 90 | 135 | 90 | 135 | 205 |
| Effective anchorage depth ¹⁾ | $h_{ef,min}$ [mm] | 85 | 85 | 110 | 85 | 110 | 180 |
| | $h_{ef,max}$ [mm] | 85 | 85 | 130 | 85 | 130 | 200 |
| Size of threaded rod | [-] | M8 | | M8, M10 | | M12 | |
| Size of internal threaded anchor | [-] | --- | FIS E 11x85 M6/M8 | --- | FIS E 15x85 M10/M12 | --- | --- |
| Maximum torque moment threaded rod and internal threaded anchor | $T_{inst,max}$ [mm] | | | | 2 | | |

¹⁾ $h_{ef,min} \leq h_{ef} \leq h_{ef,max}$ is possible.

²⁾ Bridging of unbearing layer (e.g. plaster) possible

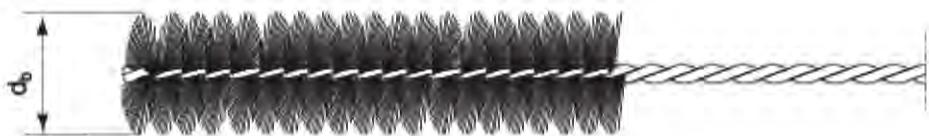Steel brush BS



Only for solid bricks and aerated concrete

Table B2: Parameters of steel brush

| | | | | | | | |
|---------------------|------------------|----|----|----|----|----|----|
| Drill hole diameter | d_0 [mm] | 10 | 12 | 14 | 16 | 18 | 20 |
| Brush diameter | $d_{b,nom}$ [mm] | 11 | 14 | 16 | 20 | 20 | 25 |

Table B3: Maximum processing time of the mortar and minimum curing time

(During the curing time of the mortar the masonry temperature may not fall below the listed minimum temperature).

| Temperature at anchoring base [°C] | | Minimum curing time ¹⁾ t_{cure} [minutes] | | | System-temperature (mortar) [°C] | | | Maximum processing time t_{work} [minutes] | | |
|--------------------------------------|--------|--|--------------------------|------------------------------------|------------------------------------|--|---|--|--------------------------|------------------------------------|
| | | FIS P Plus High Speed ³⁾ | FIS P Plus ²⁾ | FIS P Plus Low Speed ²⁾ | | | | FIS P Plus High Speed ³⁾ | FIS P Plus ²⁾ | FIS P Plus Low Speed ²⁾ |
| -10 | to -5 | 12 hours | | | | | | | | |
| >-5 | to ±0 | 3 hours | 24 hours | | | | | | | |
| >±0 | to +5 | 90 | 3 hours | 6 hours | ±0 | | 5 | | | |
| >+5 | to +10 | 45 | 90 | 3 hours | +5 | | 5 | 13 | 20 | |
| >+10 | to +20 | 30 | 60 | 2 hours | +10 | | 3 | 9 | 20 | |
| >+20 | to +30 | | 45 | 60 | +20 | | 1 | 5 | 10 | |
| >+30 | to +40 | | 35 | 30 | +30 | | | 4 | 6 | |
| | | | | | +40 | | | 2 | 4 | |

¹⁾ For wet bricks the curing time must be doubled

²⁾ Minimum cartridge temperature +5°C

³⁾ Minimum cartridge temperature ±0°C

fischer Injectionsystem FIS P Plus for masonry

Intended Use

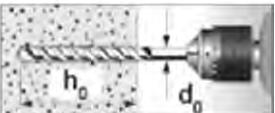
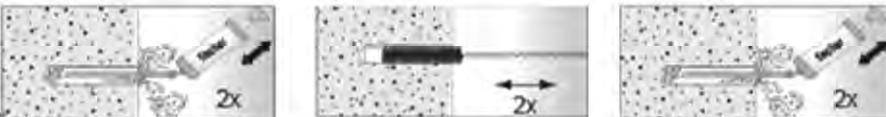
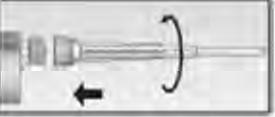
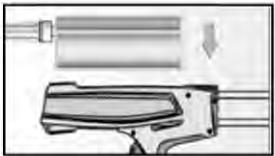
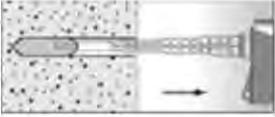
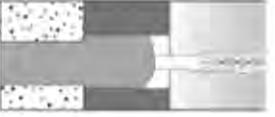
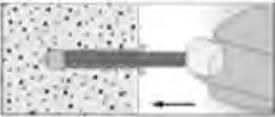
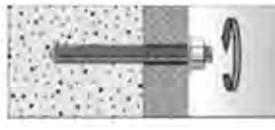
Steel brush

Processing times and curing times

Annex B 5

Installation instructions part 1

Installation and Preparing the cartridge in solid brick and autoclaved aerated concrete (without perforated sleeve)

| | | |
|---|---|--|
| 1 |  | Drill the hole. Depth of drill hole h_0 and drill hole diameter d_0 see Table B1.1 or B1.2 |
| 2 |  | Blow out the drill hole two times by hand. Brush the drill hole two times using an adequate steel brush (see Table B2) and blow out two times again |
| 3 |  | Remove the sealing cap  |
| 4 |  | Place the cartridge into a suitable dispenser.  Press out approximately 10 cm of material until the mortar is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed off. |
| 5 |  | Fill approximately 2/3 of the drill hole with mortar. Always begin from the bottom of the hole to eliminate voids ¹⁾ .  For push through installation (not FIS E) fill the annular gap also with mortar. |
| 6 |  | Only use clean and oil-free anchor elements. Mark the threaded rod for setting depth. Press the threaded rod or internal threaded anchor FIS E down to the bottom of the hole, turning it slightly by hand while doing. After inserting the anchor element, excess mortar must emerge around the anchor element. |
| 7 |  | Wait for the specified curing time t_{cure} see Table B3  Mounting the fixture $T_{\text{inst,max}}$ see Table B1.1 or B1.2 |

¹⁾ For the exact quantity of mortar see manufacturer's specification.

fischer Injectionsystem FIS P Plus for masonry

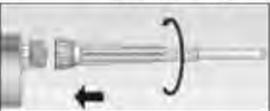
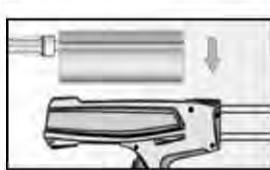
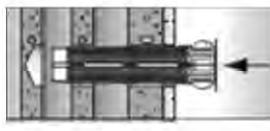
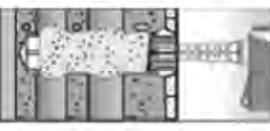
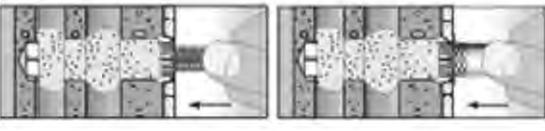
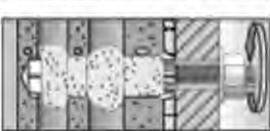
Intended Use

Installation instructions part 1 in solid brick and aerated concrete

Annex B 6

Installation instructions part 2

Installation in perforated or solid brick with perforated sleeve (pre-positioned anchorage)

| | | | | |
|---|---|---|--|---|
| 1 |  | Drill the hole. Depth of drill hole h_0 and drill hole diameter d_0 see Table B1.3 | When install perforated sleeves in solid bricks or solid areas of hollow bricks, also clean the hole by blowing out and brushing | |
| 2 |  | Remove the sealing cap |  | Screw on the static mixer (the spiral in the static mixer must be clearly visible) |
| 3 |  | Place the cartridge into a suitable dispenser |  | Press out approximately 10 cm of material until the mortar is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed off |
| 4 |  | Insert the perforated sleeve flush with the surface of the masonry or plaster. |  | Fill the perforated sleeve completely with mortar beginning from the bottom of the hole ¹⁾ . |
| 5 |  | Only use clean and oil-free anchor elements. Mark the threaded rod for setting depth. Insert the threaded rod or the internal threaded anchor FIS E by hand using light turning motions until reaching the setting depth marking (threaded rod) or flush with the surface (internal threaded anchor). | | |
| 6 |  | Wait for the specified curing time t_{cure} see Table B3 |  | Mounting the fixture. $T_{inst,max}$ see Table B1.3 |

¹⁾ For the exact quantity of mortar see manufacturer's specification.

Table B 4: Summary of bricks and blocks

| | | | | | |
|---|--|--|--|--|--|
| Brick No. 1 Solid brick Mz according to EN 771-2 $\rho \geq 1,8 \text{ [kg/dm}^3\text{]}$ $fb \geq 10 \text{ or } 20 \text{ [N/mm}^2\text{]}$ | | | Brick No. 6 Perforated brick HLz according to EN 771-1 $\rho \geq 1,4 \text{ [kg/dm}^3\text{]}$ $fb \geq 20 \text{ [N/mm}^2\text{]}$ | | |
| Brick No. 2 Solid sand-lime brick according to EN 771-2 $\rho \geq 1,8 \text{ [kg/dm}^3\text{]}$ $fb \geq 10 \text{ or } 20 \text{ [N/mm}^2\text{]}$ | | | Brick No. 7 Perforated brick HLz according to EN 771-1 $\rho \geq 1,0 \text{ [kg/dm}^3\text{]}$ $fb \geq 10 \text{ [N/mm}^2\text{]}$ | | |
| Brick No. 3 Solid sand-lime brick according to EN 771-2 $\rho \geq 1,8 \text{ [kg/dm}^3\text{]}$ $fb \geq 10 \text{ or } 20 \text{ [N/mm}^2\text{]}$ | | | Brick No. 8 Perforated brick HLz filled with mineral wool according to EN 771-1 $\rho \geq 0,6 \text{ [kg/dm}^3\text{]}$ $fb \geq 8 \text{ [N/mm}^2\text{]}$ | | |
| Brick No. 4 Sand-lime hollow brick according to EN 771-2 $\rho \geq 1,4 \text{ [kg/dm}^3\text{]}$ $fb \geq 12 \text{ or } 20 \text{ [N/mm}^2\text{]}$ | | | Brick-No. 9 Light-weight con- crete hollow block Hbl according to EN 771-1 $\rho \geq 1,0 \text{ [kg/dm}^3\text{]}$ $fb \geq 4 \text{ [N/mm}^2\text{]}$ | | |
| Brick No. 5 Perforated brick HLz according to EN 771-1 $\rho \geq 0,9 \text{ [kg/dm}^3\text{]}$ $fb \geq 10 \text{ [N/mm}^2\text{]}$ | | | Brick No. 10 Autoclaved aerated concrete block $\rho \geq 350, 500 \text{ or } 650 \text{ [kg/dm}^3\text{]}$ $fb \geq 2, 4 \text{ or } 6 \text{ [N/mm}^2\text{]}$ | | |

Imaging of the bricks are not scaled

Table B5.1: Allocation of threaded rods¹⁾, perforated sleeves^{1,2)} and perforated or solid bricks

| Kind of masonry | Brick | Valid anchor rods and perforated sleeves | |
|---|-------|--|---|
| Brick No. 1 Solid brick Mz according to EN 771-2 $\rho \geq 1,8 \text{ [kg/dm}^3\text{]}$ $fb \geq 10 \text{ or } 20 \text{ [N/mm}^2\text{]}$ | | | M8; M10; M12 FIS E 11x85 M6, M8 |
| Brick No. 2 Solid sand-lime brick according to EN 771-2 $\rho \geq 1,8 \text{ [kg/dm}^3\text{]}$ $fb \geq 10 \text{ or } 20 \text{ [N/mm}^2\text{]}$ | | | M8; M10; M12 FIS E 11x85 M6, M8 |
| Brick No. 3 Solid sand-lime brick according to EN 771-2 $\rho \geq 1,8 \text{ [kg/dm}^3\text{]}$ $fb \geq 10 \text{ or } 20 \text{ [N/mm}^2\text{]}$ | | | FIS H 12x85 K FIS H 16x85 K FIS H 20x85 K FIS H 16x130 K FIS H 20x130 K |
| Brick No. 4 Sand-lime hollow brick according to EN 771-2 $\rho \geq 1,4 \text{ [kg/dm}^3\text{]}$ $fb \geq 12 \text{ or } 20 \text{ [N/mm}^2\text{]}$ | | | FIS H 12x85 K FIS H 16x85 K FIS H 20x85 K FIS H 16x130 K FIS H 20x130 K |
| Brick No. 5 Perforated brick HLz according to EN 771-1 $\rho \geq 0,9 \text{ [kg/dm}^3\text{]}$ $fb \geq 10 \text{ [N/mm}^2\text{]}$ | | | FIS H 12x85 K FIS H 16x85 K FIS H 20x85 K FIS H 16x130 K FIS H 20x130 K |
| Brick No. 6 Perforated brick HLz according to EN 771-1 $\rho \geq 1,4 \text{ [kg/dm}^3\text{]}$ $fb \geq 20 \text{ [N/mm}^2\text{]}$ | | | FIS H 12x85 K FIS H 16x85 K FIS H 20x85 K |

¹⁾ Other combinations can be used after job site tests acc. to ETAG 029, Annex B.

²⁾ Sleeve/anchor rod combination see table B1.3

The β - factor for this job site tests are given in Table C4

Imaging of the bricks are not scaled






fischer Injectionsystem FIS P Plus for masonry

Intended Use

Allocation of threaded rods, perforated sleeves and bricks, part 1

Annex B 9

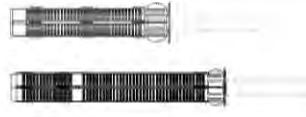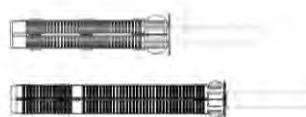Table B5.2: Allocation of threaded rods¹⁾, perforated sleeves¹⁾²⁾ and perforated or solid bricks

| Kind of masonry | Brick | Valid anchor rods and perforated sleeves | |
|--|--|---|---|
| Brick No. 7 Perforated brick HLz according to EN 771-1 $\rho \geq 1,0 \text{ [kg/dm}^3\text{]}$ $fb \geq 10 \text{ [N/mm}^2\text{]}$ |  |  | FIS H 12x85 K FIS H 16x85 K FIS H 20x85 K FIS H 20x130 K |
| Brick No. 8 Perforated brick HLz filled with mineral wool according to EN 771-1 $\rho \geq 0,6 \text{ [kg/dm}^3\text{]}$ $fb \geq 8 \text{ [N/mm}^2\text{]}$ |  |  | FIS H 12x85 K FIS H 16x85 K FIS H 20x85 K FIS H 16x130 K FIS H 20x130 K FIS H 20x200 K |
| Brick-No. 9 Light-weight con- crete hollow block Hbl according to EN 771-1 $\rho \geq 1,0 \text{ [kg/dm}^3\text{]}$ $fb \geq 4 \text{ [N/mm}^2\text{]}$ |  |  | FIS H 12x85 K FIS H 16x85 K FIS H 20x85 K FIS H 16x130 K FIS H 20x130 K |
| Brick No. 10 Autoclaved aerated concrete block $\rho \geq 350, 500 \text{ or } 650 \text{ [kg/dm}^3\text{]}$ $fb \geq 2, 4 \text{ or } 6 \text{ [N/mm}^2\text{]}$ |  |  | M8; M10; M12 |
| | |  | FIS E 11x85 M6 FIS E 11x85 M8 FIS E 15x85 M10 FIS E 15x85 M12 |

¹⁾ Other combinations can be used after job site tests acc. to ETAG 029, Annex B.

²⁾ Sleeve/anchor rod combination see table B1.3

The β - factor for this job site tests are given in Table C4

Imaging of the bricks are not scaled


fischer Injectionsystem FIS P Plus for masonry

Intended Use

Allocation of threaded rods, perforated sleeves and bricks, part 2

Annex B 10

Table C1.1: Characteristic values of resistance under tension loads and under shear loads

| Brick | Density ρ [kg/dm ³] - Compressive strength f_b [N/mm ²] | Perforated sleeve FIS H...K | Anchor size or screw size in internal threaded anchor | Effective anchorage depth $h_{ref,min}$ [mm] $h_{ref,max}$ [mm] | Characteristic resistance [kN] | | | |
|----------------------------------|---|--------------------------------|---|--|--------------------------------|-----|----------------|--|
| | | | | | N_{Rk} | | V_{Rk} | |
| | | | | | Temp. 50/80°C | | All categories | |
| | | | | | d/d | w/w | | |
| No.1 Solid brick Mz | $\rho \geq 1,8$ $f_b \geq 10$  | without | M8 | 50 | 200 | 4,0 | 2,5 | |
| | | | M10 | 50 | 79 | 3,5 | 2,0 | |
| | | | M10 | 80 | 199 | 5,0 | 3,0 | |
| | | | M10 | 200 | 200 | 8,5 | 7,5 | |
| | | | M12 | 50 | 79 | 3,0 | 2,0 | |
| | | | M12 | 80 | 199 | 5,5 | 3,5 | |
| | | | M12 | 200 | 200 | 8,0 | 5,0 | |
| | $\rho \geq 1,8$ $f_b \geq 20$ | | FIS E 11x85 M6/ M8 | 85 | 85 | 5,5 | 3,5 | |
| | | | M8 | 50 | 200 | 5,5 | 3,5 | |
| | | | M10 | 50 | 79 | 5,0 | 3,0 | |
| | | | M10 | 80 | 199 | 7,0 | 4,5 | |
| | | | M10 | 200 | 200 | 8,5 | 8,5 | |
| | | | M12 | 50 | 79 | 4,5 | 3,0 | |
| | | | M12 | 80 | 199 | 8,0 | 5,0 | |
| No.2 Solid sand-lime brick | $\rho \geq 1,8$ $f_b \geq 10$  | without | M8 | 50 | 200 | 2,5 | 1,5 | |
| | | | M10 | 50 | 79 | | | |
| | | | M10 | 80 | 199 | | | |
| | | | M10 | 200 | 200 | 8,5 | 6,0 | |
| | | | M12 | 50 | 79 | 2,5 | 1,5 | |
| | | | M12 | 80 | 199 | | | |
| | | | M12 | 200 | 200 | 8,5 | 6,5 | |
| | $\rho \geq 1,8$ $f_b \geq 20$ | | FIS E 11x85 M6/ M8 | 85 | 85 | 2,5 | 1,5 | |
| | | | M8 | 50 | 200 | 3,5 | 2,0 | |
| | | | M10 | 50 | 79 | | | |
| | | | M10 | 80 | 199 | | | |
| | | | M10 | 200 | 200 | 8,5 | 8,5 | |
| | | | M12 | 50 | 79 | 3,5 | 2,0 | |
| | | | M12 | 80 | 199 | | | |
| | | | M12 | 200 | 200 | 8,5 | 8,5 | |
| | | | FIS E 11x85 M6/ M8 | 85 | 85 | 3,5 | 2,0 | |

Imaging of the bricks are not scaled



fischer Injectionsystem FIS P Plus for masonry

Performances

Characteristic values of resistance under tension loads and under shear loads, part 1

Annex C 1

Table C1.2: Characteristic values of resistance under tension loads and under shear loads

| Brick | Density ρ [kg/dm ³] - Compressive strength f_b [N/mm ²] | Perforated sleeve FIS H...K | Anchor size or screw size in internal threaded anchor | Effective anchorage depth $h_{ref,min}$ [mm] | Characteristic resistance [kN] | | All categories |
|---|---|--|--|--|------------------------------------|--|----------------|
| | | | | | N_{Rk} | V_{Rk} | |
| | | | | | Temp. 50/80°C | | |
| | | | | | d/d | w/w | |
|  No.3 Solid sand-lime brick | $\rho \geq 1,8$ $f_b \geq 10$ | 12x85 16x85 16x85 20x85 16x130 20x130 | M8 FIS E 11x85 M6 M8/M10, FIS E 11x85 M8 M12, FIS E 15x85 M10/M12 M8/M10 M12 | 85 85 85 85 110 110 | 85 85 85 85 130 130 | 6,0 3,5 3,5 6,5 2,0 4,5 | 3,0 |
| | | | 3,5 | | | | |
| | | | 4,5 | | | | |
| | | | 5,5 | | | | |
| | | | 2,5 | | | | |
| | | | 4,5 | | | | |
|  No.4 Sand-lime hollow brick | $\rho \geq 1,4$ $f_b \geq 12$ | 12x85 16x85 16x85 20x85 16x130 20x130 | M8 FIS E 11x85 M6 M8/M10, FIS E 11x85 M8 M12, FIS E 15x85 M10/M12 M8/M10 M12 | 85 85 85 85 110 110 | 85 85 85 85 130 130 | 2,5 3,0 3,0 2,5 3,0 3,0 | 4,5 |
| | | | 4,5 | | | | |
| | | | 7,5 | | | | |
| | | | 7,5 | | | | |
| | | | 7,5 | | | | |
| | | | 7,5 | | | | |

Imaging of the bricks are not scaled



fischer Injectionsystem FIS P Plus for masonry

Performances

Characteristic values of resistance under tension loads and under shear loads, part 2

Annex C 2

Table C1.3: Characteristic values of resistance under tension loads and under shear loads

| Brick | Density ρ [kg/dm ³] Compressive strength f_b [N/mm ²] | Perforated sleeve FIS H...K | Anchor size or screw size in internal threaded anchor | Effective anchorage depth $h_{\text{ref},\text{min}}$ [mm] $h_{\text{ref},\text{max}}$ [mm] | Characteristic resistance [kN] | | | | |
|--|---|-----------------------------|---|---|--------------------------------|----------|---------------|-----|-------------------------|
| | | | | | N_{Rk} | V_{Rk} | Temp. 50/80°C | | |
| | | | | | d/d | w/w | | | |
|  No.5 Perforated brick HLz | $\rho \geq 0,9$ $f_b \geq 10$ | | 12x85 | M8 | 85 | 85 | 4,0 | 3,5 | 4,0 |
| | | | 16x85 | FIS E 11x85 M6 | 85 | 85 | 3,5 | 3,5 | 4,0 |
| | | | 16x85 | M8/M10, FIS E 11x85 M8 | 85 | 85 | 3,5 | 3,5 | 5,5 |
| | | | 20x85 | M12, FIS E 15x85 M10/M12 | 85 | 85 | 5,0 | 4,5 | 6,0 |
| | | | 16x130 | M8/M10 | 130 | 130 | 5,0 | 4,5 | 5,5 |
| | | | 20x130 | M12 | 110 | 130 | 5,0 | 4,5 | 6,0 |
|  No.6 Perforated brick HLz | $\rho \geq 1,4$ $f_b \geq 20$ | | 12x85 | M8 | 85 | 85 | 4,0 | 3,5 | 7,5 (5,5) ¹⁾ |
| | | | 16x85 | FIS E 11x85 M6 | 85 | 85 | 2,5 | | 4,0 |
| | | | 16x85 | M8/M10, FIS E 11x85 M8 | 85 | 85 | 2,5 | | 4,5 |
| | | | 20x85 | M12, FIS E 15x85 M10/M12 | 85 | 85 | 3,0 | | 8,5 (5,5) ¹⁾ |
|  No.7 Perforated brick HLz | $\rho \geq 1,0$ $f_b \geq 10$ | | 12x85 | M8 | 85 | 85 | 0,9 | | |
| | | | 16x85 | M8/M10, FIS E 11x85 M6/M8 | 85 | 85 | | | 1,2 |
| | | | 20x85 | M12, FIS E 15x85 M10/M12 | 85 | 85 | | | 2,5 |
| | | | 16x130 | M8/M10 | 110 | 130 | | | 1,5 |
| | | | 20x130 | M12 | 110 | 130 | 3,5 | 3,0 | 1,5 |
|  No.8 Perforated brick HLz | $\rho \geq 0,6$ $f_b \geq 8$ | | 12x85 | M8 | 85 | 85 | 2,0 | 2,0 | 2,5 |
| | | | 16x85 | FIS E 11x85 M6 | 85 | 85 | 2,0 | 1,5 | 2,5 |
| | | | 16x85 | M8/M10, FIS E 11x85 M8 | 85 | 85 | 2,0 | 1,5 | 3,0 |
| | | | 20x85 | M12, FIS E 15x85 M10/M12 | 85 | 85 | 2,0 | 2,0 | 1,5 |
| | | | 16x130 | M8/M10 | 130 | 130 | 3,0 | 2,5 | 3,0 |
| | | | 20x130 | M12 | 110 | 130 | 2,0 | 2,0 | 1,5 |
| | | | 20x200 | M12 | 180 | 200 | 3,0 | 3,0 | 1,5 |
|  No.9 Light-weight concrete hollow block | $\rho \geq 1,0$ $f_b \geq 4$ | | 12x85 | M8 | 85 | 85 | | | |
| | | | 16x85 | M8/M10, FIS E 11x85 M6/M8 | 85 | 85 | | | 3,0 |
| | | | 20x85 | M12, FIS E 15x85 M10/M12 | 85 | 85 | | | 2,0 |
| | | | 16x130 | M8/M10 | 130 | 130 | | | |
| | | | 20x130 | M12 | 110 | 130 | | | |

¹⁾ Characteristic value of pushing out of one brick $V_{Rk,pb} = 5,5$ kN

Imaging of the bricks are not scaled

fischer Injectionsystem FIS P Plus for masonry

Performances

Characteristic values of resistance under tension loads and under shear loads, part 3

Annex C 3

Table C1.4: Characteristic values of resistance under tension loads and under shear loads

| Brick | Density ρ [kg/dm ³] - Compressive strength f_b [N/mm ²] | Perforated sleeve FIS H...K | Anchor size or screw size in internal threaded anchor | Effective anchorage depth $h_{ef,min}$ [mm] $h_{ef,max}$ [mm] | Characteristic resistance [kN] | | All categories | |
|---|---|-----------------------------|---|--|--------------------------------|-----|----------------|--|
| | | | | | N_{Rk} | | | |
| | | | | | Temp. 50/80°C | | | |
| | | | | | d/d | w/w | | |
|  No.10 Aerated concrete block | $\rho \geq 350$ $f_b \geq 2$ | ohne | M8 | 100 | 120 | 1,5 | 1,2 | |
| | | | M10 | 100 | 120 | | 1,2 | |
| | | | M12 | 100 | 120 | | 1,5 | |
| | | | FIS E 11x85 M6/M8 FIS E 15x85 M10/M12 | 85 | | | 1,2 | |
| | $\rho \geq 500$ $f_b \geq 4$ | ohne | M8 | 100 | 120 | 2,0 | 2,5 | |
| | | | M10 | 100 | 120 | 2,5 | 2,0 | |
| | | | M12 | 100 | 120 | | 2,5 | |
| | | | FIS E 11x85 M6/M8 FIS E 15x85 M10/M12 | 85 | | 2,0 | 2,0 | |
| | $\rho \geq 650$ $f_b \geq 6$ | ohne | M8 | 100 | 120 | 3,5 | 3,0 | |
| | | | M10 | 100 | 120 | 5,0 | 3,0 | |
| | | | M12 | 100 | 120 | | 3,5 | |
| | | | FIS E 11x85 M6/M8 FIS E 15x85 M10/M12 | 85 | | 3,5 | 2,5 | |

Imaging of the bricks are not scaled

fischer Injectionsystem FIS P Plus for masonry

Performances

Characteristic values of resistance under tension loads and under shear loads, part 4

Annex C 4

Appendix 20 / 24

Table C2: Characteristic bending moments

| Size | | | M8 | M10 | M12 |
|--|----------------------------------|----------------|-----------------------|-----|-----|
| Characteristic bending moment M _{Rk,s} | Zinc-plated steel | Property class | 5.8 [Nm] | 19 | 37 |
| | | | 8.8 [Nm] | 30 | 60 |
| | Stainless steel A4 | Property class | 50 [Nm] | 19 | 37 |
| | | | 70 [Nm] | 26 | 52 |
| | | | 80 [Nm] | 30 | 60 |
| | High corrosion-resistant steel C | Property class | 50 [Nm] | 19 | 37 |
| | | | 70 ¹⁾ [Nm] | 26 | 52 |
| | | | 80 [Nm] | 30 | 60 |

¹⁾ $f_{uk} = 700 \text{ N/mm}^2$; $f_{yk} = 560 \text{ N/mm}^2$

Table C2.1: Characteristic bending moments for internal threaded anchors FIS E

| Size FIS E | | M6 | M8 | M10 | M12 |
|--|----------------------------------|-------------------------|----------|-----|-----|
| Characteristic bending moments M _{Rk,s} | zinc plated steel, | Property class of screw | 5.8 [Nm] | 8 | 19 |
| | | | 8.8 [Nm] | 12 | 30 |
| | stainless steel A4 | Property class of screw | 70 [Nm] | 11 | 26 |
| | high corrosion resistant steel C | Property class of screw | 70 [Nm] | 11 | 26 |

Tabelle C3: Displacements under tension loads and shear loads

| Material | N [kN] | δN_0 [mm] | δN^∞ [mm] | V [kN] | δV_0 [mm] | δV^∞ [mm] |
|---|------------------|-------------------|------------------------|------------------|-------------------|------------------------|
| solid units and autoclaved aerated concrete | N_{Rk} | 0,03 | 0,06 | V_{Rk} | 0,59 | 0,88 |
| | $1,4 * \gamma_M$ | | | $1,4 * \gamma_M$ | | |
| hollow units | N_{Rk} | 0,03 | 0,06 | V_{Rk} | 1,71 | 2,56 |
| | $1,4 * \gamma_M$ | | | $1,4 * \gamma_M$ | | |

fischer Injectionsystem FIS P Plus for masonry

Performances

Characteristic bending moments; displacements

Annex C 5

Table C4: β- factor for job site tests according to ETAG 029, Annex B

| Using categories | | w/w | d/d |
|-----------------------------|---|-------|-------|
| Temperature range [°C] | | 50/80 | 50/80 |
| Brick | Size ¹⁾ | | |
| Solid brick | M8 | 0,57 | 0,96 |
| | M10 | 0,59 | |
| | M12 FIS E 11x85 M6 / M8 FIS E 15x85 M10 / M12 | 0,60 | |
| Hollow brick | All sizes | 0,86 | 0,96 |
| Autoclaved aerated concrete | All size | 0,73 | 0,81 |

fischer Injectionsystem FIS P Plus for masonry**Performances**
β- factors for job site tests**Annex C 6**


Appendix 22 / 24

Table C5: Edge distance and spacing (installation with and without sleeves)

| Direction to bed joint | | | ⊥ | | | | Group factor | | | | Min. thickness of the masonry members [mm] |
|------------------------|------------------|--------------------|-----------|------------------|-----------|----------------------------|----------------|----------------|----------------|----------------|---|
| Brick No. | h_{ef} [mm] | $C_{cr} = C_{min}$ | s_{min} | s_{cr} | s_{min} | s_{cr} | ⊥ | | | | |
| | | [mm] | [mm] | [mm] | [mm] | [mm] | $\alpha_{g,N}$ | $\alpha_{g,V}$ | $\alpha_{g,N}$ | $\alpha_{g,V}$ | [mm] |
| 1 | 50 | 100 | 75 | 60 ¹⁾ | 150 | 2 | 2 | 1,5 | 1,4 | | $h_{ef} + 30$ (≥ 80) |
| | 80 | 100 | 75 | 60 ¹⁾ | 240 | 2 | 2 | 1,5 | 1,4 | | |
| | 200 | 150 | 75 | | 240 | | | 2 | | | |
| 2 | 50 | 100 | 75 | | 240 | | | 2 | | | $h_{ef} + 30$ (≥ 80) |
| | 80 | 100 | 75 | | 240 | | | 2 | | | |
| | 200 | 150 | 75 | | 240 | | | 2 | | | |
| 3 | 85 | 100 | 115 | | 240 | | | 2 | | | $h_{ef} + 30$ (≥ 80) |
| | 130 | 100 | 115 | | 240 | | | 2 | | | |
| 4 | all sizes | 100 | 115 | 100 | 240 | 2 | 2 | 1,5 | 1,5 | | |
| 5 | all sizes | 100 | 115 | | 240 | | | 2 | | | |
| 6 | all sizes | 100 | 115 | | 240 | | | 2 | | | |
| 7 | all sizes | 100 | 100 | 240 | 100 | 375 (500) ²⁾ | 1 | 1 | 1 | 1 | |
| 8 | all sizes | 120 | 245 | | 250 | | | 2 | | | |
| 9 | all sizes | 80 | 240 | | 365 | | | 2 | | | |
| 10 | all sizes | 100 | 250 | | 300 | | | 2 | | | |

¹⁾ only valid for tension loads, for shear loads $s_{\min} \parallel = s_{cr} \parallel$

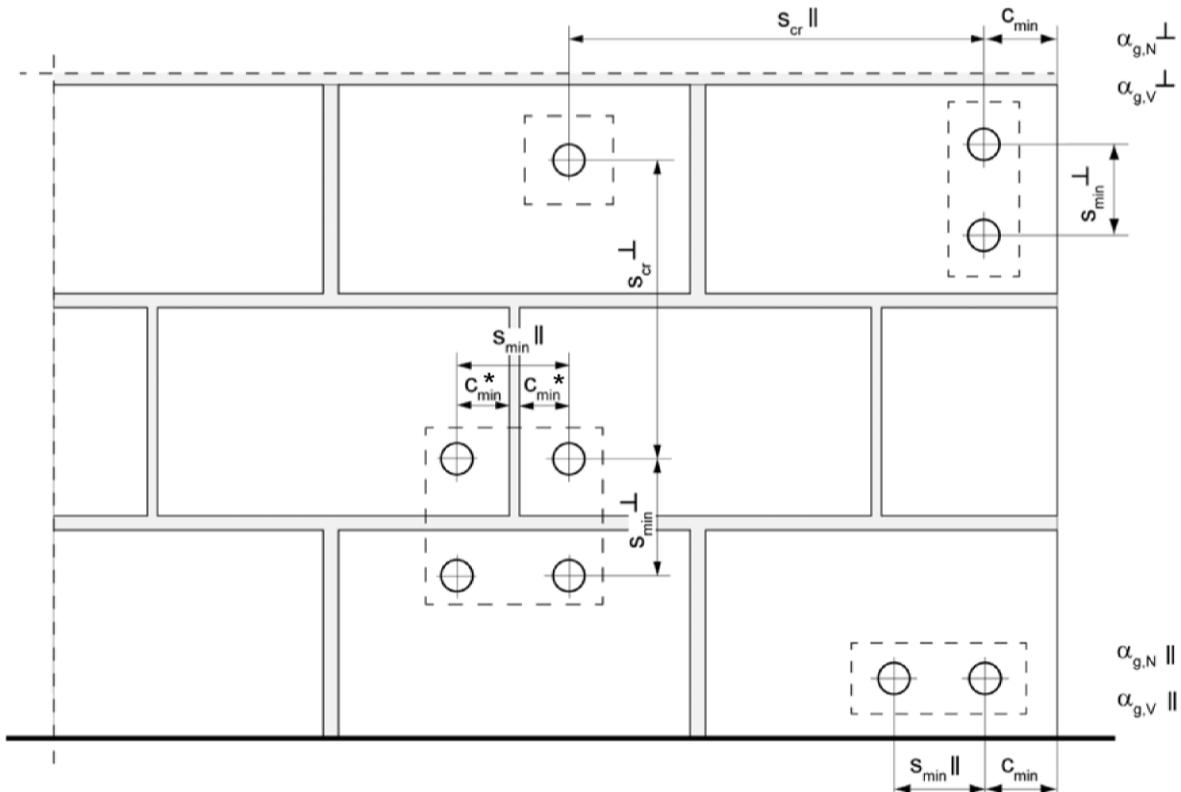²⁾ spacing for alternative brick dimension, see table B4, brick 7



* Only, if joints are visible and/or vertical joints are not filled with mortar

$s_{\min} \parallel$ = Minimum spacing parallel to bed joint

$s_{\min} \perp$ = Minimum spacing vertical to bed joint

$s_{cr} \parallel$ = Characteristic spacing parallel to bed joint

$s_{cr} \perp$ = Characteristic spacing vertical to bed joint

$c_{cr} = c_{\min}$ = Edge distance

$\alpha_{g,N} \parallel$ = Group factor for tension load parallel to bed joint

$\alpha_{g,V} \parallel$ = Group factor for shear load parallel to bed joint

$\alpha_{g,N} \perp$ = Group factor for tension load vertical to bed joint

$\alpha_{g,V} \perp$ = Group factor for shear load vertical to bed joint

For $s > s_{cr}$ $\alpha_g = 2$

For $s_{\min} \leq s \leq s_{cr}$ α_g according to table C5

$$N_{Rk}^g = \alpha_{g,N} \parallel \cdot N_{Rk}; \quad V_{Rk}^g = \alpha_{g,V} \parallel \cdot V_{Rk} \quad (\text{Group of 2 anchors})$$

$$N_{Rk}^g = \alpha_{g,N} \parallel \cdot \alpha_{g,N} \perp \cdot N_{Rk}; \quad V_{Rk}^g = \alpha_{g,V} \parallel \cdot \alpha_{g,V} \perp \cdot V_{Rk} \quad (\text{Group of 4 anchors})$$

fischer Injectionsystem FIS P Plus for masonry

Performance

Definition of minimum edge distance, minimum spacing and group factors

Annex C 8