

## IZJAVA O SVOJSTVIMA

### DoP 0382

za fischer sidreni vijak FBN II HDG (Mehaničko sidro za uporabu u betonu)

HR

1. Jedinstveni identifikator tipa proizvoda: **DoP 0382**
2. Namjena korištenja: **Naknadno učvršćivanje u ne-napuknutom betonu, vidi dodatak, posebno priloge B1-B5.**
3. Proizvođač: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Njemačka**
4. Ovlašteni zastupnik: **–**
5. Sistem/i od AVCP: **1**
6. Europski dokument za ocjenjivanje: **EAD 330232-01-0601-v01**  
Europska tehnička ocjena: **ETA-18/0101; 2025-07-03**  
Tijelo za tehničko ocjenjivanje: **ETA-Danmark A/S**  
Prijavljeno tijelo/prijavljena tijela: **2873 TU Darmstadt**

### 7. Objavljena svojstva:

#### **Mehanička otpornost i stabilnost (BWR 1)**

##### **Karakteristični otpor na opterećenje (statičko i kvazi-statičko opterećenje) Metoda A:**

Otpornost na lom čelika: Priloge C1  
Otpornost na čupanje: Priloge C1  
Otpornost na lom betona: Priloge C1  
Robusnost: vidi dodatak, posebno prilog C1, C2  
Minimalna udaljenost od ruba i razmak: Priloge B5  
Udaljenost ruba kako bi se spriječilo cijepanje pod opterećenjem: - NPD

##### **Karakteristični otpor na smicanje (statičko i kvazi-statičko opterećenje), Metoda A:**

Otpornost na lom čelika (posmično opterećenje): Priloge C2  
Otpornost na otkazivanje: Priloge C2

##### **Karakteristična otpornost za pojednostavljeni návrh:**

Metoda B: NPD  
Metoda C: NPD

##### **Istisnine:**

Pomaci pri statičkom i kvazi-statičkom opterećenju: Priloge C2

#### **Sigurnost u slučaju požara (BWR 2)**

Reakcija na vatru: NPD

##### **Otpornost na vatru:**

Vatrootpornost na lom čelika (vlačna sila): NPD  
Vatrootpornost na čupanje (vlačna sila): NPD  
Vatrootpornost na lom čelika (posmik): NPD


#### **Trajnost:**

Trajnost: Priloge A3, B1-B3

### 8. Odgovarajuća tehnička dokumentacija i/ili specifična tehnička dokumentacija: **–**

Svojstva gore navedenog proizvoda su u skladu sa skupom izjava o svojstvima. Ova izjava o svojstvima se izdaje, u skladu sa Europskom regulativom (EU) Br. 305/2011, pod punom odgovornošću gore navedenog proizvođača.

Za proizvođača i u njegovo ime potpisao:

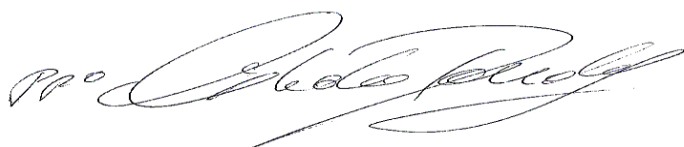

Dr. Ronald Mihala, Glavni direktor za istraživanje i razvoj  
Tumlingen, 2025-08-01



Dieter Pfaff, Voditelj Međunarodne federacije za proizvodnju i upravljanje kvalitetom

Ovaj DoP je pripremljen u različitim jezicima. U slučaju da postoji spor u tumačenju, engleska verzija će uvijek prevladati.

U aneksu se nalaze dodatni podaci na engleskom jeziku, koji ne podliježu zakonskoj regulativi.

Translation guidance Essential Characteristics and Performance Parameters for Annexes

**Smjernice za prijevod. Bitne karakteristike i parametri izvedbe za dodatke**

|                                                                                               |                                                                                                                            |                                                                              |
|-----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| Mechanical resistance and stability (BWR 1)                                                   |                                                                                                                            |                                                                              |
| <b>Mehanička otpornost i stabilnost (BWR 1)</b>                                               |                                                                                                                            |                                                                              |
| Characteristic resistance under static and quasi-static loading, Method A                     |                                                                                                                            |                                                                              |
| <b>Karakteristični otpor na opterećenje (statičko i kvazi-statičko opterećenje) Metoda A:</b> |                                                                                                                            |                                                                              |
| 1                                                                                             | Resistance to steel failure:<br><b>Otpornost na lom čelika:</b>                                                            | $N_{Rk,s}$ [kN], $E_s$ [N/mm <sup>2</sup> ]                                  |
| 2                                                                                             | Resistance to pull- out failure:<br><b>Otpornost na čupanje:</b>                                                           | $N_{Rk,p}$ [kN], $\psi_c$                                                    |
| 3                                                                                             | Resistance to concrete cone failure:<br><b>Otpornost na lom betona:</b>                                                    | $k_{cr,N}$ , $k_{ucr,N}$ [-], $h_{ef}$ , $c_{cr,N}$ [mm]                     |
| 4                                                                                             | Robustness:<br><b>Robusnost:</b>                                                                                           | $\gamma_{inst}$ [-]                                                          |
| 5                                                                                             | Minimum edge distance and spacing:<br><b>Minimalna udaljenost od ruba i razmak:</b>                                        | $c_{min}$ , $s_{min}$ , $h_{min}$ [mm]                                       |
| 6                                                                                             | Edge distance to prevent splitting under load:<br><b>Udaljenost ruba kako bi se spriječilo cijepanje pod opterećenjem:</b> | $N^0_{Rk,sp}$ [kN], $c_{cr,sp}$ [mm]                                         |
| Characteristic resistance to shear load (static and quasi-static loading), Method A           |                                                                                                                            |                                                                              |
| <b>Karakteristični otpor na smicanje (statičko i kvazi-statičko opterećenje), Metoda A:</b>   |                                                                                                                            |                                                                              |
| 7                                                                                             | Resistance to steel failure under shear load:<br><b>Otpornost na lom čelika (posmično opterećenje):</b>                    | $V^0_{Rk,s}$ [kN], $M^0_{Rk,s}$ [Nm], $k_7$ [-]                              |
| 8                                                                                             | Resistance to pry-out failure:<br><b>Otpornost na otkazivanje:</b>                                                         | $k_8$ [-]                                                                    |
| Characteristic Resistance for simplified design                                               |                                                                                                                            |                                                                              |
| <b>Karakteristična otpornost za pojednostavljeni návrh:</b>                                   |                                                                                                                            |                                                                              |
| 9                                                                                             | Method B:<br><b>Metoda B:</b>                                                                                              | $F^0_{Rk}$ [kN], $c_{cr}$ , $s_{cr}$ [mm]                                    |
| 10                                                                                            | Method C:<br><b>Metoda C:</b>                                                                                              | $F_{Rk}$ [kN]                                                                |
| Displacements                                                                                 |                                                                                                                            |                                                                              |
| <b>Istisnine:</b>                                                                             |                                                                                                                            |                                                                              |
| 11                                                                                            | Displacements under static and quasi-static loading:<br><b>Pomaci pri statičkom i kvazi-statičkom opterećenju:</b>         | $\delta_{N0}$ , $\delta_{N\infty}$ , $\delta_{V0}$ , $\delta_{V\infty}$ [mm] |
| Safety in case of fire (BWR 2)                                                                |                                                                                                                            |                                                                              |
| <b>Sigurnost u slučaju požara (BWR 2)</b>                                                     |                                                                                                                            |                                                                              |
| 12                                                                                            | Reaction to fire:<br><b>Reakcija na vatru:</b>                                                                             | Class                                                                        |
| Resistance to fire:                                                                           |                                                                                                                            |                                                                              |
| <b>Otpornost na vatru:</b>                                                                    |                                                                                                                            |                                                                              |
| 13                                                                                            | Fire resistance to steel failure (tension load):<br><b>Vatrootpornost na lom čelika (vlačna sila):</b>                     | $N_{Rk,s,fi}$ [kN]                                                           |
| 14                                                                                            | Fire resistance to pull-out failure (tension load):<br><b>Vatrootpornost na čupanje (vlačna sila):</b>                     | $N_{Rk,p,fi}$ [kN]                                                           |
| 15                                                                                            | Fire resistance to steel failure (shear load):<br><b>Vatrootpornost na lom čelika (posmik):</b>                            | $V_{Rk,s,fi}$ [kN], $M^0_{Rk,s,fi}$ [Nm]                                     |
| Aspects of durability                                                                         |                                                                                                                            |                                                                              |
| <b>Trajnost:</b>                                                                              |                                                                                                                            |                                                                              |
| 16                                                                                            | Durability:<br><b>Trajnost:</b>                                                                                            | Class                                                                        |

## **II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT**

### **1 Technical description of product**

The fischer Bolt anchor FBN II HDG is an anchor made of zinc plated, hot-dip galvanised steel which is placed into a drilled hole and anchored by torque controlled expansion. The thickness of the corrosion protection layer is minimum 40 µm with a batch average of minimum 50 µm

Product and product description is given in Annex A.

The characteristic material values, dimensions and tolerances of the anchors not indicated in Annexes shall correspond to the respective values laid down in the technical documentation of this European Technical Assessment.

The anchors are intended to be used with embedment depth given in Annex B, Table B4.1. The intended use specifications of the product are detailed in Annex B1.

### **2 Specification of the intended use(s) in accordance with the applicable European Assessment Document (hereinafter EAD)**

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor as given in Annex B depending on the corrosion protection.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### **3 Performance of the product and references to the methods used for its assessment**

#### **3.1 Characteristics of product**

##### **Mechanical resistance and stability (BWR 1):**

The essential characteristics are detailed in the Annex from C1 to C2.

##### **Safety in case of fire (BWR 2):**

No Performance assessed.

#### **3.2 Methods of assessment**

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirements 1 and 4 has been made in accordance with EAD 330232-01-0601-v01; Mechanical fasteners for use in concrete.

## **4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base**


### **4.1 AVCP system**

According to the decision 1996/582/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 1.



## **5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark prior to CE marking

Cone bolt manufactured by cold - forming:

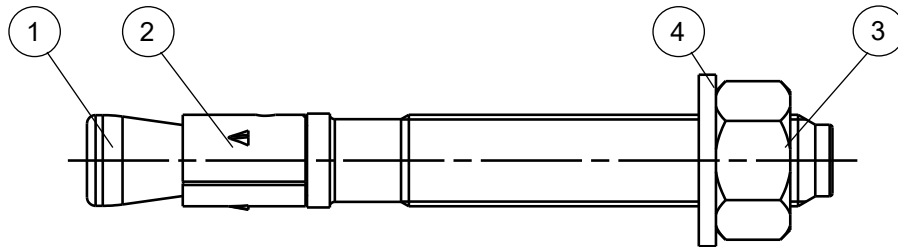

Cone bolt manufactured by turning:

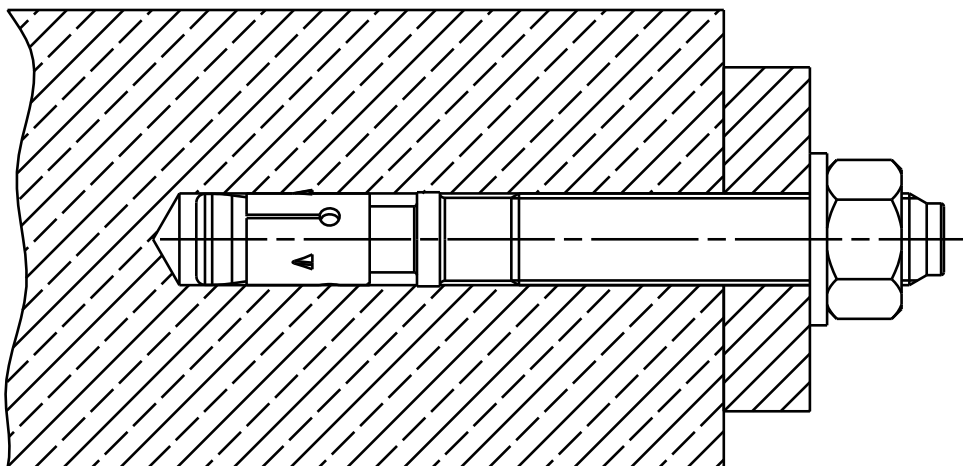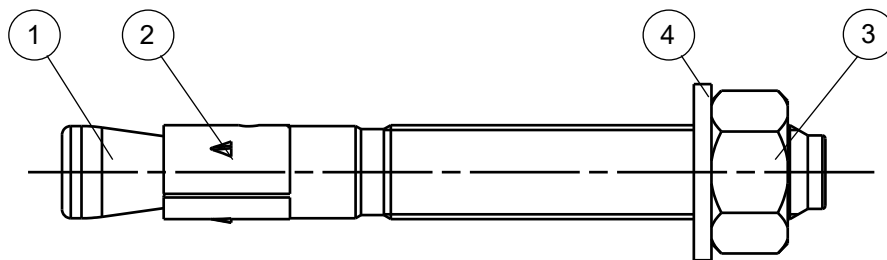

- ① Cone bolt (cold – formed or turned)
- ② Expansion sleeve
- ③ Hexagon nut
- ④ Washer


(Fig. not to scale)

fischer Bolt Anchor hot-dip galvanised FBN II HDG


**Product description**  
Installed condition

**Annex A1**  
Appendix 4 / 13

FBN II HDG for use with standard and reduced embedment depth (h<sub>ef, sta</sub> and h<sub>ef, red</sub>)

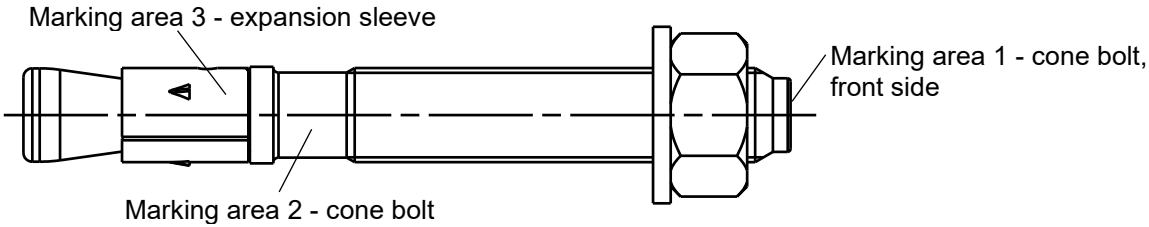

Product label, example:




Brand | type of fastener placed at marking area 2 or marking area 3

Thread Size / max. thickness of fixture (t<sub>fix</sub>) for h<sub>ef, sta</sub> placed at marking area 2


Table A2.1: Letter-code on marking area 1 and maximum thickness of fixture t<sub>fix</sub>

| Marking                                        |          | A  | B  | C  | D  | E  | F  | G  | H  | I  | K  | L  | M  | N   | O   | P   | R   | S   | T   | U   | V   | W   | X   | Y   | Z   |
|------------------------------------------------|----------|----|----|----|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Max. t <sub>fix</sub> for h <sub>ef, sta</sub> | M8-M20   | 5  | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 60 | 70 | 80  | 90  | 100 | 120 | 140 | 160 | 180 | 200 | 250 | 300 | 350 | 400 |
| Max. t <sub>fix</sub> for h <sub>ef, red</sub> | M8, M10  | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 80 | 90  | 100 | 110 | 130 | 150 | 170 | 190 | 210 | 260 | 310 | 360 | 410 |
|                                                | M12, M16 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 75 | 85 | 95  | 105 | 115 | 135 | 155 | 175 | 195 | 215 | 265 | 315 | 365 | 415 |
|                                                | M20      | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 85 | 95 | 105 | 115 | 125 | 145 | 165 | 185 | 205 | 225 | 275 | 325 | 375 | 425 |

FBN II K HDG for use with reduced embedment depth only (h<sub>ef, red</sub>):

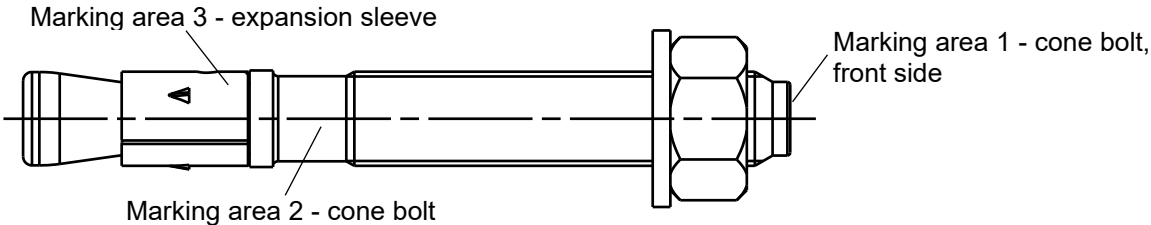

Product label, example:



Brand | type of fastener placed at marking area 2 or marking area 3

Thread Size / max. thickness of fixture (t<sub>fix</sub>) identification K for h<sub>ef, red</sub> placed at marking area 2

Table A2.2: Letter-code on marking area 1 and maximum thickness of fixture t<sub>fix</sub>


| Marking                                        |        | -A- | -B- | -C- | -D- | -E- | -F- | -G- | -H- | -I- | -K- | -L- | -M- | -N- | -O- | -P- | -R- | -S- | -T- | -U- | -V- | -W- | -X- | -Y- | -Z- |
|------------------------------------------------|--------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Max. t <sub>fix</sub> for h <sub>ef, red</sub> | M8-M20 | 5   | 10  | 15  | 20  | 25  | 30  | 35  | 40  | 45  | 50  | 60  | 70  | 80  | 90  | 100 | 120 | 140 | 160 | 180 | 200 | 250 | 300 | 350 | 400 |

(Fig. not to scale)

fischer Bolt Anchor hot-dip galvanised FBN II HDG

Product description  
Anchor types

Annex A2  
Appendix 5 / 13

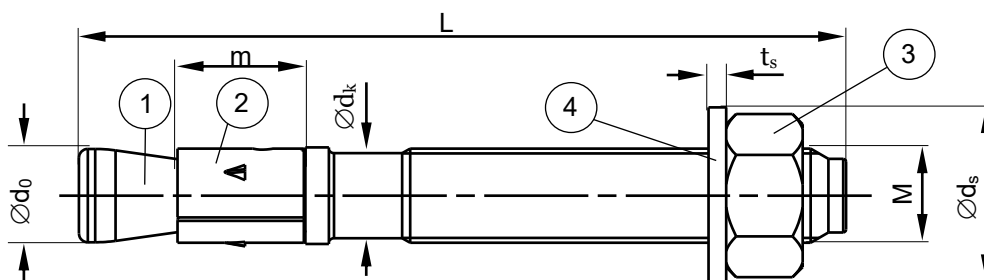

**Table A3.1:** Anchor dimensions [mm]

| Part | Designation      |                    | M8   | M10  | M12  | M16  | M20  |
|------|------------------|--------------------|------|------|------|------|------|
| 1    | Cone bolt        | Ø d <sub>0</sub>   | 7,9  | 9,9  | 11,9 | 15,9 | 19,6 |
|      |                  | Ø d <sub>k</sub>   | 7,1  | 8,9  | 10,8 | 14,5 | 18,2 |
|      |                  | L <sub>min</sub> ≥ | 56   | 71   | 86   | 120  | 139  |
|      |                  | L <sub>max</sub> ≤ | 261  | 316  | 396  | 520  | 654  |
| 2    | Expansion sleeve | m                  | 11,5 | 13,5 | 16,5 | 21,5 | 33,5 |
| 3    | Hexagon nut      | Wrench Size        | 13   | 17   | 19   | 24   | 30   |
| 4    | Washer           | t <sub>s</sub> ≥   | 1,4  | 1,8  | 2,3  | 2,7  | 2,7  |
|      |                  | Ø d <sub>s</sub> ≥ | 15   | 19   | 23   | 29   | 36   |

**Table A3.2:** Materials

| Part | Designation      | Material                                            |
|------|------------------|-----------------------------------------------------|
| 1    | Cone bolt        | Cold form steel or free cutting steel <sup>1)</sup> |
| 2    | Expansion sleeve | Stainless steel acc. to EN 10088-1:2023             |
| 3    | Hexagon nut      | Steel, property class 8 <sup>1)</sup>               |
| 4    | Washer           | Cold strip <sup>1) 2)</sup>                         |

<sup>1)</sup> Hot-dip galvanised ≥ 50 µm, according to EN ISO 10684:2004+AC:2009

<sup>2)</sup> Alternative mechanical plated ≥ 53 µm, according to EN ISO 12683:2004

(Fig. not to scale)

fischer Bolt Anchor hot-dip galvanised FBN II HDG

**Product description**  
Anchor dimensions  
Materials

**Annex A3**

Appendix 6 / 13



### Specifications of intended use

| fischer Bolt Anchor hot-dip galvanised FBN II HDG | M8 | M10 | M12 | M16 | M20 |
|---------------------------------------------------|----|-----|-----|-----|-----|
| Static and quasi-static loads                     |    |     | ✓   |     |     |
| Standard embedment depth                          |    |     | ✓   |     |     |
| Reduced embedment depth                           |    |     | ✓   |     |     |
| Uncracked concrete                                |    |     | ✓   |     |     |

#### Base materials:

- Normal weight concrete (uncracked) according to EN 206:2013+A2:2021
- Strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021

#### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions and to external atmospheric  
Classification of atmospheric corrosivity, determination and estimation C1 – CX  
according to EAD 330232-01-0601-v01

#### Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Design of fastenings according to EN 1992-4:2018

#### Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Hammer or hollow drilling according to Annex B5

#### Durability:

- Variable working life according to EAD 330232-01-0601-v01

**Table B1.1:** Durability of hot dip galvanised **coatings** according to EN ISO 10684:2004+AC:2009 for coatings with mean thickness of minimum 50 µm

| Corrosivity category | Corrosivity | Durability                                                                                   |
|----------------------|-------------|----------------------------------------------------------------------------------------------|
|                      |             | Thickness according to EN ISO 10684:2004+AC:2009 chapter 8.3 $\geq 50\mu\text{m}$ in average |
|                      |             | Durability [years]                                                                           |
| C1                   | Very low    | 50 <sup>1)</sup>                                                                             |
| C2                   | Low         | 50 <sup>1)</sup>                                                                             |
| C3                   | Medium      | 25                                                                                           |
| C4                   | High        | 12,5                                                                                         |
| C5                   | Very high   | 5                                                                                            |
| CX                   | Extreme     | 2                                                                                            |

<sup>1)</sup> Durability of coating thickness. Working life of fastener according to EAD 330232-01-0601-v01 section 1.2.2 (limited to 50 years)

|                                                   |                                    |
|---------------------------------------------------|------------------------------------|
| fischer Bolt Anchor hot-dip galvanised FBN II HDG | <b>Annex B1</b><br>Appendix 7 / 13 |
| <b>Intended use</b><br>Specification              |                                    |

**Table B2.1** Description of typical atmospheric environments **indoor** related to the estimation of corrosivity categories according to ISO 9223:2012 Table C.1 and the corresponding durability categories according to EAD 330232-01-0601-v01 chapter 2.2.20 a (1) – (2)

| Corrosivity category | Corrosivity | Typical environments – Examples                                                                                                                                                                                                                                                                                          |                             |
|----------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
|                      |             | Indoor                                                                                                                                                                                                                                                                                                                   | EAD-330232 chapter 2.2.20 a |
| C1                   | Very low    | Heated spaces with low relative humidity and insignificant pollution,<br>e.g. offices, schools, museums                                                                                                                                                                                                                  | (1)                         |
| C2                   | Low         | Unheated spaces with varying temperature and relative humidity. Low frequency of condensation and low pollution,<br>e.g. storage, sport halls                                                                                                                                                                            | (1)                         |
| C3                   | Medium      | Spaces with moderate frequency of condensation and moderate pollution from production process,<br>e.g. food-processing plants, laundries, breweries, dairies                                                                                                                                                             | (2)                         |
| C4                   | High        | Spaces with high frequency of condensation and high pollution from production process,<br>e.g. industrial processing plants, swimming pools                                                                                                                                                                              | (2)                         |
| C5                   | Very high   | Spaces with very high frequency of condensation and/or high pollution from production process,<br>e.g. mines, caverns for industrial purposes, unventilated sheds in subtropical and tropical zones                                                                                                                      | (2)                         |
| CX                   | Extreme     | Spaces with almost permanent condensation or extensive periods of exposure to extreme humidity effects and/or high pollution from production process,<br>e.g. unventilated sheds in humid tropical zones with penetration of outdoor pollution including airborne chlorides and corrosion-stimulating particulate matter | (2)                         |

fischer Bolt Anchor hot-dip galvanised FBN II HDG

**Intended use**  
Specification

**Annex B2**

Appendix 8 / 13

**Table B3.1** Description of typical atmospheric environments **outdoor** related to the estimation of corrosivity categories according to ISO 9223:2012 Table C.1 and the corresponding durability categories according to EAD 330232-01-0601-v01 chapter 2.2.20 a (1) – (2)

| Corrosivity category | Corrosivity | Typical environments – Examples                                                                                                                                                                                                                                                                                                                                                       |                             |
|----------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
|                      |             | Outdoor                                                                                                                                                                                                                                                                                                                                                                               | EAD-330232 chapter 2.2.20 a |
| C1                   | Very low    | Dry or cold zone, atmospheric environment with very low pollution and time of wetness,<br>e.g. certain deserts, Central Arctic/Antarctica                                                                                                                                                                                                                                             | (2)                         |
| C2                   | Low         | Temperate zone, atmospheric environment with low pollution ( $\text{SO}_2 < 5 \mu\text{g}/\text{m}^3$ ), e.g. rural areas, small towns<br>Dry or cold zone, atmospheric environment with short time of wetness,<br>e.g. deserts, subarctic areas                                                                                                                                      | (2)                         |
| C3                   | Medium      | Temperate zone, atmospheric environment with medium pollution ( $\text{SO}_2: 5 \mu\text{g}/\text{m}^3$ to $30 \mu\text{g}/\text{m}^3$ ) or some effect of chlorides, e.g. urban areas, coastal areas with low deposition of chlorides<br>Subtropical and tropical zone, atmosphere with low pollution                                                                                | (2)                         |
| C4                   | High        | Temperate zone, atmospheric environment with high pollution ( $\text{SO}_2: 30 \mu\text{g}/\text{m}^3$ to $90 \mu\text{g}/\text{m}^3$ ) or substantial effect of chlorides, e.g. polluted urban areas, industrial areas, coastal areas without spray of salt water or, exposure to strong effect of de-icing salts<br>Subtropical and tropical zone, atmosphere with medium pollution | (2)                         |
| C5                   | Very high   | Temperate and subtropical zone, atmospheric environment with very high pollution ( $\text{SO}_2: 90 \mu\text{g}/\text{m}^3$ to $250 \mu\text{g}/\text{m}^3$ ) and/or significant effect of chlorides, e.g. industrial areas, coastal areas, sheltered positions on coastline                                                                                                          | (2)                         |
| CX                   | Extreme     | Subtropical and tropical zone (very high time of wetness), atmospheric environment with very high $\text{SO}_2$ pollution (higher than $250 \mu\text{g}/\text{m}^3$ ) including accompanying and production factors and/or strong effect of chlorides, e.g. extreme industrial areas, coastal and offshore areas, occasional contact with salt spray                                  | (2)                         |

fischer Bolt Anchor hot-dip galvanised FBN II HDG

**Annex B3**

**Intended use**  
Specification


Appendix 9 / 13

**Table B4.1:** Installation parameters

| Size                                      |                    | M8                                     | M10                    | M12                    | M16                     | M20                      |
|-------------------------------------------|--------------------|----------------------------------------|------------------------|------------------------|-------------------------|--------------------------|
| Nominal drill hole diameter               | $d_0$              | 8                                      | 10                     | 12                     | 16                      | 20                       |
| Maximum diameter of drill bit             | $d_{cut} \leq$     | 8,45                                   | 10,45                  | 12,5                   | 16,5                    | 20,55                    |
| Effective embedment depth                 | $h_{ef} \geq$ [mm] | 40 (30 <sup>1)</sup> 2 <sup>2)</sup> ) | 50 (40 <sup>1)</sup> ) | 65 (50 <sup>1)</sup> ) | 80 (65 <sup>1)</sup> )  | 105 (80 <sup>1)</sup> )  |
| Depth of drill hole to deepest point      | $h_1 \geq$         | 56 (46 <sup>1)</sup> 2 <sup>2)</sup> ) | 68 (58 <sup>1)</sup> ) | 85 (70 <sup>1)</sup> ) | 104 (89 <sup>1)</sup> ) | 135 (110 <sup>1)</sup> ) |
| Diameter of clearance hole in the fixture | $d_f \leq$         | 9                                      | 12                     | 14                     | 18                      | 22                       |
| Required setting torque                   | $T_{inst}$ [Nm]    | 15                                     | 30                     | 40                     | 70                      | 200                      |

<sup>1)</sup> Only for reduced embedment depth

<sup>2)</sup> Use restricted to anchoring of structural components which are statically indeterminate

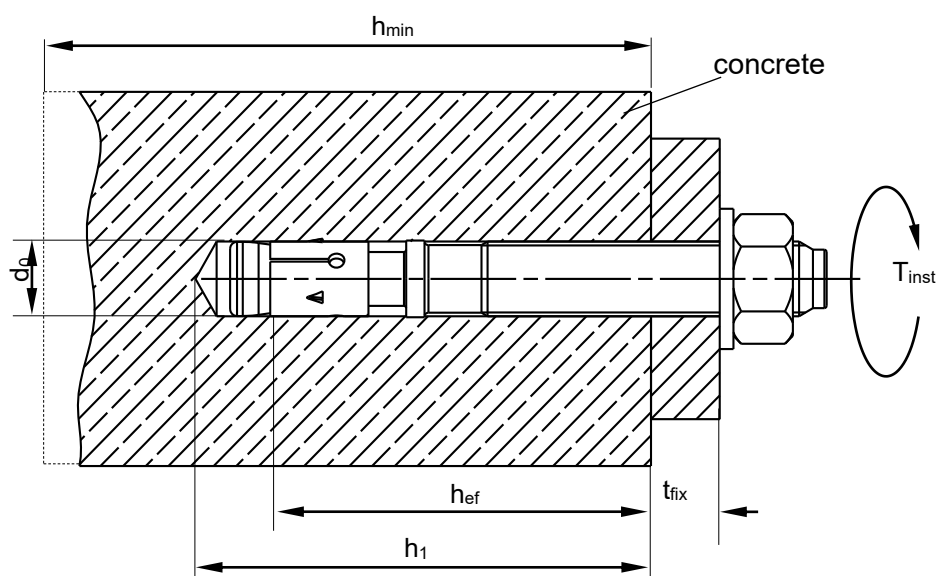

$h_{ef}$  = Effective embedment depth  
 $t_{fix}$  = Thickness of fixture  
 $h_1$  = Depth of drill hole to deepest point  
 $h_{min}$  = Minimum thickness of concrete member  
 $T_{inst}$  = Required setting torque  
 $d_0$  = Nominal drill hole diameter

(Fig. not to scale)

fischer Bolt Anchor hot-dip galvanised FBN II HDG

**Intended use**  
Installation parameters

**Annex B4**


Appendix 10 / 13

**Table B5.1:** Minimum thickness of concrete members, minimum spacing and minimum edge distance

| Size                     |                                         | M8               | M10 | M12 | M16 | M20 |
|--------------------------|-----------------------------------------|------------------|-----|-----|-----|-----|
| Standard embedment depth | Effective embedment depth $h_{ef, sta}$ | 40               | 50  | 65  | 80  | 105 |
|                          | Minimum thickness of member $h_{min}$   | 100              | 100 | 120 | 160 | 200 |
|                          | Minimum spacing $s_{min}$               | 40               | 50  | 70  | 90  | 120 |
|                          | Minimum edge distance $c_{min}$         | 40               | 50  | 70  | 90  | 120 |
| Reduced embedment depth  | Effective embedment depth $h_{ef, red}$ | 30 <sup>1)</sup> | 40  | 50  | 65  | 80  |
|                          | Minimum thickness of member $h_{min}$   | 100              | 100 | 100 | 120 | 160 |
|                          | Minimum spacing $s_{min}$               | 40               | 50  | 70  | 90  | 120 |
|                          | Minimum edge distance $c_{min}$         | 40               | 80  | 100 | 120 | 120 |

<sup>1)</sup> Use restricted to anchoring of structural components which are statically indeterminate

### Installation instructions

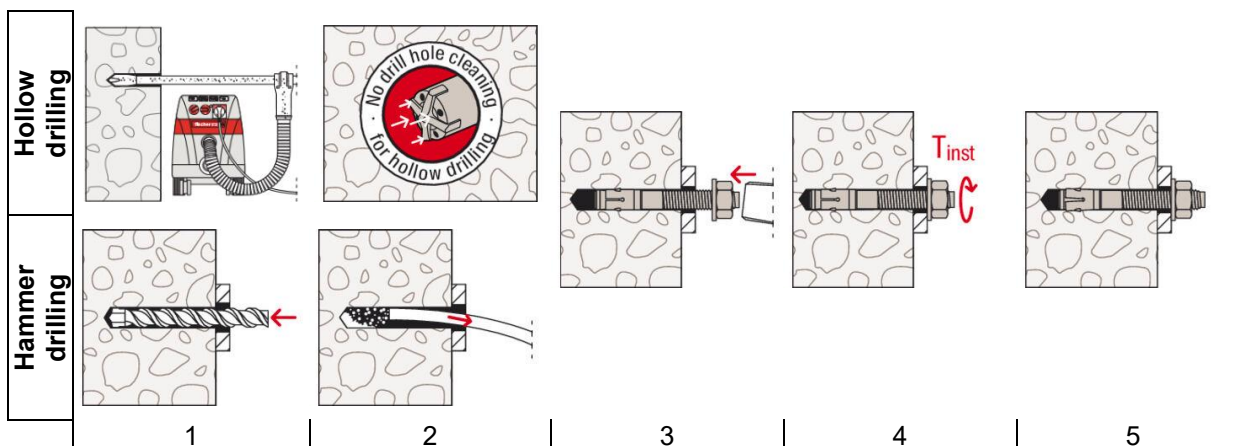

| No. | Description                                                  |                                                        |
|-----|--------------------------------------------------------------|--------------------------------------------------------|
| 1   | Create drill hole with hammer drill                          | Create drill hole with hollow drill and vacuum cleaner |
| 2   | Clean bore hole                                              | -                                                      |
| 3   | Set anchor                                                   |                                                        |
| 4   | Expand anchor with prescribed installation torque $T_{inst}$ |                                                        |
| 5   | Finished installation                                        |                                                        |

| Types of drills |  |
|-----------------|--|
| Hammer drill    |  |
| Hollow drill    |  |

(Fig. not to scale)

|                                                                                                             |                                  |
|-------------------------------------------------------------------------------------------------------------|----------------------------------|
| fischer Bolt Anchor hot-dip galvanised FBN II HDG                                                           | Annex B5<br><br>Appendix 11 / 13 |
| Intended use<br>Minimum thickness of member, minimum spacing and edge distance<br>Installation instructions |                                  |

**Table C1.1:** Characteristic values of **tension** resistance for **standard and reduced embedment depth** under static and quasi-static loads

| Size                                                                         |                                   |        | M8                  | M10             | M12  | M16  | M20 |
|------------------------------------------------------------------------------|-----------------------------------|--------|---------------------|-----------------|------|------|-----|
| Steel failure for standard and reduced embedment depth                       |                                   |        |                     |                 |      |      |     |
| Characteristic resistance                                                    | N <sub>Rk,s</sub>                 | [kN]   | 16,5                | 27,2            | 41,6 | 77,9 | 107 |
| Partial safety factor                                                        | γ <sub>Ms</sub>                   | [-]    | 1,4                 | 1,4             | 1,4  | 1,5  | 1,5 |
| Pullout failure for standard embedment depth                                 |                                   |        |                     |                 |      |      |     |
| Characteristic resistance C20/25                                             | N <sub>Rk,p</sub>                 | [kN]   | - <sup>1)</sup>     |                 |      |      |     |
| Pullout failure for reduced embedment depth                                  |                                   |        |                     |                 |      |      |     |
| Characteristic resistance C20/25                                             | N <sub>Rk,p</sub>                 | [kN]   | 6 <sup>2)</sup>     | - <sup>1)</sup> |      |      |     |
| Increasing factors for N <sub>Rk,p</sub>                                     | ψ <sub>c</sub>                    | C25/30 | 1,12                |                 |      |      |     |
|                                                                              |                                   | C30/37 | 1,23                |                 |      |      |     |
|                                                                              |                                   | C35/45 | 1,32                |                 |      |      |     |
|                                                                              |                                   | C40/50 | 1,41                |                 |      |      |     |
|                                                                              |                                   | C45/55 | 1,50                |                 |      |      |     |
|                                                                              |                                   | C50/60 | 1,58                |                 |      |      |     |
| Installation safety factor                                                   | γ <sub>inst</sub>                 | [-]    | 1,0                 |                 |      |      |     |
| Concrete cone and splitting failure for standard and reduced embedment depth |                                   |        |                     |                 |      |      |     |
| Effective embedment depth                                                    | $\frac{h_{ef, sta}}{h_{ef, red}}$ | [mm]   | 40                  | 50              | 65   | 80   | 105 |
|                                                                              |                                   |        | 30 <sup>2)</sup>    | 40              | 50   | 65   | 80  |
| Factor k <sub>1</sub> for uncracked concrete                                 | k <sub>ucr,N</sub>                | [-]    | 11,0                |                 |      |      |     |
| Spacing                                                                      | s <sub>cr,N</sub>                 | [mm]   | 3 h <sub>ef</sub>   |                 |      |      |     |
| Edge distance                                                                | c <sub>cr,N</sub>                 | [mm]   | 1,5 h <sub>ef</sub> |                 |      |      |     |
| Spacing (splitting failure)                                                  | s <sub>cr,sp</sub>                | [mm]   | 190                 | 200             | 290  | 350  | 370 |
| Edge distance (splitting failure)                                            | c <sub>cr,sp</sub>                | [mm]   | 95                  | 100             | 145  | 175  | 185 |

<sup>1)</sup> Pullout failure is not relevant

<sup>2)</sup> Use restricted to anchoring of structural components which are statically indeterminate

fischer Bolt Anchor hot-dip galvanised FBN II HDG

**Annex C1**

**Performances**

Characteristic values of tension resistance for standard and reduced embedment

Appendix 12 / 13

**Table C2.1:** Characteristic values of **shear** resistance for **standard and reduced embedment depth** under static and quasi-static loads

| Size                                                                     |                     | M8                 | M10  | M12  | M16   | M20 |
|--------------------------------------------------------------------------|---------------------|--------------------|------|------|-------|-----|
| Steel failure without lever arm for standard and reduced embedment depth |                     |                    |      |      |       |     |
| Characteristic resistance                                                | $V_{Rk,s}^0$ [kN]   | 13,3               | 21,0 | 31,3 | 55,1  | 67  |
| Steel failure with lever arm for standard embedment depth                |                     |                    |      |      |       |     |
| Characteristic bending moment                                            | $M_{Rk,s}^0$ [Nm]   | 26,2               | 52,3 | 91,6 | 232,2 | 422 |
| Steel failure with lever arm for reduced embedment depth                 |                     |                    |      |      |       |     |
| Characteristic bending moment                                            | $M_{Rk,s}^0$ [Nm]   | 19,9 <sup>1)</sup> | 45,9 | 90,0 | 226,9 | 349 |
| Concrete pryout failure for standard and reduced embedment depth         |                     |                    |      |      |       |     |
| Factor for pryout                                                        | $k_8$               | 1,8                | 2,1  | 2,3  | 2,3   | 2,3 |
| Installation safety factor                                               | $\gamma_{inst}$ [-] | 1,0                |      |      |       |     |
| Concrete edge failure for standard and reduced embedment depth           |                     |                    |      |      |       |     |
| Effective length of anchor                                               | $l_{f,sta}$         | 40                 | 50   | 65   | 80    | 105 |
|                                                                          | $l_{f,red}$ [mm]    | 30 <sup>1)</sup>   | 40   | 50   | 65    | 80  |
| Effective diameter of anchor                                             | $d_{nom}$           | 8                  | 10   | 12   | 16    | 20  |
| Installation safety factor                                               | $\gamma_{inst}$ [-] | 1,0                |      |      |       |     |

<sup>1)</sup> Use restricted to anchoring of structural components which are statically indeterminate

**Table C2.2:** Displacements due to tension loads

| Size                     |                                             | M8  | M10 | M12  | M16  | M20  |
|--------------------------|---------------------------------------------|-----|-----|------|------|------|
| Standard embedment depth | $h_{ef, sta}$ [mm]                          | 40  | 50  | 65   | 80   | 105  |
| Tension load C20/25      | N [kN]                                      | 6,1 | 8,5 | 12,6 | 17,2 | 25,8 |
| Displacements            | $\frac{\delta_{N0}}{\delta_{N\infty}}$ [mm] | 0,6 | 0,9 | 1,5  | 1,8  | 1,8  |
|                          |                                             | 3,1 |     |      |      |      |
| Reduced embedment depth  | $h_{ef, red}$ [mm]                          | 30  | 40  | 50   | 65   | 80   |
| Tension load C20/25      | N [kN]                                      | 2,8 | 6,1 | 8,5  | 12,6 | 17,2 |
| Displacements            | $\frac{\delta_{N0}}{\delta_{N\infty}}$ [mm] | 0,4 | 0,7 | 0,7  | 0,9  | 1,0  |
|                          |                                             | 1,6 |     |      |      |      |

**Table C2.3:** Displacements due to shear loads

| Size          |                                             | M8  | M10  | M12  | M16  | M20  |
|---------------|---------------------------------------------|-----|------|------|------|------|
| Shear load    | V [kN]                                      | 7,6 | 12,0 | 17,9 | 31,5 | 38,2 |
| Displacements | $\frac{\delta_{V0}}{\delta_{V\infty}}$ [mm] | 1,5 | 1,6  | 2,0  | 3,0  | 2,6  |
|               |                                             | 2,3 | 2,4  | 3,0  | 4,5  | 3,9  |

fischer Bolt Anchor hot-dip galvanised FBN II HDG

**Annex C2**

**Performances**

Characteristic values of shear resistance for standard and reduced embedment depth  
Displacements