



## IZJAVA O SVOJSTVIMA



No. 0111 – HR

1. Jedinstveni identifikator tipa proizvoda: **fischer SuperBond (Superljepilo)**

2. Namjena korištenja:

| Proizvod                                      | Namjena korištenja                                                                                                                                               |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| sidro s vezivnim sredstvom za uporabu u Beton | Za učvršćivanje i / ili podupiranje betonskih konstrukcija ili teških jedinica, kao što su obloge i spuštene stropovi, vidi dodatak, pogotovo priloge B 1 - B 15 |

3. Proizvođač: **fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Germany**

4. Ovlašteni zastupnik: --

5. Sistem/i od AVCP 1

6a. Harmonizirani standardi:---

Prijavljeno tijelo/prijavljena tijela: ---

6b. Europski dokument za ocjenjivanje: **ETAG 001, 2013-04**

Europska tehnička ocjena: **ETA-12/0258; 2016-05-19**

Tijelo za tehničko ocjenjivanje: **DIBt**

Prijavljeno tijelo/prijavljena tijela: **1343 – MPA Darmstadt**

7. Objavljena svojstva:

### Mehanička otpornost i stabilnost (BWR 1)

| Bitne karakteristike                                                                                                                                                                                                                                  | Svojstva                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| Karakteristične vrijednosti pod statičkim i kvazistatičkim opterećenjem za dizajniranje prema TR 029 ili CEN/TS 1992-4:2009, Zamjena;<br>Karakterističan otpor za seizmičku kategoriju C1 i C2 za dizajniranje prema Technical Report TR 045, Zamjena | Vidi dodatak, pogotovo priloge C 1 - C 16 |

### Sigurnost u slučaju požara (BWR 2)

| Bitne karakteristike | Svojstva                                 |
|----------------------|------------------------------------------|
| Reakcija na požar    | Sidrišta zadovoljavaju zahtjeve klase A1 |
| Otpornost na vatru   | Ne određuje izvedba (NPD)                |

8. Odgovarajuća tehnička dokumentacija i/ili specifična tehnička dokumentacija: ---

Svojstva gore navedenog proizvoda su u skladu sa skupom izjava o svojstvima. Ova izjava o svojstvima se izdaje, u skladu sa Europskom regulativom (EU) Br. 305/2011, pod punom odgovornošću gore navedenog proizvođača.

Za proizvođača i u njegovo ime potpisao:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

Tumlingen, 2016-06-02

- Ovaj DoP je pripremljen u različitim jezicima. U slučaju da postoji spor u tumačenju, engleska verzija će uvijek prevladati.

- U aneksu se nalaze dodatni podaci na engleskom jeziku, koji ne podliježu zakonskoj regulativi

## Specific Part

### 1 Technical description of the product

The fischer superbond is a bonded anchor for use in concrete consisting of a cartridge with injection mortar fischer FIS SB and a steel element according to Annex A2.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

| Essential characteristic                                                                                                                                                                                                                   | Performance           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Characteristic values under static and quasi-static action for design according to TR 029 or CEN/TS 1992-4:2009, Displacements;<br>Seismic performance categories C1 and C2 for design according to Technical Report TR 045, Displacements | See Annex C 1 to C 16 |

#### 3.2 Safety in case of fire (BWR 2)

| Essential characteristic | Performance                                 |
|--------------------------|---------------------------------------------|
| Reaction to fire         | Anchorage satisfy requirements for Class A1 |
| Resistance to fire       | No performance assessed                     |

#### 3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

#### 3.4 Safety in use (BWR 4)

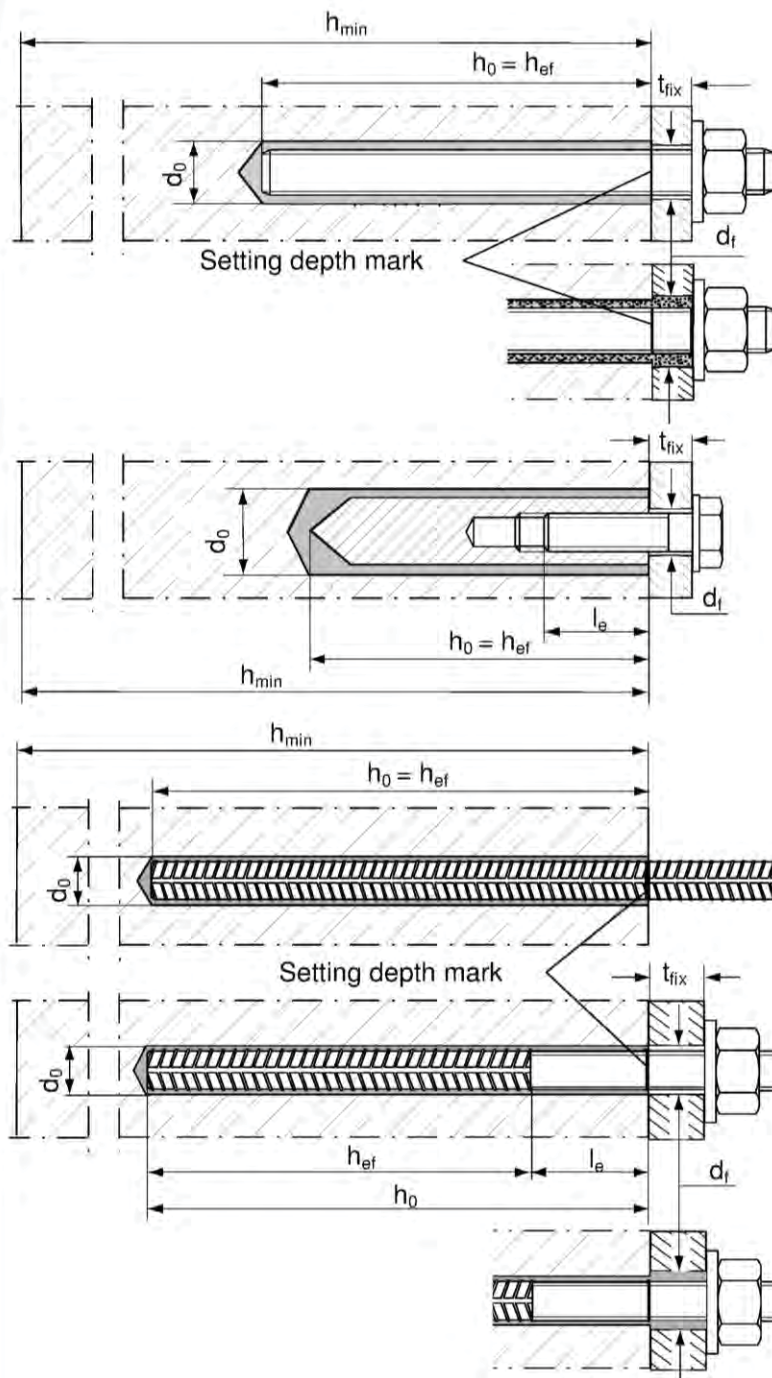
The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

**4      Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with guideline for European technical approval ETAG 001, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

## Installation conditions



**Anchor rod**  
Pre-positioned anchor

**Anchor rod**  
Push through anchor  
(annular gap filled with mortar)  
Only injection mortar system  
FIS SB

**fischer**  
**internal threaded anchor RG MI**  
Pre-positioned anchor only

**Reinforcing bar**  
Only injection mortar system FIS SB

**fischer rebar anchor FRA**  
Pre-positioned anchor  
Only injection mortar system FIS SB

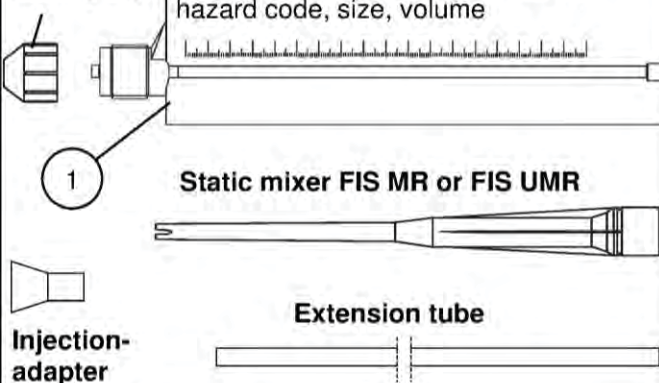
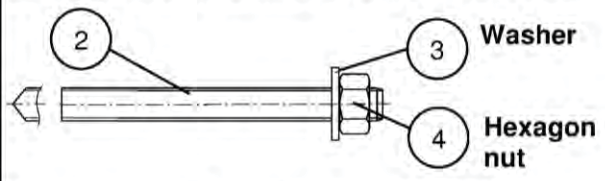
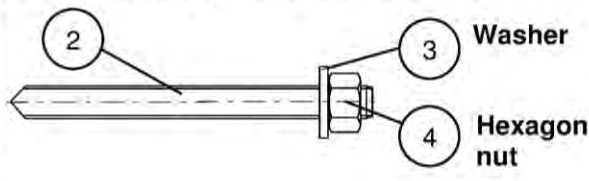
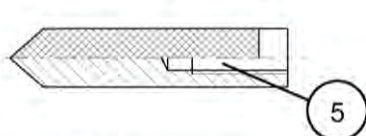
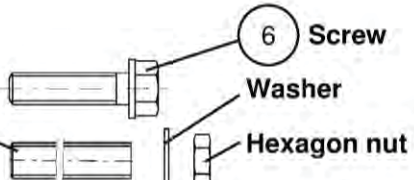
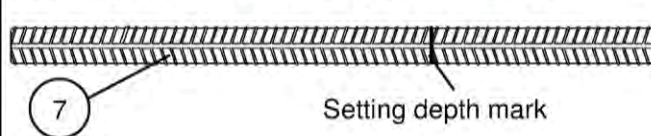
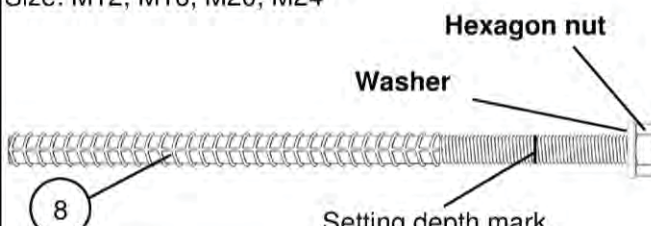
**fischer rebar anchor FRA**  
Push through anchor  
(annular gap filled with mortar)  
Only injection mortar system FIS SB

fischer Superbond

**Product description**  
Installation conditions

**Annex A 1**



| Injection system FIS SB                                                                                                                                                                                                                                                                                                                                                                                                | Resin capsule system RSB                                                                                                                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Cartridge sizes</b><br/>(390 ml, 585 ml, 1100 ml, 1500 ml)</p> <p>Imprint: FIS SB, FIS SB High Speed, processing notes, shelf-life, piston travel scale, curing times and processing times (depending on temperature), hazard code, size, volume</p>  <p><b>Static mixer FIS MR or FIS UMR</b></p> <p><b>Extension tube</b></p> | <p><b>Resin capsule RSB</b><br/>(8, 10 mini, 10, 12 mini, 12, 16 mini, 16, 16 E, 20, 20 E / 24, 30)</p>  |
| <p><b>Anchor rod</b><br/>Size: M8, M10, M12, M16, M20, M24, M27, M30</p>                                                                                                                                                                                                                                                            | <p><b>fischer anchor rod RG M</b><br/>Size: M8, M10, M12, M16, M20, M24, M30</p>                       |
| <p><b>fischer internal threaded anchor RG MI</b><br/>Size: M8, M10, M12, M16, M20</p>                                                                                                                                                                                                                                               | <p><b>Threaded rod</b> (6)</p>                                                                         |
| <p><b>Reinforcing bar</b><br/>Size: <math>\phi 8</math>, <math>\phi 10</math>, <math>\phi 12</math>, <math>\phi 14</math>, <math>\phi 16</math>, <math>\phi 20</math>, <math>\phi 25</math>, <math>\phi 28</math>, <math>\phi 32</math></p>                                                                                         |                                                                                                                                                                                            |
| <p><b>fischer rebar anchor FRA</b><br/>Size: M12, M16, M20, M24</p>                                                                                                                                                                                                                                                                 |                                                                                                                                                                                            |
| <p>fischer Superbond</p>                                                                                                                                                                                                                                                                                                                                                                                               | <p><b>Annex A 2</b></p>                                                                                                                                                                    |
| <p><b>Product description</b><br/>Cartridges / resin capsule / Static mixer / Steel elements</p>                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                            |

**Table A1: Materials**

| Part | Designation                                                                        | Material                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                             |
|------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | Mortar cartridge                                                                   | Mortar, hardener, filler                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                             |
|      | Steel grade                                                                        | Steel, zinc plated                                                                                                                                                                                                                                     | Stainless steel A4                                                                                                                                                                                                                              | High corrosion resistant steel C                                                                                                                                                                                                            |
| 2    | Anchor rod                                                                         | Property class 5.8 or 8.8;<br>EN ISO 898-1:2013<br>zinc plated $\geq 5 \mu\text{m}$ ,<br>EN ISO 4042:1999 A2K<br>or hot-dip galvanised<br>EN ISO 10684:2004<br>$f_{uk} \leq 1000 \text{ N/mm}^2$<br>$A_5 > 12 \%$<br>fracture elongation <sup>1)</sup> | Property class 50, 70 or 80<br>EN ISO 3506-1:2009<br>1.4401; 1.4404; 1.4578;<br>1.4571; 1.4439; 1.4362;<br>1.4062, 1.4662, 1.4462<br>EN 10088-1:2014<br>$f_{uk} \leq 1000 \text{ N/mm}^2$<br>$A_5 > 12 \%$<br>fracture elongation <sup>1)</sup> | Property class 50 or 80<br>EN ISO 3506-1:2009<br>or property class 70 with<br>$f_{yk} = 560 \text{ N/mm}^2$<br>1.4565; 1.4529<br>EN 10088-1:2014<br>$f_{uk} \leq 1000 \text{ N/mm}^2$<br>$A_5 > 12 \%$<br>fracture elongation <sup>1)</sup> |
| 3    | Washer<br>ISO 7089:2000                                                            | zinc plated $\geq 5 \mu\text{m}$ ,<br>EN ISO 4042:1999 A2K<br>or hot-dip galvanised<br>EN ISO 10684:2004                                                                                                                                               | 1.4401; 1.4404;<br>1.4578; 1.4571; 1.4439;<br>1.4362<br>EN 10088-1:2014                                                                                                                                                                         | 1.4565; 1.4529<br>EN 10088-1:2014                                                                                                                                                                                                           |
| 4    | Hexagon nut                                                                        | Property class 5 or 8;<br>EN ISO 898-2:2012<br>zinc plated $\geq 5 \mu\text{m}$ ,<br>ISO 4042:1999 A2K<br>or hot-dip galvanised<br>EN ISO 10684:2004                                                                                                   | Property class 50, 70 or 80<br>EN ISO 3506-1:2009<br>1.4401; 1.4404; 1.4578;<br>1.4571; 1.4439; 1.4362<br>EN 10088-1:2014                                                                                                                       | Property class 50, 70 or 80<br>EN ISO 3506-1:2009<br>1.4565; 1.4529<br>EN 10088-1:2014                                                                                                                                                      |
| 5    | fischer<br>internal threaded<br>anchor RG MI                                       | Property class 5.8<br>ISO 898-1:2013<br>zinc plated $\geq 5 \mu\text{m}$ ,<br>ISO 4042:1999 A2K                                                                                                                                                        | Property class 70<br>EN ISO 3506-1:2009<br>1.4401; 1.4404; 1.4578;<br>1.4571; 1.4439; 1.4362<br>EN 10088-1:2014                                                                                                                                 | Property class 70<br>EN ISO 3506-1:2009<br>1.4565; 1.4529<br>EN 10088-1:2014                                                                                                                                                                |
| 6    | Screw or anchor /<br>threaded rod for fischer<br>internal threaded<br>anchor RG MI | Property class 5.8 or 8.8;<br>EN ISO 898-1:2013<br>zinc plated $\geq 5 \mu\text{m}$ ,<br>ISO 4042:1999 A2K                                                                                                                                             | Property class 70<br>EN ISO 3506-1:2009<br>1.4401; 1.4404; 1.4578;<br>1.4571; 1.4439; 1.4362<br>EN 10088-1:2014                                                                                                                                 | Property class 70<br>EN ISO 3506-1:2009<br>1.4565; 1.4529<br>EN 10088-1:2014                                                                                                                                                                |
| 7    | Reinforcing bar<br>EN 1992-1-1:2004 and<br>AC:2010, Annex C                        | Bars and de-coiled rods, class B or C with<br>$f_{yk}$ and $k$ according to NDP or NCL of EN 1992-1-1:2004+AC:2010<br>$f_{uk} = f_{tk} = k \cdot f_{yk}$                                                                                               |                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                             |
| 8    | fischer<br>rebar anchor FRA                                                        | Rebar part:<br>Bars and de-coiled rods class B or C<br>with $f_{yk}$ and $k$ according to NDP or NCL<br>of EN 1992-1-1:2004+AC:2010<br>$f_{uk} = f_{tk} = k \cdot f_{yk}$                                                                              | Threaded part:<br>Property class 70 or 80<br>EN ISO 3506-1:2009<br>1.4565; 1.4529, 1.4401, 1.4404, 1.4571,<br>1.4578, 1.4439, 1.4362, 1.4062<br>EN 10088-1:2014                                                                                 |                                                                                                                                                                                                                                             |

<sup>1)</sup> For applications without requirements for seismic performance category C2 the fracture elongation may be in the range of  $A_5 > 8 \%$  in accordance with TR029 Section 5.2.3.2 (Reductions for seismic performance category C1 must be noted)

fischer Superbond

**Product description**  
Materials
**Annex A 3**

### Specifications of intended use (part 1)

**Table B1.1:** Overview use and performance categories injection mortar system FIS SB

|                                                                                                                                                                             |                       |                                                                                                 |                                                                             |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------------------------|--------------------------------------------------------------------------------------------------------|-------------------------|-----------------------------------------------------------------------------------------------------------------|-------------------------|
| Anchorage subject to                                                                                                                                                        |                       | FIS SB mit ...                                                                                  |                                                                             |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
|                                                                                                                                                                             |                       | Anchor rod<br> |                                                                             | fischer internal threaded anchor RG MI<br> |                           | Reinforcing bar<br> |                         | fischer rebar anchor FRA<br> |                         |
| Hammer drilling with standard drill bit<br>                                                |                       | all sizes                                                                                       |                                                                             |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
| Hammer drilling with hollow drill bit (Heller "Duster Expert" or Hilti "TE-CD, TE-YD")<br> |                       | Nominal drill bit diameter (d <sub>0</sub> ) 12 mm to 35 mm                                     |                                                                             |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
| Diamond drilling<br>                                                                       |                       | not permitted                                                                                   |                                                                             |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
| Static and quasi static load, in                                                                                                                                            | uncracked concrete    | all sizes                                                                                       | Tables: C1, C5, C6.1, C10                                                   | all sizes                                                                                                                   | Tables: C2, C5, C7.1, C11 | all sizes                                                                                              | Tables: C3, C5, C8, C12 | all sizes                                                                                                       | Tables: C4, C5, C9, C13 |
|                                                                                                                                                                             | cracked concrete      |                                                                                                 |                                                                             |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
| Seismic performance category (only hammer drilling with Standard / hollow drill bits)                                                                                       | C1                    | all sizes                                                                                       | Tables: C14, C16, C17                                                       | ---                                                                                                                         |                           | all sizes                                                                                              | Tables: C15, C16, C18   | ---                                                                                                             |                         |
|                                                                                                                                                                             | C2                    | M12, M16, M20, M24                                                                              | Tables: C14, C16, C19                                                       |                                                                                                                             |                           | ---                                                                                                    | ---                     |                                                                                                                 |                         |
| Use category                                                                                                                                                                | dry or wet concrete   | all sizes                                                                                       |                                                                             |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
|                                                                                                                                                                             | flooded hole          | not permitted                                                                                   |                                                                             |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
| Installation temperature                                                                                                                                                    |                       | FIS SB: -15 °C to +40 °C<br>FIS SB High Speed: -20 °C to +40 °C                                 |                                                                             |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
| In-service temperature                                                                                                                                                      | Temperature-range I   | -40 °C to +40 °C                                                                                | (max. long term temperature +24 °C and max. short term temperature +40 °C)  |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
|                                                                                                                                                                             | Temperature-range II  | -40 °C to +80 °C                                                                                | (max. long term temperature +50 °C and max. short term temperature +80 °C)  |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
|                                                                                                                                                                             | Temperature-range III | -40 °C to +120 °C                                                                               | (max. long term temperature +72 °C and max. short term temperature +120 °C) |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
|                                                                                                                                                                             | Temperature-range IV  | -40 °C to +150 °C                                                                               | (max. long term temperature +90 °C and max. short term temperature +150 °C) |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
| fischer Superbond                                                                                                                                                           |                       |                                                                                                 |                                                                             |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
| Intended Use<br>Specifications (part 1)                                                                                                                                     |                       |                                                                                                 |                                                                             |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |
| Annex B 1                                                                                                                                                                   |                       |                                                                                                 |                                                                             |                                                                                                                             |                           |                                                                                                        |                         |                                                                                                                 |                         |

**Specifications of intended use (part 2)****Table B1.2:** Overview use and performance categories resin capsule system RSB

| Anchorages subject to                                                                  |                                                                                   | RSB with ...                                                                      |                           |                                                                                   |                           |                                                                                     |                                                                                     |
|----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------------------------------|---------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                                        |                                                                                   | fischer anchor rod RG M                                                           |                           | fischer internal threaded anchor RG MI                                            |                           | Reinforcing bar                                                                     | fischer rebar anchor FRA                                                            |
|                                                                                        |                                                                                   |  |                           |  |                           |  |  |
| Hammer drilling with standard drill bit                                                |  | all sizes                                                                         |                           | all sizes                                                                         |                           | not permitted                                                                       | not permitted                                                                       |
| Hammer drilling with hollow drill bit (Heller "Duster Expert" or Hilti "TE-CD, TE-YD") |  | Nominal drill bit diameter (d <sub>0</sub> ) 12 mm to 35 mm                       |                           | all sizes                                                                         |                           |                                                                                     |                                                                                     |
| Diamond drilling                                                                       |  | all sizes <sup>1)</sup>                                                           |                           | all sizes <sup>1)</sup>                                                           |                           |                                                                                     |                                                                                     |
| Static and quasi static load, in                                                       | uncracked concrete                                                                | all sizes                                                                         | Tables: C1, C5, C6.2, C10 | all sizes                                                                         | Tables: C2, C5, C7.2, C11 |                                                                                     |                                                                                     |
|                                                                                        | cracked concrete                                                                  | all sizes <sup>1)</sup>                                                           |                           | all sizes <sup>1)</sup>                                                           |                           |                                                                                     |                                                                                     |
| Seismic performance category (only hammer drilling with Standard / hollow drill bits)  | C1                                                                                | all sizes                                                                         | Tables: C14, C16, C17     | ---                                                                               |                           |                                                                                     |                                                                                     |
|                                                                                        | C2                                                                                | ---                                                                               |                           |                                                                                   |                           |                                                                                     |                                                                                     |
| Use category                                                                           | dry or wet concrete                                                               | all sizes                                                                         |                           | all sizes                                                                         |                           |                                                                                     |                                                                                     |
|                                                                                        | flooded hole                                                                      | all sizes                                                                         |                           | all sizes                                                                         |                           |                                                                                     |                                                                                     |
| Installation temperature                                                               |                                                                                   | -30 °C to +40 °C                                                                  |                           |                                                                                   |                           |                                                                                     |                                                                                     |
| In-service temperature                                                                 | Temperature-range I                                                               | -40 °C to +40 °C                                                                  |                           | (max. long term temperature +24 °C and max. short term temperature +40 °C)        |                           |                                                                                     |                                                                                     |
|                                                                                        | Temperature-range II                                                              | -40 °C to +80 °C                                                                  |                           | (max. long term temperature +50 °C and max. short term temperature +80 °C)        |                           |                                                                                     |                                                                                     |
|                                                                                        | Temperature-range III                                                             | -40 °C to +120 °C                                                                 |                           | (max. long term temperature +72 °C and max. short term temperature +120 °C)       |                           |                                                                                     |                                                                                     |
|                                                                                        | Temperature-range IV                                                              | -40 °C to +150 °C                                                                 |                           | (max. long term temperature +90 °C and max. short term temperature +150 °C)       |                           |                                                                                     |                                                                                     |

<sup>1)</sup> For diamond drilling in cracked concrete only nominal drill bit diameters ( $d_0$ )  $\geq 18$  mm are permitted

fischer Superbond

**Intended Use**  
Specifications (part 2)

**Annex B 2**



### Specifications of intended use (part 3)

#### Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206:2013
- Strength classes C20/25 to C50/60 according to EN 206:2013

#### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure, to permanently damp internal conditions or in other particular aggressive conditions (high corrosion resistant steel)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

#### Design:

- Anchorages have to be designed by a responsible engineer with experience of concrete anchor design
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages under static or quasi-static actions are designed in accordance with EOTA Technical Report TR 029 "Design of bonded anchors" Edition September 2010 or CEN/TS 1992-4:2009
- Anchorages under seismic actions (cracked concrete) have to be designed in accordance with:
  - EOTA Technical Report TR 045 "Design of Metal Anchors under Seismic Action", Edition February 2013
  - Anchorages shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure
  - Fastenings in stand-off installation or with a grout layer are not allowed

#### Installation:

- Anchor installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- In case of aborted hole: The hole shall be filled with mortar
- Anchorage depth should be marked and adhered to on installation
- Overhead installation is allowed

fischer Superbond

**Intended Use**  
Specifications (part 3)

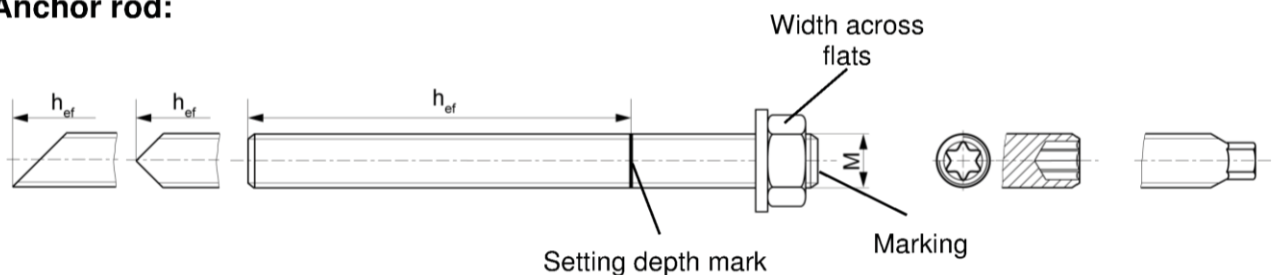
**Annex B 3**

**Table B2.1:** Installation parameters for anchor rods in combination with injection mortar system FIS SB

| Size                                                    |                                | M8                              | M10 | M12 | M16             | M20 | M24 | M27 | M30 |
|---------------------------------------------------------|--------------------------------|---------------------------------|-----|-----|-----------------|-----|-----|-----|-----|
| Width across flats                                      | SW                             | 13                              | 17  | 19  | 24              | 30  | 36  | 41  | 46  |
| Nominal drill bit diameter                              | $d_0$                          | 10                              | 12  | 14  | 18              | 24  | 28  | 30  | 35  |
| Drill hole depth                                        | $h_0$                          | $h_0 = h_{ef}$                  |     |     |                 |     |     |     |     |
| Effective anchorage depth                               | $h_{ef,min}$                   | 60                              | 60  | 70  | 80              | 90  | 96  | 108 | 120 |
|                                                         | $h_{ef,max}$                   | 160                             | 200 | 240 | 320             | 400 | 480 | 540 | 600 |
| Minimum spacing and minimum edge distance               | $s_{min} = c_{min}$            | 40                              | 45  | 55  | 65              | 85  | 105 | 120 | 140 |
| Diameter of clearance hole in the fixture <sup>1)</sup> | pre-positioned anchorage $d_f$ | 9                               | 12  | 14  | 18              | 22  | 26  | 30  | 33  |
|                                                         | push through anchorage $d_f$   | 11                              | 14  | 16  | 20              | 26  | 30  | 33  | 40  |
| Minimum thickness of concrete member                    | $h_{min}$                      | $h_{ef} + 30$<br>( $\geq 100$ ) |     |     | $h_{ef} + 2d_0$ |     |     |     |     |
| Maximum installation torque                             | $T_{inst,max}$ [Nm]            | 10                              | 20  | 40  | 60              | 120 | 150 | 200 | 300 |

<sup>1)</sup> For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

### Anchor rod:



### Marking (on random place) fischer anchor rod:

Property class 8.8, stainless steel, property class 80 or high corrosion resistant steel, property class 80: •  
 Stainless steel A4, property class 50 and high corrosion resistant steel, property class 50: ••  
 Or colour coding according to DIN 976-1

### Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

- Materials, dimensions and mechanical properties according Annex A 3, Table A1
- Inspection certificate 3.1 according to EN 10204:2004, the documents have to be stored
- Setting depth is marked

fischer Superbond

### Intended Use

Installation parameters anchor rods in combination with injection mortar system FIS SB

**Annex B 4**

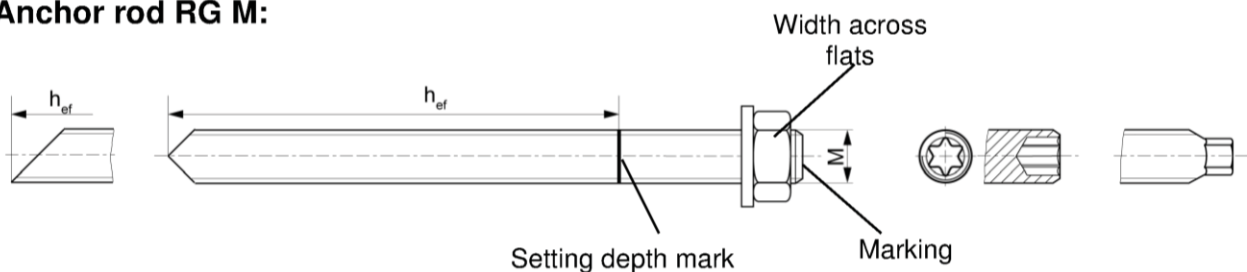


**Table B2.2:** Installation parameters for fischer anchor rods RG M in combination with resin capsule system RSB

| Size                                                        |                     | M8                              | M10 | M12 | M16             | M20 | M24 | M30 |
|-------------------------------------------------------------|---------------------|---------------------------------|-----|-----|-----------------|-----|-----|-----|
| Width across flats                                          | SW                  | 13                              | 17  | 19  | 24              | 30  | 36  | 46  |
| Nominal drill bit diameter                                  | $d_0$               | 10                              | 12  | 14  | 18              | 25  | 28  | 35  |
| Drill hole depth                                            | $h_0$               | $h_0 = h_{ef}$                  |     |     |                 |     |     |     |
| Effective anchorage depth                                   | $h_{ef,1}$          | ---                             | 75  | 75  | 95              | --- | --- | --- |
|                                                             | $h_{ef,2}$          | 80                              | 90  | 110 | 125             | 170 | 210 | 280 |
|                                                             | $h_{ef,3}$          | ---                             | 150 | 150 | 190             | 210 | --- | --- |
| Width across flats                                          | $s_{min} = c_{min}$ | 40                              | 45  | 55  | 65              | 85  | 105 | 140 |
| Diameter of pre-clearance hole in the fixture <sup>1)</sup> | $d_f$               | 9                               | 12  | 14  | 18              | 22  | 26  | 33  |
| Minimum thickness of concrete member                        | $h_{min}$           | $h_{ef} + 30$<br>( $\geq 100$ ) |     |     | $h_{ef} + 2d_0$ |     |     |     |
| Maximum installation torque                                 | $T_{inst,max}$ [Nm] | 10                              | 20  | 40  | 60              | 120 | 150 | 300 |

<sup>1)</sup> For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

### Anchor rod RG M:



### Marking (on random place):

Property class 8.8, stainless steel, property class 80 or high corrosion resistant steel, property class 80: •  
 Stainless steel A4, property class 50 and high corrosion resistant steel, property class 50: ••  
 Or colour coding according to DIN 976-1

fischer Superbond

### Intended Use

Installation parameters anchor rods in combination with resin capsule system RSB

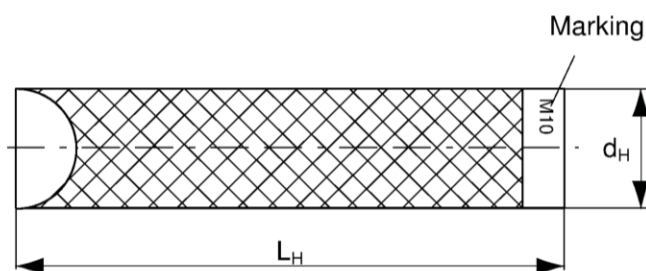
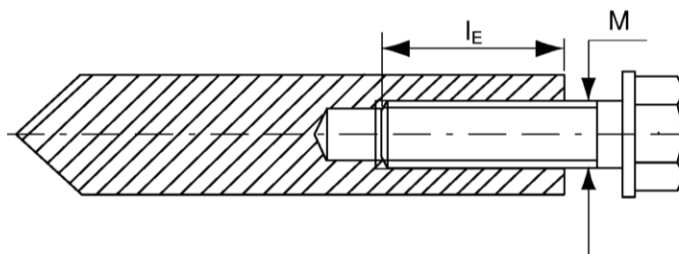
**Annex B 5**

**Table B3:** Installation parameters for fischer internal threaded anchors RG MI

| Size                                                       |                             | M8             | M10 | M12 | M16 | M20 |
|------------------------------------------------------------|-----------------------------|----------------|-----|-----|-----|-----|
| Diameter of anchor                                         | $d_H$                       | 12             | 16  | 18  | 22  | 28  |
| Nominal drill bit diameter                                 | $d_0$                       | 14             | 18  | 20  | 24  | 32  |
| Drill hole depth                                           | $h_0$                       | $h_0 = h_{ef}$ |     |     |     |     |
| Effective anchorage depth<br>( $h_{ef} = L_H$ )            | $h_{ef}$                    | 90             | 90  | 125 | 160 | 200 |
| Minimum spacing and<br>minimum edge distance               | $s_{min}$<br>=<br>$c_{min}$ | 55             | 65  | 75  | 95  | 125 |
| Diameter of clearance hole in<br>the fixture <sup>1)</sup> | $d_f$                       | 9              | 12  | 14  | 18  | 22  |
| Minimum thickness<br>of concrete member                    | $h_{min}$                   | 120            | 125 | 165 | 205 | 260 |
| Maximum screw-in depth                                     | $l_{E,max}$                 | 18             | 23  | 26  | 35  | 45  |
| Minimum screw-in depth                                     | $l_{E,min}$                 | 8              | 10  | 12  | 16  | 20  |
| Maximum<br>installation torque                             | $T_{inst,max}$ [Nm]         | 10             | 20  | 40  | 80  | 120 |

<sup>1)</sup> For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

### fischer internal threaded anchor RG MI



**Marking:** Anchor size  
e.g.: **M10**

Stainless steel additional **A4**  
e.g.: **M10 A4**

High corrosion resistant steel  
additional **C**  
e.g.: **M10 C**

Retaining bolt or threaded rods (including nut and washer) must comply with the appropriate material and strength class of Annex A 3, Table A1

fischer Superbond

#### Intended Use

Installation parameters fischer internal threaded anchors RG MI

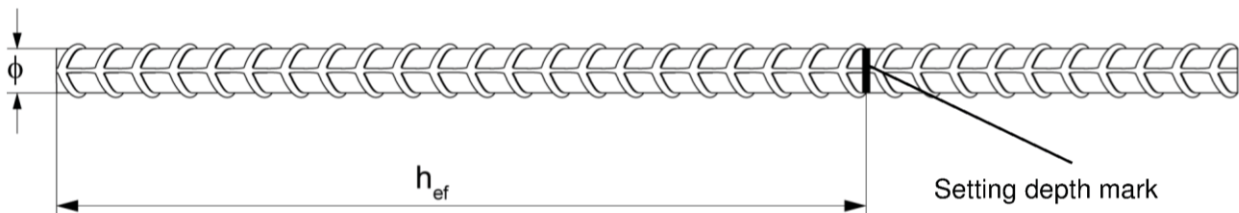
**Annex B 6**

**Table B4:** Installation parameters for reinforcing bars

| Nominal diameter of the bar $\phi$                            |      | 8 <sup>1)</sup>                 |     | 10 <sup>1)</sup> |     | 12 <sup>1)</sup> |     | 14              | 16  | 20  | 25 | 28 | 32 |
|---------------------------------------------------------------|------|---------------------------------|-----|------------------|-----|------------------|-----|-----------------|-----|-----|----|----|----|
| Nominal drill bit diameter $d_0$                              | [mm] | 10                              | 12  | 12               | 14  | 14               | 16  | 18              | 20  | 25  | 30 | 35 | 40 |
| Drill hole depth $h_0$                                        |      | $h_0 = h_{ef}$                  |     |                  |     |                  |     |                 |     |     |    |    |    |
| Effective anchorage depth $h_{ef,min}$                        |      | 60                              | 60  | 70               | 75  | 80               | 90  | 100             | 112 | 128 |    |    |    |
| $h_{ef,max}$                                                  |      | 160                             | 200 | 240              | 280 | 320              | 400 | 500             | 560 | 640 |    |    |    |
| Minimum spacing and minimum edge distance $s_{min} = c_{min}$ |      | 40                              | 45  | 55               | 60  | 65               | 85  | 110             | 130 | 160 |    |    |    |
| Minimum thickness of concrete member $h_{min}$                |      | $h_{ef} + 30$<br>( $\geq 100$ ) |     |                  |     |                  |     | $h_{ef} + 2d_0$ |     |     |    |    |    |

<sup>1)</sup> Both drill bit diameters can be used

### Reinforcing bar



- The minimum value of related rib area  $f_{R,min}$  must fulfil the requirements of EN 1992-1-1:2004+AC:2010
- The rib height must be within the range:  $0,05 \cdot \phi \leq h_{rib} \leq 0,07 \cdot \phi$   
( $\phi$  = Nominal diameter of the bar ,  $h_{rib}$  = rib height)

fischer Superbond

**Intended Use**  
Installation parameters reinforcing bars

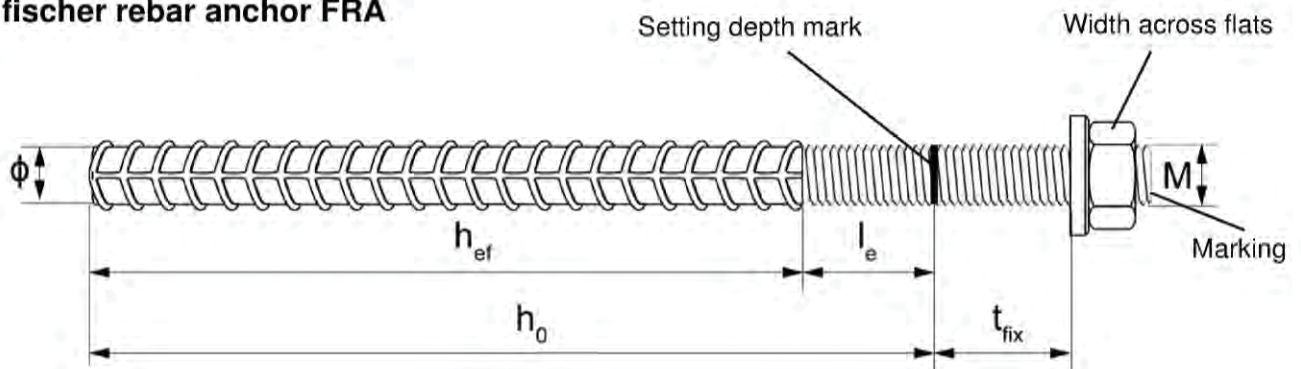
**Annex B 7**

**Table B5:** Installation parameters for fischer rebar anchor FRA


| Size                                                    |                                     | M12 <sup>1)</sup>            |              | M16       | M20       | M24       |
|---------------------------------------------------------|-------------------------------------|------------------------------|--------------|-----------|-----------|-----------|
| Nominal diameter of the bar                             | $\phi$                              | 12                           |              | 16        | 20        | 25        |
| Width across flats                                      | SW                                  | 19                           |              | 24        | 30        | 36        |
| Nominal drill bit diameter                              | $d_0$                               | 14                           | 16           | 20        | 25        | 30        |
| Drill hole depth                                        | $h_0$                               | $h_{ef} + l_e$               |              |           |           |           |
| Effective anchorage depth                               | $h_{ef,min}$<br>$h_{ef,max}$        | 70<br>140                    |              | 80<br>220 | 90<br>300 | 96<br>380 |
| Distance concrete surface to welded joint               | $l_e$                               | 100                          |              |           |           |           |
| Minimum spacing and minimum edge distance               | $s_{min}$<br>=<br>$c_{min}$         | 55                           |              | 65        | 85        | 105       |
| Diameter of clearance hole in the fixture <sup>2)</sup> | pre-positioned anchorage $\leq d_f$ | 14                           |              | 18        | 22        | 26        |
|                                                         | push through anchorage $\leq d_f$   | 18                           |              | 22        | 26        | 32        |
| Minimum thickness of concrete member                    | $h_{min}$                           | $h_0 + 30$<br>( $\geq 100$ ) | $h_0 + 2d_0$ |           |           |           |
| Maximum installation torque                             | $T_{inst,max}$ [Nm]                 | 40                           |              | 60        | 120       | 150       |

<sup>1)</sup> Both drill bit diameters can be used

<sup>2)</sup> For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

**fischer rebar anchor FRA**

Marking frontal e.g.:



fischer Superbond

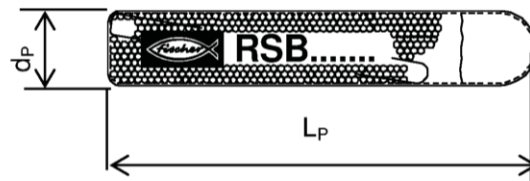
**Intended Use**

Installation parameters rebar anchor FRA

**Annex B 8**

**Table B6:** Dimension of resin capsule RSB

| Resin capsule           |       | RSB 8 | RSB 10 mini | RSB 10 | RSB 12 mini | RSB 12 | RSB 16 mini | RSB 16 | RSB 16 E | RSB 20 | RSB 20 E / 24 | RSB 30 |
|-------------------------|-------|-------|-------------|--------|-------------|--------|-------------|--------|----------|--------|---------------|--------|
| Diameter of the capsule | $d_P$ | 9,0   | 10,5        |        | 12,5        |        | 16,5        |        |          | 23,0   |               | 27,5   |
| Length of the capsule   | $L_P$ | 85    | 72          | 90     | 72          | 97     | 72          | 95     | 123      | 160    | 190           | 260    |

**Table B7:** Allocation of resin capsule RSB to fischer anchor rod RG M

| Size                         |            |      | M8  | M10         | M12         | M16         | M20       | M24       | M30 |
|------------------------------|------------|------|-----|-------------|-------------|-------------|-----------|-----------|-----|
| Minimum anchorage depth      | $h_{ef,1}$ | [mm] | --- | 75          | 75          | 95          | ---       | ---       | --- |
| Associated resin capsule RSB |            | [-]  | --- | 10 mini     | 12 mini     | 16 mini     | ---       | ---       | --- |
| Medium anchorage depth       | $h_{ef,2}$ | [mm] | 80  | 90          | 110         | 125         | 170       | 210       | 280 |
| Associated resin capsule RSB |            | [-]  | 8   | 10          | 12          | 16          | 20        | 20 E / 24 | 30  |
| Maximum anchorage depth      | $h_{ef,3}$ | [mm] | --- | 150         | 150         | 190         | 210       | ---       | --- |
| Associated resin capsule RSB |            | [-]  | --- | 2 x 10 mini | 2 x 12 mini | 2 x 16 mini | 20 E / 24 | ---       | --- |

**Table B8:** Allocation of resin capsule RSB to fischer internal threaded anchor RG MI

| Size                         |          |      | M8 | M10 | M12 | M16 | M20       |
|------------------------------|----------|------|----|-----|-----|-----|-----------|
| Effective anchorage depth    | $h_{ef}$ | [mm] | 90 | 90  | 125 | 160 | 200       |
| Associated resin capsule RSB |          | [-]  | 10 | 12  | 16  | 16E | 20 E / 24 |

fischer Superbond

**Intended Use**  
Resin capsule RSB  
Parameters and allocations

**Annex B 9**



**Table B9:** Parameters of steel brush FIS BS Ø

|                      |       |      |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------|-------|------|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Drill bit diameter   | $d_0$ | [mm] | 10 | 12 | 14 | 16 | 18 | 20 | 24 | 25 | 28 | 30 | 32 | 35 | 40 |
| Steel brush diameter | $d_b$ |      | 11 | 14 | 16 | 20 |    | 25 | 26 | 27 | 30 | 40 |    | 42 |    |

**Table B10:** Maximum processing time of the mortar and minimum curing time  
(Minimal cartridge temperature +5 °C; minimal resin capsule temperature -15 °C)




| System temperature<br>[°C] | Maximum processing time<br>$t_{work}$<br>[minutes] |                      | Minimum curing time <sup>1)</sup><br>$t_{cure}$<br>[minutes] |                      |           |
|----------------------------|----------------------------------------------------|----------------------|--------------------------------------------------------------|----------------------|-----------|
|                            | FIS SB                                             | FIS SB<br>High Speed | FIS SB                                                       | FIS SB<br>High Speed | RSB       |
| -30 bis -20                | ---                                                | ---                  | ---                                                          | ---                  | 120 hours |
| > -20 bis -15              | ---                                                | 60                   | ---                                                          | 24 hours             | 48 hours  |
| > -15 bis -10              | 60                                                 | 30                   | 36 hours                                                     | 8 hours              | 30 hours  |
| > -10 bis -5               | 30                                                 | 15                   | 24 hours                                                     | 3 hours              | 16 hours  |
| > -5 bis ±0                | 20                                                 | 10                   | 8 hours                                                      | 2 hours              | 10 hours  |
| > ±0 bis +5                | 13                                                 | 5                    | 4 hours                                                      | 1 hour               | 45        |
| > +5 bis +10               | 9                                                  | 3                    | 2 hours                                                      | 45                   | 30        |
| > +10 bis +20              | 5                                                  | 2                    | 1 hour                                                       | 30                   | 20        |
| > +20 bis +30              | 4                                                  | 1                    | 45                                                           | 15                   | 5         |
| > +30 bis +40              | 2                                                  | ---                  | 30                                                           | ---                  | 3         |

fischer Superbond

**Intended Use**  
Cleaning tools  
Processing times and curing times


**Annex B 10**

**Installation instructions part 1; Injection mortar system FIS SB****Drilling and cleaning the hole (hammer drilling with standard drill bit)**

|   |                                                                                    |                                                                                                                                                                                                                 |
|---|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 |   | Drill the hole.<br>Drill hole diameter $d_0$ and drill hole depth $h_0$ see <b>Tables B2.1, B3, B4, B5</b>                                                                                                      |
| 2 |   | Blow out the drill hole twice, with oil-free compressed air ( $p \geq 6$ bar). In uncracked concrete the use of a manual blow-out pump is possible (Installation parameters: $d_0 < 18$ mm and $h_{ef} < 10d$ ) |
| 3 |   | Brush the drill hole twice. For drill hole diameter $\geq 30$ mm use a power drill. For deep holes use an extension. Corresponding brushes see <b>Table B9</b>                                                  |
| 4 |  | Blow out the drill hole twice, with oil-free compressed air ( $p \geq 6$ bar). In uncracked concrete the use of a manual blow-out pump is possible (Installation parameters: $d_0 < 18$ mm and $h_{ef} < 10d$ ) |

Go to step 5

**Drilling and cleaning the hole (hammer drilling with hollow drill bit)**

|   |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                              |
|---|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 |  | Check a suitable hollow drill (see <b>Table B1.1</b> ) for correct operation of the dust extraction                                                                                                                                                                                                                                                                          |
| 2 |  | Use a suitable dust extraction system, e.g. Bosch GAS 35 M AFC or a comparable dust extraction system with equivalent performance data<br><br>Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process. Diameter of drill hole $d_0$ and drill hole depth $h_0$ see <b>Tables B2.1, B3, B4, B5</b> |

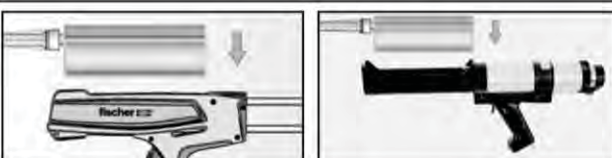
Go to step 5

fischer Superbond




**Intended use**  
Installation instructions part 1**Annex B 11**

## Installation instructions part 2; Injection mortar system FIS SB

### Preparing the cartridge

|   |                                                                                   |                                                                                                                                       |
|---|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| 5 |  | <p>Remove the sealing cap</p> <p>Screw on the static mixer<br/>(the spiral in the static mixer must be clearly visible)</p>           |
| 6 |  | <p>Place the cartridge into the dispenser</p>                                                                                         |
| 7 |  | <p>Extrude approximately 10 cm of material until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey</p> |

### Mortar injection

|   |                                                                                    |                                                                                                                                                                   |                                                                                                                                                                                                                                                    |
|---|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 8 |  |  <p>For drill hole depth <math>\geq 150</math> mm<br/>use an extension tube</p> |  <p>For overhead installation, deep holes<br/><math>h_0 &gt; 250</math> mm or drill hole diameter<br/><math>d_0 \geq 40</math> mm use an injection-adapter</p> |
|---|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Go to step 9

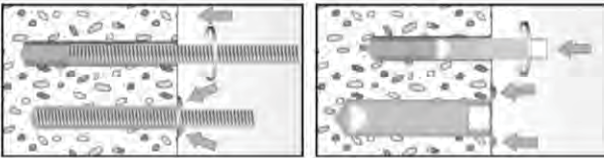



fischer Superbond

**Intended use**  
Installation instructions part 2




**Annex B 12**



**Installation instructions part 3; Injection mortar system FIS SB****Installation anchor rod or fischer internal threaded anchor RG MI**

|    |                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                       |    |                                                                                     |                                                                                             |
|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| 9  |                                                                                                        | <p>Only use clean and oil-free anchor elements. Mark the setting depth of the anchor. Push the threaded rod or fischer internal threaded RG MI anchor down to the bottom of the hole, turning it slightly while doing so.</p> <p>After inserting the anchor element, excess mortar must be emerged around the anchor element. If not, pull out the anchor element immediately and reinject mortar</p> |    |                                                                                     |                                                                                             |
|    |  <p>For overhead installations support the anchor rod with wedges. (e.g. fischer centering wedges)</p> |  <p>For push through installation fill the annular gap with mortar</p>                                                                                                                                                                                                                                              |    |                                                                                     |                                                                                             |
| 10 |  <p>Wait for the specified curing time<br/><math>t_{\text{cure}}</math> see <b>Table B10</b></p>      | <td data-bbox="861 884 949 1061">11</td> <td data-bbox="949 884 1268 1061">  </td> <td data-bbox="1268 884 1522 1061"> <p>Mounting the fixture<br/><math>T_{\text{inst,max}}</math> see <b>Tables B2.1, B3</b></p> </td>                                                                                           | 11 |  | <p>Mounting the fixture<br/><math>T_{\text{inst,max}}</math> see <b>Tables B2.1, B3</b></p> |

**Installation reinforcing bar or fischer FRA**

|    |                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                          |    |                                                                                      |                                                                                      |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 9  |                                                                                                  | <p>Only use clean and oil-free reinforcing bars or fischer FRA. Mark the setting depth. Turn while using force to push the reinforcement bar or the fischer FRA into the filled hole up to the setting depth mark</p> <p>When the setting depth mark is reached, excess mortar must be emerged from the mouth of the drill hole. If not, pull out the anchor element immediately and reinject mortar</p> |    |                                                                                      |                                                                                      |
| 10 |  <p>Wait for the specified curing time<br/><math>t_{\text{cure}}</math> see <b>Table B10</b></p> | <td data-bbox="813 1489 901 1662">11</td> <td data-bbox="901 1489 1220 1662">  </td> <td data-bbox="1220 1489 1522 1662"> <p>Mounting the fixture<br/><math>T_{\text{inst,max}}</math> see <b>Table B5</b></p> </td>                                                                                                 | 11 |  | <p>Mounting the fixture<br/><math>T_{\text{inst,max}}</math> see <b>Table B5</b></p> |



fischer Superbond

**Intended use**

Installation instructions part 3







**Annex B 13**

**Installation instructions part 4; resin capsule RSB****Drilling and cleaning the hole (hammer drilling with standard drill bit)**

|   |                                                                                   |                                                                                                                                                                                                                         |
|---|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 |  | Drill the hole.<br>Drill hole diameter $d_0$ and drill hole depth $h_0$ see<br><b>Tables B2.2, B3</b>                                                                                                                   |
| 2 |  | Blow out the drill hole four times, with oil-free compressed air ( $p \geq 6$ bar). In uncracked concrete the use of a manual blow-out pump is possible (Installation parameters:<br>$d_0 < 18$ mm and $h_{ef} < 10d$ ) |

Go to step 6

**Drilling and cleaning the hole (wet drilling with diamond drill bit)**

|   |                                                                                     |                                                                                                          |                                                                                     |                                         |
|---|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------|
| 1 |   | Drill the hole.<br>Drill hole diameter $d_0$ and<br>drill hole depth $h_0$ see<br><b>Tables B2.2, B3</b> |  | Break the drill core<br>and draw it out |
| 2 |  | Flush the drill hole with clean water until it flows clear                                               |                                                                                     |                                         |
| 3 |  | Blow out the drill hole twice, using oil-free compressed air ( $p > 6$ bar)                              |                                                                                     |                                         |
| 4 |  | Brush the drill hole twice using a power drill. Corresponding brushes see<br><b>Table B9</b>             |                                                                                     |                                         |
| 5 |  | Blow out the drill hole twice, using oil-free compressed air ( $p > 6$ bar)                              |                                                                                     |                                         |

Go to step 6

fischer Superbond

**Intended use**


Installation instructions part 4

**Annex B 14**








**Installation instructions part 5; resin capsule RSB**

Drilling and cleaning the hole (hammer drilling with hollow drill bit)

|   |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                   |
|---|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 |  | Check a suitable hollow drill (see <b>Table B1.2</b> ) for correct operation of the dust extraction                                                                                                                                                                                                                                                                                               |
| 2 |  | <p>Use a suitable dust extraction system, e.g. Bosch GAS 35 M AFC or a comparable dust extraction system with equivalent performance data</p> <p>Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process. Diameter of drill hole <math>d_0</math> and drill hole depth <math>h_0</math> see <b>Tables B2.2, B3</b></p> |

Go to step 6

**Installation fischer anchor rod RG M or fischer internal threaded anchor RG MI**

|   |                                                                                     |                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                             |                                                                                      |                                                                |
|---|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------|
| 6 |   | Resin capsule RSB or two RSB mini, must be pushed into the drill hole by hand                                                                                                                                                                             |                                                                                                                                                                                                          | Depending on the anchor being installed, use a suitable setting tool                 |                                                                |
| 7 |  |                                                                                                                                                                        | Only use clean and grease-free anchors. Using a suitable adapter, drive the RG M or fischer internal threaded anchor RG MI into the capsule using a hammer drill set on rotary hammer action. Stop when the anchor reaches the bottom of the hole and is set to the correct embedment depth |                                                                                      |                                                                |
| 8 |  | When reaching the correct embedment depth, excess mortar must emerge from the mouth of the drill hole. If not, the anchor must be pulled out directly and a second resin capsule must be pushed into the drill hole. Setting process must be repeated (7) |                                                                                                                                                                                                                                                                                             |                                                                                      |                                                                |
| 9 |  | Wait for the specified curing time, $t_{cure}$ see <b>Table B10</b>                                                                                                                                                                                       | 10                                                                                                                                                                                                                                                                                          |  | Mounting the fixture max $T_{inst}$ see <b>Tables B2.2, B3</b> |

fischer Superbond

**Intended use**  
Installation instructions part 5

**Annex B 15**

**Table C1:** Characteristic values for the **steel bearing capacity** under tensile / shear load of **fischer anchor rods** and **standard threaded rods**

| Size                                               |                                                         |     |      | M8                        | M10 | M12 | M16 | M20 | M24 | M27  | M30  |
|----------------------------------------------------|---------------------------------------------------------|-----|------|---------------------------|-----|-----|-----|-----|-----|------|------|
| Bearing capacity under tensile load, steel failure |                                                         |     |      |                           |     |     |     |     |     |      |      |
| Charact.bearing capacity $N_{Rk,s}$                | Steel zinc plated                                       | 5.8 | [kN] | 19                        | 29  | 43  | 79  | 123 | 177 | 230  | 281  |
|                                                    |                                                         | 8.8 |      | 29                        | 47  | 68  | 126 | 196 | 282 | 368  | 449  |
|                                                    | Stainless steel A4 and High corrosion resistant steel C | 50  |      | 19                        | 29  | 43  | 79  | 123 | 177 | 230  | 281  |
|                                                    |                                                         | 70  |      | 26                        | 41  | 59  | 110 | 172 | 247 | 322  | 393  |
|                                                    |                                                         | 80  |      | 30                        | 47  | 68  | 126 | 196 | 282 | 368  | 449  |
| Partial safety factors <sup>1)</sup>               |                                                         |     |      |                           |     |     |     |     |     |      |      |
| Partial safety factor $\gamma_{Ms,N}$              | Steel zinc plated                                       | 5.8 | [-]  | 1,50                      |     |     |     |     |     |      |      |
|                                                    |                                                         | 8.8 |      | 1,50                      |     |     |     |     |     |      |      |
|                                                    | Stainless steel A4 and High corrosion resistant steel C | 50  |      | 2,86                      |     |     |     |     |     |      |      |
|                                                    |                                                         | 70  |      | 1,50 <sup>2)</sup> / 1,87 |     |     |     |     |     |      |      |
|                                                    |                                                         | 80  |      | 1,60                      |     |     |     |     |     |      |      |
| Bearing capacity under shear load, steel failure   |                                                         |     |      |                           |     |     |     |     |     |      |      |
| without lever arm                                  |                                                         |     |      |                           |     |     |     |     |     |      |      |
| Charact.bearing capacity $V_{Rk,s}$                | Steel zinc plated                                       | 5.8 | [kN] | 9                         | 15  | 21  | 39  | 61  | 89  | 115  | 141  |
|                                                    |                                                         | 8.8 |      | 15                        | 23  | 34  | 63  | 98  | 141 | 184  | 225  |
|                                                    | Stainless steel A4 and High corrosion resistant steel C | 50  |      | 9                         | 15  | 21  | 39  | 61  | 89  | 115  | 141  |
|                                                    |                                                         | 70  |      | 13                        | 20  | 30  | 55  | 86  | 124 | 161  | 197  |
|                                                    |                                                         | 80  |      | 15                        | 23  | 34  | 63  | 98  | 141 | 184  | 225  |
| with lever arm                                     |                                                         |     |      |                           |     |     |     |     |     |      |      |
| Charact. bending moment $M_{Rk,s}^0$               | Steel zinc plated                                       | 5.8 | [Nm] | 19                        | 37  | 65  | 166 | 324 | 560 | 833  | 1123 |
|                                                    |                                                         | 8.8 |      | 30                        | 60  | 105 | 266 | 519 | 896 | 1333 | 1797 |
|                                                    | Stainless steel A4 and High corrosion resistant steel C | 50  |      | 19                        | 37  | 65  | 166 | 324 | 560 | 833  | 1123 |
|                                                    |                                                         | 70  |      | 26                        | 52  | 92  | 232 | 454 | 784 | 1167 | 1573 |
|                                                    |                                                         | 80  |      | 30                        | 60  | 105 | 266 | 519 | 896 | 1333 | 1797 |
| Partial safety factors <sup>1)</sup>               |                                                         |     |      |                           |     |     |     |     |     |      |      |
| Partial safety factor $\gamma_{Ms,V}$              | Steel zinc plated                                       | 5.8 | [-]  | 1,25                      |     |     |     |     |     |      |      |
|                                                    |                                                         | 8.8 |      | 1,25                      |     |     |     |     |     |      |      |
|                                                    | Stainless steel A4 and High corrosion resistant steel C | 50  |      | 2,38                      |     |     |     |     |     |      |      |
|                                                    |                                                         | 70  |      | 1,25 <sup>2)</sup> / 1,56 |     |     |     |     |     |      |      |
|                                                    |                                                         | 80  |      | 1,33                      |     |     |     |     |     |      |      |

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> Only admissible for steel C<sub>1</sub> with  $f_{yk} / f_{uk} \geq 0,8$  and  $A_5 > 12 \%$  (e.g. fischer anchor rods)

fischer Superbond

## Performances

### Performance

Characteristic steel bearing capacity of fischer anchor rods and standard threaded rods

## Annex C 1



**Table C2: Characteristic values for the steel bearing capacity under tensile / shear load of fischer internal threaded anchors RG MI**

| Size                                               |                                |                   |     | M8   | M10                       | M12  | M16  | M20  |      |
|----------------------------------------------------|--------------------------------|-------------------|-----|------|---------------------------|------|------|------|------|
| Bearing capacity under tensile load, steel failure |                                |                   |     |      |                           |      |      |      |      |
| Characteristic bearing capacity with screw         | N <sub>Rk,s</sub>              | Property class    | 5.8 | [kN] | 19                        | 29   | 43   | 79   | 123  |
|                                                    |                                |                   | 8.8 |      | 29                        | 47   | 68   | 108  | 179  |
|                                                    |                                | Property class 70 | A4  |      | 26                        | 41   | 59   | 110  | 172  |
|                                                    |                                |                   | C   |      | 26                        | 41   | 59   | 110  | 172  |
| Partial safety factors <sup>1)</sup>               |                                |                   |     |      |                           |      |      |      |      |
| Partial safety factor                              | γ <sub>Ms,N</sub>              | Property class    | 5.8 | [-]  | 1,50                      |      |      |      |      |
|                                                    |                                |                   | 8.8 |      | 1,50                      |      |      |      |      |
|                                                    |                                | Property class 70 | A4  |      | 1,87                      |      |      |      |      |
|                                                    |                                |                   | C   |      | 1,87                      |      |      |      |      |
| Bearing capacity under shear load, steel failure   |                                |                   |     |      |                           |      |      |      |      |
| without lever arm                                  |                                |                   |     |      |                           |      |      |      |      |
| Characteristic bearing capacity with screw         | V <sub>Rk,s</sub>              | Property class    | 5.8 | [kN] | 9,2                       | 14,5 | 21,1 | 39,2 | 62,0 |
|                                                    |                                |                   | 8.8 |      | 14,6                      | 23,2 | 33,7 | 54,0 | 90,0 |
|                                                    |                                | Property class 70 | A4  |      | 12,8                      | 20,3 | 29,5 | 54,8 | 86,0 |
|                                                    |                                |                   | C   |      | 12,8                      | 20,3 | 29,5 | 54,8 | 86,0 |
| with lever arm                                     |                                |                   |     |      |                           |      |      |      |      |
| Characteristic bending moment with screw           | M <sup>0</sup> <sub>Rk,s</sub> | Property class    | 5.8 | [Nm] | 20                        | 39   | 68   | 173  | 337  |
|                                                    |                                |                   | 8.8 |      | 30                        | 60   | 105  | 266  | 519  |
|                                                    |                                | Property class 70 | A4  |      | 26                        | 52   | 92   | 232  | 454  |
|                                                    |                                |                   | C   |      | 26                        | 52   | 92   | 232  | 454  |
| Partial safety factors <sup>1)</sup>               |                                |                   |     |      |                           |      |      |      |      |
| Partial safety factor                              | γ <sub>Ms,V</sub>              | Property class    | 5.8 | [-]  | 1,25                      |      |      |      |      |
|                                                    |                                |                   | 8.8 |      | 1,25                      |      |      |      |      |
|                                                    |                                | Property class 70 | A4  |      | 1,56                      |      |      |      |      |
|                                                    |                                |                   | C   |      | 1,56                      |      |      |      |      |
|                                                    |                                |                   |     |      | 1,25 / 1,50 <sup>2)</sup> |      |      |      |      |

<sup>1)</sup> In absence of other national regulations<sup>2)</sup> Only for steel failure without lever arm

fischer Superbond

**Performances**

Characteristic steel bearing capacity of fischer internal threaded anchors RG MI

**Annex C 2**

**Table C3:** Characteristic values for the **steel bearing capacity** under tensile / shear load of **reinforcing bars**

| Nominal diameter of the bar                                   | $\phi$       | 8    | 10                                   | 12 | 14 | 16 | 20 | 25 | 28 | 32 |
|---------------------------------------------------------------|--------------|------|--------------------------------------|----|----|----|----|----|----|----|
| Bearing capacity under tensile load, steel failure            |              |      |                                      |    |    |    |    |    |    |    |
| Characteristic bearing capacity                               | $N_{Rk,s}$   | [kN] | $A_s \cdot f_{uk}^{1)}$              |    |    |    |    |    |    |    |
| Bearing capacity under shear load, steel failure              |              |      |                                      |    |    |    |    |    |    |    |
| without lever arm                                             |              |      |                                      |    |    |    |    |    |    |    |
| Characteristic bearing capacity                               | $V_{Rk,s}$   | [kN] | $0,5 \cdot A_s \cdot f_{uk}^{1)}$    |    |    |    |    |    |    |    |
| Ductility factor acc. to CEN/TS 1992-4-5:2009 Section 6.3.2.1 | $k_2$        | [-]  | 0,8                                  |    |    |    |    |    |    |    |
| with lever arm                                                |              |      |                                      |    |    |    |    |    |    |    |
| Characteristic bending moment                                 | $M^0_{Rk,s}$ | [Nm] | $1,2 \cdot W_{el} \cdot f_{uk}^{1)}$ |    |    |    |    |    |    |    |

<sup>1)</sup>  $f_{uk}$  or  $f_{yk}$  respectively must be taken from the specifications of the reinforcing bar

**Table C4:** Characteristic values for the **steel bearing capacity** under tensile / shear load of **fischer rebar anchors FRA**

| Size                                               |                 |      | M12  | M16 | M20 | M24 |
|----------------------------------------------------|-----------------|------|------|-----|-----|-----|
| Bearing capacity under tensile load, steel failure |                 |      |      |     |     |     |
| Characteristic bearing capacity                    | $N_{Rk,s}$      | [kN] | 63   | 111 | 173 | 270 |
| Partial safety factors <sup>1)</sup>               |                 |      |      |     |     |     |
| Partial safety factor                              | $\gamma_{Ms,N}$ | [-]  | 1,4  |     |     |     |
| Bearing capacity under shear load, steel failure   |                 |      |      |     |     |     |
| without lever arm                                  |                 |      |      |     |     |     |
| Characteristic bearing capacity                    | $V_{Rk,s}$      | [kN] | 30   | 55  | 86  | 124 |
| with lever arm                                     |                 |      |      |     |     |     |
| Characteristic bearing capacity                    | $M^0_{Rk,s}$    | [Nm] | 92   | 233 | 454 | 785 |
| Partial safety factors <sup>1)</sup>               |                 |      |      |     |     |     |
| Partial safety factor                              | $\gamma_{Ms,V}$ | [-]  | 1,56 |     |     |     |

<sup>1)</sup> In absence of other national regulations

fischer Superbond

**Performances**

Characteristic steel bearing capacity of reinforcing bars and fischer rebar anchors FRA

**Annex C 3**



**Table C5: General design factors for the bearing capacity under tensile / shear load; uncracked or cracked concrete**

| Size                                                                                                              |                          |                            | All Sizes |                      |     |     |     |     |     |           |     |    |    |
|-------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------|-----------|----------------------|-----|-----|-----|-----|-----|-----------|-----|----|----|
| Bearing capacity under tensile load                                                                               |                          |                            |           |                      |     |     |     |     |     |           |     |    |    |
| Factors acc. to CEN/TS 1992-4:2009 Section 6.2.2.3                                                                |                          |                            |           |                      |     |     |     |     |     |           |     |    |    |
| Uncracked concrete                                                                                                |                          | $k_{ucr}$                  | [-]       | 10,1                 |     |     |     |     |     |           |     |    |    |
| Cracked concrete                                                                                                  |                          | $k_{cr}$                   |           | 7,2                  |     |     |     |     |     |           |     |    |    |
| Factors for the compressive strength of concrete > C20/25                                                         |                          |                            |           |                      |     |     |     |     |     |           |     |    |    |
| Increasing factor for $\tau_{Rk}$                                                                                 | C25/30                   | $\Psi_c$                   | [-]       | 1,02                 |     |     |     |     |     |           |     |    |    |
|                                                                                                                   | C30/37                   |                            |           | 1,04                 |     |     |     |     |     |           |     |    |    |
|                                                                                                                   | C35/45                   |                            |           | 1,07                 |     |     |     |     |     |           |     |    |    |
|                                                                                                                   | C40/50                   |                            |           | 1,08                 |     |     |     |     |     |           |     |    |    |
|                                                                                                                   | C45/55                   |                            |           | 1,09                 |     |     |     |     |     |           |     |    |    |
|                                                                                                                   | C50/60                   |                            |           | 1,10                 |     |     |     |     |     |           |     |    |    |
| Splitting failure                                                                                                 |                          |                            |           |                      |     |     |     |     |     |           |     |    |    |
| Edge distance                                                                                                     | $h / h_{ef} \geq 2,0$    | $C_{cr,sp}$                | [mm]      | 1,0 $h_{ef}$         |     |     |     |     |     |           |     |    |    |
|                                                                                                                   | $2,0 > h / h_{ef} > 1,3$ |                            |           | 4,6 $h_{ef}$ - 1,8 h |     |     |     |     |     |           |     |    |    |
|                                                                                                                   | $h / h_{ef} \leq 1,3$    |                            |           | 2,26 $h_{ef}$        |     |     |     |     |     |           |     |    |    |
| Spacing                                                                                                           |                          | $S_{cr,sp}$                |           | 2 $C_{cr,sp}$        |     |     |     |     |     |           |     |    |    |
| Bearing capacity under shear load                                                                                 |                          |                            |           |                      |     |     |     |     |     |           |     |    |    |
| Installation safety factors                                                                                       |                          |                            |           |                      |     |     |     |     |     |           |     |    |    |
| All installation conditions                                                                                       |                          | $\gamma_2 = \gamma_{inst}$ | [-]       | 1,0                  |     |     |     |     |     |           |     |    |    |
| Concrete pry-out failure                                                                                          |                          |                            |           |                      |     |     |     |     |     |           |     |    |    |
| Factor k acc. to TR029 Section 5.2.3.3 resp. $k_3$ acc. to CEN/TS 1992-4-5:2009 Section 6.3.3                     |                          | $k_{(3)}$                  | [-]       | 2,0                  |     |     |     |     |     |           |     |    |    |
| Concrete edge failure                                                                                             |                          |                            |           |                      |     |     |     |     |     |           |     |    |    |
| The value of $h_{ef}$ (= $l_f$ ) under shear load                                                                 |                          |                            | [mm]      | $\min(h_{ef}; 8d)$   |     |     |     |     |     |           |     |    |    |
| Calculation diameters                                                                                             |                          |                            |           |                      |     |     |     |     |     |           |     |    |    |
| Size                                                                                                              |                          |                            |           | M8                   | M10 | M12 | M16 | M20 | M24 | M27       | M30 |    |    |
| fischer anchor rods and standard threaded rods                                                                    |                          | d                          | [mm]      | 8                    | 10  | 12  | 16  | 20  | 24  | 27        | 30  |    |    |
| fischer internal threaded anchors RG MI                                                                           |                          | d                          |           | 12                   | 16  | 18  | 22  | 28  | --- | ---       | --- |    |    |
| fischer rebar anchors FRA                                                                                         |                          | d                          |           | ---                  | --- | 12  | 16  | 20  | 25  | ---       | --- |    |    |
| Nominal diameter of the bar                                                                                       |                          |                            | $\phi$    | 8                    | 10  | 12  | 14  | 16  | 20  | 25        | 28  | 32 |    |
| Reinforcing bar                                                                                                   |                          |                            | d         | [mm]                 | 8   | 10  | 12  | 14  | 16  | 20        | 25  | 28 | 32 |
|                                                                                                                   |                          |                            |           |                      |     |     |     |     |     |           |     |    |    |
| fischer Superbond                                                                                                 |                          |                            |           |                      |     |     |     |     |     | Annex C 4 |     |    |    |
| Performances<br>General design factors relating to the characteristic bearing capacity under tensile / shear load |                          |                            |           |                      |     |     |     |     |     |           |     |    |    |

**Table C6.1:** Characteristic values of **resistance** for **fischer anchor rods** and **standard threaded rods** in hammer drilled holes in combination with **injection mortar system FIS SB; uncracked or cracked concrete**

| Size                                                                               |                     |                            | M8              | M10                  | M12 | M16 | M20 | M24 | M27 | M30 |     |     |
|------------------------------------------------------------------------------------|---------------------|----------------------------|-----------------|----------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Combined pullout and concrete cone failure                                         |                     |                            |                 |                      |     |     |     |     |     |     |     |     |
| Calculation diameter                                                               |                     | d                          | [mm]            | 8                    | 10  | 12  | 16  | 20  | 24  | 27  | 30  |     |
| Uncracked concrete                                                                 |                     |                            |                 |                      |     |     |     |     |     |     |     |     |
| Characteristic bond resistance in uncracked concrete C20/25                        |                     |                            |                 |                      |     |     |     |     |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete) |                     |                            |                 |                      |     |     |     |     |     |     |     |     |
| Temperature range                                                                  | I: 24 °C / 40 °C    |                            | $\tau_{Rk,ucr}$ | [N/mm <sup>2</sup> ] | 12  | 13  | 13  | 13  | 13  | 12  | 10  | 10  |
|                                                                                    | II: 50 °C / 80 °C   |                            |                 |                      | 12  | 12  | 12  | 13  | 13  | 12  | 10  | 10  |
|                                                                                    | III: 72 °C / 120 °C |                            |                 |                      | 10  | 11  | 11  | 11  | 11  | 11  | 9   | 9   |
|                                                                                    | IV: 90 °C / 150 °C  |                            |                 |                      | 10  | 10  | 10  | 11  | 10  | 10  | 8   | 8   |
| Installation safety factors                                                        |                     |                            |                 |                      |     |     |     |     |     |     |     |     |
| Dry and wet concrete                                                               |                     | $\gamma_2 = \gamma_{inst}$ | [-]             | 1,0                  |     |     |     |     |     |     |     |     |
| Cracked concrete                                                                   |                     |                            |                 |                      |     |     |     |     |     |     |     |     |
| Characteristic bond resistance in cracked concrete C20/25                          |                     |                            |                 |                      |     |     |     |     |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete) |                     |                            |                 |                      |     |     |     |     |     |     |     |     |
| Temperature range                                                                  | I: 24 °C / 40 °C    |                            | $\tau_{Rk,cr}$  | [N/mm <sup>2</sup> ] | 6,5 | 7,0 | 7,5 | 7,5 | 7,5 | 7,5 | 7,5 | 7,5 |
|                                                                                    | II: 50 °C / 80 °C   |                            |                 |                      | 6,0 | 6,5 | 7,5 | 7,5 | 7,5 | 7,5 | 7,0 | 7,0 |
|                                                                                    | III: 72 °C / 120 °C |                            |                 |                      | 5,5 | 6,0 | 6,5 | 6,5 | 6,5 | 6,5 | 6,0 | 6,0 |
|                                                                                    | IV: 90 °C / 150 °C  |                            |                 |                      | 5,0 | 5,5 | 6,0 | 6,0 | 6,0 | 6,0 | 5,5 | 5,5 |
| Installation safety factors                                                        |                     |                            |                 |                      |     |     |     |     |     |     |     |     |
| Dry and wet concrete                                                               |                     | $\gamma_2 = \gamma_{inst}$ | [-]             | 1,0                  |     |     |     |     |     |     |     |     |

fischer Superbond

**Performances**

Characteristic values for static or quasi-static action under tensile load for fischer anchor rods and standard threaded rods with FIS SB (uncracked or cracked concrete)

**Annex C 5**

**Table C6.2:** Characteristic values of **resistance** for **fischer anchor rods RG M** in hammer or diamond drilled holes in combination with **resin capsule RSB**; **uncracked or cracked concrete**

| Size                                                                                                       |                     |                            | M8                   | M10 | M12 | M16 | M20 | M24 | M30 |     |
|------------------------------------------------------------------------------------------------------------|---------------------|----------------------------|----------------------|-----|-----|-----|-----|-----|-----|-----|
| Combined pullout and concrete cone failure                                                                 |                     |                            |                      |     |     |     |     |     |     |     |
| Calculation diameter                                                                                       |                     | d                          | [mm]                 | 8   | 10  | 12  | 16  | 20  | 24  | 30  |
| Uncracked concrete                                                                                         |                     |                            |                      |     |     |     |     |     |     |     |
| Characteristic bond resistance in uncracked concrete C20/25                                                |                     |                            |                      |     |     |     |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete as well as flooded hole) |                     |                            |                      |     |     |     |     |     |     |     |
| Temperature range                                                                                          | I: 24 °C / 40 °C    | $\tau_{Rk,ucr}$            | [N/mm <sup>2</sup> ] | 12  | 13  | 13  | 13  | 13  | 12  | 10  |
|                                                                                                            | II: 50 °C / 80 °C   |                            |                      | 12  | 12  | 12  | 13  | 13  | 12  | 10  |
|                                                                                                            | III: 72 °C / 120 °C |                            |                      | 10  | 11  | 11  | 11  | 11  | 11  | 9   |
|                                                                                                            | IV: 90 °C / 150 °C  |                            |                      | 10  | 10  | 10  | 11  | 10  | 10  | 8   |
| Diamond-drilling (dry and wet concrete as well as flooded hole)                                            |                     |                            |                      |     |     |     |     |     |     |     |
| Temperature range                                                                                          | I: 24 °C / 40 °C    | $\tau_{Rk,ucr}$            | [N/mm <sup>2</sup> ] | 13  | 13  | 14  | 14  | 14  | 13  | 11  |
|                                                                                                            | II: 50 °C / 80 °C   |                            |                      | 12  | 13  | 13  | 14  | 13  | 13  | 10  |
|                                                                                                            | III: 72 °C / 120 °C |                            |                      | 11  | 12  | 12  | 12  | 12  | 11  | 9,5 |
|                                                                                                            | IV: 90 °C / 150 °C  |                            |                      | 10  | 11  | 11  | 11  | 11  | 10  | 8,5 |
| Installation safety factors                                                                                |                     |                            |                      |     |     |     |     |     |     |     |
| Dry and wet concrete                                                                                       |                     | $\gamma_2 = \gamma_{inst}$ | [-]                  | 1,0 |     |     |     |     |     |     |
| Flooded hole                                                                                               |                     | $\gamma_2 = \gamma_{inst}$ | [-]                  | 1,2 |     |     | 1,0 |     |     |     |
| Cracked concrete                                                                                           |                     |                            |                      |     |     |     |     |     |     |     |
| Characteristic bond resistance in cracked concrete C20/25                                                  |                     |                            |                      |     |     |     |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete as well as flooded hole) |                     |                            |                      |     |     |     |     |     |     |     |
| Temperature range                                                                                          | I: 24 °C / 40 °C    | $\tau_{Rk,cr}$             | [N/mm <sup>2</sup> ] | 6,5 | 7,0 | 7,5 | 7,5 | 7,5 | 7,5 | 7,5 |
|                                                                                                            | II: 50 °C / 80 °C   |                            |                      | 6,0 | 6,5 | 7,5 | 7,5 | 7,5 | 7,5 | 7,0 |
|                                                                                                            | III: 72 °C / 120 °C |                            |                      | 5,5 | 6,0 | 6,5 | 6,5 | 6,5 | 6,5 | 6,0 |
|                                                                                                            | IV: 90 °C / 150 °C  |                            |                      | 5,0 | 5,5 | 6,0 | 6,0 | 6,0 | 6,0 | 5,5 |
| Diamond-drilling (dry and wet concrete as well as flooded hole)                                            |                     |                            |                      |     |     |     |     |     |     |     |
| Temperature range                                                                                          | I: 24 °C / 40 °C    | $\tau_{Rk,cr}$             | [N/mm <sup>2</sup> ] | --- | --- | --- | 7,5 | 7,5 | 7,5 | 7,5 |
|                                                                                                            | II: 50 °C / 80 °C   |                            |                      | --- | --- | --- | 7,5 | 7,5 | 7,5 | 7,0 |
|                                                                                                            | III: 72 °C / 120 °C |                            |                      | --- | --- | --- | 6,5 | 6,5 | 6,5 | 6,5 |
|                                                                                                            | IV: 90 °C / 150 °C  |                            |                      | --- | --- | --- | 6,0 | 6,0 | 6,0 | 6,0 |
| Installation safety factors                                                                                |                     |                            |                      |     |     |     |     |     |     |     |
| Dry and wet concrete                                                                                       |                     | $\gamma_2 = \gamma_{inst}$ | [-]                  | 1,0 |     |     |     |     |     |     |
| Flooded hole                                                                                               |                     | $\gamma_2 = \gamma_{inst}$ | [-]                  | 1,2 |     |     | 1,0 |     |     |     |

fischer Superbond

**Performances**

Characteristic values for static or quasi-static action under tensile load for fischer anchor rods RG M with RSB (uncracked or cracked concrete)

**Annex C 6**



**Table C7.1:** Characteristic values of **resistance** for **fischer internal threaded anchors RG MI** in hammer drilled holes in combination with **injection mortar FIS SB**; **uncracked or cracked concrete**

| Size                                                                               |                     | M8                         | M10                  | M12 | M16 | M20 |     |     |
|------------------------------------------------------------------------------------|---------------------|----------------------------|----------------------|-----|-----|-----|-----|-----|
| Combined pullout and concrete cone failure                                         |                     |                            |                      |     |     |     |     |     |
| Calculation diameter                                                               |                     | d                          | [mm]                 | 12  | 16  | 18  | 22  | 28  |
| Uncracked concrete                                                                 |                     |                            |                      |     |     |     |     |     |
| Characteristic bond resistance in uncracked concrete C20/25                        |                     |                            |                      |     |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete) |                     |                            |                      |     |     |     |     |     |
| Temperature range                                                                  | I: 24 °C / 40 °C    | $\tau_{Rk,ucr}$            | [N/mm <sup>2</sup> ] | 12  | 12  | 11  | 11  | 9,5 |
|                                                                                    | II: 50 °C / 80 °C   |                            |                      | 12  | 11  | 11  | 10  | 9   |
|                                                                                    | III: 72 °C / 120 °C |                            |                      | 11  | 10  | 10  | 9   | 8   |
|                                                                                    | IV: 90 °C / 150 °C  |                            |                      | 10  | 9,5 | 9   | 8,5 | 7,5 |
| Installation safety factors                                                        |                     |                            |                      |     |     |     |     |     |
| Dry and wet concrete                                                               |                     | $\gamma_2 = \gamma_{inst}$ | [-]                  | 1,0 |     |     |     |     |
| Cracked concrete                                                                   |                     |                            |                      |     |     |     |     |     |
| Characteristic bond resistance in cracked concrete C20/25                          |                     |                            |                      |     |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete) |                     |                            |                      |     |     |     |     |     |
| Temperature range                                                                  | I: 24 °C / 40 °C    | $\tau_{Rk,cr}$             | [N/mm <sup>2</sup> ] | 5   |     |     |     |     |
|                                                                                    | II: 50 °C / 80 °C   |                            |                      | 5   |     |     |     |     |
|                                                                                    | III: 72 °C / 120 °C |                            |                      | 4,5 |     |     |     |     |
|                                                                                    | IV: 90 °C / 150 °C  |                            |                      | 4   |     |     |     |     |
| Installation safety factors                                                        |                     |                            |                      |     |     |     |     |     |
| Dry and wet concrete                                                               |                     | $\gamma_2 = \gamma_{inst}$ | [-]                  | 1,0 |     |     |     |     |

fischer Superbond

**Performances**

Characteristic values for static or quasi-static action under tensile load for fischer internal threaded anchors RG MI (uncracked or cracked concrete)

**Annex C 7**

**Table C7.2:** Characteristic values of **resistance** for **fischer internal threaded anchors RG MI** in hammer or diamond drilled holes in combination with resin capsule **RSB**; **uncracked or cracked concrete**

| Size                                                                                                       |                     | M8              | M10                        | M12 | M16 | M20 |     |     |
|------------------------------------------------------------------------------------------------------------|---------------------|-----------------|----------------------------|-----|-----|-----|-----|-----|
| Combined pullout and concrete cone failure                                                                 |                     |                 |                            |     |     |     |     |     |
| Calculation diameter                                                                                       | d                   | [mm]            | 12                         | 16  | 18  | 22  | 28  |     |
| Uncracked concrete                                                                                         |                     |                 |                            |     |     |     |     |     |
| Characteristic bond resistance in uncracked concrete C20/25                                                |                     |                 |                            |     |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete as well as flooded hole) |                     |                 |                            |     |     |     |     |     |
| Temperature range                                                                                          | I: 24 °C / 40 °C    | $\tau_{Rk,ucr}$ | [N/mm <sup>2</sup> ]       | 12  | 12  | 11  | 11  | 9,5 |
|                                                                                                            | II: 50 °C / 80 °C   |                 |                            | 12  | 11  | 11  | 10  | 9   |
|                                                                                                            | III: 72 °C / 120 °C |                 |                            | 11  | 10  | 10  | 9   | 8   |
|                                                                                                            | IV: 90 °C / 150 °C  |                 |                            | 10  | 9,5 | 9   | 8,5 | 7,5 |
| Diamond-drilling (dry and wet concrete as well as flooded hole)                                            |                     |                 |                            |     |     |     |     |     |
| Temperature range                                                                                          | I: 24 °C / 40 °C    | $\tau_{Rk,ucr}$ | [N/mm <sup>2</sup> ]       | 13  | 12  | 12  | 11  | 10  |
|                                                                                                            | II: 50 °C / 80 °C   |                 |                            | 13  | 12  | 12  | 11  | 9,5 |
|                                                                                                            | III: 72 °C / 120 °C |                 |                            | 11  | 11  | 10  | 9,5 | 8,5 |
|                                                                                                            | IV: 90 °C / 150 °C  |                 |                            | 10  | 10  | 9,5 | 9   | 8   |
| Installation safety factors                                                                                |                     |                 |                            |     |     |     |     |     |
| Dry and wet concrete                                                                                       |                     | [-]             | 1,0                        |     |     |     |     |     |
| Flooded hole                                                                                               |                     |                 | $\gamma_2 = \gamma_{inst}$ | 1,2 | 1,0 |     |     |     |
| Cracked concrete                                                                                           |                     |                 |                            |     |     |     |     |     |
| Characteristic bond resistance in cracked concrete C20/25                                                  |                     |                 |                            |     |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete as well as flooded hole) |                     |                 |                            |     |     |     |     |     |
| Temperature range                                                                                          | I: 24 °C / 40 °C    | $\tau_{Rk,cr}$  | [N/mm <sup>2</sup> ]       | 5   |     |     |     |     |
|                                                                                                            | II: 50 °C / 80 °C   |                 |                            | 5   |     |     |     |     |
|                                                                                                            | III: 72 °C / 120 °C |                 |                            | 4,5 |     |     |     |     |
|                                                                                                            | IV: 90 °C / 150 °C  |                 |                            | 4   |     |     |     |     |
| Diamond-drilling (dry and wet concrete as well as flooded hole)                                            |                     |                 |                            |     |     |     |     |     |
| Temperature range                                                                                          | I: 24 °C / 40 °C    | $\tau_{Rk,cr}$  | [N/mm <sup>2</sup> ]       | --- | 5   |     |     |     |
|                                                                                                            | II: 50 °C / 80 °C   |                 |                            | 5   |     |     |     |     |
|                                                                                                            | III: 72 °C / 120 °C |                 |                            | 4,5 |     |     |     |     |
|                                                                                                            | IV: 90 °C / 150 °C  |                 |                            | 4   |     |     |     |     |
| Installation safety factors                                                                                |                     |                 |                            |     |     |     |     |     |
| Dry and wet concrete                                                                                       |                     | [-]             | 1,0                        |     |     |     |     |     |
| Flooded hole                                                                                               |                     |                 | $\gamma_2 = \gamma_{inst}$ | 1,2 | 1,0 |     |     |     |

fischer Superbond

**Performances**

Characteristic values for static or quasi-static action under tensile load for fischer internal threaded anchors RG MI with RSB (uncracked or cracked concrete)

**Annex C 8**

**Table C8:** Characteristic values of **resistance** for **reinforcing bars** in hammer drilled holes in combination with **injection mortar FIS SB; uncracked or cracked concrete**

| Nominal diameter of the bar $\phi$                                                 |                     |                            | 8                    | 10  | 12  | 14  | 16  | 20  | 25  | 28  | 32  |     |
|------------------------------------------------------------------------------------|---------------------|----------------------------|----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Combined pullout and concrete cone failure                                         |                     |                            |                      |     |     |     |     |     |     |     |     |     |
| Calculation diameter                                                               |                     | d                          | [mm]                 | 8   | 10  | 12  | 14  | 16  | 20  | 25  | 28  | 32  |
| Uncracked concrete                                                                 |                     |                            |                      |     |     |     |     |     |     |     |     |     |
| Characteristic bond resistance in uncracked concrete C20/25                        |                     |                            |                      |     |     |     |     |     |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete) |                     |                            |                      |     |     |     |     |     |     |     |     |     |
| Temperature range                                                                  | I: 24 °C / 40 °C    | $\tau_{Rk,ucr}$            | [N/mm <sup>2</sup> ] | 8,0 | 8,5 | 9,0 | 9,5 | 9,5 | 10  | 9,5 | 9,0 | 7,5 |
|                                                                                    | II: 50 °C / 80 °C   |                            |                      | 8,0 | 8,5 | 9,0 | 9,0 | 9,5 | 9,5 | 9,0 | 8,5 | 7,5 |
|                                                                                    | III: 72 °C / 120 °C |                            |                      | 7,0 | 7,5 | 8,0 | 8,0 | 8,5 | 8,5 | 8,0 | 7,5 | 6,5 |
|                                                                                    | IV: 90 °C / 150 °C  |                            |                      | 6,5 | 7,0 | 7,0 | 7,5 | 7,5 | 8,0 | 7,5 | 7,0 | 6,0 |
| Cracked concrete                                                                   |                     |                            |                      |     |     |     |     |     |     |     |     |     |
| Characteristic bond resistance in cracked concrete C20/25                          |                     |                            |                      |     |     |     |     |     |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete) |                     |                            |                      |     |     |     |     |     |     |     |     |     |
| Temperature range                                                                  | I: 24 °C / 40 °C    | $\tau_{Rk,cr}$             | [N/mm <sup>2</sup> ] | 4,5 | 6,0 | 6,0 | 6,0 | 7,0 | 6,0 | 6,0 | 6,0 | 6,0 |
|                                                                                    | II: 50 °C / 80 °C   |                            |                      | 4,5 | 5,5 | 5,5 | 5,5 | 6,5 | 6,0 | 6,0 | 6,0 | 6,0 |
|                                                                                    | III: 72 °C / 120 °C |                            |                      | 4,0 | 5,0 | 5,0 | 5,0 | 6,0 | 5,5 | 5,5 | 5,5 | 5,5 |
|                                                                                    | IV: 90 °C / 150 °C  |                            |                      | 3,5 | 4,5 | 4,5 | 4,5 | 5,5 | 5,0 | 5,0 | 5,0 | 5,0 |
| Installation safety factors                                                        |                     |                            |                      |     |     |     |     |     |     |     |     |     |
| Dry and wet concrete                                                               |                     | $\gamma_2 = \gamma_{inst}$ | [-]                  | 1,0 |     |     |     |     |     |     |     |     |

fischer Superbond

**Performances**

Characteristic values for static or quasi-static action under tensile load for reinforcing bars with injection mortar FIS SB (uncracked or cracked concrete)

**Annex C 9**



**Table C9: Characteristic values of resistance for fischer rebar anchors FRA in hammer drilled holes in combination with injection mortar FIS SB; uncracked or cracked concrete**

| Size                                                                               |                            | M12                                  | M16 | M20 | M24 |     |
|------------------------------------------------------------------------------------|----------------------------|--------------------------------------|-----|-----|-----|-----|
| Combined pullout and concrete cone failure                                         |                            |                                      |     |     |     |     |
| Calculation diameter                                                               | d                          | [mm]                                 | 12  | 16  | 20  | 25  |
| Uncracked concrete                                                                 |                            |                                      |     |     |     |     |
| Characteristic bond resistance in uncracked concrete C20/25                        |                            |                                      |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete) |                            |                                      |     |     |     |     |
| Temperature range                                                                  | I: 24 °C / 40 °C           | $\tau_{Rk,ucr}$ [N/mm <sup>2</sup> ] | 9,0 | 9,5 | 10  | 9,5 |
|                                                                                    | II: 50 °C / 80 °C          |                                      | 9,0 | 9,5 | 9,5 | 9,0 |
|                                                                                    | III: 72 °C / 120 °C        |                                      | 8,0 | 8,5 | 8,5 | 8,0 |
|                                                                                    | IV: 90 °C / 150 °C         |                                      | 7,0 | 7,5 | 8,0 | 7,5 |
| Cracked concrete                                                                   |                            |                                      |     |     |     |     |
| Characteristic bond resistance in cracked concrete C20/25                          |                            |                                      |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete) |                            |                                      |     |     |     |     |
| Temperature range                                                                  | I: 24 °C / 40 °C           | $\tau_{Rk,cr}$ [N/mm <sup>2</sup> ]  | 6,0 | 7,0 | 6,0 | 6,0 |
|                                                                                    | II: 50 °C / 80 °C          |                                      | 5,5 | 6,5 | 6,0 | 6,0 |
|                                                                                    | III: 72 °C / 120 °C        |                                      | 5,0 | 6,0 | 5,5 | 5,5 |
|                                                                                    | IV: 90 °C / 150 °C         |                                      | 4,5 | 5,5 | 5,0 | 5,0 |
| Installation safety factors                                                        |                            |                                      |     |     |     |     |
| Dry and wet concrete                                                               | $\gamma_2 = \gamma_{inst}$ | [-]                                  | 1,0 |     |     |     |

fischer Superbond

**Performances**

Characteristic values for static or quasi-static action under tensile load for fischer rebar anchors FRA with injection mortar FIS SB (uncracked or cracked concrete)

**Annex C 10**

**Table C10: Displacements for anchor rods**

| Size                                                            |                           | M8   | M10  | M12  | M16  | M20  | M24  | M27  | M30  |
|-----------------------------------------------------------------|---------------------------|------|------|------|------|------|------|------|------|
| Displacement-Factors for tensile load <sup>1)</sup>             |                           |      |      |      |      |      |      |      |      |
| Uncracked or cracked concrete; Temperature range I, II, III, IV |                           |      |      |      |      |      |      |      |      |
| $\delta_{N0}$ -Factor                                           | [mm/(N/mm <sup>2</sup> )] | 0,07 | 0,08 | 0,09 | 0,10 | 0,11 | 0,12 | 0,12 | 0,13 |
| $\delta_{N\infty}$ -Factor                                      |                           | 0,13 | 0,14 | 0,15 | 0,17 | 0,17 | 0,18 | 0,19 | 0,19 |
| Displacement-Factors for shear load <sup>2)</sup>               |                           |      |      |      |      |      |      |      |      |
| Uncracked or cracked concrete; Temperature range I, II, III, IV |                           |      |      |      |      |      |      |      |      |
| $\delta_{V0}$ -Factor                                           | [mm/kN]                   | 0,18 | 0,15 | 0,12 | 0,09 | 0,07 | 0,06 | 0,05 | 0,05 |
| $\delta_{V\infty}$ -Factor                                      |                           | 0,27 | 0,22 | 0,18 | 0,14 | 0,11 | 0,09 | 0,08 | 0,07 |

<sup>1)</sup> Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0\text{-Factor}} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty\text{-Factor}} \cdot \tau_{Ed}$$

( $\tau_{Ed}$ : Design value of the applied tensile stress)

<sup>2)</sup> Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0\text{-Factor}} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty\text{-Factor}} \cdot V_{Ed}$$

( $V_{Ed}$ : Design value of the applied shear force)

**Table C11: Displacements for fischer internal threaded anchor RG MI**

| Size                                                            |                           | M8   | M10  | M12  | M16  | M20  |
|-----------------------------------------------------------------|---------------------------|------|------|------|------|------|
| Displacement-Factors for tensile load <sup>1)</sup>             |                           |      |      |      |      |      |
| Uncracked or cracked concrete; Temperature range I, II, III, IV |                           |      |      |      |      |      |
| $\delta_{N0}$ -Factor                                           | [mm/(N/mm <sup>2</sup> )] | 0,09 | 0,10 | 0,10 | 0,11 | 0,19 |
| $\delta_{N\infty}$ -Factor                                      |                           | 0,13 | 0,15 | 0,15 | 0,17 | 0,19 |
| Displacement-Factors for shear load <sup>2)</sup>               |                           |      |      |      |      |      |
| Uncracked or cracked concrete; Temperature range I, II, III, IV |                           |      |      |      |      |      |
| $\delta_{V0}$ -Factor                                           | [mm/kN]                   | 0,12 | 0,09 | 0,08 | 0,07 | 0,05 |
| $\delta_{V\infty}$ -Factor                                      |                           | 0,18 | 0,14 | 0,12 | 0,10 | 0,08 |

<sup>1)</sup> Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0\text{-Factor}} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty\text{-Factor}} \cdot \tau_{Ed}$$

( $\tau_{Ed}$ : Design value of the applied tensile stress)

<sup>2)</sup> Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0\text{-Factor}} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty\text{-Factor}} \cdot V_{Ed}$$

( $V_{Ed}$ : Design value of the applied shear force)

fischer Superbond

**Performances**

Displacements for anchor rods and fischer internal threaded anchors RG MI

**Annex C 11**



**Table C12: Displacements for reinforcing bars**

| Nominal diameter of the bar $\phi$                              |                           | 8    | 10   | 12   | 14   | 16   | 20   | 25   | 28   | 32   |
|-----------------------------------------------------------------|---------------------------|------|------|------|------|------|------|------|------|------|
| Displacement-Factors for tensile load <sup>1)</sup>             |                           |      |      |      |      |      |      |      |      |      |
| Uncracked or cracked concrete; Temperature range I, II, III, IV |                           |      |      |      |      |      |      |      |      |      |
| $\delta_{N0}$ -Factor                                           | [mm/(N/mm <sup>2</sup> )] | 0,07 | 0,08 | 0,09 | 0,09 | 0,10 | 0,11 | 0,12 | 0,13 | 0,13 |
| $\delta_{N\infty}$ -Factor                                      |                           | 0,11 | 0,13 | 0,13 | 0,15 | 0,16 | 0,16 | 0,18 | 0,20 | 0,20 |
| Displacement-Factors for shear load <sup>2)</sup>               |                           |      |      |      |      |      |      |      |      |      |
| Uncracked or cracked concrete; Temperature range I, II, III, IV |                           |      |      |      |      |      |      |      |      |      |
| $\delta_{V0}$ -Factor                                           | [mm/kN]                   | 0,18 | 0,15 | 0,12 | 0,10 | 0,09 | 0,07 | 0,06 | 0,05 | 0,05 |
| $\delta_{V\infty}$ -Factor                                      |                           | 0,27 | 0,22 | 0,18 | 0,16 | 0,14 | 0,11 | 0,09 | 0,08 | 0,06 |

1) Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0\text{-Factor}} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty\text{-Factor}} \cdot \tau_{Ed}$$

( $\tau_{Ed}$ : Design value of the applied tensile stress)

2) Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0\text{-Factor}} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty\text{-Factor}} \cdot V_{Ed}$$

( $V_{Ed}$ : Design value of the applied shear force)**Table C13: Displacements for fischer rebar anchors FRA**

| Size                                                            |                           | M12  | M16  | M20  | M24  |
|-----------------------------------------------------------------|---------------------------|------|------|------|------|
| Displacement-Factors for tensile load <sup>1)</sup>             |                           |      |      |      |      |
| Uncracked or cracked concrete; Temperature range I, II, III, IV |                           |      |      |      |      |
| $\delta_{N0}$ -Factor                                           | [mm/(N/mm <sup>2</sup> )] | 0,09 | 0,10 | 0,11 | 0,12 |
| $\delta_{N\infty}$ -Factor                                      |                           | 0,13 | 0,15 | 0,16 | 0,18 |
| Displacement-Factors for shear load <sup>2)</sup>               |                           |      |      |      |      |
| Uncracked or cracked concrete; Temperature range I, II, III, IV |                           |      |      |      |      |
| $\delta_{V0}$ -Factor                                           | [mm/kN]                   | 0,12 | 0,09 | 0,07 | 0,06 |
| $\delta_{V\infty}$ -Factor                                      |                           | 0,18 | 0,14 | 0,11 | 0,09 |

1) Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0\text{-Factor}} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty\text{-Factor}} \cdot \tau_{Ed}$$

( $\tau_{Ed}$ : Design value of the applied tensile stress)

2) Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0\text{-Factor}} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty\text{-Factor}} \cdot V_{Ed}$$

( $V_{Ed}$ : Design value of the applied shear force)

fischer Superbond

**Performances**

Displacements for reinforcing bars and fischer rebar anchors FRA

**Annex C 12**



**Table C14:** Characteristic values for the **steel bearing capacity** under tensile / shear load of **fischer anchor rods** and **standard threaded rods** under seismic action performance category **C1** or **C2**

| Size                                                                             |                                                         |                |     | M8   | M10 | M12 | M16 | M20 | M24 | M27 | M30 |     |
|----------------------------------------------------------------------------------|---------------------------------------------------------|----------------|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bearing capacity under tensile load, steel failure <sup>1)</sup>                 |                                                         |                |     |      |     |     |     |     |     |     |     |     |
| fischer anchor rods and standard threaded rods, performance category C1          |                                                         |                |     |      |     |     |     |     |     |     |     |     |
| Charact.bearing capacity $N_{Rk,s,C1}$                                           | Steel zinc plated                                       | Property class | 5.8 | [kN] | 19  | 29  | 43  | 79  | 123 | 177 | 230 | 281 |
|                                                                                  |                                                         |                | 8.8 |      | 30  | 47  | 68  | 126 | 196 | 282 | 368 | 449 |
|                                                                                  | Stainless steel A4 and High corrosion resistant steel C |                | 50  |      | 19  | 29  | 43  | 79  | 123 | 177 | 230 | 281 |
|                                                                                  |                                                         |                | 70  |      | 26  | 41  | 59  | 110 | 172 | 247 | 322 | 393 |
|                                                                                  |                                                         |                | 80  |      | 30  | 47  | 68  | 126 | 196 | 282 | 368 | 449 |
| fischer anchor rods and standard threaded rods, performance category C2          |                                                         |                |     |      |     |     |     |     |     |     |     |     |
| Charact.bearing capacity $N_{Rk,s,C2}$                                           | Steel zinc plated                                       | Property class | 5.8 | [kN] | --- | --- | 39  | 72  | 108 | 177 | --- | --- |
|                                                                                  |                                                         |                | 8.8 |      | --- | --- | 61  | 116 | 173 | 282 | --- | --- |
|                                                                                  | Stainless steel A4 and High corrosion resistant steel C |                | 50  |      | --- | --- | 39  | 72  | 108 | 177 | --- | --- |
|                                                                                  |                                                         |                | 70  |      | --- | --- | 53  | 101 | 152 | 247 | --- | --- |
|                                                                                  |                                                         |                | 80  |      | --- | --- | 61  | 116 | 173 | 282 | --- | --- |
| Bearing capacity under shear load, steel failure without lever arm <sup>1)</sup> |                                                         |                |     |      |     |     |     |     |     |     |     |     |
| fischer anchor rods, performance category C1                                     |                                                         |                |     |      |     |     |     |     |     |     |     |     |
| Charact.bearing capacity $V_{Rk,s,C1}$                                           | Steel zinc plated                                       | Property class | 5.8 | [kN] | 9   | 15  | 21  | 39  | 61  | 89  | 115 | 141 |
|                                                                                  |                                                         |                | 8.8 |      | 15  | 23  | 34  | 63  | 98  | 141 | 184 | 225 |
|                                                                                  | Stainless steel A4 and High corrosion resistant steel C |                | 50  |      | 9   | 15  | 21  | 39  | 61  | 89  | 115 | 141 |
|                                                                                  |                                                         |                | 70  |      | 13  | 20  | 30  | 55  | 86  | 124 | 161 | 197 |
|                                                                                  |                                                         |                | 80  |      | 15  | 23  | 34  | 63  | 98  | 141 | 184 | 225 |
| Standard threaded rods, performance category C1                                  |                                                         |                |     |      |     |     |     |     |     |     |     |     |
| Charact.bearing capacity $V_{Rk,s,C1}$                                           | Steel zinc plated                                       | Property class | 5.8 | [kN] | 6   | 11  | 15  | 27  | 43  | 62  | 81  | 99  |
|                                                                                  |                                                         |                | 8.8 |      | 11  | 16  | 24  | 44  | 69  | 99  | 129 | 158 |
|                                                                                  | Stainless steel A4 and High corrosion resistant steel C |                | 50  |      | 6   | 11  | 15  | 27  | 43  | 62  | 81  | 99  |
|                                                                                  |                                                         |                | 70  |      | 9   | 14  | 21  | 39  | 60  | 87  | 113 | 138 |
|                                                                                  |                                                         |                | 80  |      | 11  | 16  | 24  | 44  | 69  | 99  | 129 | 158 |
| fischer anchor rods and standard threaded rods, performance category C2          |                                                         |                |     |      |     |     |     |     |     |     |     |     |
| Charact.bearing capacity $V_{Rk,s,C2}$                                           | Steel zinc plated                                       | Property class | 5.8 | [kN] | --- | --- | 14  | 27  | 43  | 62  | --- | --- |
|                                                                                  |                                                         |                | 8.8 |      | --- | --- | 22  | 44  | 69  | 99  | --- | --- |
|                                                                                  | Stainless steel A4 and High corrosion resistant steel C |                | 50  |      | --- | --- | 14  | 27  | 43  | 62  | --- | --- |
|                                                                                  |                                                         |                | 70  |      | --- | --- | 20  | 39  | 60  | 87  | --- | --- |
|                                                                                  |                                                         |                | 80  |      | --- | --- | 22  | 44  | 69  | 99  | --- | --- |

<sup>1)</sup> Partial safety factors for performance category C1 or C2 see Table C16, for fischer anchor rods FIS A / RG M the factor for steel ductility is 1,0

fischer Superbond

**Performances**

Characteristic steel bearing capacity of fischer anchor rods and standard threaded rods under seismic action (performance category C1 or C2)

**Annex C 13**



**Table C15: Characteristic values for the steel bearing capacity under tensile / shear load of reinforcing bars (B500B) under seismic action performance category C1**

| Nominal diameter of the bar                                                      | $\phi$        | 8    | 10 | 12 | 14 | 16 | 20  | 25  | 28  | 32  |     |
|----------------------------------------------------------------------------------|---------------|------|----|----|----|----|-----|-----|-----|-----|-----|
| Bearing capacity under tensile load, steel failure <sup>1)</sup>                 |               |      |    |    |    |    |     |     |     |     |     |
| Reinforcing bar B500B acc. to DIN 488-2:2009-08, performance category C1         |               |      |    |    |    |    |     |     |     |     |     |
| Characteristic bearing capacity                                                  | $N_{Rk,s,C1}$ | [kN] | 28 | 44 | 63 | 85 | 111 | 173 | 270 | 339 | 443 |
| Bearing capacity under shear load, steel failure without lever arm <sup>1)</sup> |               |      |    |    |    |    |     |     |     |     |     |
| Reinforcing bar B500B acc. to DIN 488-2:2009-08, performance category C1         |               |      |    |    |    |    |     |     |     |     |     |
| Characteristic bearing capacity                                                  | $V_{Rk,s,C1}$ | [kN] | 10 | 15 | 22 | 30 | 39  | 61  | 95  | 119 | 155 |

<sup>1)</sup> Partial safety factors for performance category C1 see Table C16

**Table C16: Partial safety factors of fischer anchor rods, standard threaded rods and reinforcing bars (B500B) under seismic action performance category C1 or C2**

| Size                                                             |                                                         |       |     | M8                        | M10 | M12 | M16 | M20 | M16 | M24 | M27 | M30 |
|------------------------------------------------------------------|---------------------------------------------------------|-------|-----|---------------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Nominal diameter of the bar $\phi$                               |                                                         |       |     | 8                         | 10  | 12  | 14  | 16  | 20  | 25  | 28  | 32  |
| Bearing capacity under tensile load, steel failure <sup>1)</sup> |                                                         |       |     |                           |     |     |     |     |     |     |     |     |
| Partial safety factor<br>$\gamma_{Ms,N}$                         | Steel zinc plated                                       | 5.8   | [-] | 1,50                      |     |     |     |     |     |     |     |     |
|                                                                  |                                                         | 8.8   |     | 1,50                      |     |     |     |     |     |     |     |     |
|                                                                  | Stainless steel A4 and High corrosion resistant steel C | 50    |     | 2,86                      |     |     |     |     |     |     |     |     |
|                                                                  |                                                         | 70    |     | 1,50 <sup>2)</sup> / 1,87 |     |     |     |     |     |     |     |     |
|                                                                  |                                                         | 80    |     | 1,60                      |     |     |     |     |     |     |     |     |
|                                                                  | Reinforcing bar                                         | B500B |     | 1,40                      |     |     |     |     |     |     |     |     |
| Bearing capacity under shear load, steel failure <sup>1)</sup>   |                                                         |       |     |                           |     |     |     |     |     |     |     |     |
| Partial safety factor<br>$\gamma_{Ms,V}$                         | Steel zinc plated                                       | 5.8   | [-] | 1,25                      |     |     |     |     |     |     |     |     |
|                                                                  |                                                         | 8.8   |     | 1,25                      |     |     |     |     |     |     |     |     |
|                                                                  | Stainless steel A4 and High corrosion resistant steel C | 50    |     | 2,38                      |     |     |     |     |     |     |     |     |
|                                                                  |                                                         | 70    |     | 1,25 <sup>2)</sup> / 1,56 |     |     |     |     |     |     |     |     |
|                                                                  |                                                         | 80    |     | 1,33                      |     |     |     |     |     |     |     |     |
|                                                                  | Reinforcing bar                                         | B500B |     | 1,50                      |     |     |     |     |     |     |     |     |

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> Only admissible for steel C, with  $f_{yk} / f_{uk} \geq 0,8$  and  $A_5 > 12\%$  (e.g. fischer anchor rods)

fischer Superbond

**Performances**

Characteristic steel bearing capacity of reinforcing bars under seismic action (performance category C1); partial safety factors (performance category C1 or C2)

**Annex C 14**

**Table C17:** Characteristic values of **resistance** for **fischer anchor rods** and **standard threaded rods** in hammer drilled holes with **injection mortar FIS SB** and **resin capsule RSB** under seismic action performance category **C1**

| Size                                                                                                                                | M8                         | M10            | M12                  | M16               | M20 | M24 | M27 <sup>1)</sup> | M30 |     |     |
|-------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------|----------------------|-------------------|-----|-----|-------------------|-----|-----|-----|
| Characteristic bond resistance, combined pullout and concrete cone failure                                                          |                            |                |                      |                   |     |     |                   |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit<br>(dry and wet concrete; resin capsule RSB additional in flooded hole) |                            |                |                      |                   |     |     |                   |     |     |     |
| Temperature range                                                                                                                   | I: 24 °C / 40 °C           | $\tau_{Rk,C1}$ | [N/mm <sup>2</sup> ] | 4,6               | 5,0 | 5,6 | 5,6               | 5,6 | 5,6 | 6,4 |
|                                                                                                                                     | II: 50 °C / 80 °C          |                |                      | 4,3               | 4,6 | 5,6 | 5,6               | 5,6 | 5,3 | 6,0 |
|                                                                                                                                     | III: 72 °C / 120 °C        |                |                      | 3,9               | 4,3 | 4,9 | 4,9               | 4,9 | 4,5 | 5,1 |
|                                                                                                                                     | IV: 90 °C / 150 °C         |                |                      | 3,6               | 3,9 | 4,5 | 4,5               | 4,5 | 4,5 | 4,1 |
| Installation safety factors                                                                                                         |                            |                |                      |                   |     |     |                   |     |     |     |
| Bearing capacity under tensile load                                                                                                 |                            |                |                      |                   |     |     |                   |     |     |     |
| Dry and wet concrete                                                                                                                | $\gamma_2 = \gamma_{inst}$ | [-]            | 1,0                  |                   |     |     |                   |     |     |     |
| Flooded hole                                                                                                                        |                            |                | 1,2 <sup>2)</sup>    | 1,0 <sup>2)</sup> |     |     |                   |     |     |     |
| Bearing capacity under shear load                                                                                                   |                            |                |                      |                   |     |     |                   |     |     |     |
| All installation conditions                                                                                                         | $\gamma_2 = \gamma_{inst}$ | [-]            | 1,0                  |                   |     |     |                   |     |     |     |

<sup>1)</sup> Only use with injection mortar FIS SB<sup>2)</sup> Only use with resin capsule RSB in flooded hole**Table C18:** Characteristic values of **resistance** for **reinforcing bars** in hammer drilled holes with **injection mortar FIS SB** under seismic action performance category **C1**

| Nominal diameter of the bar                                                        |                     | $\phi$                     | 8                    | 10  | 12  | 14  | 16  | 20  | 25  | 28  | 32  |
|------------------------------------------------------------------------------------|---------------------|----------------------------|----------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Characteristic bond resistance, combined pullout and concrete cone failure         |                     |                            |                      |     |     |     |     |     |     |     |     |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete) |                     |                            |                      |     |     |     |     |     |     |     |     |
| Temperature range                                                                  | I: 24 °C / 40 °C    | $\tau_{Rk,C1}$             | [N/mm <sup>2</sup> ] | 3,2 | 4,3 | 4,5 | 4,5 | 5,3 | 4,5 | 4,5 | 5,1 |
|                                                                                    | II: 50 °C / 80 °C   |                            |                      | 3,2 | 3,9 | 4,1 | 4,1 | 4,9 | 4,5 | 4,5 | 5,1 |
|                                                                                    | III: 72 °C / 120 °C |                            |                      | 2,8 | 3,6 | 3,8 | 3,8 | 4,5 | 4,1 | 4,1 | 4,7 |
|                                                                                    | IV: 90 °C / 150 °C  |                            |                      | 2,5 | 3,2 | 3,4 | 3,4 | 4,1 | 3,8 | 3,8 | 4,3 |
| Installation safety factors                                                        |                     |                            |                      |     |     |     |     |     |     |     |     |
| Bearing capacity under tensile load                                                |                     |                            |                      |     |     |     |     |     |     |     |     |
| Dry and wet concrete                                                               |                     | $\gamma_2 = \gamma_{inst}$ | [-]                  | 1,0 |     |     |     |     |     |     |     |
| Bearing capacity under shear load                                                  |                     |                            |                      |     |     |     |     |     |     |     |     |
| All installation conditions                                                        |                     | $\gamma_2 = \gamma_{inst}$ | [-]                  | 1,0 |     |     |     |     |     |     |     |

fischer Superbond

**Performances**

Characteristic values under seismic action (performance category C1) for fischer anchor rods, standard threaded rods and reinforcing bars

**Annex C 15**



**Table C19:** Characteristic values of **resistance** for **fischer anchor rods** and **standard threaded rods** in hammer drilled holes with **injection mortar FIS SB** under seismic action performance category **C2**

| Size                                                                               |                  | M12                        |                      | M16 |      | M20 |      | M24 |      |     |  |
|------------------------------------------------------------------------------------|------------------|----------------------------|----------------------|-----|------|-----|------|-----|------|-----|--|
| Characteristic bond resistance, combined pullout and concrete cone failure         |                  |                            |                      |     |      |     |      |     |      |     |  |
| Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete) |                  |                            |                      |     |      |     |      |     |      |     |  |
| Temperature range                                                                  | I: 24 °C / 40 °C | $\tau_{Rk,C2}$             | [N/mm <sup>2</sup> ] | 4,5 |      | 3,2 |      | 2,6 |      | 3,0 |  |
|                                                                                    | 4,5              |                            |                      | 3,2 |      | 2,6 |      | 3,0 |      |     |  |
|                                                                                    | 3,9              |                            |                      | 2,7 |      | 2,3 |      | 2,6 |      |     |  |
|                                                                                    | 3,6              |                            |                      | 2,5 |      | 2,1 |      | 2,4 |      |     |  |
| II: 50 °C / 80 °C                                                                  |                  |                            |                      |     |      |     |      |     |      |     |  |
| III: 72 °C / 120 °C                                                                |                  |                            |                      |     |      |     |      |     |      |     |  |
| IV: 90 °C / 150 °C                                                                 |                  |                            |                      |     |      |     |      |     |      |     |  |
| Installation safety factors                                                        |                  |                            |                      |     |      |     |      |     |      |     |  |
| Bearing capacity under tensile load                                                |                  |                            |                      |     |      |     |      |     |      |     |  |
| Dry and wet concrete                                                               |                  | $\gamma_2 = \gamma_{inst}$ | [-]                  | 1,0 |      |     |      |     |      |     |  |
| Bearing capacity under shear load                                                  |                  |                            |                      |     |      |     |      |     |      |     |  |
| All installation conditions                                                        |                  | $\gamma_2 = \gamma_{inst}$ | [-]                  | 1,0 |      |     |      |     |      |     |  |
| Displacement-Factors for tensile load <sup>1)</sup>                                |                  |                            |                      |     |      |     |      |     |      |     |  |
| $\delta_{N,(DLS)}\text{-Factor}$                                                   |                  | [mm/(N/mm <sup>2</sup> )]  | 0,09                 |     | 0,10 |     | 0,11 |     | 0,12 |     |  |
| $\delta_{N,(ULS)}\text{-Factor}$                                                   |                  |                            | 0,15                 |     | 0,17 |     | 0,17 |     | 0,18 |     |  |
| Displacement-Factors for shear load <sup>2)</sup>                                  |                  |                            |                      |     |      |     |      |     |      |     |  |
| $\delta_{V,(DLS)}\text{-Factor}$                                                   |                  | [mm/kN]                    | 0,18                 |     | 0,10 |     | 0,07 |     | 0,06 |     |  |
| $\delta_{V,(ULS)}\text{-Factor}$                                                   |                  |                            | 0,25                 |     | 0,14 |     | 0,11 |     | 0,09 |     |  |

<sup>1)</sup> Calculation of effective displacement:

$$\delta_{N,(DLS)} = \delta_{N,(DLS)\text{-Factor}} \cdot \tau_{Ed}$$

$$\delta_{N,(ULS)} = \delta_{N,(ULS)\text{-Factor}} \cdot \tau_{Ed}$$

( $\tau_{Ed}$ : Design value of the applied tensile stress)

<sup>2)</sup> Calculation of effective displacement:

$$\delta_{V,(DLS)} = \delta_{V,(DLS)\text{-Factor}} \cdot V_{Ed}$$

$$\delta_{V,(ULS)} = \delta_{V,(ULS)\text{-Factor}} \cdot V_{Ed}$$

( $V_{Ed}$ : Design value of the applied shear force)

fischer Superbond

**Performances**

Characteristic values under seismic action (performance category C2) for fischer anchor rods and standard threaded rods

**Annex C 16**