

IZJAVA O SVOJSTVIMA

DoP 0361

za sidreni vijak fischer FWA Plus (Mehaničko sidro za uporabu u betonu)

HR

1. Jedinstveni identifikator tipa proizvoda:

DoP 0361
2. Namjena korištenja:

Naknadno učvršćivanje u ne-napuknutom betonu., vidi dodatak, posebno priloge B1 - B3.
3. Proizvođač:

fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Njemačka
4. Ovlašteni zastupnik:

–
5. Sistem/i od AVCP:

1
6. Europski dokument za ocjenjivanje:

EAD 330232-01-0601
- Europska tehnička ocjena:

ETA-24/0714; 2024-10-15
- Tijelo za tehničko ocjenjivanje:

DIBt- Deutsches Institut für Bautechnik
- Prijavljeno tijelo/prijavljena tijela:

2873 TU Darmstadt

7. Objavljena svojstva:
- Mehanička otpornost i stabilnost (BWR 1)**

Karakteristični otpor na opterećenje (statičko i kvazi-statičko opterećenje) Metoda A:

1 Otpornost na lom čelika: Priloge C1

2 Otpornost na čupanje: Priloge C1

3 Otpornost na lom betona: Priloge C1

4 Robusnost: Priloge C1

5 Minimalna udaljenost od ruba i razmak: Priloge C2

6 Udaljenost ruba kako bi se spriječilo cijepanje pod opterećenjem: Priloge C1

Karakteristični otpor na smicanje (statičko i kvazi-statičko opterećenje):

7 Otpornost na lom čelika (posmično opterećenje): Priloge C2

8 Otpornost na otkazivanje: Priloge C2

Karakteristična otpornost za pojednostavljeni návrh:

9 Metoda B: NPD

10 Metoda C: NPD

Istisnine:

11 Pomaci pri statičkom i kvazi-statičkom opterećenju: Priloge C2

Karakteristični otpor i pomaci za kategorije seizmičke učinkovitosti C1 i C2:

12 Otpornost na vlačno opterećenje (napetost), pomaci, kategorija C1: NPD

Otpornost na vlačno opterećenje (napetost), pomaci, kategorija C2: NPD

13 Otpornost na posmično opterećenje, pomaci, kategorije C1: NPD

Otpornost na posmično opterećenje, pomaci, kategorije C2: NPD

14 Faktor prstenaste pukotine: NPD
- Sigurnost u slučaju požara (BWR 2)**

15 Reakcija na vatru: Klasa (A1)

Otpornost na vatru:


16 Vatrootpornost na lom čelika (vlačna sila): NPD

17 Vatrootpornost na čupanje (vlačna sila): NPD

18 Vatrootpornost na lom čelika (posmik): NPD

Trajnost:

19 Trajnost: Priloge A3, B1
8. Odgovarajuća tehnička dokumentacija i/ili specifična tehnička dokumentacija:

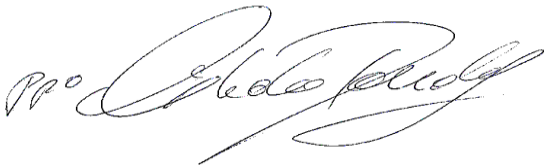–
- Svojstva gore navedenog proizvoda su u skladu sa skupom izjava o svojstvima.Ova izjava o svojstvima se izdaje, u skladu sa Europskom regulativom (EU) Br. 305/2011, pod punom odgovornošću gore navedenog proizvođača.
- Za proizvođača i u njegovo ime potpisao:
- 
- Dr. Ronald Mihala, Voditelj razvoja i upravljanja proizvodima
Tumlingen, 2024-10-29
- 
- Jürgen Grün, Glavni direktor za kemiju i kvalitetu
- Ovaj DoP je pripremljen u različitim jezicima. U slučaju da postoji spor u tumačenju, engleska verzija će uvijek prevladati.
- U aneksu se nalaze dodatni podaci na engleskom jeziku, koji ne podliježu zakonskoj regulativi.
- Fischer DATA DOP_ECs_V98.xlsm
- 1 / 1

Smjernice za prijevod. Bitne karakteristike i parametri izvedbe za dodatke

Mechanical resistance and stability (BWR 1)		
Mehanička otpornost i stabilnost (BWR 1)		
Characteristic resistance to tension load (static and quasi-static loading) Method A:		
Karakteristični otpor na opterećenje (statičko i kvazi-statičko opterećenje) Metoda A:		
1	Resistance to steel failure: Otpornost na lom čelika:	$N_{Rk,s}$ [kN]
2	Resistance to pull-out failure: Otpornost na čupanje:	$N_{Rk,p}$ [kN], ψ_c [-]
3	Resistance to concrete cone failure: Otpornost na lom betona:	$k_{cr,N}$, $k_{ucr,N}$ [-], h_{ef} , $c_{cr,N}$ [mm]
4	Robustness: Robusnost:	V_{inst} [-]
5	Minimum edge distance and spacing: Minimalna udaljenost od ruba i razmak:	c_{min} , s_{min} , h_{min} [mm]
6	Edge distance to prevent splitting under load: Udaljenost ruba kako bi se spriječilo cijepanje pod opterećenjem:	$N^0_{Rk,sp}$ [kN], $c_{cr,sp}$ [mm]
Characteristic resistance to shear load (static and quasi-static loading):		
Karakteristični otpor na smicanje (statičko i kvazi-statičko opterećenje):		
7	Resistance to steel failure (shear load): Otpornost na lom čelika (posmično opterećenje):	$V^0_{Rk,s}$ [kN], $M^0_{Rk,s}$ [Nm], k_7 [-]
8	Resistance to pry-out failure: Otpornost na otkazivanje:	k_8 [-]
Characteristic resistance for simplified design:		
Karakteristična otpornost za pojednostavljeni návrh:		
9	Method B: Metoda B:	F^0_{Rk} [kN], $M^0_{Rk,s}$ [Nm], ψ_c [-], c_{cr} , s_{cr} , s_{min} , c_{min} , h_{min} [mm]
10	Method C: Metoda C:	F_{Rk} [kN], $M^0_{Rk,s}$ [Nm], c_{cr} , s_{cr} , s_{min} , h_{min} [mm]
Displacements:		
Istisnine:		
9	Displacements under static and quasi-static loading: Pomaci pri statičkom i kvazi-statičkom opterećenju:	δ_{N0} , $\delta_{N\infty}$, δ_{V0} , $\delta_{V\infty}$ [mm]
Characteristic resistance and displacements for seismic performance categories C1 and C2:		
Karakteristični otpor i pomaci za kategorije seizmičke učinkovitosti C1 i C2:		
12	Resistance to tension load, displacements, category C1: Otpornost na vlačno opterećenje (napetost), pomaci, kategorija C1:	$N_{Rk,s,C1}$, $N_{Rk,p,C1}$ [kN]
	Resistance to tension load, displacements, category C2: Otpornost na vlačno opterećenje (napetost), pomaci, kategorija C2:	$N_{Rk,s,C2}$, $N_{Rk,p,C2}$ [kN], $\delta_{N,C2}$ [mm]
13	Resistance to shear load, displacements, category C1: Otpornost na posmično opterećenje, pomaci, kategorije C1:	$V_{Rk,s,C1}$ [kN]
	Resistance to shear load, displacements, category C2: Otpornost na posmično opterećenje, pomaci, kategorije C2:	$V_{Rk,s,C2}$ [kN], $\delta_{V,C2}$ [mm]
14	Factor for annular gap: Faktor prstenaste pukotine:	α_{gap} [-]
Safety in case of fire (BWR 2)		
Sigurnost u slučaju požara (BWR 2)		
15	Reaction to fire: Reakcija na vatru:	Class
Resistance to fire:		
Otpornost na vatru:		
16	Fire resistance to steel failure (tension load): Vatrootpornost na lom čelika (vlačna sila):	$N_{Rk,s,fi}$ [kN]
17	Fire resistance to pull-out failure (tension load): Vatrootpornost na čupanje (vlačna sila):	$N_{Rk,p,fi}$ [kN]
18	Fire resistance to steel failure (shear load): Vatrootpornost na lom čelika (posmik):	$V_{Rk,s,fi}$ [kN], $M^0_{Rk,s,fi}$ [Nm]
Durability:		
Trajnost:		
19	Durability: Trajnost:	Description/Level

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product

The FWA Plus is a torque-controlled expansion anchor made of galvanised steel. It is available in the sizes M8, M10, M12 and M16. The expansion is achieved by torque acting on the bolt. As the anchor is prestressed, the cone is pulled into the expansion sleeve and the load applied to the anchor is transferred to the concrete mainly by friction. The anchor body of sizes M8 to M16 is cold-formed. The FWA Plus is suitable for use in uncracked concrete of strength classes C20/25 to C50/60

The product description is given in Annex A and the intended use specifications of the product are detailed in Annex B.

2 Specification of the intended use(s) in accordance with the applicable European Assessment Document (hereinafter EAD)

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

Characteristic	Assessment of characteristic
-----------------------	-------------------------------------

3.1 Mechanical resistance and stability (BWR1)

Characteristic resistance to tension load (static and quasi-static loading) Method A

Resistance to steel failure	Annex C1
Resistance to pull-out failure	Annex C1
Resistance to concrete cone failure	Annex C1
Robustness	Annex B
Minimum edge distance and spacing	Annex C2
Edge distance to prevent splitting under load	Annex C1

Characteristic resistance to shear load (static and quasi-static loading)

Resistance to steel failure under shear load	Annex C2
Resistance to pry-out failure	Annex C2

Characteristic resistance for simplified design

Method B	Not relevant
Method C	Not relevant

Displacements

Displacements under static and quasi-static loading	Annex C2
---	-----------------

Characteristic resistance and displacements for seismic performance categories C1 and C2

Resistance to tension load, displacements	No performance assessed
Resistance to shear load, displacements	No performance assessed
Factor for annual gap	No performance assessed

Characteristic	Assessment of characteristic
3.2 Safety in case of fire (BWR2)	
Reaction to fire	The anchors are made from steel classified as performance class A1 of the characteristic reaction to fire, in accordance with the provisions of EC decision 96/603/EC, amended by EC Decision 2000/605/EC.
Resistance to fire	
Fire resistance to steel failure (tension load)	No performance assessed
Fire resistance to pull-out failure (tension load)	No performance assessed
Fire resistance to steel failure (shear load)	No performance assessed

3.3 Aspects of durability

Durability	Annex B
------------	----------------

See additional information in section 3.9

3.9 General aspects related to the performance of the product

The European Technical Assessment is issued for the product on the basis of agreed data/information, deposited with ETA-Danmark, which identifies the product that has been assessed and judged. Changes to the product or production process, which could result in this deposited data/information being incorrect, should be notified to ETA-Danmark before the changes are introduced. ETA-Danmark will decide whether or not such changes affect the ETA and consequently the validity of the CE marking on the basis of the ETA and if so whether further assessment or alterations to the ETA, shall be necessary.

4 Assessment and verification of constancy of performance (AVCP) (hereinafter AVCP) system applied, with reference to its legal base.


4.1 AVCP system

According to the decision 1996/582/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No. 305/2011) is 1.


5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark prior to CE marking

Cone bolt manufactured by cold - forming:

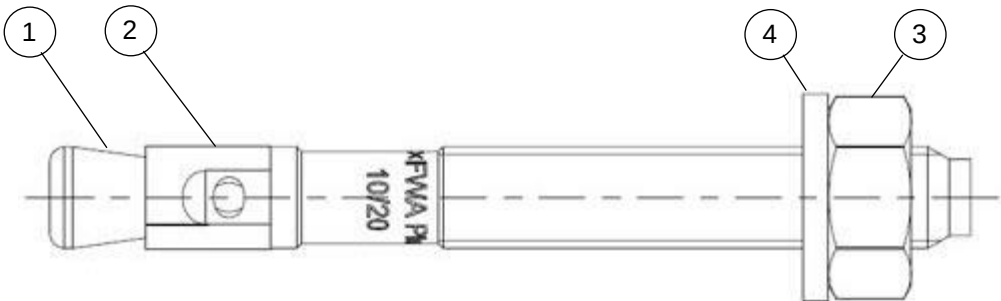


- ① Cone bolt (cold formed)
- ② Expansion sleeve
- ③ Hexagon nut
- ④ Washer

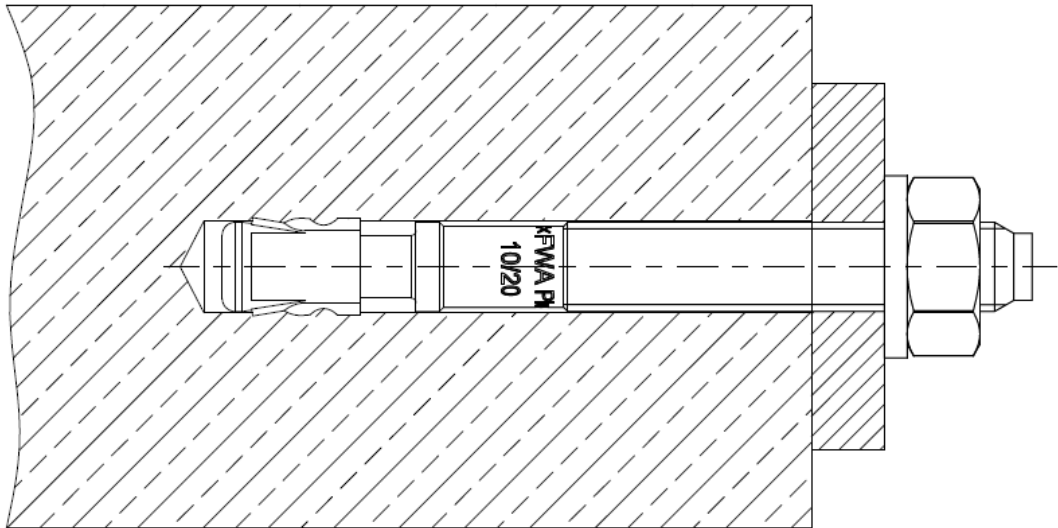

(Fig. not to scale)

fischer Bolt Anchor FWA Plus

Product description
Installed condition

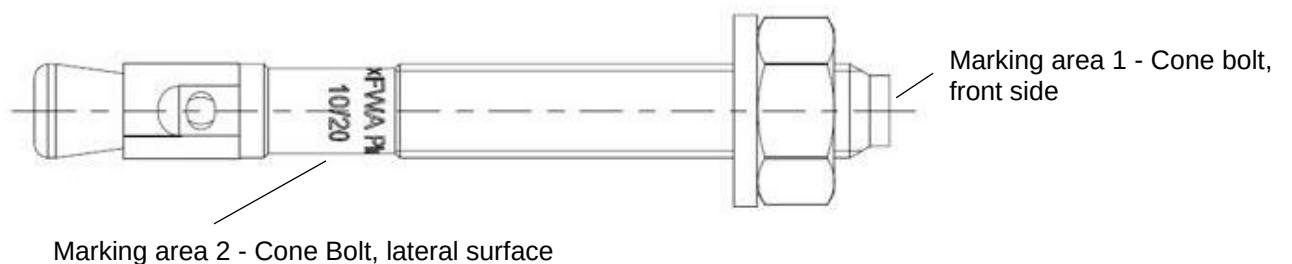

Product marking, example: FWA Plus 10/20x94

Brand | type of fastener placed at marking area 2

Thread size / max. thickness of fixture (t_{fix}) x fastener length (L) placed at marking area 2

Table A2.1: Letter-code on marking area 1 and maximum thickness of fixture t_{fix} :

Marking	A	B	C	D	E	F	G	H	I	K	L	M	N	O	P	R	S	T	U	V	W	X	Y	Z
Max. t_{fix}	5	10	15	20	25	30	35	40	45	50	60	70	80	90	100	120	140	160	180	200	250	300	350	400

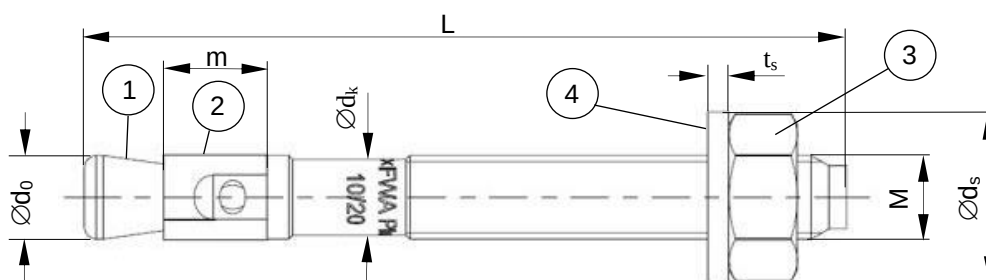


Table A2.2: Fastener dimensions [mm]

Part	Designation		FWA Plus				
			M8	M10	M12	M16	
1	Cone bolt	M	=	8	10	12	16
		Ø d ₀		7,8	9,8	11,8	15
		Ø d _k		7,1	8,9	10,7	14,6
2	Expansion sleeve	m	=	10,0	12,0	14,0	20,0
3	Hexagon nut	SW	=	13	17	19	24
4	Washer	t _s	≥	1,6	2,0	2,5	3,0
		Ø d _s		16	20	24	30
Thickness of fixture		t _{fix}	≥ ≤	0			
				100	200	200	300
Length of fastener		L _{min}	=	71	84	108	144
		L _{max}		166	274	202	421

(Fig. not to scale)

fischer Bolt Anchor FWA Plus

Product description

Product marking, letter code and fastener dimensions

Annex A2

Appendix 6 / 12

Table A3.1: Materials FWA Plus (zinc plated $\geq 5\mu\text{m}$, ISO 4042:2022)

Part	Designation	Material
1	Cone bolt	Cold form steel
2	Expansion sleeve	Cold strip
3	Hexagon nut	Steel, property class min. 8
4	Washer	Cold strip

fischer Bolt Anchor FWA Plus

Product description
Materials


Annex A3

Appendix 7 / 12

Specifications of intended use				
fischer Bolt Anchor FWA Plus	M8	M10	M12	M16
Material: steel, zinc plated	✓			
Static and quasi-static loads				
Uncracked concrete				
Base materials: - Reinforced or unreinforced normal concrete without fibres of strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021 Use conditions (Environmental conditions): - Structures subject to dry internal conditions. Design: - The structural design is conducted under responsibility of a designer experienced in the field of fastenings and concrete works. - Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.) - Design of fastenings according to EN 1992-4:2018 and TR 055:2018.				
fischer Bolt Anchor FWA Plus				Annex B1 Appendix 8 / 12
Intended Use Specifications				

Table B2.1: Installation parameters

Type of fastener / size		FWA Plus			
		M8	M10	M12	M16
Nominal drill hole diameter	$d_0 =$	8	10	12	16
Cutting diameter of drill bit	$d_{cut} \leq$	8,45	10,45	12,5	16,5
Effective embedment depth	$h_{ef} \geq$ [mm]	48	50	70	84
Depth of drill hole in concrete	$h_1 \geq$	65	75	100	120
Diameter of clearance hole in the fixture	$d_f \leq$	9	12	14	18
Required setting torque	$T_{inst} =$ [Nm]	10	15	35	110

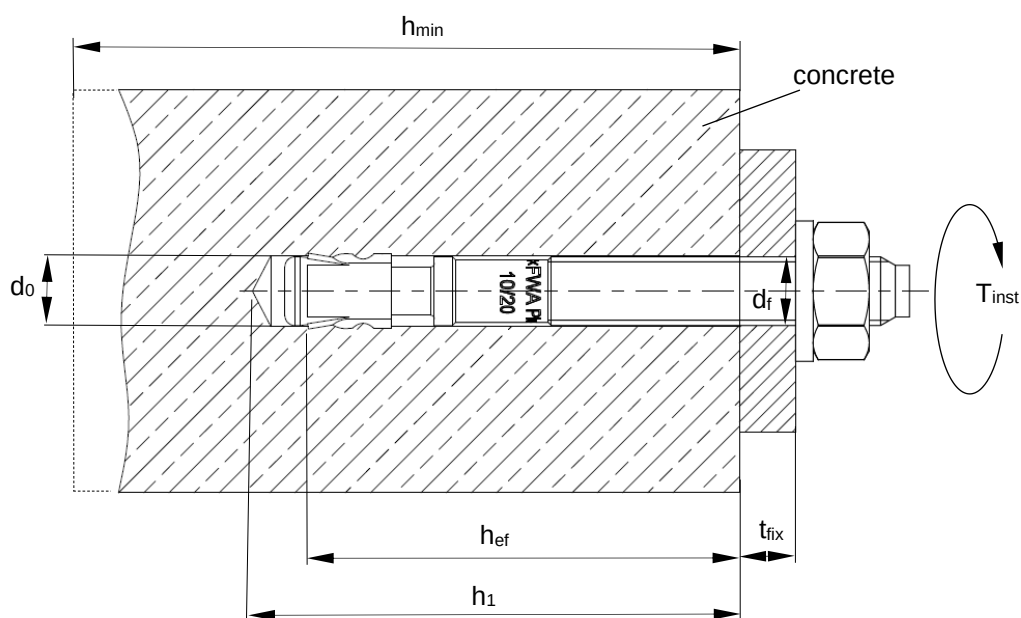

h_{ef} = Effective embedment depth
 t_{fix} = Thickness of the fixture
 h_1 = Depth of drill hole to deepest point
 h_{min} = Minimum thickness of concrete member
 T_{inst} = Required setting torque

(Fig. not to scale)


fischer Bolt Anchor FWA Plus

Intended Use
Installation parameters

Annex B2
Appendix 9 / 12

Installation instructions

- Fastener installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Use of the fastener only as supplied by the manufacturer without exchanging the components of the fastener
- Hammer drilling
- Drill hole created perpendicular +/- 5° to concrete surface, positioning without damaging the reinforcement
- In case of aborted hole: new drilling at a minimum distance twice the depth of the aborted drill hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application

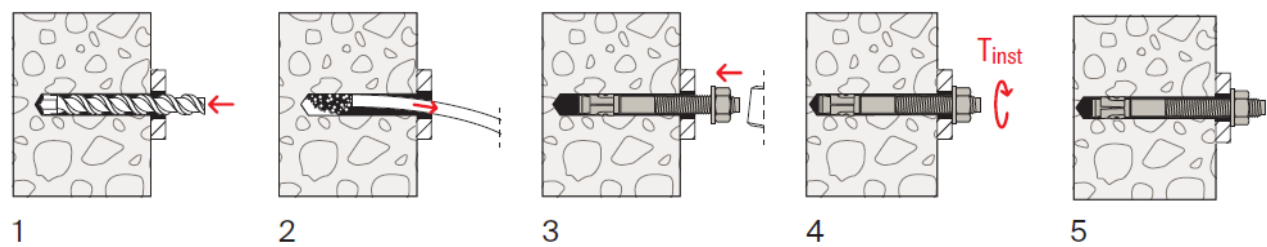

No.	Description
1	Drill the hole by hammer drilling.
2	Clean the hole.
3	Set the fastener.
4	Apply required setting torque T _{inst}
5	Installed fastener

(Fig. not to scale)

fischer Bolt Anchor FWA Plus	Annex B3 Appendix 10 / 12
Intended Use Installation instructions	

Table C1.1: Characteristic values of **tension** resistance under static and quasi-static action

Type of fastener / size			FWA Plus			
			M8	M10	M12	M16
Steel failure						
Characteristic resistance	N _{Rk,s}	[kN]	15,5	24,3	35,2	67,5
Partial factor	γ _{Ms} ¹⁾	[-]	1,50			
Pullout failure						
Characteristic resistance in uncracked concrete C20/25	N _{Rk,p}	[kN]	12,4	16,5	28,2	34,9
Increasing factors ψ _c for N _{Rk,p} N _{Rk,p} = ψ _c · N _{Rk,p} (C20/25)	ψ _c	C25/30	1,12			
		C30/37	1,22			
		C35/45	1,32			
		C40/50	1,41			
		C45/55	1,50			
		C50/60	1,58			
Installation sensitivity factor	γ _{inst}	[-]	1,0			
Concrete cone and splitting failure						
Effective embedment depth	h _{ef}	[mm]	48	50	70	84
Factor for uncracked concrete	k _{ucr,N}	[-]	11,0 ²⁾			
Characteristic spacing	s _{cr,N}	[mm]	3 h _{ef}			
Characteristic edge distance	c _{cr,N}		1,5 h _{ef}			
Characteristic spacing for splitting failure	s _{cr,sp}		192	250	350	504
Characteristic distance for splitting failure	c _{cr,sp}		96	125	175	252
Characteristic resistance to splitting	N ⁰ _{Rk,sp}		[kN]	min {N ⁰ _{Rk,c} , N _{Rk,p} } ³⁾		
¹⁾ In absence of other national regulations ²⁾ Based on concrete strength as cylinder strength ³⁾ N⁰_{Rk,c} according to EN 1992-4:2018						
fischer Bolt Anchor FWA Plus					Annex C1 Appendix 11 / 12	
Performance Characteristic values of tension resistance under static and quasi-static action						

Table C2.1: Characteristic values of **shear** resistance under static and quasi-static action

Type of fastener / size			FWA Plus			
			M8	M10	M12	M16
Installation factor γ_{inst} [-]			1,0			
Steel failure without lever arm						
Characteristic resistance $V^0_{Rk,s}$ [kN]			11	17,4	25,3	40
Partial factor for steel failure $\gamma_{Ms}^{1)}$ [-]			1,25			
Steel failure with lever arm and concrete pryout failure						
Characteristic bending moment $M^0_{Rk,s}$ [Nm]			22,5	44,8	78,6	199
Partial factor for steel failure $\gamma_{Ms}^{1)}$			1,25			
Factor for ductility k_7 [-]			0,8			
Factor for pryout k_8			1		2	
Concrete edge failure						
Effective length of fastener l_f [mm]			48	50	70	84
Effective diameter of fastener d_{nom}			8	10	12	16

¹⁾ In absence of other national regulations

Table C2.2: Minimum thickness of concrete members, minimum spacing and minimum edge distances

Type of fastener / size		FWA Plus			
		M8	M10	M12	M16
Minimum thickness of member	h_{min}	100	120	140	170
Minimum spacing	s_{min} [mm]	65	95	100	115
Minimum edge distance	c_{min}	65	95	100	115

Table C2.3: Displacements under static and quasi static **tension** action

Type of fastener / size		FWA Plus			
		M8	M10	M12	M16
Tension load	N [kN]	5,7	7,6	18,3	16,2
Displacements	δ_{N0}	0,8	1,0	1,2	1,3
	$\delta_{N\infty}$ [mm]	1,2	1,5	1,8	2,0

Table C2.4: Displacements under static and quasi static **shear** action

Type of fastener / size		FWA Plus			
		M8	M10	M12	M16
Shear load	V [kN]	6,3	9,9	14,5	22,9
Displacements	δ_{V0}	1,9	2,7	3,5	3,5
	$\delta_{V\infty}$ [mm]	2,9	4,1	5,3	3,5

fischer Bolt Anchor FWA Plus

Performance

Characteristic values of shear resistance, minimum thickness of concrete members, minimum spacing and edge distance, displacements due to tension and shear action

Annex C2

Appendix 12 / 12