

IZJAVA O SVOJSTVIMA

DoP 0344

za fischer vijak za beton ULTRACUT FBS II R (Mehaničko sidro za uporabu u betonu)

HR

- | | |
|--|---|
| 1. Jedinstveni identifikator tipa proizvoda: | DoP 0344 |
| 2. Namjena korištenja: | Naknadno učvršćivanje u napuknutom i ne-napuknutom betonu, vidi dodatak, posebno priloge B1 - B5. |
| 3. Proizvođač: | fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Njemačka |
| 4. Ovlašteni zastupnik: | — |
| 5. Sistem/i od AVCP: | 1 |
| 6. Europski dokument za ocjenjivanje: | EAD 330232-01-0601 |
| Europska tehnička ocjena: | ETA-17/0740; 2022-03-08 |
| Tijelo za tehničko ocjenjivanje: | DIBt- Deutsches Institut für Bautechnik |
| Prijavljeno tijelo/prijavljena tijela: | 2873 TU Darmstadt |

7. Objavljena svojstva:

Mehanička otpornost i stabilnost (BWR 1)

Karakteristični otpor na opterećenje (statičko i kvazi-statičko opterećenje) Metoda A:

- 1 Otpornost na lom čelika: Priloge C1
- 2 Otpornost na čupanje: Priloge C1
- 3 Otpornost na lom betona: Priloge C1
- 4 Robusnost: Priloge C1
- 5 Minimalna udaljenost od ruba i razmak: Priloge B3
- 6 Udaljenost ruba kako bi se spriječilo cijepanje pod opterećenjem: Priloge C1

Karakteristični otpor na smicanje (statičko i kvazi-statičko opterećenje):

- 7 Otpornost na lom čelika (posmično opterećenje): Priloge C1
- 8 Otpornost na otkazivanje: Priloge C1

Karakteristična otpornost za pojednostavljeni návrh:

- 9 Metoda B: NPD
- 10 Metoda C: NPD

Istisnine:

- 11 Pomaci pri statičkom i kvazi-statičkom opterećenju: Priloge C4

Karakteristični otpor i pomaci za kategorije seizmičke učinkovitosti C1 i C2:

- 12 Otpornost na vlačno opterećenje (napetost), pomaci, kategorija C1: Prilog C2
Otpornost na vlačno opterećenje (napetost), pomaci, kategorija C2: Prilog C2
- 13 Otpornost na posmično opterećenje, pomaci, kategorije C1: Prilog C2
Otpornost na posmično opterećenje, pomaci, kategorije C2: Prilog C2
- 14 Faktor prstenaste pukotine: Prilog C2

Sigurnost u slučaju požara (BWR 2)

- 15 Reakcija na vatru: Klasa (A1)

Otpornost na vatru:

- 16 Vatrootpornost na lom čelika (vlačna sila): Prilog C3
- 17 Vatrootpornost na čupanje (vlačna sila): Prilog C3
- 18 Vatrootpornost na lom čelika (posmik): Prilog C3

Trajnost:

- 19 Trajnost: Priloge B1

8. Odgovarajuća tehnička dokumentacija i/ili specifična tehnička dokumentacija:

—

Svojstva gore navedenog proizvoda su u skladu sa skupom izjava o svojstvima. Ova izjava o svojstvima se izdaje, u skladu sa Europskom regulativom (EU) Br. 305/2011, pod punom odgovornošću gore navedenog proizvođača.

Za proizvođača i u njegovo ime potpisao:



Dr.-Ing. Oliver Geibig, Generalni direktor poslovne jedinice i inženjering
Tumlingen, 2024-02-16



Jürgen Grün, Glavni direktor za kemiju i kvalitetu

Ovaj DoP je pripremljen u različitim jezicima. U slučaju da postoji spor u tumačenju, engleska verzija će uvijek prevladati.

U aneksu se nalaze dodatni podaci na engleskom jeziku, koji ne podliježu zakonskoj regulativi.

Translation guidance Essential Characteristics and Performance Parameters for Annexes

Smjernice za prijevod. Bitne karakteristike i parametri izvedbe za dodatke

Mechanical resistance and stability (BWR 1)	
Mehanička otpornost i stabilnost (BWR 1)	
Characteristic resistance to tension load (static and quasi-static loading) Method A:	
Karakteristični otpor na opterećenje (statičko i kvazi-statičko opterećenje) Metoda A:	
1 Resistance to steel failure: Otpornost na lom čelika:	$N_{Rk,s}$ [kN]
2 Resistance to pull-out failure: Otpornost na čupanje:	$N_{Rk,p}$ [kN], ψ_c [-]
3 Resistance to concrete cone failure: Otpornost na lom betona:	$k_{cr,N}$, $k_{ucr,N}$ [-], h_{ef} , $c_{cr,N}$ [mm]
4 Robustness: Robusnost:	γ_{inst} [-]
5 Minimum edge distance and spacing: Minimalna udaljenost od ruba i razmak:	c_{min} , s_{min} , h_{min} [mm]
6 Edge distance to prevent splitting under load: Udaljenost ruba kako bi se spriječilo cijepanje pod opterećenjem:	$N_{Rk,sp}^0$ [kN], $c_{cr,sp}$ [mm]
Characteristic resistance to shear load (static and quasi-static loading):	
Karakteristični otpor na smicanje (statičko i kvazi-statičko opterećenje):	
7 Resistance to steel failure (shear load): Otpornost na lom čelika (posmično opterećenje):	$V_{Rk,s}^0$ [kN], $M_{Rk,s}^0$ [Nm], k_7 [-]
8 Resistance to pry-out failure: Otpornost na otkazivanje:	k_8 [-]
Characteristic Resistance for simplified design:	
Karakteristična otpornost za pojednostavljeni návrh:	
9 Method B: Metoda B:	F_{Rk}^0 [kN], $M_{Rk,s}^0$ [Nm], ψ_c [-], c_{cr} , s_{cr} , s_{min} , c_{min} , h_{min} [mm]
10 Method C: Metoda C:	F_{Rk} [kN], $M_{Rk,s}^0$ [Nm], c_{cr} , s_{cr} , s_{min} , h_{min} [mm]
Displacements:	
Istisnine:	
9 Displacements under static and quasi-static loading: Pomaci pri statičkom i kvazi-statičkom opterećenju:	δ_{N0} , $\delta_{N\infty}$, δ_{V0} , $\delta_{V\infty}$ [mm]
Characteristic resistance and displacements for seismic performance categories C1 and C2:	
Karakteristični otpor i pomaci za kategorije seizmičke učinkovitosti C1 i C2:	
12 Resistance to tension load, displacements, category C1: Otpornost na vlačno opterećenje (napetost), pomaci, kategorija C1:	$N_{Rk,s,C1}$, $N_{Rk,p,C1}$ [kN]
Resistance to tension load, displacements, category C2: Otpornost na vlačno opterećenje (napetost), pomaci, kategorija C2:	$N_{Rk,s,C2}$, $N_{Rk,p,C2}$ [kN], $\delta_{N,C2}$ [mm]
13 Resistance to shear load, displacements, category C1: Otpornost na posmično opterećenje, pomaci, kategorije C1:	$V_{Rk,s,C1}$ [kN]
Resistance to shear load, displacements, category C2: Otpornost na posmično opterećenje, pomaci, kategorije C2:	$V_{Rk,s,C2}$ [kN], $\delta_{V,C2}$ [mm]
14 Factor for annular gap: Faktor prstenaste pukotine:	α_{gap} [-]
Safety in case of fire (BWR 2)	
Sigurnost u slučaju požara (BWR 2)	
15 Reaction to fire: Reakcija na vatru:	Class
Resistance to fire:	
Otpornost na vatru:	
16 Fire resistance to steel failure (tension load): Vatrootpornost na lom čelika (vlačna sila):	$N_{Rk,s,fi}$ [kN]
17 Fire resistance to pull-out failure (tension load): Vatrootpornost na čupanje (vlačna sila):	$N_{Rk,p,fi}$ [kN]
18 Fire resistance to steel failure (shear load): Vatrootpornost na lom čelika (posmik):	$V_{Rk,s,fi}$ [kN], $M_{Rk,s,fi}^0$ [Nm]
Durability:	
Trajnost:	
19 Durability: Trajnost:	Description/Level

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product

fischer concrete screw UltraCut FBS II R is a concrete screw made of stainless steel. The anchor is installed in a drilled hole and anchored by mechanical interlock.

An illustration of the product is given in Annex A.

The characteristic material values, dimensions and tolerances of the anchors not indicated in Annexes shall correspond to the respective values laid down in the technical documentation of this European Technical Assessment.

The anchors are intended to be used with embedment depth given in Annex B, Table B2.1. The intended use specifications of the product are detailed in the Annex B1.

2 Specification of the intended use in accordance with the applicable European Assessment Document (hereinafter EAD)

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Characteristics of product

Mechanical resistance and stability (BWR 1):

The essential characteristics are detailed in the Annex C1, C2 and C4.

Safety in case of fire (BWR 2):

The essential characteristics are detailed in the Annex C3.

Other Basic Requirements are not relevant.

3.2 Methods of assessment


The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirement 1 has been made in accordance with EAD 330232-01-0601; Mechanical fasteners for use in concrete.

4 Assessment and verification of constancy of performance (AVCP)

4.1 AVCP system

According to the decision 1996/582/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No. 305/2011) is 1.

Product in the installed condition

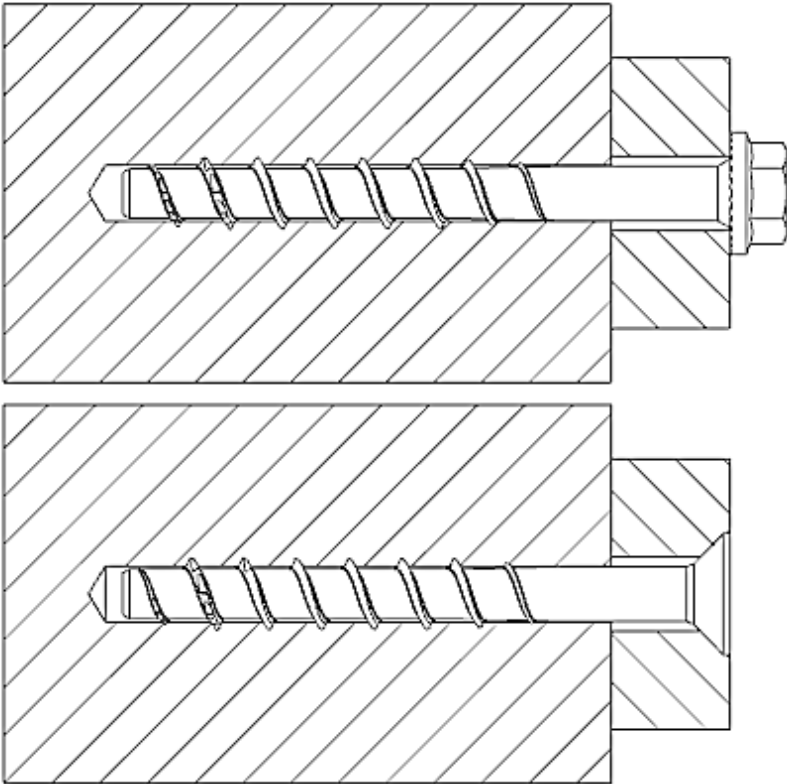




FBS II US R /
FBS II US TX R

FBS II SK R

(Fig. not to scale)

fischer concrete screw UltraCut FBS II R		Annex A1 of European Technical Assessment ETA-17/0740
Product description Product in the installed condition		

Table A2.1: Geometry and material

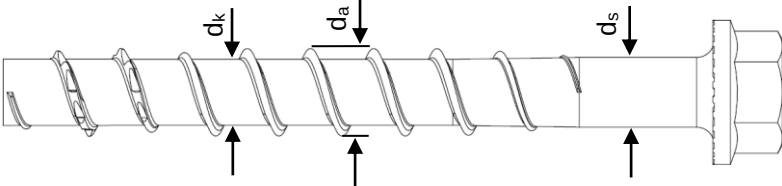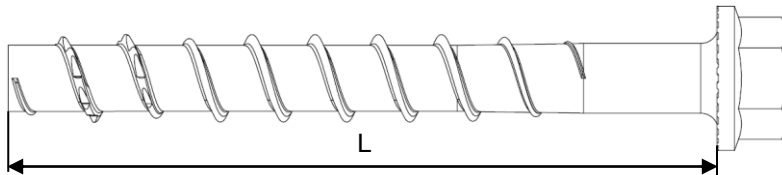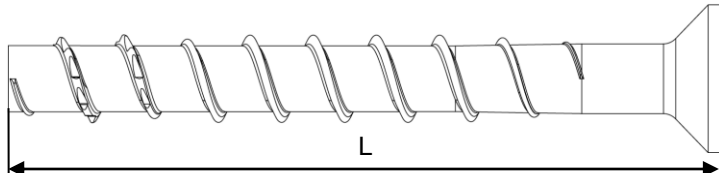Type of screw / size		FBS II US R / SK R			
		8	10	12	
Thread outer diameter	d_a	[mm]	10,3	12,5	14,6
Core diameter	d_k		7,5	9,4	11,1
Shaft diameter	d_s		8,0	9,9	11,7
Material		Tip: hardened steel; Shaft and head: stainless steel			
Hexagon head with formed washer (US)					
Hexagon head with formed washer and TX-drive (US TX)					
Countersunk Head (SK)					

Head Marking

FBS II: Product short name

R: Material type

XXX: Screw length L

e.g. 10: Screw size



(Fig. not to scale)

fischer concrete screw UltraCut FBS II R	Annex A2 of European Technical Assessment ETA-17/0740
Product description Geometry and material	

Specification of intended use:

Size	FBS II R							
	8		10			12		
Nominal embedment depth [mm]	50	65	55	65	85	60	75	100
Static and quasi-static loads in cracked and uncracked concrete	✓							
Fire exposure								
Seismic performance category C1 and C2	-	✓	-	✓	-	✓	-	✓

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres (cracked and uncracked) according to EN 206:2013 + A1:2016
- Strength classes C20/25 to C50/60 according to EN 206:2013 + A1:2016

Use conditions (Environmental conditions):

- Structures subjected to dry internal conditions
- For all other conditions according to EN 1993-1-4:2015-10, corresponding to corrosion resistance class CRC III

Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the screw is indicated on the design drawings (e.g. position of the screw relative to reinforcement or to supports, etc.).
- Design of fastenings according to EN 1992-4:2016 and EOTA Technical Report TR 055


Installation:

- Hammer drilling or diamond drilling or hollow drilling according to Annex B4
- Screw installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on site.
- In case of aborted hole: New hole must be drilled at a minimum distance of twice the depth of the aborted hole or closer, if the hole is filled with a high strength mortar and only if the hole is not in the direction of the oblique tensile or shear load.
- Adjustability according to Annex B3
- Cleaning of drill hole is not necessary when using a hollow drill or:
 - If drilling vertically upwards
 - If drilling vertical downwards and the drill hole depth has been increased. It is recommended to increase the drill depth with additional $3 d_0$.
- After correct installation further turning of the screw head should not be possible.
- The head of the screw must be fully engaged on the fixture and show no signs of damage.
- For seismic performance category C2 applications: The gap between screw shaft and fixture must be filled with mortar; mortar compressive strength $\geq 50 \text{ N/mm}^2$. (e.g. FIS V Plus, FIS HB, FIS SB or FIS EM Plus)

fischer concrete screw UltraCut FBS II R	Annex B1 of European Technical Assessment ETA-17/0740
Intended use Specification	

Table B2.1: Installation parameters

FBS II R			8		10			12		
Nominal embedment depth	h_{nom}	[mm]	50	65	55	65	85	60	75	100
Nominal drill hole diameter	d_0		8		10			12		
Cutting diameter of drill bits			8,45		10,45			12,50		
Cutting diameter for diamond drillers	$d_{cut} \leq$		8,10		10,30			12,30		
Clearance hole diameter	d_f		10,6 – 12,0		12,8 – 14,0			14,8 – 16,0		
Wrench size (US,S)	SW		13		15			17		
Tx-size	Tx	[-]	40		50			-		
Countersunk head diameter	d_h	[mm]	18		21					
Countersunk diameter in fixture	d_c		20		23					
Drill hole depth			60	75	65	75	95	70	85	110
Drill hole depth (with adjustable setting)	$h_1 \geq$		70	85	75	85	105	80	95	120
Thickness of fixture	$t_{fix} \leq$		L - h_{nom}							
Length of screw	$L_{min} =$		[mm]	50	65	55	65	85	60	75
	$L_{max} =$	400		415	405	415	435	410	425	450
Torque impact screw driver	$T_{imp,max}$	[Nm]	450					650		
Torque impact screw driver (with adjustable setting process)	$T_{imp,max}$		300					450		

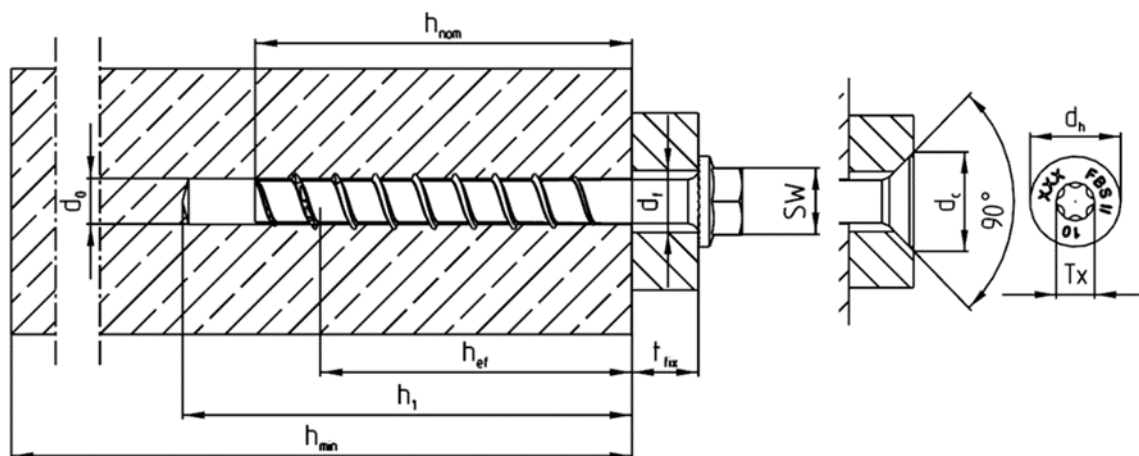


(Fig. not to scale)

fischer concrete screw UltraCut FBS II R

 Intended use
Installation parameters

Annex B2
of European
Technical Assessment
ETA-17/0740

Adjustment

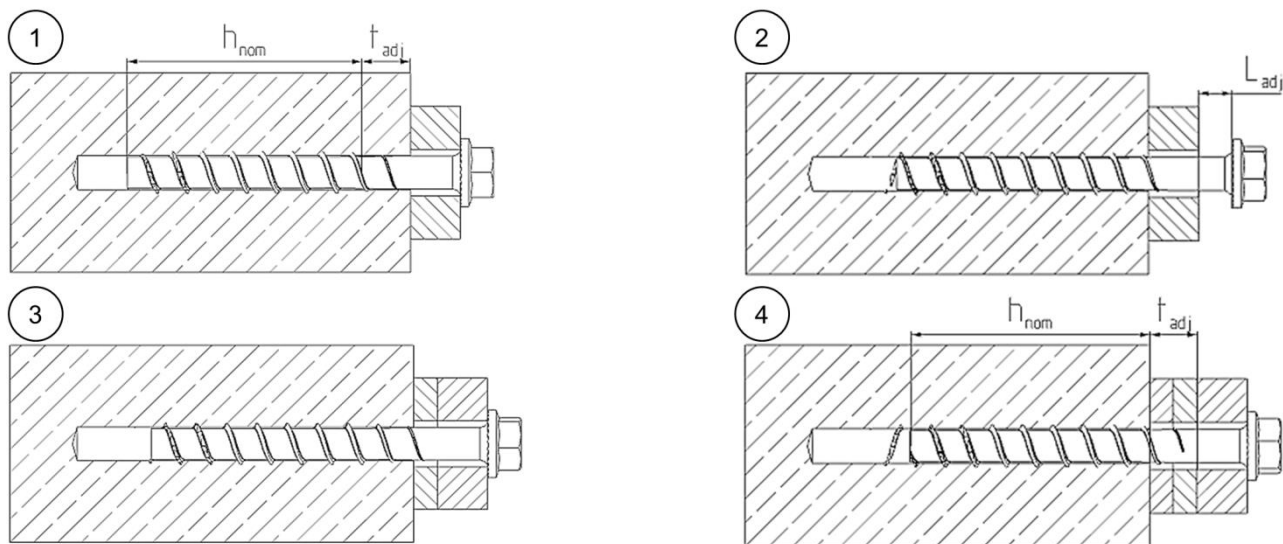

It is permissible to untighten the screw up to two times for adjustment purposes. Therefore the screw may be untightened to a maximum of $L_{adj} = 20$ mm to the surface of the initial fixture. The total permissible thickness of shims added during the adjustment process is $t_{adj} = 10$ mm. The required nominal anchoring depth h_{nom} must be kept after the adjustment process.

(Fig. not to scale)

Table B3.1: Minimum thickness of concrete members, minimum spacing and edge distance


FBS II R			8		10			12		
Nominal embedment depth	h_{nom}	[mm]	50	65	55	65	85	60	75	100
Minimum thickness of concrete member	h_{min}		100	120	100	120	140	110	130	150
Minimum spacing	s_{min}		35		40			50		
Minimum edge distance	c_{min}		35		40			50		

fischer concrete screw UltraCut FBS II R

Intended use – Adjustment
Minimum thickness of members, minimum spacing and edge distance

Annex B3
of European
Technical Assessment
ETA-17/0740


Installation instruction part 1



Step 1: Creation of the drill hole:


Drill the hole using hammer drill, hollow drill or diamond core drill

Drill hole diameter d_0 and drill hole depth h_1 according to table B2.1




Step 2: Cleaning of the drill hole - horizontal:

Clean the drill hole. This step can be omitted in the preparation of the hole by using a hollow drill bit or diamond core drill. (recommendation: use the fischer FHD hollow drill bit)

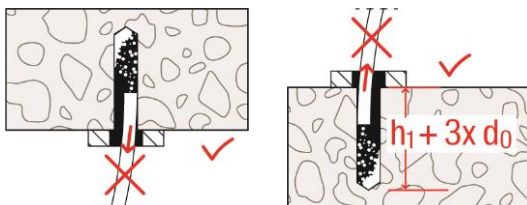

Step 2: Cleaning of the drill hole - vertical:

Cleaning of the drill hole can be omitted, if drilling vertically upwards or if drilling vertically downwards and the hole depth has been increased. It is recommended to increase the drill hole depth by an additional 3 x drilling $\varnothing$ when drilling vertically downwards.

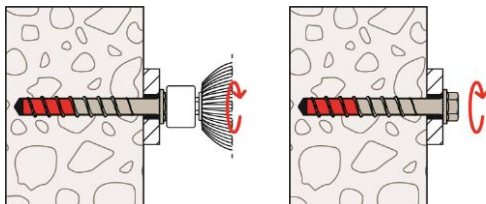


Step 3: Installation:

Turn in until the head is in contact with the fixture.

Installation with any torque impact screw driver up to the maximum mentioned torque moment ($T_{imp,max}$ according to table B2.1).

(recommendation: use the fischer FSS 18V 400BL)

Alternatively, all other tools without an indicated torque moment are allowed (e.g. ratchet spanner). The indicated torque moments $T_{imp,max}$ for impact screw driver are not decisive for manual installation.



Step 4: Checking of the correct installation:




After installation a further turning of the screw must not be possible. The head of the screw must be in contact with the fixture and is not damaged

fischer concrete screw UltraCut FBS II R

Installation Instructions

Annex B4
of European
Technical Assessment
ETA-17/0740

Installation instruction part 2



Adjustment


Optional:

It is permissible to adjust the screw twice.

Therefore, the screw may be untightened to a maximum of $L_{adj} = 20 \text{ mm}$ off the surface of the initial fixture. The total permissible thickness of shims added during the adjustment process

is $t_{adj} = 10 \text{ mm}$.

The required nominal anchoring depth h_{nom} must be kept after the adjustment process. (see also annex B3)



Filling of the annular gap

For seismic performance category C2 applications:

The gap between screw shaft and fixture must be filled with mortar; mortar compressive strength $\geq 50 \text{ N/mm}^2$ (e. g. FIS V Plus, FIS HB, FIS SB or FIS EM Plus).

As an aid for filling the gap, the filling disc FFD is recommended.

fischer concrete screw UltraCut FBS II R

Installation Instructions

Annex B5
of European
Technical Assessment
ETA-17/0740

Table C1.1: Characteristic values for static and quasi-static action

FBS II R			8		10			12			
Nominal embedment depth	h_{nom}	[mm]	50	65	55	65	85	60	75	100	
Steel failure for tension load and shear load											
Characteristic resistance	$N_{Rk,s}$	[kN]	27,8		43,8			67,7			
Partial factor	$\gamma_{Ms,N}$	-	1,5								
Characteristic resistance	$V^0_{Rk,s}$	[kN]	18,0	27,8	13,2	19,3	36,6	20,4	40,1	45,8	
Partial factor	$\gamma_{Ms,V}$	[-]	1,25								
Factor for ductility	k_7		1,0								
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	31,3		68,5			112,8			
Pullout failure											
Charact. resistance in concrete C20/25	uncracked	$N_{Rk,p}$	[kN]	7,0	14,0	8,5	14,0	$\geq N^0_{Rk,c^{(1)}}$	10,0	12,0	$\geq N^0_{Rk,c^{(1)}}$
	cracked	$N_{Rk,p}$	[kN]	4,0	9,0	4,5	6,0	16,0	4,5	11,0	$\geq N^0_{Rk,c^{(1)}}$
Increasing factors concrete	C25/30	ψ_c	[-]	1,12							
	C30/37			1,22							
	C35/45			1,32							
	C40/50			1,41							
	C45/55			1,50							
	C50/60			1,58							
Installation factor	γ_{inst}	[-]	1,0								
Concrete cone failure and splitting failure; concrete pryout failure											
Effective embedment depth	h_{ef}	[mm]	40	52	43	51	68	47	60	81	
Factor for uncracked concrete	$k_{ucr,N}$	[-]	11,0								
Factor for cracked concrete	$k_{cr,N}$		7,7								
Characteristic edge distance	$c_{cr,N}$	[mm]	1,5 h_{ef}								
Characteristic spacing	$s_{cr,N}$		3 h_{ef}								
Char. resistance for splitting	$N^0_{Rk,Sp}$	[kN]	12,0	18,4	13,0	17,9	$\geq N^0_{Rk,c^{(1)}}$	15,8	22,9	$\geq N^0_{Rk,c^{(1)}}$	
Char. edge distance for splitting	$c_{cr,sp}$	[mm]	1,5 h_{ef}								
Char. spacing for splitting	$s_{cr,sp}$		3 h_{ef}								
Factor for pryout failure	k_8	[-]	1,0				2,0	1,0	2,0		
Installation factor	γ_{inst}		1,0								
Concrete edge failure											
Effective length in concrete	$l_f = h_{nom}$	[mm]	50	65	55	65	85	60	75	100	
Nominal diameter of screw	d_{nom}		8		10			12			
Adjustment											
Maximum thickness of shims	t_{adj}	[mm]	10								
Max. number of adjustments	n_a		2								

¹⁾ $N^0_{Rk,c}$ according EN 1992-4:2018

fischer concrete screw UltraCut FBS II R

Characteristic values for static and quasi-static action

Annex C1
 of European
 Technical Assessment
 ETA-17/0740

Table C2.1: Characteristic values for Seismic Performance Category C1

FBS II R			8	10	12	
Nominal embedment depth		h_{nom}	[mm]	65	85	100
Steel failure for tension load and shear load C1						
Characteristic resistance		$N_{Rk,s,C1}$	[kN]	27,8	43,8	67,7
		$V_{Rk,s,C1}$		18,1	29,3	36,6
Without filling of the annular gap ¹⁾		α_{gap}	[-]	0,5		
With filling of the annular gap ¹⁾				1,0		
Pullout failure						
Characteristic resistance in cracked concrete		$N_{Rk,p,C1}$	[kN]	9,0	16,0	$\geq N^0_{Rk,c^{(2)}}$
Concrete cone failure						
Effective embedment depth		h_{ef}	[mm]	52	68	81
Concrete cone failure	Edge distance	$C_{cr,N}$		1,5 h_{ef}		
	Spacing	$S_{cr,N}$		3 h_{ef}		
Installation factor		γ_{inst}	[-]	1,0		
Concrete pryout failure						
Factor for pryout failure		k_8	[-]	1,0	2,0	
Concrete edge failure						
Effective length in concrete		$l_f = h_{nom}$	[mm]	65	85	100
Nominal diameter of screw		d_{nom}		8	10	12

¹⁾ Filling of the annular gap according annex B 5²⁾ $N^0_{Rk,c}$ according EN 1992-4:2018**Table C2.2: Characteristic values for Seismic Performance Category C2**

FBS II R			8	10	12	
Nominal embedment depth		h_{nom}	[mm]	65	85	100
Steel failure for tension load and shear load C2						
Characteristic resistance		$N_{RK,S,C2}$	[kN]	27,8	43,8	67,7
		$V_{RK,S,C2}$		9,7	8,8	19,7
With filling of the annular gap ¹⁾		α_{gap}	[-]	1,0		
Pullout failure						
Characteristic resistance in cracked concrete		$N_{RK,p,C2}$	[kN]	2,8	5,0	7,3
Concrete cone failure						
Effective embedment depth		h_{ef}	[mm]	52	68	81
Concrete cone failure	Edge distance	$C_{cr,N}$		1,5 h_{ef}		
	Spacing	$S_{cr,N}$		3 h_{ef}		
Installation factor		γ_{inst}	[-]	1,0		
Concrete pryout failure						
Factor for pryout failure		k_8	[-]	1,0	2,0	
Concrete edge failure						
Effective length in concrete		$l_f = h_{nom}$	[mm]	65	85	100
Nominal diameter of screw		d_{nom}		8	10	12

¹⁾ Filling of the annular gap according annex B 5. Application without filling of the annular gap not allowed.**fischer concrete screw UltraCut FBS II R**

Characteristic values for Seismic Performance Category C1 and C2

Annex C2
of European
Technical Assessment
ETA-17/0740

Table C3.1: Characteristic values for resistance to fire

FBS II R			8		10			12			
Nominal embedment depth		h_{nom}	[mm]	50	65	55	65	85	60	75	100
Steel failure for tension load and shear load ($F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}$)											
Characteristic resistance for the head shapes	US, US TX	$F_{Rk,s,fi}$	R30	[kN]	2,3	6,4	3,5	11,0	4,6	15,2	
			R60		1,8	4,7	2,7	8,1	3,7	11,2	
			R90		1,3	2,9	2,0	5,2	2,7	7,3	
			R120		1,0	2,0	1,6	3,8	2,2	5,3	
	SK	$F_{Rk,s,fi}$	R30	[kN]	2,1			3,0			No performance declared
			R60		1,7			2,3			
			R90		1,2			1,6			
			R120		1,0			1,2			
	US, US TX	$M^0_{Rk,s,fi}$	R30	[Nm]	2,6	7,2	7,6	15,4	16,8	25,3	
			R60		2,0	5,2	6,0	11,4	13,3	18,7	
			R90		1,5	3,3	4,4	7,3	9,8	12,1	
			R120		1,2	2,3	3,6	5,3	8,0	8,8	
	SK	$M^0_{Rk,s,fi}$	R30	[Nm]	2,4			4,2			No performance declared
			R60		1,9			3,2			
			R90		1,4			2,2			
			R120		1,1			1,7			

Pullout failure											
Characteristic resistance	$N_{Rk,p,fi}$	R30	[kN]	1,7	2,4	2,1	3,5	4,3	2,5	3,0	6,3
		R60									
		R90									
		R120									

Concrete cone failure											
Characteristic resistance	$N_{Rk,c,fi}$	R30	[kN]	1,6	3,4	2,1	3,2	6,6	2,6	4,8	10,2
		R60									
		R90									
		R120									

Edge distance											
R30 to R120		$C_{cr,fi}$	[mm]	2 h_{ef}							
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm											
Spacing											
R30 to R120		$S_{cr,fi}$	[mm]	2 $C_{cr,fi}$							

Concrete pryout failure											
R30 to R120		k_8	[-]	1,0				2,0	1,0	2,0	

The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given value.

fischer concrete screw UltraCut FBS II R								Annex C3 of European Technical Assessment ETA-17/0740			
Characteristic values for resistance to fire											

Table C4.1: Displacements due to tension loads (static and quasi-static)

FBS II R			8		10			12		
Nominal embedment depth	h_{nom}	[mm]	50	65	55	65	85	60	75	100
Tension load in uncracked concrete	N	[kN]	3,5	7,1	4,2	7,0	11,9	5,0	6,0	17,1
Displacement in uncracked concrete	δ_{N0}	[mm]	0,5	0,7	0,4	0,6	0,8	1,0	0,9	1,25
	$\delta_{N\infty}$		0,7	0,7	0,8	0,8	0,8	1,25	1,25	1,25
Tension load in cracked concrete	N	[kN]	3,5	4,5	4,2	7,0	8,1	5,0	6,0	12,0
Displacement in cracked concrete	δ_{N0}	[mm]	0,6	0,4	0,4	0,6	0,7	0,9	0,9	1,4
	$\delta_{N\infty}$		1,5	1,1	1,0	1,8	1,8	1,4	1,7	1,9

Table C4.2: Displacements due to shear loads (static and quasi-static)

FBS II R			8		10			12		
Nominal embedment depth	h_{nom}	[mm]	50	65	55	65	85	60	75	100
Shear load in cracked and uncracked concrete	V	[kN]	11,0	15,9	10,4	11,9	20,9	12,7	24,9	26,2
Displacement (the gap between fastener and fixture is subtracted)	δ_{V0}	[mm]	4,1	2,7	1,2	1,2	3,5	1,1	2,5	2,9
	$\delta_{V\infty}$		6,2	4,1	1,8	1,8	5,3	1,7	3,8	4,4

Table C4.3: Displacements due to tension loads
(Seismic Performance Category C2)

FBS II R			8	10	12
Nominal embedment depth	h_{nom}	[mm]	65	85	100
Displacement DLS	$\delta_{N,C2 (DLS)}$		0,9	0,9	1,1
Displacement ULS	$\delta_{N,C2 (ULS)}$		2,5	2,7	3,2

Table C4.4: Displacements due to shear loads
(Seismic Performance Category C2)

FBS II R			8	10	12
Nominal embedment depth	h_{nom}	[mm]	65	85	100
Displacement DLS	$\delta_{V,C2 (DLS)}$		1,6	1,7	2,6
Displacement ULS	$\delta_{V,C2 (ULS)}$		5,0	3,8	6,6

fischer concrete screw UltraCut FBS II R

Displacements due to tension and shear loads

Annex C4
of European
Technical Assessment
ETA-17/0740