

IZJAVA O SVOJSTVIMA

DoP 0185

za fischer vijak za beton ULTRACUT FBS II (Mehaničko sidro za uporabu u betonu)

HR

1. <u>Jedinstveni identifikator tipa proizvoda:</u>	DoP 0185		
2. <u>Namjena korištenja:</u>	Postinstalirano sidro za korištenje u betonu za redundantne nekonstrukcijske sustave		
3. <u>Proizvođač:</u>	Vidi dodatak, posebno priloge B1- B6 fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Njemačka		
4. <u>Ovlašteni zastupnik:</u>	-		
5. <u>Sistem/i od AVCP:</u>	2+		
6. <u>Europski dokument za ocjenjivanje:</u>	EAD 330747-00-0601 (Edition 06/2018)		
Europska tehnička ocjena:	ETA-18/0242; 2020-11-13		
Tijelo za tehničko ocjenjivanje:	DIBt- Deutsches Institut für Bautechnik		
Prijavljeno tijelo/prijavljena tijela:	1343 MPA Darmstadt / 2873 TU Darmstadt		
7. <u>Objavljena svojstva:</u>			
Sigurnost u uporabi (BWR 4)			
Karakteristični otpor na opterećenje (statičko i kvazi-statičko opterećenje):	Otpornost na lom čelika: Otpornost na čupanje:	Priloge C1 Priloge C1	E _s = 210 000 MPa
	Otpornost na lom betona: Robusnost:	Priloge C1 Priloge C1	
	Minimalna udaljenost od ruba i razmak: Udaljenost ruba kako bi se spriječilo cijepanje pod opterećenjem:	Priloge B4 Priloge C1	
Karakteristični otpor na smicanje (statičko i kvazi-statičko opterećenje):	Otpornost na lom čelika (posmično opterećenje): Otpornost na otkazivanje: Otpornost na lom ruba betona:	Priloge C1 Priloge C1 Priloge C1	
Karakteristična otpornost za sve smjerove opterećenja i načine sloma za pojednostavljeni dizajn:	Krakteristični otpor:	Priloge C2 (hollow core slabs)	
Trajnost:	Trajnost:	Priloge A3, B1	
Sigurnost u slučaju požara (BWR 2)			
Reakcija na vatru:	Klasa (A1)		
Otpornost na vatru:	Vatrootpornost na lom čelika (vlačna sila): Vatrootpornost na čupanje (vlačna sila): Vatrootpornost na lom čelika (posmik):	Priloge C3 Priloge C3 Priloge C3	



8. Odgovarajuća tehnička dokumentacija i/ili specifična –
tehnička dokumentacija:

Svojstva gore navedenog proizvoda su u skladu sa skupom izjava o svojstvima. Ova izjava o svojstvima se izdaje, u skladu sa Europskom regulativom (EU) Br. 305/2011, pod punom odgovornošću gore navedenog proizvođača

Za proizvođača i u njegovo ime potpisao:

Thilo Pregartner, Dr.-Ing.
Tumlingen, 2020-11-27

Peter Schillinger, Dipl.-Ing.

Ovaj DoP je pripremljen u različitim jezicima. U slučaju da postoji spor u tumačenju, engleska verzija će uvijek prevladati.

U aneksu se nalaze dodatni podaci na engleskom jeziku, koji ne podliježu zakonskoj regulativi.

Specific Part

1 Technical description of the product

The fischer concrete screw ULTRACUT FBS II is an anchor of size 6 mm made of hardened carbon steel. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable EAD

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 3

3.2 Safety in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B 4, Annex C 1 and C 2
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 1 and C 2
Durability	See Annex B 1

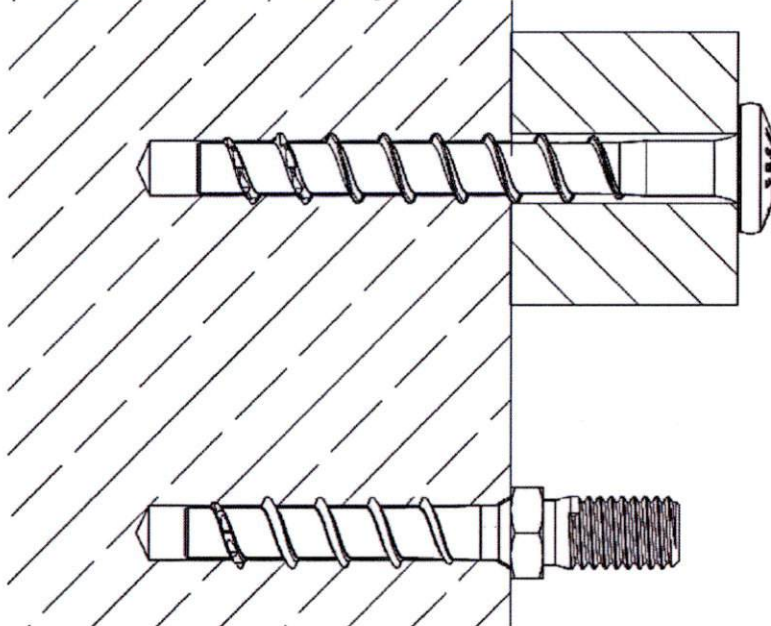
4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330747-00-0601, the applicable European legal act is: [97/161/EC].


The system to be applied is: 2+

Product in the installed condition

Installed condition in normal weight concrete



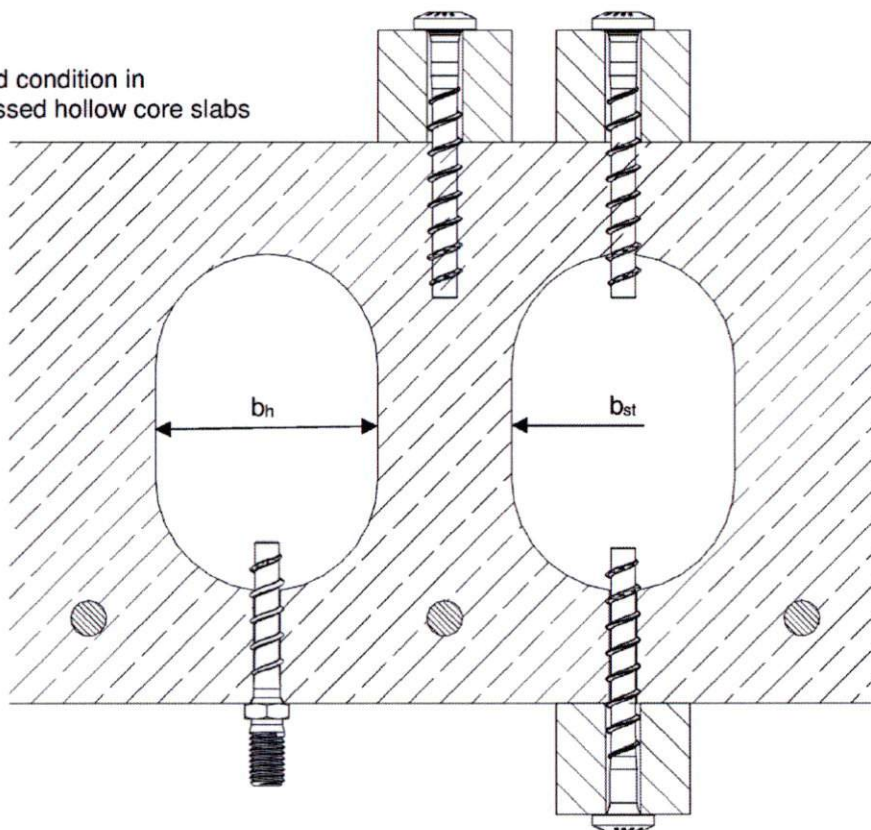Installed condition in
prestressed hollow core slabs



(Figure not to scale)

fischer concrete screw ULTRACUT FBS II














Product description

Product in the installed condition

Annex A 1

Appendix 2/ 13

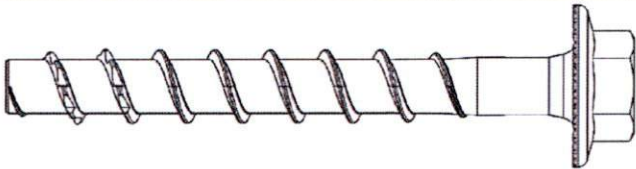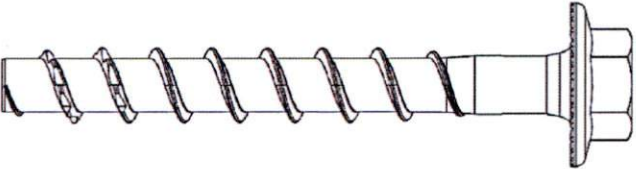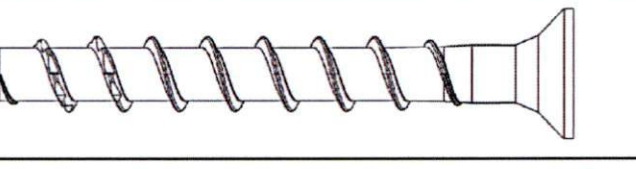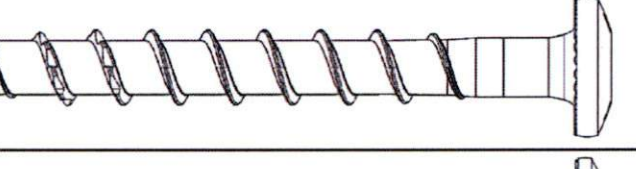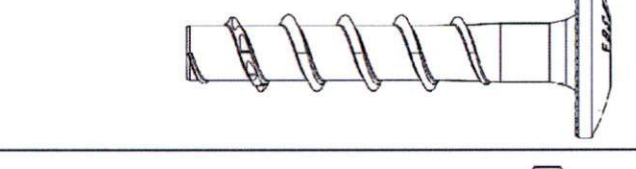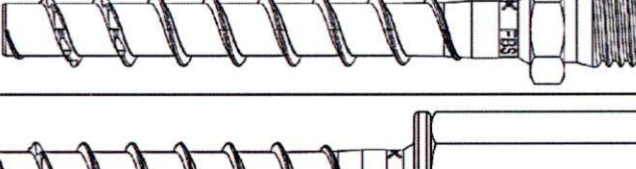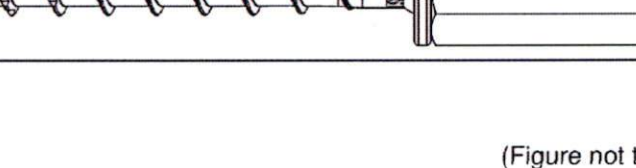Table A2.1: Screw types FBS II 6**FBS II 6**

Hexagon head with formed washer (US)		
Hexagon head with formed washer and TX-drive (US TX)		
Countersunk head (SK)		
Pan head (P)		
Large pan head (LP)		
Hexagon head and connection thread M8 or M10 (M)		
Hexagon connecting nut with metric internal thread (I)		

(Figure not to scale)

fischer concrete screw ULTRACUT FBS II


Product description
Screw types FBS II 6

Annex A 2

Appendix 3/ 13

Table A3.1: Geometry and material


FBS II 6			All head shapes
Thread outer diameter	d_a	[mm]	7,75
Core diameter	d_k		5,65
Shaft diameter	d_s		6,0
Material	[-]		Hardened carbon steel; $A_5 \geq 8\%$
Coating			galvanized

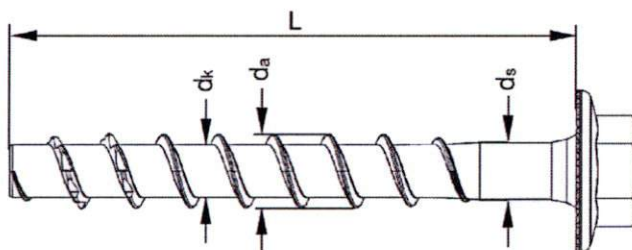

Head marking at US, US TX, SK, P, LP

FBS II: Product identification

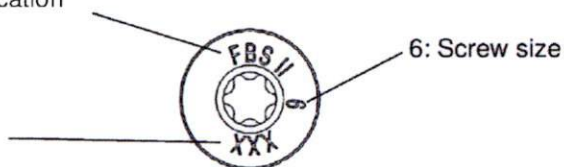
XXX: Screw length L



Marking at M8, M10, I

Head marking:

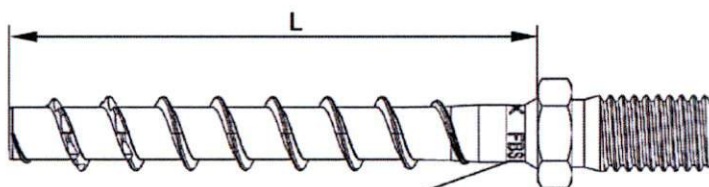XX: Screw length L



Rotary marking:

FBS II: Product identification

6: Screw size

(Figure not to scale)

fischer concrete screw ULTRACUT FBS II

Product description

Geometry, material and marking

Annex A 3

Appendix 4/ 13

Specification of intended use:

Anchorage subject to:

- Static and quasi static loads: all types and embedment depths
- Used in concrete for redundant non-structural systems
- Used for fire: only for concrete C20/25 to C50/60 (does not apply for prestressed hollow core slabs)

Base materials:

- Compacted reinforced and unreinforced normal weight concrete without fibres (cracked and uncracked) according to EN 206:2013+A1:2016
- Strength classes C20/25 to C50/60 according to EN 206:2013+A1:2016
- Prestressed hollow core slabs, where the cavity width does not exceed 4.2 times the web width ($b_H \leq 4,2 \times b_{SI}$) with strength classes C30/37 to C50/60

Use conditions (Environmental conditions):

- Structures subjected to dry internal conditions

Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the screw is indicated on the design drawings (e.g. position of the screw relative to reinforcement or to supports, etc.)
- Design of fastenings according to EN 1992-4: 2018 and EOTA Technical Report TR 055

Installation:

- Hammer drilling or hollow drilling
- Screw installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on site
- In case of aborted hole: New hole must be drilled at a minimum distance of twice the depth of the aborted hole or closer, if the hole is filled with a high strength mortar and only if the hole is not in the direction of the oblique tensile or shear load
- Adjustability according to Annex B3 and B6
- Cleaning of drill hole is not necessary when using a hollow drill or:
 - If drilling vertically upwards
 - If drilling vertically downwards and the drill hole depth has been increased. It is recommended to increase the drill depth with additional $3 d_0$
- After correct installation further turning of the screw head shall not be possible
- The head of the screw must be fully engaged on the fixture and show no signs of damage
- In Precast pre-stressed hollow core slabs the screw may be installed from all directions, if the web thickness and the spacing to the tensioning strands according to table B3.1 are observed (also in the area of solid material)

fischer concrete screw ULTRACUT FBS II

Intended use
Specification

Annex B 1

Appendix 5/ 13


Table B2.1: Installation parameters – drilling bore hole and setting tools

FBS II 6			All head shapes	
Nominal embedment depth	h_{nom}	[mm]	$25 \leq h_{nom} < 35$	$35 \leq h_{nom} \leq 55$
Nominal drill hole diameter	d_0		6	
Cutting diameter of drill bits	$d_{cut} \leq$		6,4	
Clearance hole diameter	$d_f \leq$		8	
Drill hole depth	$h_1 \geq$	[mm]	$h_{nom} + 5$	$h_{nom} + 10^{1)}$
Drill hole depth (with adjustable setting)			$h_{nom} + 15$	$h_{nom} + 20$
Torque impact screw driver	$T_{imp,max}$	[Nm]	80	450
Maximum installation torque with metrical screws or hexagon nuts on head shapes M and I	T_{max}		5	10

¹⁾ Value can be reduced to $h_{nom} + 5$ for installation vertically upwards

Table B2.2: Installation parameters – drive and fixture

FBS II 6			US	US TX	SK	P	LP	M8	M10	I
Wrench size	SW	[mm]	10 / 13		-			10	13	-
TX size	TX	[-]	-	30				-		
Head diameter	d _h	[mm]	17		13,5	14,4	17,5			
Thickness of fixture	t _{fix} ≤		L - h _{nom}							
Length of screw	L _{min} =		25							
	L _{max} =	325						55		

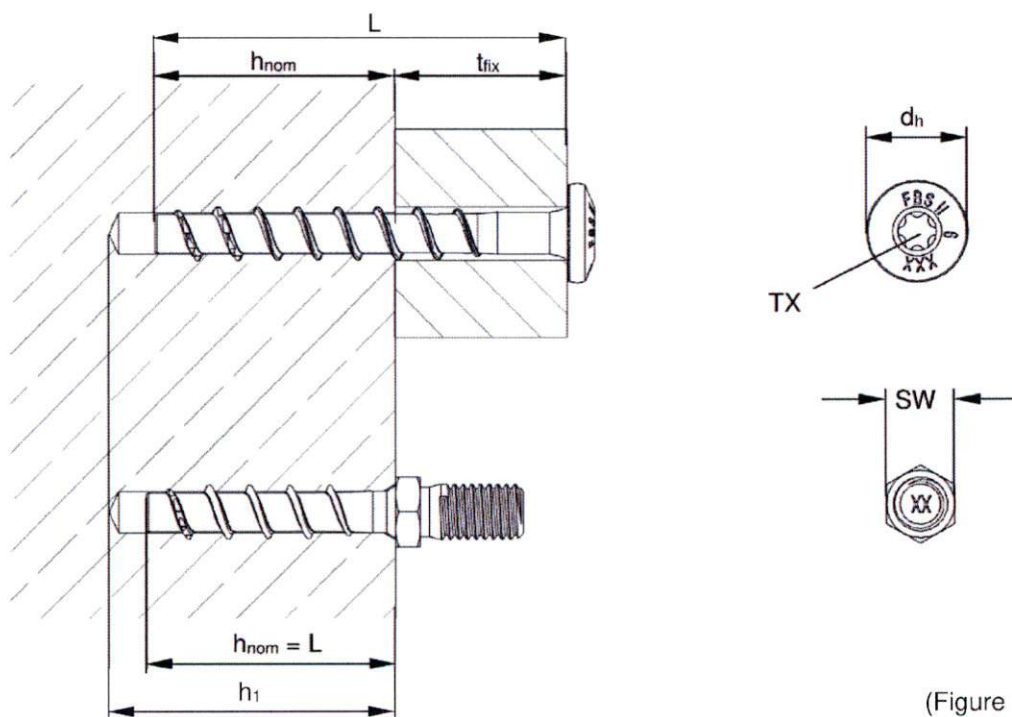

(Figure not to scale)

fischer concrete screw ULTRACUT FBS II

Intended use
Installation parameters

Annex B 2


Appendix 6/ 13

Table B3.1: Installation parameters – Additional information for prestressed hollow core slabs


FBS II 6

Distance to the tensioning strands	$a_P \geq$	[mm]	50
Thickness of the slab web	$d_b \geq$		25
Minimum thickness of fixture	$t_{fix} \geq$		$L - d_b^{1)} - 30 \text{ mm}$
Torque impact screw driver	$T_{imp,max}$	[Nm]	80 (450 ²⁾)

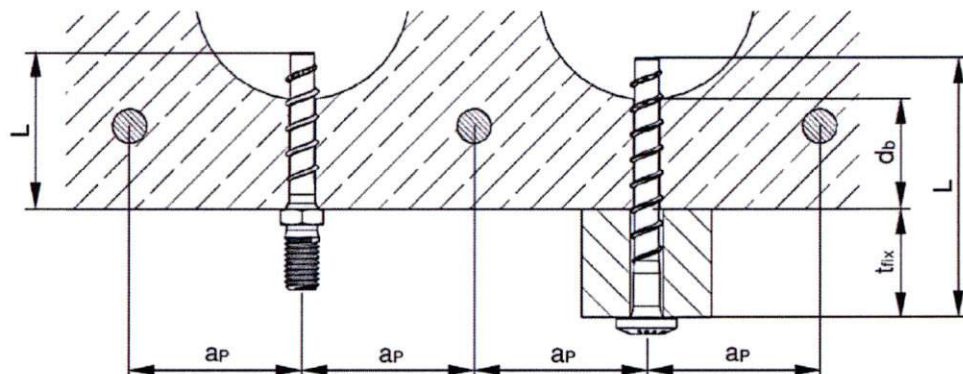- 1) If d_b is not known, then set $d_b = 25 \text{ mm}$
 2) Parent value applies if all the following conditions are met:
 - $d_b \geq 35 \text{ mm}$
 - $h_{nom} \geq 35 \text{ mm}$



Adjustment

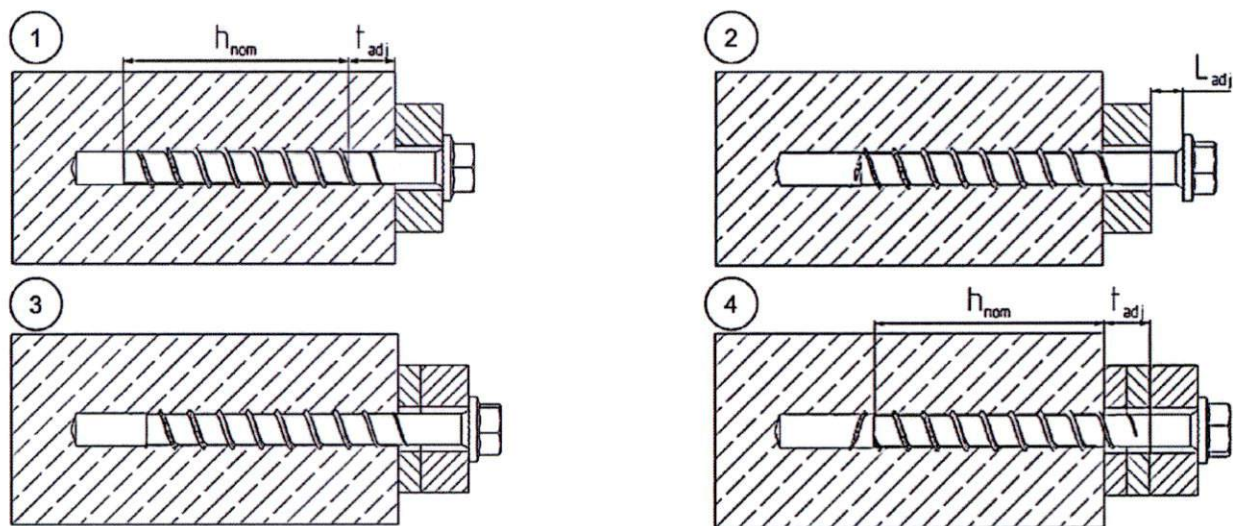

(Figure not to scale)

It is permissible to untighten the screw up to two times for adjustment purposes.
 Therefore the screw may be untightened to a maximum of $L_{adj} = 20 \text{ mm}$ to the surface of the initial fixture.
 The total permissible thickness of shims added during the adjustment process is $t_{adj} = 10 \text{ mm}$.

fischer concrete screw ULTRACUT FBS II

Intended use

Installation parameters prestressed hollow core slabs and adjustment

Annex B 3

Appendix 7/ 13

Table B4.1: Minimum thickness of concrete members, minimum spacing and edge distance

FBS II 6

Minimum thickness of concrete member	h_{min}	[mm]	$\max.(80; h_1^{1}) + 30$
Minimum spacing	s_{min}		35
Minimum edge distance	c_{min}		

¹⁾ Drill hole depth according to table B2.1

Table B4.2: Minimum spacing and edge distance for prestressed hollow core slabs

FBS II 6

Minimum spacing	s_{min}	[mm]	100
Minimum edge distance	c_{min}		
Minimum distance between anchor groups	a_{min}		

fischer concrete screw ULTRACUT FBS II







Intended use

Minimum thickness of members, minimum spacing and edge distance

Annex B 4

Appendix 8/ 13

Installation instruction part 1

1.  2. 	For installation in prestressed hollow core slabs: Determine and mark the position of the tensoning strands, e.g. with a suitable scanner. Keep distances to the tensoning strands according to table B3.1.
	Step 1: Creation of the drill hole: Drill the hole using hammer drill or hollow drill Drill hole diameter d_0 and drill hole depth h_1 according to table B2.1
	Step 2: Cleaning of the drill hole - horizontal: Clean the drill hole. This step can be omitted in the preparation of the hole by using a hollow drill bit.
	Step 2: Cleaning of the drill hole - vertical: Cleaning of the drill hole can be omitted, if drilling vertically upwards or if drilling vertically downwards and the hole depth has been increased. It is recommended to increase the drill hole depth by an additional $3 \times d_0$ when drilling vertically downwards.
	Step 3: Installation: Installation with any torque impact screw driver up to the maximum mentioned torque moment ($T_{imp,max}$ according to table B2.1). (recommendation: use the fischer FSS 18V 400BL) Alternatively, all other tools without an indicated torque moment are allowed (e.g. ratchet spanner). The indicated torque moments $T_{imp,max}$ for impact screw driver are not decisive for manual installation.
	Step 4: Checking of the correct installation: After installation a further turning of the screw must not be possible. The head of the screw must be in contact with the fixture and is not damaged.




fischer concrete screw ULTRACUT FBS II

Intended use
Installation instruction

Annex B 5

Appendix 9/ 13

Installation instruction part 2



Adjustment

Optional:

It is permissible to adjust the screw twice. Therefore, the screw may be untightened to a maximum of $L_{adj} = 20$ mm off the surface of the initial fixture. The total permissible thickness of shims added during the adjustment process is $t_{adj} = 10$ mm.

fischer concrete screw ULTRACUT FBS II

Intended use
Installation instruction

Annex B 6

Appendix 10/ 13

Table C1.1: Characteristic values for static and quasi-static action**FBS II 6**

Nominal embedment depth		h_{nom}	[mm]	25	30	35	40	45	50	55	
Steel failure for tension load and shear load											
Characteristic resistance		$N_{Rk,s}$	[kN]	21							
Partial factor		$\gamma_{Ms,N}$	[-]	1,4							
Characteristic resistance		$V^0_{Rk,s}$	[kN]	4,8		9,0				13,3	
Partial factor		$\gamma_{Ms,V}$	[-]	1,5							
Factor for ductility		k_7		1,0							
Characteristic bending resistance		$M^0_{Rk,s}$	[Nm]	17,1							
Pullout failure											
Characteristic resistance in concrete C20/25	uncracked	$N_{Rk,p}$	[kN]	3,0	5,0	6,5	8,0	10,0	12,0	13,5	
	cracked			1,5	2,5	3,5	5,0	6,0	7,5	8,5	
Increasing factors concrete	C25/30	ψ/c	[-]	1,12							
	C30/37			1,22							
	C35/45			1,32							
	C40/50			1,41							
	C45/55			1,50							
	C50/60			1,58							
Installation factor		γ_{inst}		1,0							
Concrete cone failure and splitting failure; concrete pryout failure											
Effective embedment depth		h_{ef}	[mm]	19	23	27	32	36	40	44	
Factor for uncracked concrete		$k_{ucr,N}$	[-]	11,0							
Factor for cracked concrete		$k_{cr,N}$		7,7							
Characteristic edge distance		$c_{cr,N}$	[mm]	1,5 h_{ef}							
Characteristic spacing		$s_{cr,N}$		3 h_{ef}							
Characteristic resistance for splitting		$N^0_{Rk,sp}$	[kN]	$\min(N^0_{Rk,c}{}^1; N_{Rk,p})$							
Characteristic edge distance for splitting		$c_{cr,sp}$	[mm]	2 x h_{ef}			1,5 x h_{ef}				
Characteristic spacing for splitting		$s_{cr,sp}$		4 x h_{ef}			3 x h_{ef}				
Factor for pryout failure		k_8	[-]	1,3		2,0					
Installation factor		γ_{inst}		1,0							
Concrete edge failure											
Effective length in concrete		l_f	[mm]	25	30	35	40	45	50	55	
Nominal diameter of screw		d_{nom}		6							
Adjustment											
Maximum thickness of shims		t_{adj}	[mm]	10							
Max. number of adjustments		n_a	[-]	2							

¹⁾ $N_{Rk,c}^0$ according EN 1992-4:2018

fischer concrete screw ULTRACUT FBS II

Performances

Characteristic values for static and quasi-static action

Annex C 1

Appendix 11/ 13

Table C2.1: Characteristic values for static and quasi-static action in prestressed hollow core slabs

FBS II 6										
Nominal embedment depth		h_{nom}	[mm]	25	30	35	40	45	50	55
All load directions and failure modes										
Characteristic resistance	C30/37	$d_b \geq 25$	[kN]	0,5	1,0					
		$d_b \geq 30$		3,5	3,5					
		$d_b \geq 35$			4,0	4,5	5,0	5,5	6,0	6,5
		$d_b \geq 40$			4,8	5,5	6,0	7,0	7,5	8,0
		$d_b \geq 50$				7,0	8,0	9,0		12,0
	C35/45	$d_b \geq 25$		0,5	1,1					
		$d_b \geq 30$		3,8	3,8					
		$d_b \geq 35$			4,3	4,9	5,4	5,9	6,5	7,0
		$d_b \geq 40$			4,8	5,9	6,5	7,6	8,1	8,6
		$d_b \geq 50$				7,6	8,6	9,0		13,0
	C40/50	$d_b \geq 25$		0,6	1,1					
		$d_b \geq 30$		4,0	4,0					
		$d_b \geq 35$			4,6	5,2	5,7	6,3	6,9	7,5
		$d_b \geq 40$			4,8	6,3	6,9	8,0	8,6	9,2
		$d_b \geq 50$				8,0	9,0			13,3
	C45/55	$d_b \geq 25$		0,6	1,2					
		$d_b \geq 30$		4,3	4,3					
		$d_b \geq 35$			4,8	5,5	6,1	6,7	7,3	7,9
		$d_b \geq 40$				6,7	7,3	8,5	9,0	9,8
		$d_b \geq 50$				8,5	9,0			13,3
	C50/60	$d_b \geq 25$		0,6	1,3					
		$d_b \geq 30$		4,5	4,5					
		$d_b \geq 35$			4,8	5,8	6,4	7,1	7,7	8,4
		$d_b \geq 40$				7,1	7,7	9,0		10,3
		$d_b \geq 50$				9,0				13,3
Partial factor		γ_M	[-]	1,5						
Installation factor		γ_{inst}		1,0						
Characteristic bending resistance		$M^0_{RK,S}$	[Nm]	17,1						
Partial factor		γ_{Ms}	[-]	1,5						
Edge distance		$c_{cr} = c_{min}$	[mm]	100						
Spacing		$s_{cr} = s_{min}$		100						

fischer concrete screw ULTRACUT FBS II

Performances

Characteristic values in prestressed hollow core slabs

Annex C 2

Appendix 12/ 13

Table C3.1: Characteristic values for resistance to fire ^{1) 2)}**FBS II 6**

Nominal embedment depth	h_{nom}	[mm]	25	30	35	40	45	50	55
-------------------------	-----------	------	----	----	----	----	----	----	----

Steel failure for tension load and shear load

Characteristic resistance for all head shapes	$N_{Rk,s,fi}$	R30	[kN]	1,00					
		R60		0,60					
		R90		0,50					
		R120		0,40					
	$V_{Rk,s,fi}$	R30	[kN]	1,00					
		R60		0,60					
		R90		0,50					
		R120		0,40					
Characteristic bending resistance for all head shapes	$M^0_{Rk,s,fi}$	R30	[Nm]	0,80					
		R60		0,50					
		R90		0,40					
		R120		0,35					

Pullout failure

Characteristic resistance	$N_{Rk,p,fi}$	R30	[kN]	0,4	0,6	0,9	1,2	1,5	1,9	2,1
		R60								
		R90								
		R120								
				0,3	0,5	0,7	1	1,2	1,5	1,7

Edge distance

R30 to R120	$C_{cr,fi}$	[mm]	$2 h_{ef}$
-------------	-------------	------	------------

In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm

Spacing

R30 to R120	$S_{cr,fi}$	[mm]	$2 C_{cr,fi}$
-------------	-------------	------	---------------

¹⁾ The embedment depth has to be increased for wet concrete by at least 30 mm compared to the given value.

²⁾ Not valid for prestressed hollow core slabs

fischer concrete screw ULTRACUT FBS II

Performances

Characteristic values for resistance to fire

Annex C 3

Appendix 13/ 13