

## TELJESÍTMÉNYNYILATKOZAT

### DoP 0370

fischer ULTRACUT FBS II R betoncsavar-hoz (Fémdübelek betonban történő felhasználásra)

HU

1. A terméktípus egyedi azonosító kódja: **DoP 0370**
2. Felhasználás célja(i): **Repedezett vagy repedésmentes betonba utólag beszerelhető rögzítőelem, ld. a Mellékletet, különösen ezt a mellékletet B1 - B5.**
3. Gyártó: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Németország**
4. A meghatalmazott képviselő: **-**
5. Az AVCP-rendszer(ek): **1**
6. Az európai értékelési dokumentum: **EAD 330232-01-0601**  
Európai műszaki értékelés: **ETA-17/0740; 2025-01-08**  
A műszaki értékelést végző szerv: **DIBt- Deutsches Institut für Bautechnik**  
Bejelentett szerv(ek): **2873 TU Darmstadt**

### 7. A nyilatkozatban szereplő teljesítmény(ek):

#### **Mechanikus szilárdság és stabilitás (BWR 1)**

##### **Karakterisztikus ellenállás húzásra (statikus és kvázi-statikusan terhelések) Módszer A:**

- Ellenállás acél szakadás tönkremenetel esetén: Melléklet C1
- Ellenállás kihúzó szakadás tönkremenetel esetén: Melléklet C1
- Ellenállás beton szakadókúp tönkremenetel esetén: Melléklet C1
- Ellenállóképesség: Melléklet C1
- Min. perem- és tengelytávolság: Melléklet C4
- Peremtávolság hasadási tönkremenetel megelőzésére: Melléklet C1

##### **Karakterisztikus ellenállás nyírásra (statikus és kvázi-statikusan terhelések):**

- Ellenállás acél szakadás tönkremenetel esetén (nyírás): Melléklet C1
- Ellenállás pry-out tönkremenetel esetén: Melléklet C1

##### **Karakterisztikus ellenállás az egyszerűbb tervezés érdekében:**

- Módszer B: NPD
- Módszer C: NPD

##### **Elmozdulások:**

- Elmozdulások statikus és kvázi-statikusan terhelés esetén: Melléklet C4

##### **Karakterisztikus ellenállás és elmozdulások a C1 és C2 szeizmikus teljesítménykategóriákhoz:**

- Ellenállás húzó terhelés esetén, elmozdulások, Kategória C1: Melléklet C2
- Ellenállás húzó terhelés esetén, elmozdulások, Kategória C2: Melléklet C2
- Ellenállás nyíró terhelés esetén, elmozdulások, Kategória C1: Melléklet C2
- Ellenállás nyíró terhelés esetén, elmozdulások, Kategória C2: Melléklet C2
- Faktor Annuláris rés: Melléklet C2

#### **Biztonság tűz esetén (BWR 2)**

- Tűzzel szembeni viselkedés: Osztály (A1)

##### **Tűzállóság:**

- Tűzállóság acél tönkremenetelnél (húzásra): Melléklet C3
- Tűzállóság kihúzó szakadás tönkremenetel esetén (húzásra): Melléklet C3
- Tűzállóság acél tönkremenetel esetén (nyírásra): Melléklet C3

#### **Tartósság:**

- Tartósság: Melléklet B1

8. Megfelelő műszaki dokumentáció és/vagy egyedi műszaki dokumentáció: -

A fent azonosított termék teljesítménye megfelel a bejelentett teljesítmény(ek)nek. A 305/2011/EU rendeletnek megfelelően e teljesítménynyilatkozat kiadásáért kizárólag a fent meghatározott gyártó a felelős.

A gyártó nevében és részéről aláíró személy:



Dr. Ronald Mihala, Fejlesztési és termelési osztály vezérigazgatója  
Tumlingen, 2025-02-03



Dieter Pfaff, Nemzetközi Termelési Szövetségért és Minőségért felelős vezérigazgató

Ez a Teljesítmény nyilatkozat különböző nyelveken elkészült. Vitás értelmezés esetén az angol verzió az irányadó.

A melléklet a (nyelvsemleges formában megadott) törvényi előírásokon túl önkéntesen megadott, kiegészítő információkat is tartalmaz angolul.

Translation guidance Essential Characteristics and Performance Parameters for Annexes

**Mellékletek Alapvető jellemzői és Teljesítményparaméterei fordítási útmutató**

Mechanical resistance and stability (BWR 1)		
<b>Mechanikus szilárdság és stabilitás (BWR 1)</b>		
Characteristic resistance under static and quasi-static loading, Method A		
<b>Karakterisztikus ellenállás húzásra (statikus és kvázi-statikusan terhelések) Módszer A:</b>		
1	Resistance to steel failure: <b>Ellenállás acél szakadás tönkremenetel esetén:</b>	$N_{Rk,s}$ [kN], $E_s$ [N/mm <sup>2</sup> ]
2	Resistance to pull-out failure: <b>Ellenállás kihúzó tönkremenetel esetén:</b>	$N_{Rk,p}$ [kN], $\psi_c$
3	Resistance to concrete cone failure: <b>Ellenállás beton szakadókúp tönkremenetel esetén:</b>	$k_{cr,N}$ , $k_{ucr,N}$ [-], $h_{ef}$ , $c_{cr,N}$ [mm]
4	Robustness: <b>Ellenállóképesség:</b>	$\gamma_{inst}$ [-]
5	Minimum edge distance and spacing: <b>Min. perem- és tengelytávolság:</b>	$c_{min}$ , $s_{min}$ , $h_{min}$ [mm]
6	Edge distance to prevent splitting under load: <b>Peremtávolság hasadási tönkremenetel megelőzésére:</b>	$N_{Rk,sp}^0$ [kN], $c_{cr,sp}$ [mm]
Characteristic resistance to shear load (static and quasi-static loading), Method A		
<b>Karakterisztikus ellenállás nyírásra (statikus és kvázi-statikusan terhelések):</b>		
7	Resistance to steel failure under shear load: <b>Ellenállás acél szakadás tönkremenetel esetén (nyírás):</b>	$V_{Rk,s}^0$ [kN], $M_{Rk,s}^0$ [Nm], $k_7$ [-]
8	Resistance to pry-out failure: <b>Ellenállás pry-out tönkremenetel esetén:</b>	$k_8$ [-]
Characteristic Resistance for simplified design		
<b>Karakterisztikus ellenállás az egyszerűbb tervezés érdekében:</b>		
9	Method B: <b>Módszer B:</b>	$F_{Rk}^0$ [kN], $c_{cr}$ , $s_{cr}$ [mm]
10	Method C: <b>Módszer C:</b>	$F_{Rk}$ [kN]
Displacements		
<b>Elmozdulások:</b>		
11	Displacements under static and quasi-static loading: <b>Elmozdulások statikus és kvázi-statikusan terhelés esetén:</b>	$\delta_{N0}$ , $\delta_{N\infty}$ , $\delta_{V0}$ , $\delta_{V\infty}$ [mm]
12	Stiffness characteristics for tension loading for non-linear spring models:	$k_{1,ucr}$ , $k_{2,ucr}$ , $k_{3,ucr}$ , $k_{4,ucr}$ , $k_{1,cr}$ , $k_{2,cr}$ , $k_{3,cr}$ , $k_{4,cr}$ [kN/mm]
Characteristic resistance and displacements for seismic performance categories C1 and C2		
<b>Karakterisztikus ellenállás és elmozdulások a C1 és C2 szeizmikus teljesítménykategóriákhoz:</b>		
13	Resistance to tension load, displacements, category C1: <b>Ellenállás húzó terhelés esetén, elmozdulások, Kategória C1:</b>	$N_{Rk,s,C1}$ [kN], $N_{Rk,p,C1}$ [kN]
	Resistance to tension load, displacements, category C2: <b>Ellenállás húzó terhelés esetén, elmozdulások, Kategória C2:</b>	$N_{Rk,s,C2}$ [kN], $N_{Rk,p,C2}$ [kN], $\delta_{N,C2}$ [mm]
14	Resistance to shear load, displacements, category C1: <b>Ellenállás nyíró terhelés esetén, elmozdulások, Kategória C1:</b>	$V_{Rk,s,C1}$ [kN]
	Resistance to shear load, displacements, category C2: <b>Ellenállás nyíró terhelés esetén, elmozdulások, Kategória C2:</b>	$V_{Rk,s,C2}$ [kN], $\delta_{V,C2}$ [mm]
15	Factor for annular gap <b>Faktor Annuláris rés:</b>	$\alpha_{gap}$ [-]
Safety in case of fire (BWR 2)		
<b>Biztonság tűz esetén (BWR 2)</b>		
16	Reaction to fire: <b>Tűzzel szembeni viselkedés:</b>	Class
Resistance to fire:		
<b>Tűzállóság:</b>		
17	Fire resistance to steel failure (tension load): <b>Tűzállóság acél tönkremenetelnél (húzásra):</b>	$N_{Rk,s,fi}$ [kN]
18	Fire resistance to pull-out failure (tension load): <b>Tűzállóság kihúzó tönkremenetel esetén (húzásra):</b>	$N_{Rk,p,fi}$ [kN]
19	Fire resistance to steel failure (shear load): <b>Tűzállóság acél tönkremenetel esetén (nyírásra):</b>	$V_{Rk,s,fi}$ [kN], $M_{Rk,s,fi}^0$ [Nm]
Aspects of durability		
<b>Tartósság:</b>		
20	Durability: <b>Tartósság:</b>	Class

## **II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT**

### **1 Technical description of product and intended use**

#### **Technical description of the product**

fischer concrete screw UltraCut FBS II R is a concrete screw made of stainless steel. The anchor is installed in a drilled hole and anchored by mechanical interlock.

An illustration of the product is given in Annex A.

The characteristic material values, dimensions and tolerances of the anchors not indicated in Annexes shall correspond to the respective values laid down in the technical documentation of this European Technical Assessment.

The anchors are intended to be used with embedment depth given in Annex B, Table B2.1. The intended use specifications of the product are detailed in the Annex B1.

### **2 Specification of the intended use in accordance with the applicable European Assessment Document (hereinafter EAD)**

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### **3 Performance of the product and references to the methods used for its assessment**

#### **3.1 Characteristics of product**

##### **Mechanical resistance and stability (BWR 1):**

The essential characteristics are detailed in the Annex C1, C2 and C4.

##### **Safety in case of fire (BWR 2):**

The essential characteristics are detailed in the Annex C3.

Durability:

See annex B1.

Other Basic Requirements are not relevant.

#### **3.2 Methods of assessment**


The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirement 1 has been made in accordance with EAD 330232-01-0601; Mechanical fasteners for use in concrete.

## **4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base.**


### **4.1 AVCP system**

According to the decision 1996/582/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No. 305/2011) is 1.


**Product in the installed condition**

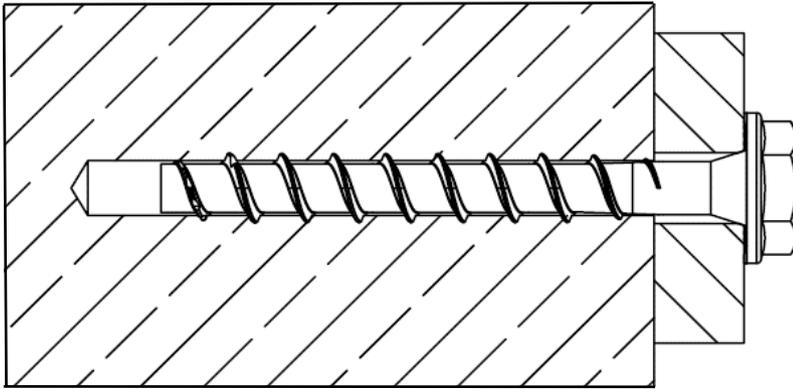

FBS II US R/  
FBS II US TX R

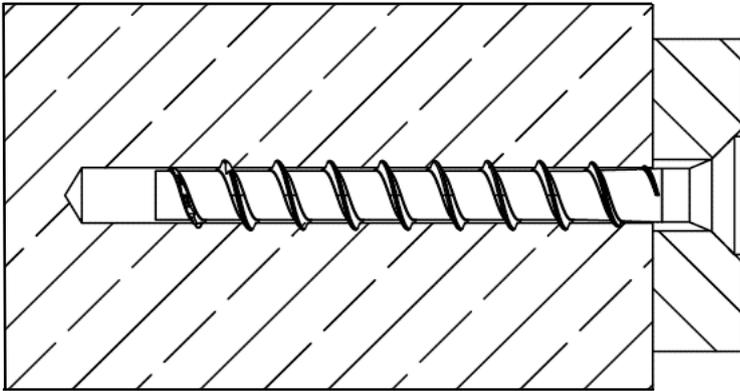

FBS II SK R

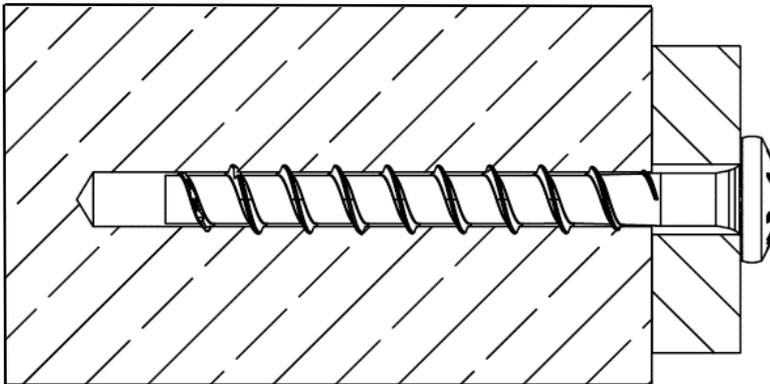

FBS II P R

*(Figure not to scale)*

**fischer concrete screw UltraCut FBS II R**

**Product description**  
Product in the installed condition

**Annex A 1**

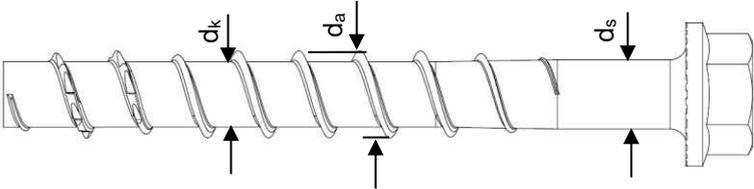
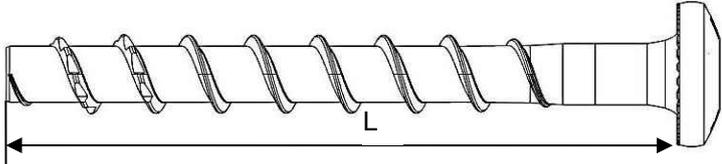

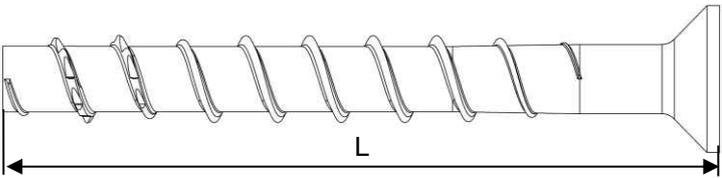
Appendix 4 / 14

**Table A2.1: Geometry and material**


Type of screw / size		FBS II US R / FBS II SK R / FBS II P R				
		6	8	10	12	
Thread outer diameter	$d_a$	[mm]	7,8	10,3	12,5	14,6
Core diameter	$d_k$		5,6	7,5	9,4	11,1
Shaft diameter	$d_s$		6,0	8,0	9,9	11,7

Material Tip: hardened steel;  
Shaft and head: stainless steel EN 10088-1:2023

Coating Tip: red colour

Hexagon head with formed washer (US/US TX)		
Pan head (P)		
Countersunk Head (SK)		

**Head Marking (example)**

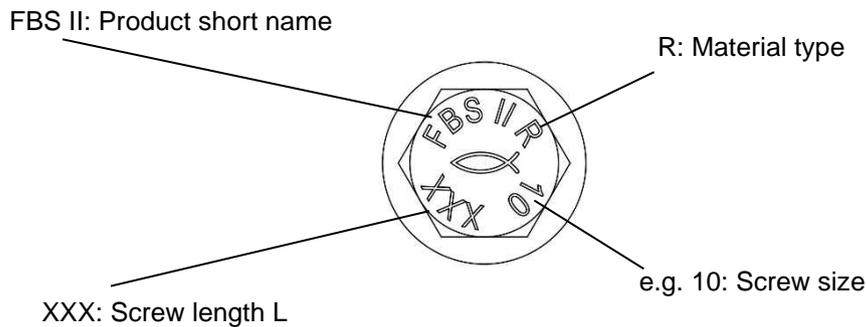

(Figure not to scale)

**fischer concrete screw UltraCut FBS II R**

**Product description**  
Geometry and material

**Annex A 2**

Appendix 5 / 14

## Specification of intended use:

Size	FBS II R								
	6	8	10			12			
Nominal embedment depth [mm]	60	50	65	55	65	85	60	75	100
Hammer drilling 	✓								
Hollow drilling 	- 1)	✓							
Diamond drilling 									
Static and quasi-static loads	✓								
Cracked and uncracked concrete									
Fire exposure									
Seismic performance category C1	✓	- 1)	✓	- 1)	✓	- 1)	✓	- 1)	✓
Seismic performance category C2	- 1)		✓	- 1)	✓	- 1)	✓	- 1)	✓

1) No performance assessed

### Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres (cracked or uncracked) according to EN 206:2013+A2:2021
- Strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021

### Use conditions (Environmental conditions):

- Structures subjected to dry internal conditions (FBS II R)
- For all other conditions according to EN 1993-1-4:2006 + A1:2015, corresponding to corrosion resistance class  
- CRC III: for FBS II R

### Design:

- The structural design according to EN 1992-4:2018 are conducted under responsibility of a designer experienced in the field of anchorages and concrete works.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the screw relative to reinforcement or to supports, etc.).
- Design of fastenings according to EN 1992-4:2018 and EOTA Technical Report TR 055:2018

**fischer concrete screw UltraCut FBS II R**

**Intended use**  
Specification of intended use


**Annex B 1**

Appendix 6 / 14

**Table B2.1: Installation parameters**

FBS II R		6	8		10			12		
Nominal embedment depth	$h_{nom}$	60	50	65	55	65	85	60	75	100
Nominal drill hole diameter	$d_0$	6	8		10			12		
Cutting diameter of drill bits		6,40	8,45		10,45			12,50		
Cutting diameter for diamond drillers	$d_{cut} \leq$	- 1)	8,10		10,30			12,30		
Clearance hole diameter	$d_f$	8,0	10,6 – 12,0		12,8 – 14,0			14,8 – 16,0		
Wrench size (US)	SW	10 / 13	13		15			17		
TX-size (SK / P / US TX))	TX	30	40		50			-		
Countersunk head diameter	$d_h$	13,3	18		21					
Countersunk diameter in fixture	$d_c$	15,2	20		23					
Drill hole depth		70	60	75	65	75	95	70	85	110
Drill hole depth (with adjustable setting)	$h_1 \geq$	- 1)	70	85	75	85	105	80	95	120
Thickness of fixture	$t_{fix} \leq$	L - $h_{nom}$								
Length of screw	$L_{min} =$	65	50	65	55	65	85	60	75	100
	$L_{max} =$	400	400	415	405	415	435	410	425	450
Torque impact screw driver	$T_{imp,max}$	240	450					650		
Torque impact screw driver (with adjustable setting process)	$T_{imp,max}$	- 1)	300					450		

1) No performance assessed

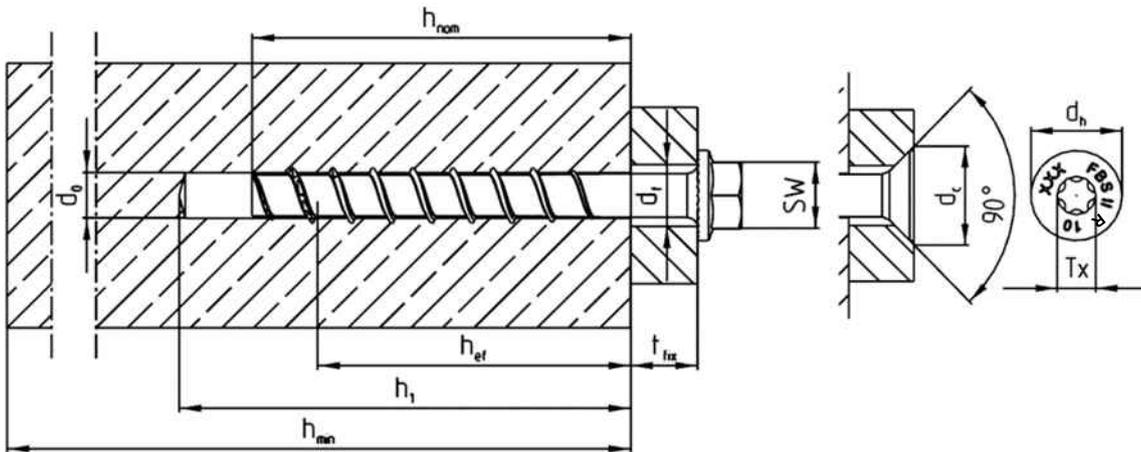

(Figure not to scale)


**fischer concrete screw UltraCut FBS II R**

**Intended use**  
Installation parameters

**Annex B 2**

Appendix 7 / 14


# Installation instruction part 1 FBS II 8/10/12 R



## Step 1: Drilling of the hole:


Drill the hole using hammer drill, hollow drill or diamond core drill

Drill hole diameter  $d_0$  and drill hole depth  $h_1$  according to table B2.1




## Step 2: Cleaning of the drill hole - horizontal:

Clean the drill hole. This step can be omitted in the preparation of the hole by using a hollow drill bit or diamond core drill. (recommendation: use the fischer FHD hollow drill bit)

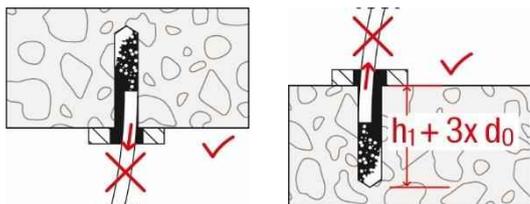

## Step 2: Cleaning of the drill hole - vertical:

Cleaning of the drill hole can be omitted, if drilling vertically upwards or if drilling vertically downwards and the hole depth has been increased. It is recommended to increase the drill hole depth by an additional  $3 \times \text{drilling } \varnothing$  when drilling vertically downwards.

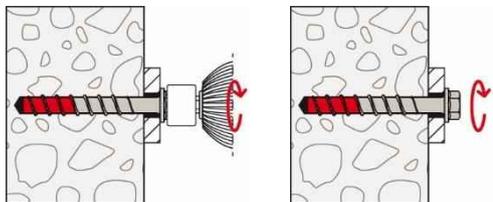


## Step 3: Installation:

Turn in until the head is in contact with the fixture.

Installation with any torque impact screw driver up to the maximum mentioned torque moment ( $T_{\text{imp,max}}$  according to table B2.1).

Alternatively, all other tools without an indicated torque moment are allowed (e.g. ratchet spanner). The indicated torque moments  $T_{\text{imp,max}}$  for impact screw driver are not decisive for manual installation.



## Step 4: Checking of the correct installation:

After installation a further turning of the screw must not be possible. The head of the screw must be in contact with the fixture and is not damaged




fischer concrete screw UltraCut FBS II R

Intended use  
Installation Instructions

Annex B 3

Appendix 8 / 14

# Installation instruction part 2 FBS II 8/10/12 R



## Adjustment


Optional:

It is permissible to adjust the screw twice.

Therefore, the screw may be untightened to a maximum of  $L_{adj} = 20$  mm off the surface of the initial fixture. The total permissible thickness of shims added during the adjustment process

is  $t_{adj} = 10$  mm.

The required nominal anchoring depth  $h_{nom}$  must be kept after the adjustment process. (see also annex B 3)



## Filling of the annular gap

For seismic performance category C2 applications:

The gap between screw shaft and fixture must be filled with mortar; mortar compressive strength  $\geq 50$  N/mm<sup>2</sup>

(e. g. FIS V Plus, FIS HB, FIS SB or FIS EM Plus). As an aid for filling the gap, the filling disc FFD is recommended.

fischer concrete screw UltraCut FBS II R


Intended use

Installation Instructions

Annex B 4

Appendix 9 / 14


# Installation instruction FBS II 6 R



## Step 1: Drilling of the hole:


Drill the hole using hammer drill

Drill hole diameter  $d_0$  and  
drill hole depth  $h_1$  according to table B2.1



## Step 2: Cleaning of the drill hole:


Clean the drill hole.



## Step 3: Installation:

Turn in until the head is in contact with the fixture.

Installation with any torque impact screw driver up to the  
maximum mentioned torque moment ( $T_{imp,max}$  according to  
table B2.1).



## Step 4: Checking of the correct installation:

After installation a further turning of the screw must not be  
possible. The head of the screw must be in contact with the  
fixture and is not damaged

fischer concrete screw UltraCut FBS II R

Intended use  
Installation Instructions

Annex B 5

Appendix 10 / 14

<b>Table C1.1: Characteristic values for static and quasi-static action</b>												
<b>FBS II R</b>			<b>6</b>		<b>8</b>		<b>10</b>			<b>12</b>		
Nominal embedment depth	$h_{nom}$	[mm]	60	50	65	55	65	85	60	75	100	
<b>Steel failure for tension load and shear load</b>												
Characteristic resistance	$N_{Rk,s}$	[kN]	19,3	27,8		43,8			67,7			
Partial factor	$\gamma_{Ms,N}$	-	1,5									
Characteristic resistance	$V^0_{Rk,s}$	[kN]	12,6	18,0	27,8	13,2	19,3	36,6	20,4	40,1	45,8	
Partial factor	$\gamma_{Ms,V}$	[-]	1,25									
Factor for ductility	$k_7$		0,75									
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	16,1	31,3		68,5			112,8			
<b>Pullout failure</b>												
Characteristic resistance in concrete C20/25	uncracked	$N_{Rk,p}$	[kN]	10,0	7,0	14,0	8,5	14,0	$\geq N^0_{Rk,c^{(1)}}$	10,0	12,0	$\geq N^0_{Rk,c^{(1)}}$
	cracked	$N_{Rk,p}$	[kN]	4,0	4,0	9,0	4,5	6,0	16,0	4,5	11,0	$\geq N^0_{Rk,c^{(1)}}$
Increasing factors concrete	C25/30	$\psi_c$	[-]	1,07	1,12							
	C30/37			1,13	1,22							
	C35/45			1,18	1,32							
	C40/50			1,23	1,41							
	C45/55			1,28	1,50							
	C50/60			1,32	1,58							
Installation factor	$\gamma_{inst}$	[-]	1,4	1,0								
<b>Concrete cone failure and splitting failure; concrete pryout failure</b>												
Effective embedment depth	$h_{ef}$	[mm]	37	40	52	43	51	68	47	60	81	
Factor for uncracked concrete	$k_{ucr,N}$	[-]	11,0									
Factor for cracked concrete	$k_{cr,N}$		7,7									
Characteristic edge distance	$c_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$									
Characteristic spacing	$s_{cr,N}$		$3 \cdot h_{ef}$									
Characteristic resistance for splitting	$N^0_{Rk,sp}$	[kN]	$\min\{N^0_{Rk,c}, N_{Rk,p}\}$	12,0	18,4	13,0	17,9	$\geq N^0_{Rk,c^{(1)}}$	15,8	22,9	$\geq N^0_{Rk,c^{(1)}}$	
Characteristic edge distance for splitting	$c_{cr,sp}$	[mm]	$1,78 \cdot h_{ef}$	$1,5 \cdot h_{ef}$								
Characteristic spacing for splitting	$s_{cr,sp}$		$3 \cdot h_{ef}$									
Factor for pryout failure	$k_8$	[-]	2,6	1,0			2,0	1,0	2,0			
Installation factor	$\gamma_{inst}$		1,4 <sup>2)</sup>	1,0								
<b>Concrete edge failure</b>												
Effective length in concrete	$l_f$	[mm]	46	50	65	55	65	85	60	75	100	
Nominal diameter of screw	$d_{nom}$		6	8		10			12			
<b>Adjustment</b>												
Maximum thickness of shims	$t_{adj}$	[mm]	- <sup>3)</sup>			10						
Maximum number of adjustments	$n_a$	[-]	- <sup>3)</sup>			2						
<sup>1)</sup> $N^0_{Rk,c}$ according to EN 1992-4:2018 <sup>2)</sup> Only for concrete cone failure and splitting failure; concrete pryout failure according to EN 1992-4:2018, Table 4.1 <sup>3)</sup> No performance assessed												
<b>fischer concrete screw UltraCut FBS II R</b>									<b>Annex C 1</b>			
<b>Performances</b> Characteristic values for static and quasi-static action												
									Appendix 11 / 14			

<b>Table C2.1: Characteristic values for Seismic Performance Category C1</b>						
<b>FBS II R</b>			<b>6</b>	<b>8</b>	<b>10</b>	<b>12</b>
Nominal embedment depth	$h_{nom}$	[mm]	60	65	85	100
<b>Steel failure for tension load and shear load C1</b>						
Characteristic resistance	$N_{RK,s,C1}$	[kN]	19,3	27,8	43,8	67,7
	$V_{RK,s,C1}$		7,5	18,1	29,3	36,6
Without filling of the annular gap	$\alpha_{gap}$	[-]	0,5			
With filling of the annular gap <sup>1)</sup>			1,0			
<b>Pullout failure</b>						
Characteristic resistance in cracked concrete	$N_{RK,p,C1}$	[kN]	3,5	9,0	16,0	$\geq N_{RK,c}^{0,2)}$
<b>Concrete cone failure</b>						
Effective embedment depth	$h_{ef}$	[mm]	37	52	68	81
Concrete cone failure	Edge distance		$C_{cr,N}$	1,5 · $h_{ef}$		
	Spacing		$S_{cr,N}$	3 · $h_{ef}$		
Installation factor	$\gamma_{inst}$	[-]	1,4	1,0		
<b>Concrete pryout failure</b>						
Factor for pryout failure	$k_8$	[-]	2,6	1,0	2,0	
<b>Concrete edge failure</b>						
Effective length in concrete	$l_f$	[mm]	46	65	85	100
Nominal diameter of screw	$d_{nom}$		6	8	10	12

<sup>1)</sup> Filling of the annular gap according to annex B 4

<sup>2)</sup>  $N_{RK,c}^0$  according to EN 1992-4:2018

<b>Table C2.2: Characteristic values for Seismic Performance Category C2</b>						
<b>FBS II R</b>			<b>6</b>	<b>8</b>	<b>10</b>	<b>12</b>
Nominal embedment depth	$h_{nom}$	[mm]	- <sup>2)</sup>	65	85	100
<b>Steel failure for tension load and shear load C2</b>						
Characteristic resistance	$N_{RK,s,C2}$	[kN]	- <sup>2)</sup>	27,8	43,8	67,7
	$V_{RK,s,C2}$			9,7	8,8	19,7
With filling of the annular gap <sup>1)</sup>	$\alpha_{gap}$	[-]	1,0			
<b>Pullout failure</b>						
Characteristic resistance in cracked concrete	$N_{RK,p,C2}$	[kN]	- <sup>2)</sup>	2,8	5,0	7,3
<b>Concrete cone failure</b>						
Effective embedment depth	$h_{ef}$	[mm]	- <sup>2)</sup>	52	68	81
Concrete cone failure	Edge distance		$C_{cr,N}$	- <sup>2)</sup>	1,5 · $h_{ef}$	
	Spacing		$S_{cr,N}$		3 · $h_{ef}$	
Installation factor	$\gamma_{inst}$	[-]	1,0			
<b>Concrete pryout failure</b>						
Factor for pryout failure	$k_8$	[-]	- <sup>2)</sup>	1,0	2,0	
<b>Concrete edge failure</b>						
Effective length in concrete	$l_f = h_{nom}$	[mm]	- <sup>2)</sup>	65	85	100
Nominal diameter of screw	$d_{nom}$			8	10	12

<sup>1)</sup> Filling of the annular gap according to annex B 4. Application without filling of the annular gap not allowed.

<sup>2)</sup> No performance assessed

<b>fischer concrete screw UltraCut FBS II R</b>	<b>Annex C 2</b>  Appendix 12 / 14
<b>Performances</b> Characteristic values for Seismic Performance Category C1 and C2	

<b>Table C3.1: Characteristic values for resistance to fire</b>														
<b>FBS II R</b>			<b>6</b>	<b>8</b>		<b>10</b>			<b>12</b>					
Nominal embedment depth	$h_{nom}$	[mm]	60	50	65	55	65	85	60	75	100			
<b>Steel failure for tension load and shear load (<math>F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}</math>)</b>														
Characteristic resistance for the head shapes	US US TX ≥SW13	$F_{Rk,s,fi}$	R30	[kN]	2,1	2,3	6,4	3,5	11,0	4,6	15,2			
			R60		1,7	1,8	4,7	2,7	8,1	3,7	11,2			
			R90		1,2	1,3	2,9	2,0	5,2	2,7	7,3			
			R120		1,0	1,0	2,0	1,6	3,8	2,2	5,3			
	SK/P <sup>1)</sup> US SW10 <sup>1)</sup>	$F_{Rk,s,fi}$	R30	[kN]	1,8	2,1	3,0	No performance assessed						
			R60		1,4	1,7	2,3							
			R90		1,1	1,2	1,6							
			R120		0,9	1,0	1,2							
	US US TX ≥SW13	$M^0_{Rk,s,fi}$	R30	[Nm]	1,7	2,6	7,2	7,6	15,4	16,8	25,3			
			R60		1,4	2,0	5,2	6,0	11,4	13,3	18,7			
			R90		1,0	1,5	3,3	4,4	7,3	9,8	12,1			
			R120		0,8	1,2	2,3	3,6	5,3	8,0	8,8			
		SK/P <sup>1)</sup> US SW10 <sup>1)</sup>	$M^0_{Rk,s,fi}$		R30	[Nm]	1,5	2,4	4,2	No performance assessed				
					R60		1,2	1,9	3,2					
					R90		0,9	1,4	2,2					
					R120		0,7	1,1	1,7					
<b>Pullout failure</b>														
Characteristic resistance	$N_{Rk,p,fi}$	R30	[kN]	1,0	1,7	2,4	2,1	3,5	4,3	2,5	3,0	6,3		
		R60												
		R90												
		R120											0,8	1,4
<b>Concrete cone failure</b>														
Characteristic resistance	$N_{Rk,c,fi}$	R30	[kN]	1,4	1,6	3,4	2,1	3,2	6,6	2,6	4,8	10,2		
		R60												
		R90												
		R120											1,1	1,3
<b>Edge distance</b>														
R30 to R120	$c_{cr,fi}$	[mm]	$2 \cdot h_{ef}$											
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm														
<b>Spacing</b>														
R30 to R120	$s_{cr,fi}$	[mm]	$2 \cdot c_{cr,fi}$											
<b>Concrete pryout failure</b>														
R30 to R120	$k_8$	[-]	2,6	1,0		2,0	1,0	2,0						
The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given value. <sup>1)</sup> Only FBS II 6 R														
<b>fischer concrete screw UltraCut FBS II R</b>									<b>Annex C 3</b>					
<b>Performances</b> Characteristic values for resistance to fire														
									Appendix 13 / 14					

**Table C4.1: Displacements due to tension loads (static and quasi-static)**

FBS II R			6	8			10			12		
Nominal embedment depth	$h_{nom}$	[mm]	60	50	65	55	65	85	60	75	100	
Tension load in uncracked concrete	N	[kN]	5,0	3,5	7,1	4,2	7,0	11,9	5,0	6,0	17,1	
Displacement in uncracked concrete	$\delta_{N0}$	[mm]	0,1	0,5	0,7	0,4	0,6	0,8	1,0	0,9	1,25	
	$\delta_{N\infty}$		0,4	0,7	0,7	0,8	0,8	0,8	1,25	1,25	1,25	
Tension load in cracked concrete	N	[kN]	2,8	3,5	4,5	4,2	7,0	8,1	5,0	6,0	12,0	
Displacement in cracked concrete	$\delta_{N0}$	[mm]	0,1	0,6	0,4	0,4	0,6	0,7	0,9	0,9	1,4	
	$\delta_{N\infty}$		0,5	1,5	1,1	1,0	1,8	1,8	1,4	1,7	1,9	

**Table C4.2: Displacements due to shear loads (static and quasi-static)**

FBS II R			6	8			10			12		
Nominal embedment depth	$h_{nom}$	[mm]	60	50	65	55	65	85	60	75	100	
Shear load in cracked and uncracked concrete	V	[kN]	7,8	11,0	15,9	10,4	11,9	20,9	12,7	24,9	26,2	
Displacement (the gap between fastener and fixture is subtracted)	$\delta_{V0}$	[mm]	2,2	4,1	2,7	1,2	1,2	3,5	1,1	2,5	2,9	
	$\delta_{V\infty}$		3,4	6,2	4,1	1,8	1,8	5,3	1,7	3,8	4,4	

**Table C4.3: Displacements due to tension loads (Seismic Performance Category C2)**

FBS II R			6	8			10			12		
Nominal embedment depth	$h_{nom}$	[mm]	- <sup>1)</sup>	65			85			100		
Displacement DLS	$\delta_{N,C2}$ (DLS)			0,9			0,9			1,1		
Displacement ULS	$\delta_{N,C2}$ (ULS)			2,5			2,7			3,2		

**Table C4.4: Displacements due to shear loads (Seismic Performance Category C2)**

FBS II R			6	8			10			12		
Nominal embedment depth	$h_{nom}$	[mm]	- <sup>1)</sup>	65			85			100		
Displacement DLS	$\delta_{V,C2}$ (DLS)			1,6			1,7			2,6		
Displacement ULS	$\delta_{V,C2}$ (ULS)			5,0			3,8			6,6		

<sup>1)</sup> No performance assessed

**Table C4.5: Minimum thickness of concrete members, minimum spacing and edge distance**

FBS II R			6	8			10			12		
Nominal embedment depth	$h_{nom}$	[mm]	60	50	65	55	65	85	60	75	100	
Minimum thickness of concrete member	$h_{min}$		100	100	120	100	120	140	110	130	150	
Minimum spacing	$s_{min}$		35			40			50			
Minimum edge distance	$c_{min}$		35			40			50			

**fischer concrete screw UltraCut FBS II R**

**Performances**

Displacements due to tension and shear loads;  
Minimum thickness of concrete members, minimum spacing and edge distance

**Annex C 4**

Appendix 14 / 14