



DICHIARAZIONE DI PRESTAZIONE

DoP W0024

Per connettore fischer CSC 45

IT

1. <u>Codice di identificazione unico del prodotto-tipo:</u>	DoP W0024
2. <u>Usi previsti:</u>	Kit per solai compositi legno-calcestruzzo usati come elementi portanti in edifici sotto carichi prevalentemente statici in classe di servizio 1 e 2 secondo EN 1995-1-1 (Eurocodice 5).
3. <u>Fabbricante:</u>	fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Germania
4. <u>Mandatario:</u>	-
5. <u>Sistemi di VVCP:</u>	1
6. <u>Documento per la valutazione europea:</u> Valutazione tecnica europea: Organismo di valutazione tecnica: Organismi notificati:	EAD 130090-00-0303 ETA-21/0154; 2025-06-12 ETA-Danmark A/S 2873 TU Darmstadt
7. <u>Prestazioni dichiarate:</u> Caratteristiche essenziali del kit solaio composito legno-calcestruzzo secondo EAD 130090-00-0303, Tabella 1	
Resistenza meccanica e stabilit� (BWR 1), Sicurezza e accessibilit� in uso (BWR 4)	
Resistenza meccanica:	Allegati B1 - B4
Stabilit� dimensionale:	NPD
Rigidezza:	NPD
Sicurezza in caso di incendio (BWR 2)	
Reazione al fuoco:	Classe (A1)
Igiene, salute e ambiente (BWR 3)	
Permeabilit� al vapore:	NPD
Risparmio energetico e ritenzione del calore (BWR 6)	
Resistenza termica:	NPD
Permeabilit� all'aria:	NPD
Inerzia termica:	NPD
Caratteristiche essenziali del fissaggio a forma di perno secondo EAD 130090-00-0303, Tabella 3	
Resistenza meccanica e stabilit� (BWR 1), Sicurezza in uso (BWR 4)	
Materiale:	Allegato 2 (3.1)
Geometria:	Allegato B3
Resistenza meccanica:	Allegato B3
Rigidezza meccanica:	Allegato B3
Protezione contro la corrosione:	Allegato 2 (3.1)
Resistenza a taglio:	Allegato B2
8. <u>Documentazione tecnica appropriata e/o documentazione tecnica specifica:</u>	-

La prestazione del prodotto sopra identificato   conforme all'insieme delle prestazioni dichiarate. La presente dichiarazione di prestazione   emessa, in conformit  al regolamento (UE) n. 305/2011, sotto la sola responsabilit  del fabbricante sopra identificato.

Firmato a nome e per conto del fabbricante da:

Dr. Ronald Mihala Direttore generale Ricerca e Sviluppo  
Tumlingen, 2025-07-10

Dieter Pfaff, Capo della Federazione Internazionale della Produzione e Gestione della Qualit 

Questa Dichiarazione di Prestazione (DoP)   stata preparata in varie lingue. In caso di contestazioni sull'interpretazione, prevarr  sempre la versione inglese.

L'Appendice include informazioni volontarie e complementari in lingua inglese che superano i requisiti di legge (lingua specificata in modo neutrale).

## II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

### 1 Technical description of product

This ETA is an assessment of the fischer CSC 45 connectors for wood-concrete composite slab kits. The connector is composed of a socket made of polyamide and two galvanised steel screws. The nominal diameter of the screws is 8 mm. Shape and tolerances of the connectors are given in Annex C. The use of screws with a different nominal diameter is not covered by this ETA.

The kits are individually designed to meet the requirements put on the works.

fischerwerke GmbH delivers the fischer CSC 45 connectors for the composite action to be used as kit components. The composite members may be prefabricated at factory, or they may be composed at the building site. The proper function of the wood-concrete composite slabs provides for the following components to be added in the factory or at the building site:

Base Material:

- Timber members, e.g., glued laminated timber according to EN 14080:2013, or glued solid timber, sawn softwood timber according to EN 14081-1:2016/A1:2019, Laminated Veneer Lumber according to EN 14374:2004 or to ETA, cross laminated timber according to ETA or light composite wood-based beams according to ETA. Hardwood sawn timber according to EN 14081-1:2016/A1:2019 is allowed only with fischer Power-Fast, fischer Power-Full, fischer PowerFast II and fischer PowerFull II screws. The screws shall be screwed into softwood without predrilling or after pre-drilling with a diameter not larger than the inner thread diameter for the length of the threaded part and with a maximum of the smooth shank diameter for the length of the smooth shank. The screws shall be driven into hardwood after pre-drilling with a suitable diameter. For details refer to the relevant ETA.

Moulding:

- In the case of concrete cast at the building site: optional intermediate layer between the concrete and the timber as formwork, e.g., timber boards or wood-based panel. Lateral moulding along the edges of the slab. This moulding has no function in the final product
- In the case of prefabricated concrete slab: no intermediate layer between timber and concrete is needed.

- No essential characteristics are assessed for the moulding.

Finalisation of wood-concrete composite slab kit:

- Concrete slab, according to EN 206:2013/A2:2021, and reinforcement according to EN 10080:2005 and national regulations either prefabricated or cast at the building site. The minimum concrete strength class is C20/25 and LC 20/22.
- The concrete slab is not part of the kit. No characteristics are assessed for the concrete slab.

Finished floor or ceiling covering as well as possible sound reducing courses are not part of the kit.

The concrete slab is generally stressed at combined compression and bending while the timber beam is stressed at combined tension and bending

This ETA covers screws for composite members with minimum concrete flange depths which comply with the regulations on the minimum slab depths in the place of use (national regulations). Recommended values are not less than 50 mm and not more than one third of the timber member' height.

Typical spans for the construction are up to 8 m with sawn softwood timber members, 10 m with LVL members and with glulam members.

A typical composite member is shown in figure A.1 of Annex A. A connector is shown in figure A.2 and A.3 of Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document (hereinafter EAD)

fischer CSC 45 connectors are intended to be used in structural composite members such as floor, roof, or wall constructions in service classes 1 and 2 as defined in EN 1995-1-1:2004/A2:2014 subject to static or quasi static loading. In addition, use class 3.1 as defined in EN 335:2013 (exterior, above ground, protected) is possible, as balconies, depending on national provisions.

The provisions made in this European Technical Assessment are based on an assumed working life of fischer CSC 45 connectors for wood-concrete composite floors of 50 years, provided that the conditions laid down in this ETA for the installation, use and maintenance are met.

The indications given on the working life cannot be interpreted as a guarantee given by the manufacturer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works

### 3 Performance of the product and references to the methods used for its assessment

Characteristic	Assessment of characteristic
<b>3.1 Mechanical resistance and stability (BWR 1*)</b>	
Structural performance	<p>Wood-concrete composite slabs including fischer CSC 45 connectors are used and manufactured according to an individual design made by a structural engineer responsible for the design of works on a case-by-case basis. Wood-concrete composite floors may function as directly load bearing and structural bracing members. The structural performance of them shall be considered in accordance with the limit state design principles specified in Eurocodes.</p> <p>The calculation method of the mechanical resistance of the slab kit shall be based on EN 1995-1-1:2004+AC:2006+A1:2008+A2:2014 and EN 1992-1-1:2023 considering the resistance of the dowel-type fasteners.</p> <p>The screws included in the fischer CSC 45 connector are made of case-hardened steel as specified in the control plan and corrosion protected with a zinc coating.</p> <p>Mechanical properties of CSC 45 connectors and applicable creep and duration of load factors for composite members are given in Annex B.</p> <p>Geometry of the connector is defined in Annex C.</p>
<b>3.2 Safety in case of fire (BWR 2)</b>	
Reaction to fire	<p>Screws for fischer CSC 45 connectors are made from steel classified as <b>Euroclass A1</b> in accordance with EN 13501-1:2018 and Commission Delegated Regulation 2016/364.</p>
<hr/>	
*) See additional information in section 3.3 – 3.4.	
No other BRW's are relevant for this ETA	
<b>3.3 General aspects</b>	
<p>fischerwerke GmbH delivers fischer CSC 45 connectors intended to be used as components in wood-concrete composite slabs in accordance with the provisions of this European Technical Assessment. The fischer CSC 45 connectors are manufactured in the factory in accordance with the provisions of this European Technical Assessment as identified during inspection of the plant.</p> <p>fischer CSC 45 connectors shall be installed on the basis of a specific structural design for each composite slab</p>	<p>installation. Load bearing capacities to be used in the design are given in Annex B.</p> <p>The design also shall take into account any aspects regarding installation of the kit components, as any temporary bracing and supporting. Wood-concrete composite slabs shall be installed by appropriately qualified personnel, following the installation plan. Only screws without any defects are allowed to be used. Before concrete is poured, the person responsible for the design of the works shall check the set of the CSC 45 connectors to be in accordance with the design. The manufacturer shall ensure that the information of these</p>

provisions is given to those concerned. For details of installation of fischer screws refer to relevant ETA.

### **3.4 Aspects related to the performance of the product**

#### **3.4.1 Corrosion protection in service class 1 and 2.**

Durability of the finished composite slab is not covered by this ETA.

Durability of the fischer CSC 45 connectors is provided by the protective zinc coating of the screws for a minimum thickness of 5 µm.

The material specification of the steel screws is deposited with ETA-Danmark.

## **4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base**

### **4.1 AVCP system**

According to the decision 2000/447/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 1.

## WOOD-CONCRETE COMPOSITE SLAB COMPOSED WITH FISCHER CSC 45 CONNECTORS

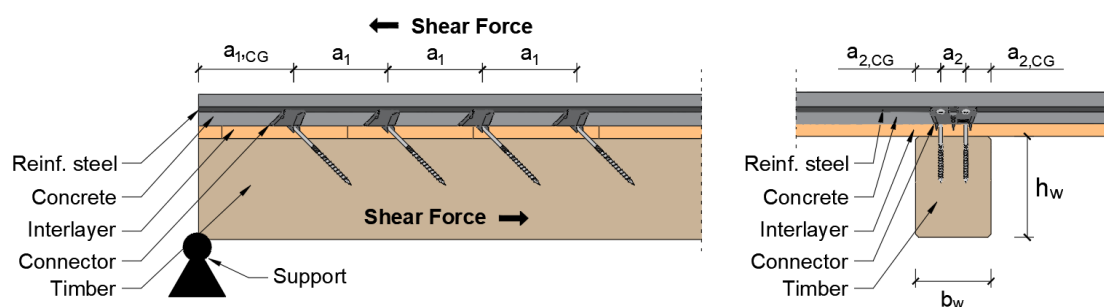


Figure A1.1: Elevation on (left) and cross-section through (right) a composite member with fischer CSC 45 connectors

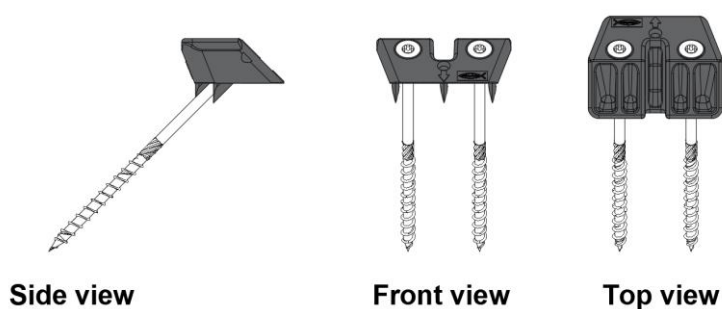


Figure A1.2: fischer CSC 45 connectors with fischer Power-Fast and PowerFast II screws

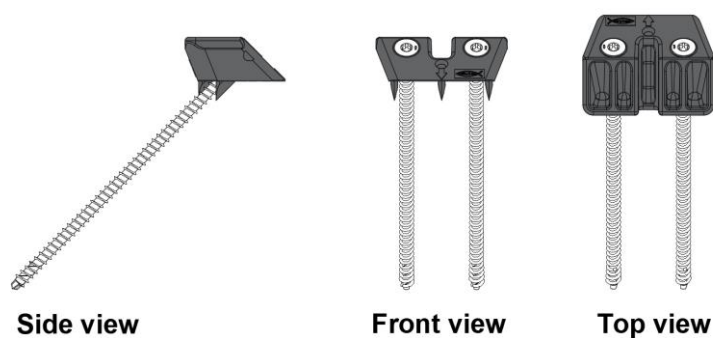


Figure A1.3: fischer CSC 45 connectors with fischer Power-Full and PowerFull II screws

Table A1.1 – Minimum spacing, end and edge distances for fischer CSC 45 connectors in mm

Nominal diameter of the screws $d$	8 mm
Minimum spacing parallel to grain $a_1$	100 mm
Minimum end distance $a_{1,CG}$	80 mm
Spacing between the two screws $a_2$	40 mm
Minimum edge distance $a_{2,CG}$	32 mm
Minimum width of the timber beam $b_w$	104 mm
Minimum height of the timber beam $h_w$	96 mm

The geometry of the connector is given in Annex C.

(Fig. not to scale)

fischer CSC 45	<b>Annex A1</b>
<b>Product description</b> Installed conditions, system components and installation parameters	

## MECHANICAL PROPERTIES

### Structural model

Composite members with fischer CSC 45 connectors are to be designed considering the influence of the slip occurring in the joints. The calculation method for the load bearing capacity and the deformation of mechanically jointed beams shall be based on EN 1995-1-1:2004+AC:2006+A1:2008+A2:2014 and EN 1992-1-1:2023 taking into account the resistance of the dowel-type fasteners. Alternative methods for the calculation based on numerical models are also applicable.

Friction between timber and concrete may be taken into account, if no acoustic interlayer is placed between timber and concrete. The friction coefficient may in this case be assumed as  $\mu = 0,25$ .

Apart from the design of the composite member, the load-carrying-capacity of the concrete layer spanning between the timber beams and the shear capacity of the timber member in the perimeter area around the screws should be checked. A proposed effective width of the concrete slab  $b_{eff}$  according to EN 1992-1-1:2023 is reported in Table B1.1.

*Table B1.1 – Evaluation of  $b_{eff}$  for timber-concrete-joints with fischer CSC 45 connectors*

$b_{eff} = b_w + 0,2 l_0 \leq s$	
where:	
$b_{eff}$	is the effective width of the concrete slab
$b_w$	is the width of the timber beam
$l_0$	is the span of the timber beam
$s$	is the spacing between two consecutive timber beams

Alternative methods for the calculation are also applicable.

### Design of the wood-concrete composite slab



The design of the wood-concrete composite slab in the ultimate and the serviceability limit states shall take into account the influence of creep, concrete shrinkage and moisture changes. The verification of the limit states is to be performed both for the initial state ( $t = 0$ ) and the final state ( $t = \infty$ ). The influence of creep and moisture changes shall be taken into account by reducing the modulus of elasticity of the timber and concrete and the slip modulus to be used in calculations analogous with EN 1995-1-1:2004+AC:2006+A1:2008+A2:2014 and EN 1992-1-1:2023.

The values of the deformation factors  $k_{def}$  for timber and fischer CSC 45 connectors should be taken from EN 1995-1-1:2004+AC:2006+A1:2008+A2:2014. The values of the deformation factor  $\varphi$  for concrete should be taken from EN 1992-1-1:2023. For composite beams in service class = 1,  $\varphi$  for concrete may be taken = 2,5. For prefabricated concrete slabs, the concrete shrinkage may be disregarded.

fischer CSC 45	<b>Annex B1</b>
<b>Intended use</b> Structural model. Design of the wood-concrete composite slab	

For timber-concrete composite joints made with fischer CSC 45 connectors the design load bearing capacity per connector  $F_{v,Rd}$  parallel to the shear plane should be taken from Table B2.1 adopting the mechanical parameters from Table B3.1.

**Table B2.1 – Evaluation of  $F_{v,Rd}$  for timber-concrete-joints with fischer CSC 45 connectors**

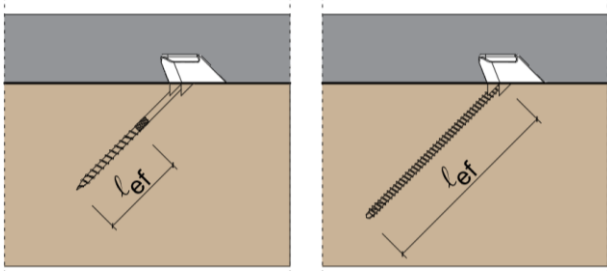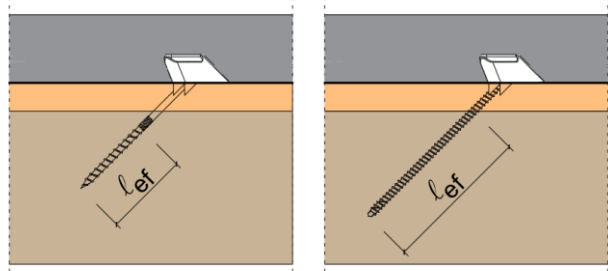$F_{v,Rd} = \min \left\{ \begin{array}{l} n_{ef} \cdot F_{ax,d} (\cos \alpha + \mu \cdot \sin \alpha) \\ F_{c,d} \end{array} \right.$	
<p>where:</p> <p><math>F_{v,Rd}</math> is the design shear load-carrying capacity per connector [N];</p> <p><math>n_{ef}</math> <math>n_{ef} = 2</math>; is the effective number of screws according to EN 1995-1-1:2004+AC:2006+A1:2008+A2:2014;</p> <p><math>\alpha</math> <math>\alpha = 45^\circ</math>; is the angle between screw axis and direction of grain;</p> <p><math>\mu</math> is the friction coefficient;</p> <p><math>F_{ax,d}</math> is the design axial load bearing capacity of a single screw [N];</p> $F_{ax,d} = \min \left\{ \begin{array}{l} k_{ax} \cdot f_{ax,k} \cdot d \cdot \ell_{ef} \cdot \left( \frac{\rho_k}{350} \right)^{0,8} \cdot \frac{k_{mod}}{\gamma_{M,EC5}} \\ f_{tens,k} / \gamma_{M,EC3} \end{array} \right.$ <p><math>k_{ax}</math> <math>k_{ax} = 1,0</math>; is the factor accounting the angle between screw axis and grain direction;</p> <p><math>f_{ax,k}</math> is the characteristic withdrawal parameter of the screws [N/mm<sup>2</sup>];</p> <p><math>f_{tens,k}</math> is the characteristic tensile strength of the screws [N];</p> <p><math>d</math> is the nominal diameter of the screws [mm];</p> <p><math>\ell_{ef}</math> is the effective length or threaded penetration of the screw in the timber member; if an intermediate layer is present and fully threaded screws are used, the effective length must be taken by the effective length penetrating the timber member only [mm];</p> <p><math>\rho_k</math> is the characteristic timber member density [kg/m<sup>3</sup>];</p> <p><math>k_{mod}</math> is the modification factor according to EN 1995-1-1:2004+AC:2006+A1:2008+A2:2014</p> <p><math>\gamma_{M,EC3}</math> is the partial factor for material according to EN 1993-1-8:2024;</p> <p><math>\gamma_{M,EC5}</math> is the partial factor for material according to EN 1995-1-1:2004+AC:2006+A1:2008+A2:2014;</p> <p><math>F_{c,d}</math> is the design shear load-carrying capacity due to concrete failure [N];</p> $F_{c,d} = 6,0 \cdot \sqrt{f_{ck}} / \gamma_{M,EC2}$ <p><math>f_{ck}</math> is the characteristic compressive cylinder strength of the concrete layer [N/mm<sup>2</sup>];</p> <p><math>\gamma_{M,EC2}</math> is the partial factor for material according to EN 1992-1-1:2023.</p>	
Direct contact between timber and concrete	With intermediate layer
	

(Fig. not to scale)

fischer CSC 45

**Annex B2**

**Intended use**

Specifications for design: Part 1



**Table B3.1 – Properties of screws employed in CSC 45 connector.**

Screw tradename	fischer Power-Fast	fischer Power-Full	fischer PowerFast II	fischer PowerFull II
Thread length	Partial thread	Full thread	Partial thread	Full thread
Nominal diameter [mm]	8,0	8,0	8,0	8,0
Inner core diameter [mm]	5,4	5,2	5,4	5,2
Characteristic tensile strength (capacity) $f_{tens,k}$ [kN]	19,1	25,0	23,0	26,4
Characteristic yield moment $M_{y,k}$ [Nmm]	20.057	25.000	22.200	30.200
Characteristic torsional strength $f_{tor,k}$ [Nmm]	25.000	28.000	28.000	28.000
Mean insertion moment $R_{tor,mean}$ [Nmm]	$\geq 37.500$	$\geq 42.000$	$\geq 42.000$	$\geq 42.000$
Characteristic withdrawal strength $f_{ax,k}$ [N/mm <sup>2</sup> ]	10,0	11,1	12,0	11,8

Other fischer screws with equal or greater mechanical performances may be used.

For timber-concrete composite joints made with fischer CSC 45 connectors the slip modulus  $K_{ser}$  per connector under service load parallel to the shear plane should be taken from Table B3.2 adopting the mechanical parameters from Table B4.1.

**Table B3.2 – Evaluation of  $K_{ser}$  for timber-concrete-joints with fischer CSC 45 connectors**

$K_{ser} = (1 + \mu) \cdot K_{\parallel} + (1 - \mu) \cdot K_{\perp}$	
where:	
$K_{\parallel}$	is the axial slip modulus per screw;
$K_{\perp}$	is the lateral slip modulus per screw;
$\mu$	is the friction coefficient;
$d$	is the nominal diameter of the screws in mm;
$\rho_m$	is the mean timber member density in kg/m <sup>3</sup> ;
$\ell_{ef}$	is the effective length of the screw in the timber member in mm; if an intermediate layer is present and fully threaded screws are used, the effective length must be taken by the effective length penetrating the timber member only;

fischer CSC 45

**Annex B3**

**Intended use**

Specifications for design: Part 1.

**Table B4.1 – Slip modulus of screws employed in CSC 45 connector, values in N/mm.**

	Wood-based material	fischer Power-Fast	fischer Power-Full	fischer PowerFast II	fischer PowerFull II
		Partial thread	Full thread	Partial thread	Full thread
K <sub>//</sub>	Softwood $\rho_k \geq 350 \text{ kg/m}^3$	$780 \cdot d^{0.2} \cdot \ell_{ef}^{0.4}$			
	Hardwood $\rho_k \geq 510 \text{ kg/m}^3$				
	LVL (EN 14374:2004) Soft- and Hardwood $\rho_k \geq 480 \text{ kg/m}^3$				
K <sub>⊥</sub>	Solid Timber, Glued-Laminated Timber Softwood and Hardwood (EN 338:2016, EN 15497:2014, EN 14080:2013)	$\rho_m^{1,5} \cdot d/23$		$\rho_m^{1,5} \cdot d/23$	
	LVL Soft- and Hardwood (EN 14374:2004)			$\rho_m^{1,5} \cdot d/20$	

### Resistance to fire

Simplified rules in EN 1995-1-2:2004 for calculation of resistance to fire in case of screws are applicable for constructions made with fischer CSC 45 connectors.

Thus, in design of works, fire resistance of the timber members may be determined according to EN 1995-1-2:2004/AC:2009 and the fire resistance of the concrete flange according to EN 1992-1-2:2023, if the national rules allow for calculation.

fischer CSC 45	<b>Annex B4</b>
<b>Intended use</b> Specifications for design: Part 1. Specifications for design: Part 2. Resistance to fire	

## CSC 45 CONNECTOR

### Geometry of connector

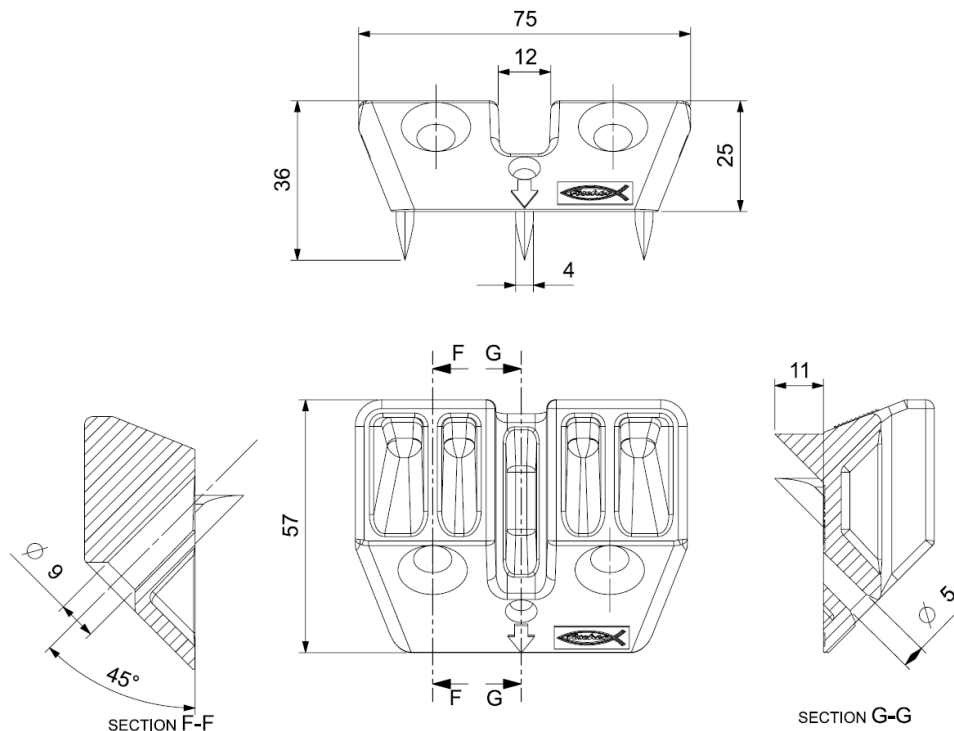


Figure C1.1 fischer CSC 45 connectors (dimensions in mm, production tolerance  $\pm 2\%$ ).

For details on the geometry of fischer Power-Fast, Power-Full, PowerFast II and PowerFull II screws refer to the relevant ETA.

### Installation of connector

Place CSC 45 connector on top of the timber beam or on top of the intermediate layer (if present, e.g., timber planking) and let the teeth at the bottom grasp the surface by hitting the connector with a hammer. If teeth do not provide enough anchoring (e.g., timber elements with very high density) use a nail or screw with diameter  $\leq 5$  mm in the central hole (see section G-G in Figure C1.1). Place the screws in the two side holes and screw them until a flush installation is reached. The tip of the screws must point to the midspan of the beam (see Figure C1.2). For details of installation of fischer screws refer to relevant ETA.

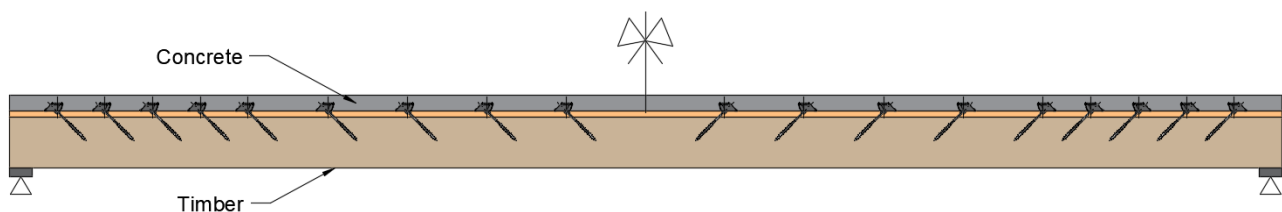


Figure C1.2 typical layout of CSC 45 connectors in a wood-concrete composite beam.

(Fig. not to scale)

fischer CSC 45

**Annex C1**

### Intended use

Geometry of connector. Installation of connector.