

## DICHIARAZIONE DI PRESTAZIONE

### DoP 0387

per il Sistema a Iniezione fischer FIS RC II / FIS RC II Low Speed (ancorante chimico per l'utilizzo nel calcestruzzo)

IT

1. Codice di identificazione unico del prodotto-tipo: **DoP 0387**
2. Usi previsti: **Fissaggio post-installato in calcestruzzo fessurato o non fessurato, vedi appendice, in particolare gli allegati da B1 - B10.**
3. Fabbricante: **fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Germany**
4. Mandatario: **-**
5. Sistemi di VVCP: **1**
6. Documento per la valutazione europea: **EAD 330499-02-0601, Edition 12/2023**  
Valutazione tecnica europea: **ETA-22/0501; 2025-09-23**  
Organismo di valutazione tecnica: **DIBt- Deutsches Institut für Bautechnik**  
Organismi notificati: **2873 TU Darmstadt**
7. Prestazioni dichiarate:  
**Resistenza meccanica e stabilità (BWR 1)**  
**Resistenza caratteristica al carico di tensione (carico statico e quasi-statico):**
  - 1) Resistenza alla rottura dell'acciaio: Allegato C1
  - 2) Resistenza alla rottura del calcestruzzo combinata con sfilamento: Allegati C2 - C4
  - 3) Resistenza alla rottura del cono di calcestruzzo: Allegato C2
  - 4) Distanza dal bordo per evitare lo splitting sotto carico: Allegato C2
  - 5) Robustezza: Allegati C2 - C4
  - 6) Massima coppia di installazione: Allegati B4
  - 7) Distanza dal bordo e interassi minimi: Allegati B3 - B5**Resistenza caratteristica al carico di taglio (carico statico e quasi statico):**
  - 8) Resistenza alla rottura dell'acciaio: Allegato C1
  - 9) Resistenza alla rottura per pry-out: Allegato C2
  - 10) Resistenza alla rottura del bordo di calcestruzzo: Allegato C2**Spostamenti con carichi a breve e a lungo termine:**
  - 11) Spostamenti con carichi a breve e a lungo termine: Allegato C5
  - 12) Resistenza nel calcestruzzo rinforzato con fibre d'acciaio: NPD**Resistenza e spostamenti caratteristici per le categorie di prestazione sismica C1 e C2:**
  - 13) Resistenza al carico di trazione, spostamenti, categoria C1: NPD
  - 14) Resistenza al carico di trazione, spostamenti, categoria C2: NPD
  - 15) Resistenza al carico di taglio, spostamenti, categoria C1: NPD
  - 16) Resistenza al carico di taglio, spostamenti, categoria C2: NPD**Sicurezza in caso di incendio (BWR 2)**
  - 17) Reazione al fuoco: Classe (A1)**Resistenza al fuoco:**
  - 18) Resistenza al fuoco alla rottura dell'acciaio (carico di trazione): NPD
  - 19) Resistenza al legame in condizioni di incendio: NPD
  - 20) Resistenza al fuoco alla rottura dell'acciaio (carico di taglio): NPD**Igiene, salute e ambiente (BWR 3)**
  - 21) Contenuto, emissione e/o rilascio di sostanze pericolose: NPD
8. Documentazione tecnica appropriata e/o documentazione tecnica specifica: **-**

La prestazione del prodotto sopra identificato è conforme all'insieme delle prestazioni dichiarate. La presente dichiarazione di prestazione è emessa, in conformità al regolamento (UE) n. 305/2011, sotto la sola responsabilità del fabbricante sopra identificato.

Firmato a nome e per conto del fabbricante da:



Dr. Ronald Mihala, Direttore generale Ricerca e Sviluppo  
Tumlingen, 2025-10-22



Dieter Pfaff, Capo della Federazione Internazionale della Produzione e Gestione della Qualità

Questa Dichiarazione di Prestazione (DoP) è stata preparata in varie lingue. In caso di contestazioni sull'interpretazione, prevarrà sempre la versione inglese.

L'Appendice include informazioni volontarie e complementari in lingua inglese che superano i requisiti di legge (lingua specificata in modo neutrale).

Translation guidance Essential Characteristics and Performance Parameters for Annexes

**Guida alla traduzione delle Caratteristiche Essenziali e dei Parametri di Prestazione per gli Annessi**

Mechanical resistance and stability (BWR 1)		
<b>Resistenza meccanica e stabilità (BWR 1)</b>		
Characteristic resistance to tension load (static and quasi-static loading):		
<b>Resistenza caratteristica al carico di tensione (carico statico e quasi-statico):</b>		
1	Resistance to steel failure: <b>Resistenza alla rottura dell'acciaio:</b>	$N_{Rk,s}$ [kN]
2	Resistance to combined pull-out and concrete cone failure: <b>Resistenza alla rottura del calcestruzzo combinata con sfilamento:</b>	$\tau_{Rk}$ and/or $\tau_{Rk,100}$ [N/mm <sup>2</sup> ], $\psi_c, \psi_{sus}^0, \psi_{sus,100}$ [-] (BF)
	Resistance to pull-out failure:	$N_{Rk,p}$ and/or $N_{Rk,p,100}$ [kN], $\psi_c$ [-] (BEF)
3	Resistance to concrete cone failure: <b>Resistenza alla rottura del cono di calcestruzzo:</b>	$c_{cr,N}$ [mm], $k_{cr,N}$ , $k_{ucr,N}$ [-]
4	Edge distance to prevent splitting under load: <b>Distanza dal bordo per evitare lo splitting sotto carico:</b>	$c_{cr,sp}$ [mm]
5	Robustness: <b>Robustezza:</b>	$\gamma_{inst}$ [-]
6	Maximum installation torque: <b>Massima coppia di installazione:</b>	$\max T_{inst}$ [Nm] (BF)
	Installation torque:	$T_{inst}$ [Nm] (BEF)
7	Minimum edge distance, spacing and member thickness: <b>Distanza dal bordo e interassi minimi:</b>	$c_{min}$ , $s_{min}$ , $h_{min}$ [mm]
Characteristic resistance to shear load (static and quasi-static loading):		
<b>Resistenza caratteristica al carico di taglio (carico statico e quasi statico):</b>		
8	Resistance to steel failure: <b>Resistenza alla rottura dell'acciaio:</b>	$V_{Rk,s}^0$ [kN], $M_{Rk,s}^0$ [Nm], $k_7$ [-]
9	Resistance to pry-out failure: <b>Resistenza alla rottura per pry-out:</b>	$k_8$ [-]
10	Resistance to concrete edge failure: <b>Resistenza alla rottura del bordo di calcestruzzo:</b>	$d_{nom}$ , $l_f$ [mm]
Displacements under short-term and long-term loading:		
<b>Spostamenti con carichi a breve e a lungo termine:</b>		
11	Displacements factors under short-term and long-term loading: <b>Spostamenti con carichi a breve e a lungo termine:</b>	$\delta_0$ , $\delta_\infty$ [mm/(N/mm <sup>2</sup> )] or [mm/kN]
12	Resistance in steel fibre reinforced concrete: <b>Resistenza nel calcestruzzo rinforzato con fibre d'acciaio:</b>	Description
Characteristic resistance and displacements for seismic performance categories C1 and C2:		
<b>Resistenza e spostamenti caratteristici per le categorie di prestazione sismica C1 e C2:</b>		
13	Resistance to tension for seismic performance category C1 <b>Resistenza al carico di trazione, spostamenti, categoria C1:</b>	$N_{Rk,s,C1}$ [kN] (all) $\tau_{Rk,C1}$ [N/mm <sup>2</sup> ] (BF) $N_{Rk,p,C1}$ [kN] (BEF)
14	Resistance to tension and displacements for seismic performance category C2 <b>Resistenza al carico di trazione, spostamenti, categoria C2:</b>	$N_{Rk,s,C2}$ [kN] (all) $\tau_{Rk,C2}$ [N/mm <sup>2</sup> ] (BF) $N_{Rk,p,C2}$ [kN] (BEF) $\delta_{N,C2(50\%)}$ , $\delta_{N,C2(100\%)}$ [mm] (all)
15	Resistance to shear for seismic performance category C1 <b>Resistenza al carico di taglio, spostamenti, categoria C1:</b>	$V_{Rk,s,C1}$ [kN] (all)
16	Resistance to shear load and displacements for seismic performance category C2 <b>Resistenza al carico di taglio, spostamenti, categoria C2:</b>	$V_{Rk,s,C2}$ [kN] (all) $\delta_{V,C2(50\%)}$ , $\delta_{V,C2(100\%)}$ [mm] (all)
Safety in case of fire (BWR 2)		
<b>Sicurezza in caso di incendio (BWR 2)</b>		
17	Reaction to fire <b>Reazione al fuoco:</b>	Class Classe (A1)
Resistance to fire		
<b>Resistenza al fuoco:</b>		
18	Fire resistance to steel failure (tension load): <b>Resistenza al fuoco alla rottura dell'acciaio (carico di trazione):</b>	$N_{Rk,s,fi}$ [kN]
19	Bond resistance under fire conditions: <b>Resistenza al legame in condizioni di incendio:</b>	$k_{fi,p}(\theta)$ [-], $\tau_{Rk,fi}(\theta)$ [N/mm <sup>2</sup> ] (BF)
20	Fire resistance to steel failure under shear loading: <b>Resistenza al fuoco alla rottura dell'acciaio (carico di taglio):</b>	$V_{Rk,s,fi}$ [kN], $M_{Rk,s,fi}^0$ [Nm]
Hygiene, health and the environment (BWR 3)		
<b>Igiene, salute e ambiente (BWR 3)</b>		
21	Content, emission and/or release of dangerous substances: <b>Contenuto, emissione e/o rilascio di sostanze pericolose:</b>	Description/Level

## Specific Part

### 1 Technical description of the product

The "fischer injection system FIS RC II and FIS RC II Low Speed" is a bonded fastener consisting of a cartridge with injection mortar fischer FIS RC II, fischer FIS RC II Low Speed, and a steel element according to Annex A3.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B3 to B6, C1 to C4
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C1 and C2
Displacements under short-term and long-term loading	See Annex C5
Characteristic resistance and displacements for seismic performance categories C1 and C2	No performance assessed

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	No performance assessed

#### 3.3 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

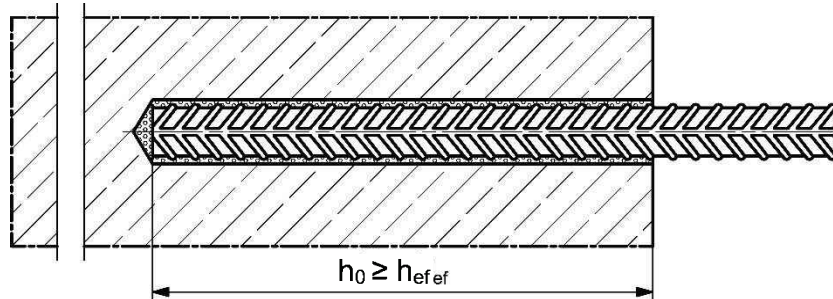
**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with the European Assessment Document EAD 330499-02-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1


## Installation conditions part 1

### Reinforcing bar




### fischer rebar anchor FRA
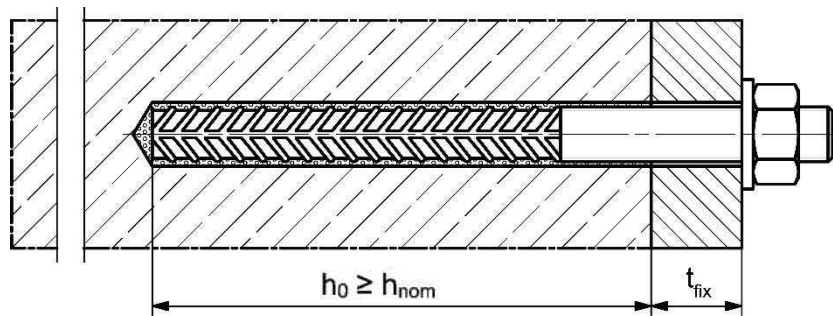
#### Pre-positioned installation



#### Push through installation (annular gap filled with mortar)

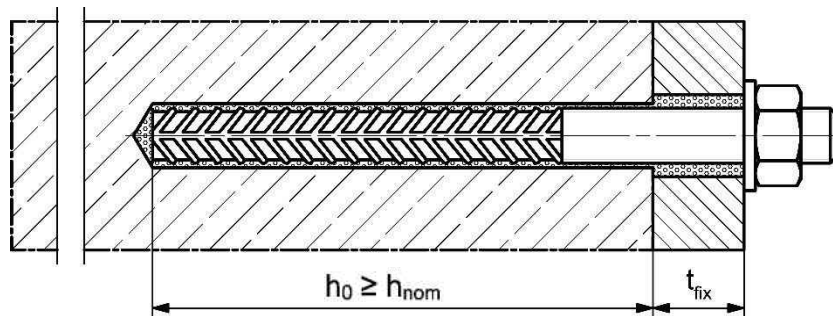

Figures not to scale

$h_0$  = drill hole depth

$h_{ef}$  = effective embedment depth

$t_{fix}$  = thickness of fixture

$h_{nom}$  = overall fastener embedment depth in the concrete

### fischer injection system FIS RC II and FIS RC II Low Speed

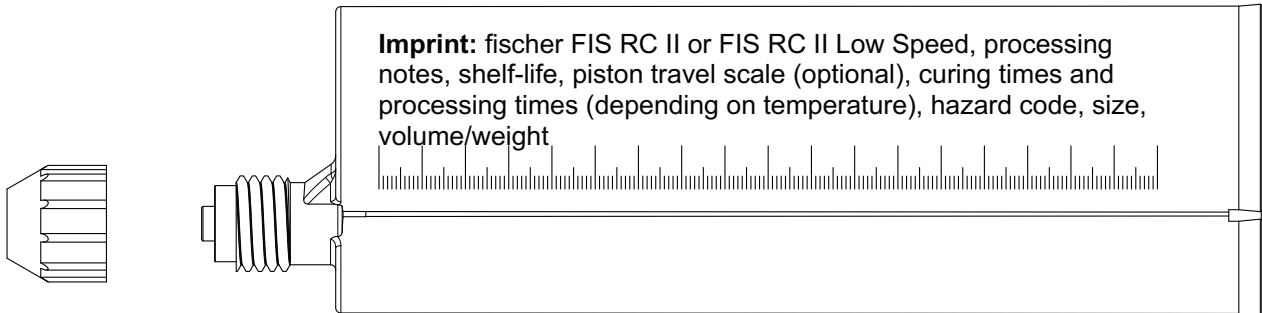
**Product description**  
Installation conditions part 1

**Annex A1**


Appendix 3 / 21

## Overview system components part 1


**Injection cartridge (shuttle cartridge) with sealing cap; Sizes: 360 ml, 825 ml**




**Injection cartridge (coaxial cartridge) with sealing cap; Sizes: 300 ml, 380 ml, 400 ml, 410 ml**

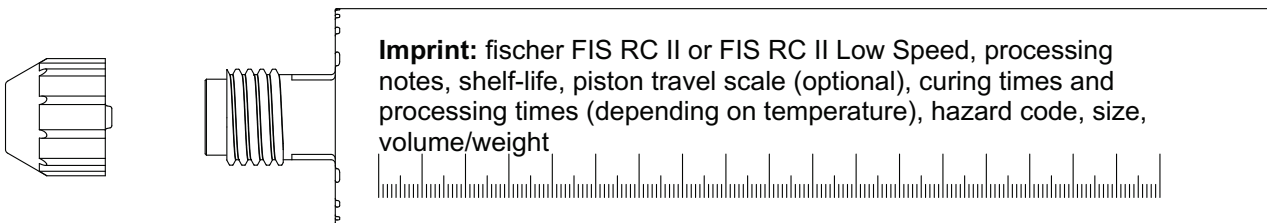


**Static mixer FIS MR Plus for injection cartridges up to 410 ml**



**Static mixer FIS JMR for injection cartridges with 825 ml**



**Injection adapter and extension tube Ø 9 for static mixer FIS MR Plus;  
Injection adapter and extension tube Ø 9 or Ø 15 for static mixer FIS JMR**



**fischer cleaning brush BS**



**Blow-out pump AB G**



or

**Compressed-air cleaning tool ABP:**



Figures not to scale

**fischer injection system FIS RC II and FIS RC II Low Speed**

**Product description**

Overview system components part 1; cartridges / static mixer / accessories

**Annex A2**

Appendix 4 / 21

## Overview system components part 2


### Reinforcing bar

Nominal diameter:  $\phi 8$ ,  $\phi 10$ ,  $\phi 12$ ,  $\phi 14$ ,  $\phi 16$ ,  $\phi 20$ ,  $\phi 25$ ,  $\phi 28$




### fischer rebar anchor FRA (fischer FRA)

Size: M12, M16, M20, M24



### washer / hexagon nut

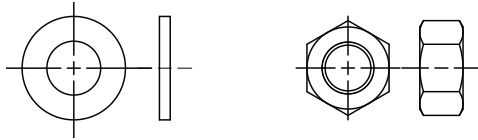

Figures not to scale

**fischer injection system FIS RC II and FIS RC II Low Speed**

### Product description

Overview system components part 2; steel components

**Annex A3**

Appendix 5 / 21





**Table A4.1: Materials**

Part	Designation	Material	
1	Injection cartridge	Mortar, hardener, filler	
	Steel grade	Stainless steel R	High corrosion resistant steel HCR
		acc. to EN 10088-1:2023 Corrosion resistance class CRC III acc. to EN 1993-1-4: 2006+A1:2015	acc. to EN 10088-1:2023 Corrosion resistance class CRC V acc. to EN 1993-1-4: 2006+A1:2015
2	Washer ISO 7089:2000 for fischer rebar anchor FRA	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2023	1.4565; 1.4529; EN 10088-1:2023
3	Hexagon nut for fischer FRA	Property class 80 acc. to fischer specification for fischer FRA or EN ISO 3506-2:2020 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2023	Property class 80 acc. to fischer specification for fischer FRA or EN ISO 3506-2:2020 1.4565; 1.4529 EN 10088-1:2023
4	Reinforcing bar	EN 1992-1-1:2004 and AC:2010, Annex C Bars and de-coiled rods, class B or C with $f_{yk}$ and $k$ according to NDP or NCI according to EN 1992-1-1/NA; $f_{uk} = f_{tk} = k \cdot f_{yk}$ ( $A_5 > 8 \%$ )	
5	fischer rebar anchor FRA	Rebar part: Bars and de-coiled rods class B or C with $f_{yk}$ and $k$ according to NDP or NCI of EN 1992-1-1:2004+AC:2010 $f_{uk} = f_{tk} = k \cdot f_{yk}$ ( $A_5 > 8 \%$ ) Threaded part: Property class 80 EN ISO 3506-1:2020	1.4401, 1.4404, 1.4571, 1.4578, 1.4439, 1.4362, 1.4062 acc. to EN 10088-1:2023 Corrosion resistance class CRC III acc. to EN 1993-1-4:2006+A1:2015 1.4565; 1.4529 acc. to EN 10088-1:2023 Corrosion resistance class CRC V acc. to EN 1993-1-4:2006+A1:2015 $f_{uk} \leq 1000 \text{ N/mm}^2$ ; fracture elongation $A_5 > 8 \%$
<b>fischer injection system FIS RC II and FIS RC II Low Speed</b>			<b>Annex A4</b>  Appendix 6 / 21
<b>Product description</b> Materials			



## Specifications of intended use part 1

**Table B1.1:** Overview use and performance categories

Anchorages subject to		FIS RC II with ...			
		Reinforcing bar		fischer FRA	
					
Hammer drilling with standard drill bit 		all sizes			
Hammer drilling with hollow drill bit (fischer „FHD“, Heller „Duster Expert“, Bosch „Speed Clean“, Hilti „TE-CD, TE-YD“, DreBo „D-Plus“, DreBo „D-Max“ 		Nominal drill bit diameter ( $d_0$ ) 12 mm to 35 mm			
Static and quasi static loading, in	uncracked concrete	all sizes	Tables: C1.1 C2.1 C3.1 C5.1	all sizes	Tables: C1.2 C2.1 C4.1 C5.2
	cracked concrete				
Use category	I1 dry or wet concrete	all sizes			
	I2 water filled hole	-1)		-1)	
Seismic performance category	C1 <sup>1)</sup>	-1)		-1)	
	C2 <sup>1)</sup>	-1)		-1)	
Installation direction		D3 (downward and horizontal and upwards installation)			
Installation temperature		$T_{i,min} = -5\text{ °C}$ to $T_{i,max} = +40\text{ °C}$ For the standard variation of temperature after installation			
In-service temperature	Temperature range I	-40 °C to +80 °C	(max. short term temperature +80 °C ; max. long term temperature +50 °C)		
	Temperature range II	-40 °C to +120°C	(max. short term temperature +120 °C ; max. long term temperature +72 °C)		
1) No performance assessed					
<b>fischer injection system FIS RC II and FIS RC II Low Speed</b>					<b>Annex B1</b>  Appendix 7 / 21
<b>Intended use</b> Specifications part 1					

## Specifications of intended use part 2

### Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres of strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021.

### Use conditions (Environmental conditions):

- Fastener intended for use in structures subject to dry, internal conditions (all materials).
- For all other conditions according to EN1993-1-4:2015 corresponding to corrosion resistance classes to Annex A4 Table A4.1.

### Design:

- Fastenings are designed in accordance with EN 1992-4:2018.
- The structural design is conducted under responsibility of a designer experienced in the field of anchorages and concrete works.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e. g. position of the fastener relative to reinforcement or to supports, etc.).

### Installation:

- Fastener installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Fastening depth should be marked and adhered to installation.

**fischer injection system FIS RC II and FIS RC II Low Speed**

**Intended use**  
Specifications part 2

**Annex B2**

Appendix 8 / 21

**Table B3.1: Installation parameters for reinforcing bars**

Nominal diameter of the bar		$\phi$	8 <sup>1)</sup>		10 <sup>1)</sup>		12 <sup>1)</sup>		14	16	20	25	28	
Nominal drill hole diameter	$d_0$	[mm]	10	12	12	14	14	16	18	20	25	30	35	
Drill hole depth	$h_0$		$h_0 = h_{ef}$											
Effective embedment depth	$h_{ef,min}$		60	60	70	75	80	90	100	112				
	$h_{ef,max}$		160	200	240	280	320	400	500	560				
Simplified spacing and edge distance <sup>2)</sup>	$s = c$		40	45	55	60	65	85	110	130				
Minimum thickness of concrete member	$h_{min}$	$h_{ef} + 30$ ( $\geq 100$ )					$h_{ef} + 2d_0$							

1) Both drill hole diameters can be used

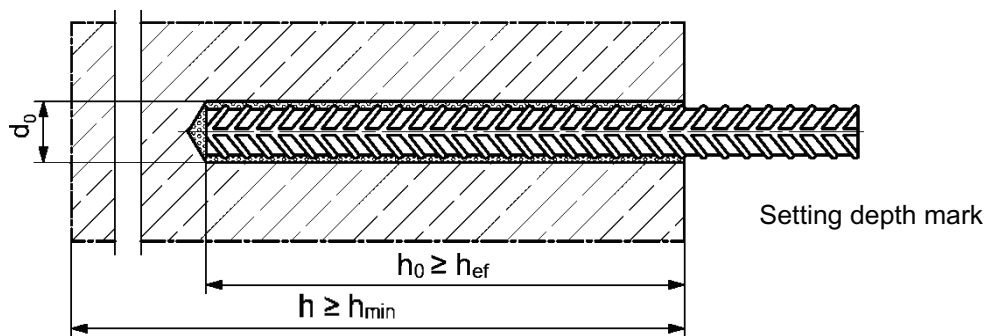
2) Detailed calculation according to **Annex B5** and **B6**

**Reinforcing bar**



- The minimum value of related rib area  $f_{R,min}$  must fulfil the requirements of EN 1992-1-1:2011
- The rib height must be within the range:  $0,05 \cdot \phi \leq h_{rib} \leq 0,07 \cdot \phi$   
( $\phi$  = Nominal diameter of the bar,  $h_{rib}$  = rib height)

**Installation conditions:**



Figures not to scale

**fischer injection system FIS RC II and FIS RC II Low Speed**

**Intended use**  
Installation parameters reinforcing bars

**Annex B3**

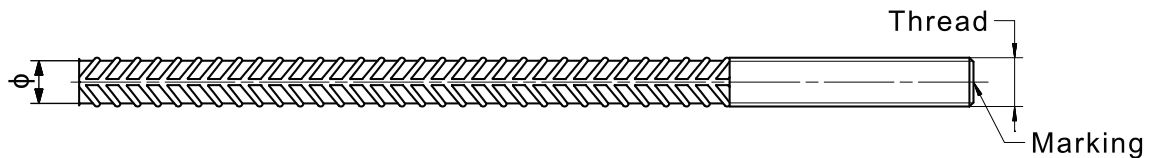
Appendix 9 / 21



**Table B4.1: Installation parameters for fischer rebar anchor FRA**

Rebar anchor FRA		Thread	M12 <sup>1)</sup>	M16	M20	M24	
Nominal diameter of the bar	$\phi$	[mm]	12	16	20	25	
Nominal drill hole diameter	$d_0$		14	16	20	25	30
Drill hole depth	$h_0$		$h_{ef} + l_e$				
Effective embedment depth	$h_{ef,min}$		70	80	90	96	
	$h_{ef,max}$		140	220	300	380	
Distance concrete surface to welded joint	$l_e$		100				
Simplified spacing and edge distance <sup>2)</sup>	$s$		55	65	85	105	
	$c$						
Maximum Diameter of clearance hole in the fixture	pre-positioned anchorage $d_f$		14	18	22	26	
	push through anchorage $d_f$		18	22	26	32	
Minimum thickness of concrete member	$h_{min}$	$h_0 + 30$	$h_0 + 2d_0$				
Maximum torque moment for attachment of the fixture	$\max T_{inst}$	[Nm]	40	60	120	150	

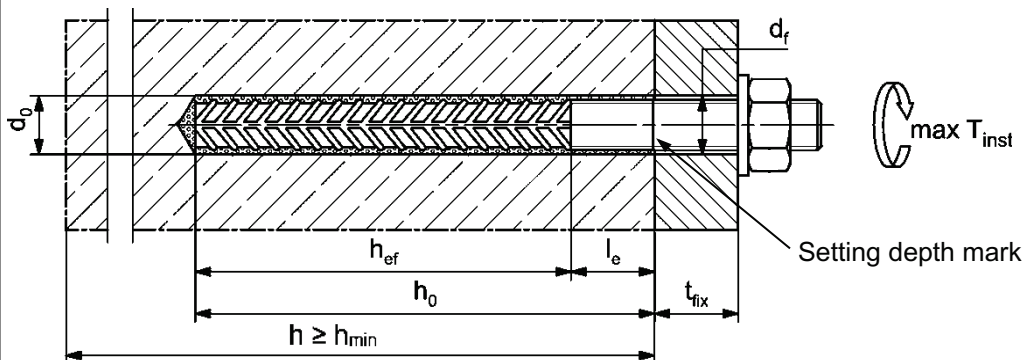
- 1) Both drill hole diameters can be used  
 2) Detailed calculation according to **Annex B5** and **B6**

**fischer rebar anchor FRA**



Marking frontal e.g.:  FRA (for stainless steel);  
 FRA HCR (for high corrosion resistant steel HCR)

**Installation conditions:**



Figures not to scale

**fischer injection system FIS RC II and FIS RC II Low Speed**

**Intended use**  
 Installation parameters rebar anchor FRA

**Annex B4**

**Table B5.1: Minimum spacing and minimum edge distance for reinforcing bars and fischer rebar anchor FRA**

Reinforcing bars / FRA (Nominal diameter)	$\phi$	8	10	12	14	16	20	25	28	
<b>Minimum edge distance</b>										
Uncracked / cracked concrete	$c_{min}$	40	45	45	45	50	55	75	80	
Minimum spacing	$s$	according to <b>Annex B6</b>								
<b>Minimum spacing</b>										
Uncracked / cracked concrete	$s_{min}$	40	45	55	60	65	85	120	140	
Minimum edge distance	$c$	according to <b>Annex B6</b>								
<b>Required projecting area</b>										
Uncracked concrete	$A_{sp,req}$	[1000	8,0	13,0	22,0	23,0	24,0	38,5	47,5	64,0
Cracked concrete		mm <sup>2</sup> ]	6,5	10,0	16,5	17,5	18,5	29,5	36,5	49,0

**Splitting failure** for minimum edge distance and spacing in dependence of the effective embedment depth  $h_{ef}$ .

For the calculation of minimum spacing and minimum edge distance of anchors in combination with different embedment depths and thicknesses of concrete members the following equation shall be fulfilled:

$$A_{sp,req} < A_{sp,t}$$

$A_{sp,req}$  = required projecting area

$A_{sp,t}$  = effective projecting area (according to **Annex B6**)

**fischer injection system FIS RC II and FIS RC II Low Speed**


**Intended use**

Minimum spacing and edge distance for reinforcing bars and fischer rebar anchor FRA

**Annex B5**


Appendix 11 / 21

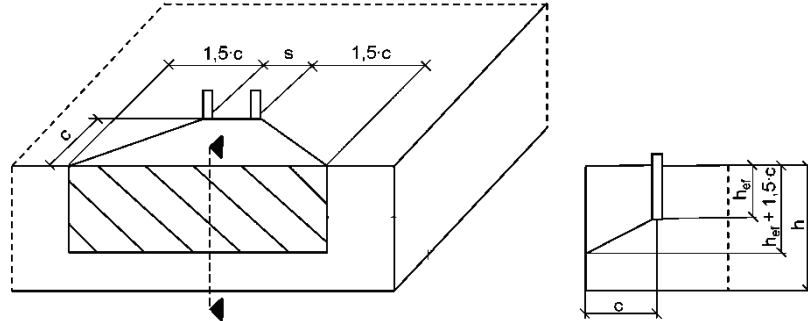**Table B6.1: Projecting area  $A_{sp,t}$  with concrete member thickness**  
 $h > h_{ef} + 1,5 \cdot c$  and  $h \geq h_{min}$



Single anchor	$A_{sp,t} = (3 \cdot c) \cdot (h_{ef} + 1,5 \cdot c)$	[mm <sup>2</sup> ]	with $c \geq c_{min}$
Group of anchors with $s > 3 \cdot c$	$A_{sp,t} = (6 \cdot c) \cdot (h_{ef} + 1,5 \cdot c)$	[mm <sup>2</sup> ]	
Group of anchors with $s \leq 3 \cdot c$	$A_{sp,t} = (3 \cdot c + s) \cdot (h_{ef} + 1,5 \cdot c)$	[mm <sup>2</sup> ]	with $c \geq c_{min}$ and $s \geq s_{min}$

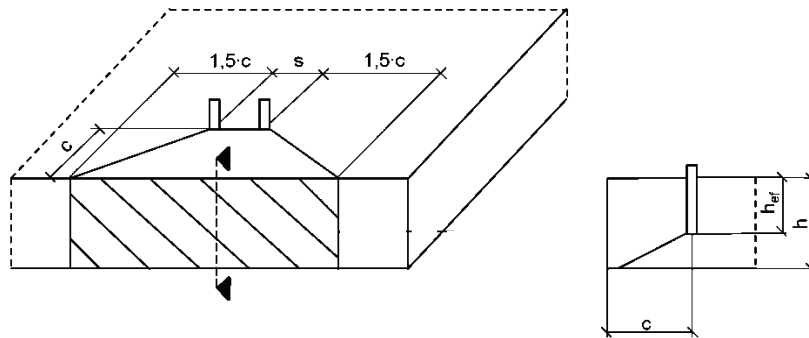**Table B6.2: Projecting area  $A_{sp,t}$  with concrete member thickness**  
 $h \leq h_{ef} + 1,5 \cdot c$  and  $h \geq h_{min}$



Single anchor	$A_{sp,t} = 3 \cdot c \cdot \text{existing } h$	[mm <sup>2</sup> ]	with $c \geq c_{min}$
Group of anchors with $s > 3 \cdot c$	$A_{sp,t} = 6 \cdot c \cdot \text{existing } h$	[mm <sup>2</sup> ]	
Group of anchors with $s \leq 3 \cdot c$	$A_{sp,t} = (3 \cdot c + s) \cdot \text{existing } h$	[mm <sup>2</sup> ]	with $c \geq c_{min}$ and $s \geq s_{min}$

Edge distance and axial spacing shall be rounded up to at least 5 mm-steps

Figures not to scale

**fischer injection system FIS RC II and FIS RC II Low Speed**


**Intended use**

Minimum thickness of concrete member for anchor rods,  
 minimum spacing and edge distance

**Annex B6**

**Table B7.1: Parameters of the cleaning brush BS (steel brush with steel bristles)**  
The size of the cleaning brush refers to the drill hole diameter

Nominal drill hole diameter	$d_0$	[mm]	10	12	14	16	18	20	25	35
Steel brush diameter BS	$d_b$		11	14	16	20		25	27	40

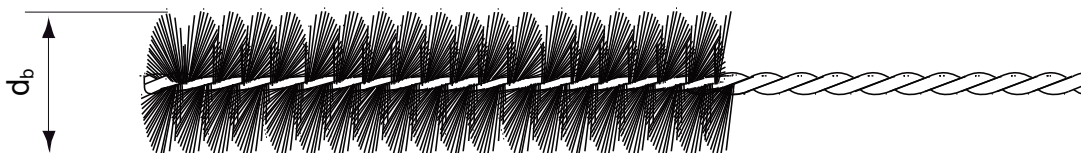

**Table B7.2: Conditions for use static mixer without an extension tube**

Nominal drill hole diameter	$d_0$	[mm]	10	12	14	16	18	20	25	30	35
Drill hole depth $h_0$ by using	FIS MR Plus		≤90		≤120	≤140	≤150	≤160	≤210		
	FIS JMR		-	-	≤90	≤160	≤180	≤190	≤220	≤250	

**Table B7.3 Maximum processing time of the mortar and minimum curing time**  
(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature)

Temperature at anchoring base [°C]	Maximum processing time $t_{work}$		Minimum curing time $t_{cure}$ <sup>1)</sup>	
	FIS RC II	FIS RC II Low Speed	FIS RC II	FIS RC II Low Speed
> -5 to 0 <sup>2)</sup>	20 min	40 min	24 h	5 d
> 0 to 5 <sup>2)</sup>	13 min	30 min	3 h	48 h
> 5 to 10	9 min	20 min	90 min	24 h
> 10 to 20	5 min	13 min	60 min	120 min
> 20 to 30	4 min	9 min	45 min	60 min
> 30 to 40	2 min	7 min	35 min	45 min

<sup>1)</sup> In wet concrete or water filled holes the curing times must be doubled

<sup>2)</sup> Minimal cartridge temperature +5°C

**fischer injection system FIS RC II and FIS RC II Low Speed**

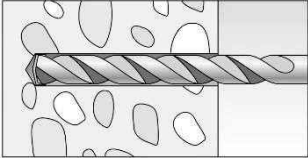
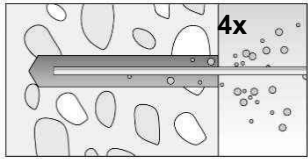
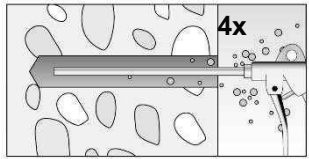
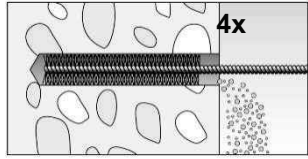
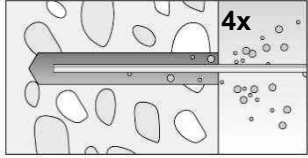
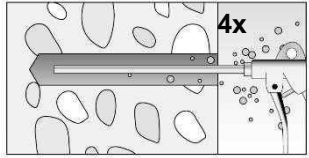
**Intended use**  
Cleaning brush (steel brush)  
Processing time and curing time

**Annex B7**

Appendix 13 / 21


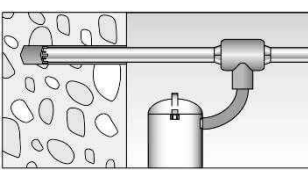
## Installation instructions part 1

### Drilling and cleaning the hole (hammer drilling with standard drill bit)

1		<p>Drill the hole. Nominal drill hole diameter <math>d_0</math> and drill hole depth <math>h_0</math> see <b>Tables B3.1, B4.1.</b></p>
2	 <p>4x</p> <p>Clean the drill hole: For <math>h_{ef} \leq 12d</math> and <math>d_0 &lt; 18</math> mm blow out the hole four times by hand.</p>	 <p>4x</p> <p>For <math>h_{ef} &gt; 12d</math> and / or <math>d_0 \geq 18</math> mm blow out the hole four times with oil-free compressed air (<math>p \geq 6</math> bar). Use suitable compressed-air nozzle.</p>
3	 <p>4x</p> <p>Brush the drill hole four times. For drill hole diameter <math>\geq 30</math> mm use a power drill. For deep holes use an extension. Use suitable brushes (see <b>Table B7.1</b>)</p>	
4	 <p>4x</p> <p>Clean the drill hole: For <math>h_{ef} \leq 12d</math> and <math>d_0 &lt; 18</math> mm blow out the hole four times by hand.</p>	 <p>4x</p> <p>For <math>h_{ef} &gt; 12d</math> and / or <math>d_0 \geq 18</math> mm blow out the hole four times with oil-free compressed air (<math>p \geq 6</math> bar). Use suitable compressed-air nozzle.</p>

Go to step 5

### Drilling and cleaning the hole (hammer drilling with hollow drill bit)

1	 <p>Check a suitable hollow drill (see <b>Table B1.1</b>) for correct operation of the dust extraction.</p>
2	 <p>Use a suitable dust extraction system, e.g. fischer FVC 35 M or a comparable dust extraction system with equivalent performance data.</p> <p>Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Nominal drill hole diameter <math>d_0</math> and drill hole depth <math>h_0</math> see <b>Tables B3.1, B4.1.</b></p>

Go to step 5

### fischer injection system FIS RC II and FIS RC II Low Speed

**Intended use**  
Installation instructions part 1

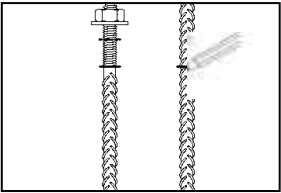
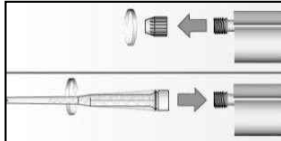
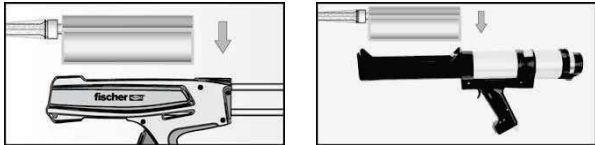
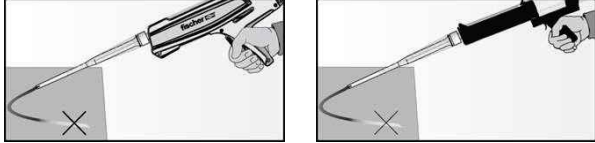
**Annex B8**

Appendix 14 / 21






## Installation instructions part 2

### Preparing the cartridge

5		Mark the setting depth of the steel element.
6		Remove the sealing cap. Screw on the static mixer (the spiral in the static mixer must be clearly visible).
7		Place the cartridge into the dispenser.
8		Extrude approximately 10 cm of material out until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey.

Go to step 9

### Injection of the mortar

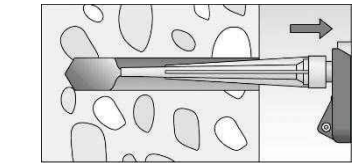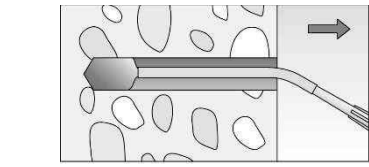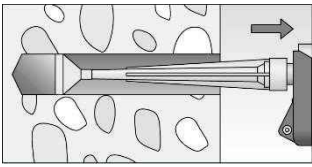9			
<p>For <math>h_0 = h_{ef}</math> fill approximately 2/3 of the drill hole with mortar. For <math>h_0 &gt; h_{ef}</math> more mortar is needed. Always begin from the bottom of the hole and avoid bubbles.</p>	<p>The conditions for mortar injection without extension tube can be found in <b>Table B7.2</b>. For deeper drill holes, than those mentioned in <b>Table B7.2</b>, use a suitable extension tube.</p>	<p>For deep holes (<math>h_0 &gt; 250</math> mm) use an injection adapter.</p>	

Go to step 10

fischer injection system FIS RC II and FIS RC II Low Speed





Intended use  
Installation instructions part 2

Annex B9

Appendix 15 / 21

### Installation instructions part 3
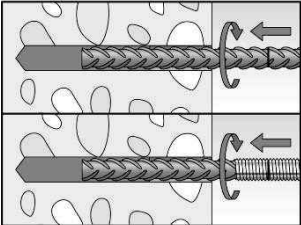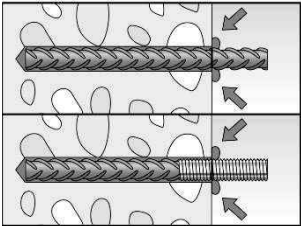
#### Installation reinforcing bars and fischer rebar anchor FRA

10		<p>Only use clean and oil-free reinforcing bars or fischer FRA. Insert the rebar / fischer FRA slowly twisted into the borehole until the embedment mark is reached.</p> <p>Recommendation: Rotation back and forth of the reinforcement bar or the fischer FRA makes pushing easy.</p>		
10		<p>When the setting depth mark is reached, excess mortar must be emerged from the mouth of the drill hole.</p>		
11	 <p>Wait for the specified curing time <math>t_{cure}</math> see <b>Table B7.3</b></p>	12	 <p><math>max T_{inst}</math></p>	<p>Mounting the fixture <math>max T_{inst}</math> for fischer FRA see <b>Table B4.1</b></p>

fischer injection system FIS RC II and FIS RC II Low Speed

**Intended use**  
Installation instructions part 3

**Annex B10**

**Table C1.1: Characteristic resistance to steel failure under tension / shear loading of reinforcing bars**

Nominal diameter of the bar	$\phi$	8	10	12	14	16	20	25	28
<b>Characteristic resistance to steel failure under tension loading</b>									
Characteristic resistance	$N_{Rk,s}$	[kN]	$A_s \cdot f_{uk}^{1)}$						
<b>Characteristic resistance to steel failure under shear loading</b>									
<b>Without lever arm</b>									
Characteristic resistance	$V_{Rk,s}^0$	[kN]	$k_6^{2)}) \cdot A_s \cdot f_{uk}^{1)}$						
Ductility factor	$k_7$	[-]	1,0						
<b>With lever arm</b>									
Characteristic resistance	$M_{Rk,s}^0$	[Nm]	$1,2 \cdot W_{el} \cdot f_{uk}^{1)}$						

1)  $f_{uk}$  respectively shall be taken from the specifications of the reinforcing bar.

2) In accordance with EN 1992-4:2018 section 7.2.2.3.1:

- $k_6 = 0,6$  for fasteners made of carbon steel with  $f_{uk} \leq 500 \text{ N/mm}^2$ ,
- $= 0,5$  for fasteners made of carbon steel with  $500 \text{ N/mm}^2 < f_{uk} \leq 1000 \text{ N/mm}^2$ ,
- $= 0,5$  for fasteners made of stainless steel.

**Table C1.2: Characteristic resistance to steel failure under tension / shear loading of fischer rebar anchors FRA**

fischer rebar anchor FRA		M12	M16	M20	M24	
<b>Characteristic resistance to steel failure under tension loading</b>						
Characteristic resistance	$N_{Rk,s}$	[kN]	62,0	111,0	173,0	236,5
<b>Partial factor<sup>1)</sup></b>						
Partial factor	$\gamma_{Ms,N}$	[-]	1,4			
<b>Characteristic resistance to steel failure under shear loading</b>						
<b>Without lever arm</b>						
Characteristic resistance	$V_{Rk,s}^0$	[kN]	34,5	64,3	100,4	144,7
Ductility factor	$k_7$	[-]	1,0			
<b>With lever arm</b>						
Characteristic resistance	$M_{Rk,s}^0$	[Nm]	107,4	273,0	532,2	920,4
<b>Partial factor<sup>1)</sup></b>						
Partial factor	$\gamma_{Ms,V}$	[-]	1,5			

1) In absence of other national regulations

**fischer injection system FIS RC II and FIS RC II Low Speed**

**Performance**

Characteristic resistance to steel failure under tension / shear loading of reinforcing bars and fischer rebar anchors FRA

**Annex C1**

Appendix 17 / 21

**Table C2.1: Characteristic resistance to concrete failure under tension / shear loading**

Size		All sizes								
<b>Characteristic resistance to concrete failure under tension loading</b>										
Installation factor	$\gamma_{inst}$	[-]	See annex C3 to C4							
<b>Factors for the compressive strength of concrete &gt; C20/25</b>										
Increasing factor $\psi_c$ for cracked or uncracked concrete $\tau_{Rk(X,Y)} = \psi_c \cdot \tau_{Rk(C20/25)}$	C25/30	[-]	1,05							
	C30/37		1,10							
	C35/45		1,15							
	C40/50		1,19							
	C45/55		1,22							
	C50/60		1,26							
<b>Splitting failure</b>										
Edge distance	$h / h_{ef} \geq 2,0$	$c_{cr,sp}$	[mm]	1,0 $h_{ef}$						
	$2,0 > h / h_{ef} > 1,3$			4,6 $h_{ef}$ - 1,8 h						
	$h / h_{ef} \leq 1,3$			2,26 $h_{ef}$						
Spacing	$s_{cr,sp}$			2 $c_{cr,sp}$						
<b>Concrete cone failure</b>										
Uncracked concrete	$k_{ucr,N}$	[-]	11,0							
Cracked concrete	$k_{cr,N}$		7,7							
Edge distance	$c_{cr,N}$	[mm]	1,5 $h_{ef}$							
Spacing	$s_{cr,N}$		2 $c_{cr,N}$							
<b>Factors for sustained tension loading</b>										
Temperature range		[°C]	50 / 80				72 / 120			
Factor	$\psi_{sus}^0$	[-]	0,74				0,87			
<b>Characteristic resistance to concrete failure under shear loading</b>										
Installation factor	$\gamma_{inst}$	[-]	1,0							
<b>Concrete pry-out failure</b>										
Factor for pry-out failure	$k_8$	[-]	2,0							
<b>Concrete edge failure</b>										
Effective length of fastener in shear loading	$l_f$	[mm]	for $d_{nom} \leq 24$ mm: min ( $h_{ef}$ ; 12 $d_{nom}$ ) for $d_{nom} > 24$ mm: min ( $h_{ef}$ ; max (8 $d_{nom}$ ; 300 mm))							
<b>Calculation diameters</b>										
Size			M12		M16		M20		M24	
fischer rebar anchor FRA	$d_{nom}$	[mm]	12		16		20		25	
Size (nominal diameter of the bar)	$\phi$	[mm]	8	10	12	14	16	20	25	28
Reinforcing bar	$d_{nom}$		8	10	12	14	16	20	25	28
<b>fischer injection system FIS RC II and FIS RC II Low Speed</b>								<b>Annex C2</b>		
<b>Performance</b> Characteristic resistance to concrete failure under tension / shear loading										
								Appendix 18 / 21		

**Table C3.1:** Characteristic resistance to **combined pull-out and concrete failure** for reinforcing bars in hammer drilled holes; **uncracked or cracked concrete**

Nominal diameter of the bar		$\phi$	8	10	12	14	16	20	25	28		
<b>Combined pull-out and concrete cone failure</b>												
Calculation diameter		d	[mm]	8	10	12	14	16	20	25	28	
<b>Uncracked concrete</b>												
<b>Characteristic bond resistance in uncracked concrete C20/25</b>												
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)												
Tem- perature range	I: 50 °C / 80 °C		$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	11,0	11,0	11,0	10,0	10,0	9,5	9,0	8,5
	II: 72 °C / 120 °C				9,5	9,5	9,0	8,5	8,5	8,0	7,5	7,0
<b>Installation factor</b>												
Dry or wet concrete		$\gamma_{inst}$	[-]	1,0								
<b>Cracked concrete</b>												
<b>Characteristic bond resistance in cracked concrete C20/25</b>												
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)												
Tem- perature range	I: 50 °C / 80 °C		$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	- <sup>1)</sup>	3,0	5,0	5,0	5,0	4,5	4,0	4,0
	II: 72 °C / 120 °C				- <sup>1)</sup>	3,0	4,5	4,5	4,5	4,0	3,5	3,5
<b>Installation factor</b>												
Dry or wet concrete		$\gamma_{inst}$	[-]	1,0								

<sup>1)</sup> No performance assessed

**fischer injection system FIS RC II and FIS RC II Low Speed**

**Performance**

Characteristic resistance to combined pull-out and concrete failure for reinforcing bars

**Annex C3**

Appendix 19 / 21

**Table C4.1: Characteristic resistance to combined pull-out and concrete failure for fischer rebar anchors FRA in hammer drilled holes; uncracked or cracked concrete**

fischer rebar anchor FRA		M12	M16	M20	M24			
<b>Combined pull-out and concrete cone failure</b>								
Calculation diameter	d	[mm]	12	16	20	25		
<b>Uncracked concrete</b>								
<b>Characteristic bond resistance in uncracked concrete C20/25</b>								
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)								
Temperature range	I: 50 °C / 80 °C		$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	11,0	10,0	9,5	9,5
	II: 72 °C / 120 °C							
<b>Installation factors</b>								
Dry or wet concrete		$\gamma_{inst}$	[-]	1,0				
<b>Cracked concrete</b>								
<b>Characteristic bond resistance in cracked concrete C20/25</b>								
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)								
Temperature range	I: 50 °C / 80 °C		$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	5,0	5,0	4,5	4,0
	II: 72 °C / 120 °C							
<b>Installation factors</b>								
Dry or wet concrete		$\gamma_{inst}$	[-]	1,0				
<b>fischer injection system FIS RC II and FIS RC II Low Speed</b>								
<b>Performance</b> Characteristic resistance to combined pull-out and concrete failure for fischer rebar anchor FRA					<b>Annex C4</b>			
Appendix 20 / 21								

**Table C5.1: Displacements for reinforcing bars**

Nominal diameter of the bar $\phi$	8	10	12	14	16	20	25	28	
<b>Displacement-Factors for tension loading<sup>1)</sup></b>									
<b>Uncracked concrete; Temperature range I, II</b>									
$\delta_{N0}$ -Factor	[mm/(N/mm <sup>2</sup> )]	0,09	0,09	0,10	0,10	0,10	0,10	0,10	0,11
$\delta_{N\infty}$ -Factor		0,10	0,10	0,12	0,12	0,12	0,12	0,13	0,13
<b>Cracked concrete; Temperature range I, II</b>									
$\delta_{N0}$ -Factor	[mm/(N/mm <sup>2</sup> )]	- <sup>3)</sup>	0,12	0,13	0,13	0,13	0,13	0,13	0,14
$\delta_{N\infty}$ -Factor		- <sup>3)</sup>	0,27	0,30	0,30	0,30	0,30	0,35	0,37
<b>Displacement-Factors for shear loading<sup>2)</sup></b>									
<b>Uncracked or cracked concrete; Temperature range I, II</b>									
$\delta_{V0}$ -Factor	[mm/kN]	0,11	0,11	0,10	0,10	0,10	0,09	0,09	0,08
$\delta_{V\infty}$ -Factor		0,12	0,12	0,11	0,11	0,11	0,10	0,10	0,09
1) Calculation of effective displacement: $\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau$ $\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau$ $\tau$ : acting bond strength under tension loading					2) Calculation of effective displacement: $\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V$ $\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V$ $V$ : acting shear loading				
3) No performance assessed									

**Table C5.2: Displacements for fischer rebar anchors FRA**

fischer rebar anchor FRA	M12	M16	M20	M24	
<b>Displacement-Factors for tension loading<sup>1)</sup></b>					
<b>Uncracked concrete; Temperature range I, II</b>					
$\delta_{N0}$ -Factor	[mm/(N/mm <sup>2</sup> )]	0,10	0,10	0,10	0,10
$\delta_{N\infty}$ -Factor		0,12	0,12	0,12	0,13
<b>Cracked concrete; Temperature range I, II</b>					
$\delta_{N0}$ -Factor	[mm/(N/mm <sup>2</sup> )]	0,12	0,13	0,13	0,13
$\delta_{N\infty}$ -Factor		0,30	0,30	0,30	0,35
<b>Displacement-Factors for shear loading<sup>2)</sup></b>					
<b>Uncracked or cracked concrete; Temperature range I, II</b>					
$\delta_{V0}$ -Factor	[mm/kN]	0,10	0,10	0,09	0,09
$\delta_{V\infty}$ -Factor		0,11	0,11	0,10	0,10
1) Calculation of effective displacement: $\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau$ $\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau$ $\tau$ : acting bond strength under tension loading		2) Calculation of effective displacement: $\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V$ $\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V$ $V$ : acting shear loading			

<b>fischer injection system FIS RC II and FIS RC II Low Speed</b>	<b>Annex C5</b>  Appendix 21 / 21
<b>Performance</b> Displacements for reinforcing bars and fischer rebar anchors FRA	