



DICHIARAZIONE DI PRESTAZIONE

DoP 0232

per il Sistema a iniezione fischer FIS V Plus (ancorante chimico per l'utilizzo in muratura)

IT

1. <u>Codice di identificazione unico del prodotto-tipo:</u>	DoP 0232
2. <u>Usi previsti:</u>	Fissaggio post-installato negli elementi in muratura. Vedi appendice, in particolare gli allegati da B1- B20
3. <u>Fabbricante:</u>	fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Germany
4. <u>Mandatario:</u>	–
5. <u>Sistemi di VVCP:</u>	1
6. <u>Documento per la valutazione europea:</u> Valutazione tecnica europea: Organismo di valutazione tecnica: Organismi notificati:	EAD 330076-00-0604, Edition 11/ 2017 ETA-20/0729; 2020-11-26 DIBt- Deutsches Institut für Bautechnik 2873 TU Darmstadt
7. <u>Prestazioni dichiarate:</u> Resistenza meccanica e stabilità (BWR 1) Valore caratteristico per la resistenza:	Fattore di riduzione: Allegato C110 Resistenza caratteristica di un ancorante singolo sotto carico di trazione: Vedi appendice, in particolare gli allegati da B3, C1, C3, C5, C7, C9, C11, C13, C15, C17, C19, C22, C25, C27, C30, C34, C38, C42, C46, C50, C54, C58, C61, C63, C66, C69, C73, C77, C80, C82, C84, C87, C90, C93, C96, C99, C102, C104, C107, C109 Resistenza caratteristica di un gruppo di ancoranti sotto carico di trazione: Allegato B20 Resistenza caratteristica di un ancorante singolo sotto carico di taglio: Vedi appendice, in particolare gli allegati da B3, C2, C3, C5, C7, C9, C11, C13, C15, C17, C19, C23, C25, C27, C31, C35, C39, C43, C47, C51, C55, C59, C61, C64, C66, C70, C74, C78, C80, C82, C84, C88, C90, C94, C96, C100, C102, C104, C107, C109 Resistenza caratteristica di un gruppo di ancoranti sotto carico di taglio senza e con influenza del bordo: Allegato B20 Distanza dal bordo e interasse caratteristici: Vedi appendice, in particolare gli allegati da B20, C4, C6, C8, C10, C12, C14, C16, C18, C20, C21, C24, C26, C28, C29, C32, C33, C36, C37, C40, C41, C44, C45, C48, C49, C52, C53, C56, C57, C60, C62, C65, C67, C68, C71, C72, C75, C76, C79, C81, C83, C85, C86, C89, C91, C92, C95, C97, C98, C101, C103, C105, C108 Distanza dal bordo e interasse minimi: Vedi appendice, in particolare gli allegati da B20, C4, C6, C8, C10, C12, C14, C16, C18, C20, C21, C24, C26, C28, C29, C32, C33, C36, C37, C40, C41, C44, C45, C48, C49, C52, C53, C56, C57, C60, C62, C65, C67, C68, C71, C72, C75, C76, C79, C81, C83, C85, C86, C89, C91, C92, C95, C97, C98, C101, C103, C105, C108 Fattore di gruppo sotto carico di trazione e di taglio: Vedi appendice, in particolare gli allegati da B20, C4, C6, C8, C10, C12, C14, C16, C18, C20, C21, C24, C26, C28, C29, C32, C33, C36, C37, C40, C41, C44, C45, C48, C49, C52, C53, C56, C57, C60, C62, C65, C67, C68, C71, C72, C75, C76, C79, C81, C83, C85, C86, C89, C91, C92, C95, C97, C98, C101, C103, C106, C108 Spessore minimo dell'elemento: Allegato B2
Durabilità:	Allegati A5, B2
Spostamenti :	Allegato C110
Sicurezza in caso di incendio (BWR 2) Reazione al fuoco:	Classe (A1)
Igiene, salute e ambiente (BWR 3) Contenuto, emissione e/o rilascio di sostanze pericolose	NPD



8. Documentazione tecnica appropriata e/o
documentazione tecnica specifica:

—

La prestazione del prodotto sopra identificato è conforme all'insieme delle prestazioni dichiarate. La presente dichiarazione di prestazione è emessa, in conformità al regolamento (UE) n. 305/2011, sotto la sola responsabilità del fabbricante sopra identificato.

Firmato a nome e per conto del fabbricante da:

Dr. Oliver Geibig, Direttore Generale Unità di Business & Engineering
Tumlingen, 2020-12-10

Jürgen Grün, Direttore Generale Chimica & Qualità

Questa Dichiarazione di Prestazione (DoP) è stata preparata in varie lingue. In caso di contestazioni sull'interpretazione, prevarrà sempre la versione inglese.

L'Appendice include informazioni volontarie e complementari in lingua inglese che superano i requisiti di legge (lingua specificata in modo neutrale).

Specific Part

1 Technical description of the product

The fischer injection system FIS V Plus for masonry is a bonded anchor (injection type) consisting of a mortar cartridge with injection mortar fischer FIS V Plus, FIS VS Plus Low Speed and FIS VW Plus High Speed, a perforated sieve sleeve and an anchor rod with hexagon nut and washer or an internal threaded rod in the range of M6 to M16. The steel elements are made of zinc coated steel, stainless steel or high corrosion resistant steel.

The anchor rod is placed into a drilled hole filled with injection mortar and is anchored via the bond between steel element, injection mortar and masonry and mechanical interlock.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic values for resistance	See Annexes B20, C 1 to C 110
Displacements	See Annex C 110
Durability	See annex B 2

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1

3.3 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with the European Assessment Document EAD 330076-00-0604 the applicable European legal act is: [97/177/EC].

The system to be applied is: 1


Installation conditions part 1

Anchor rods with perforated sleeve FIS H K; Installation in perforated and solid brick masonry

Pre-positioned anchorage:

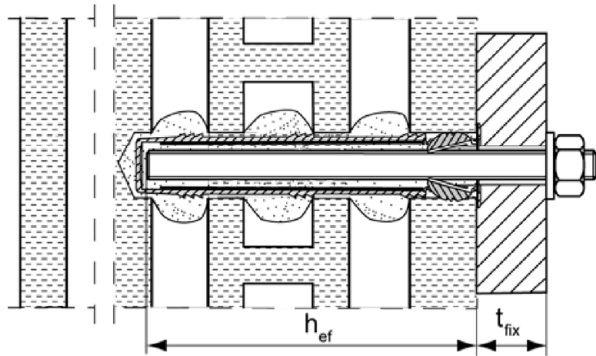

Installation with render bridge



Size of the perforated sleeve:

FIS H 12x50 K

FIS H 16x85 K

FIS H 20x85 K


FIS H 20x200 K

FIS H 12x85 K


FIS H 16x130 K

FIS H 20x130 K

Push through anchorage:

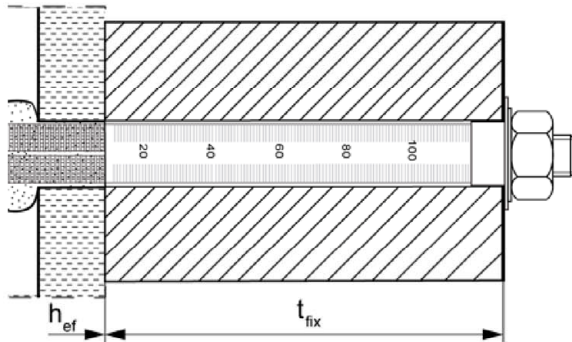

Installation with render bridge

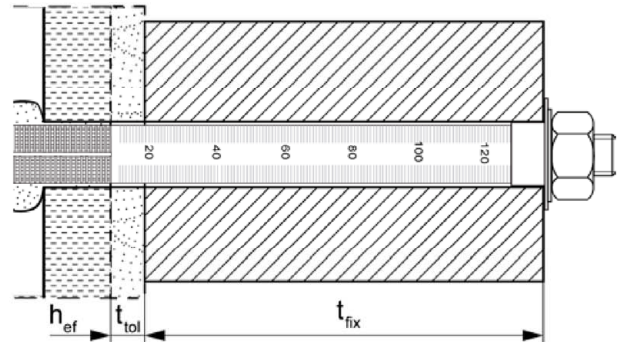


Size of the perforated sleeve:

FIS H 18x130/200 K


FIS H 22x130/200 K

Internal threaded anchor FIS E with perforated sleeve FIS H K; Installation in perforated and solid brick masonry

Pre-positioned anchorage:

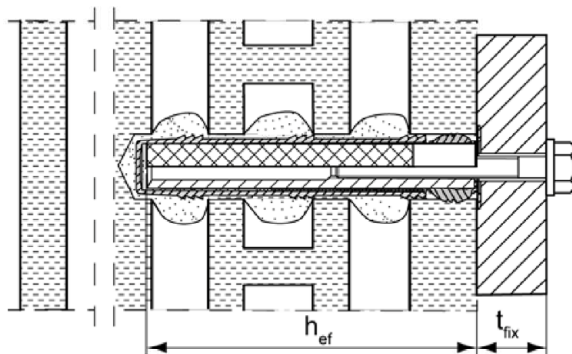

Installation with render bridge

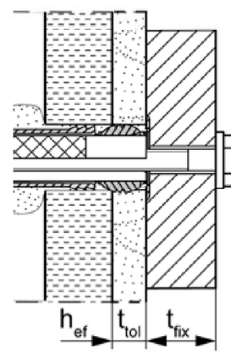

Pictures not to scale

h_{ef} = effective anchorage depth

t_{tol} = thickness of unbearing layer (e.g. plaster)

t_{fix} = thickness of fixture

fischer injection system FIS V Plus for masonry

Product description

Installation conditions part 1,

Anchor rods and internal threaded anchor with perforated sleeve


Annex A 1

Appendix 2 / 136


Installation conditions part 2

**Anchor rods without perforated sleeve FIS H K;
installation in solid brick masonry and autoclaved aerated concrete**

Pre-positioned anchorage:

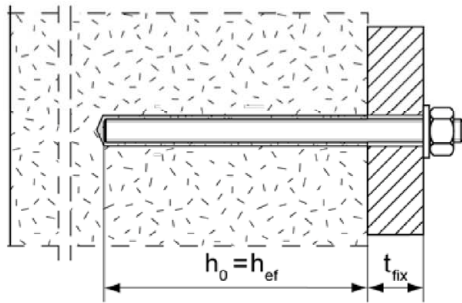


Push through anchorage: Annular gap filled with mortar

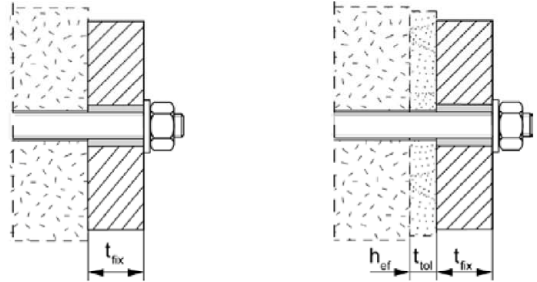


Installation with
render bridge

**Internal threaded anchors FIS E without perforated sleeve FIS H K;
installation in solid brick masonry and autoclaved aerated concrete**

Pre-positioned anchorage:

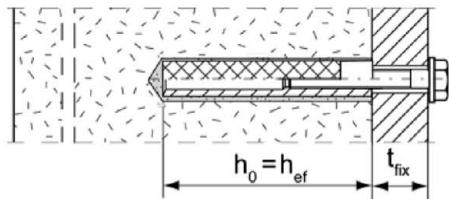


Installation with render bridge

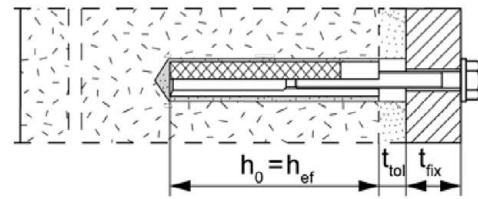

**Anchor rods and internal threaded anchors FIS E without perforated sleeve FIS H K; installation with centring sleeve in autoclaved aerated concrete with conical drill hole
(installation with special conic drill bit PBB)**


Pre-positioned anchorage:

anchor rods M8, M10, M12

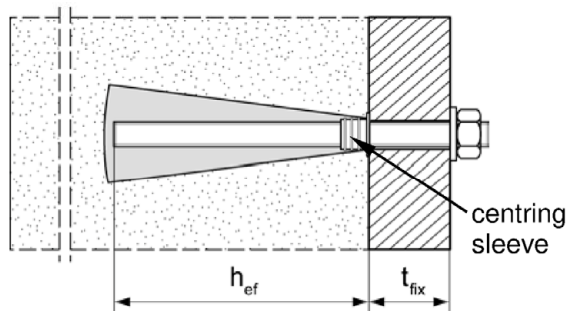

Pre-positioned anchorage:

Internal threaded anchor FIS E 11x85 M6 / M8

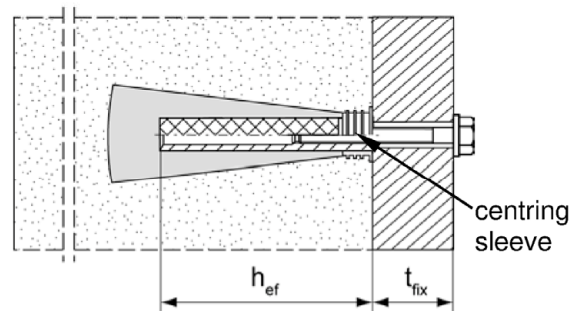

Pictures not to scale

h_0 = depth of drill hole

t_{tol} = thickness of unbearing layer (e.g. plaster)

h_{ef} = effective anchorage depth

t_{fix} = thickness of fixture

fischer injection system FIS V Plus for masonry

Product description

Installation conditions part 2, Anchor rods and internal threaded anchor without perforated sleeve / with centring sleeve

Annex A 2

Appendix 3 / 136




Overview system components part 1

Mortar cartridge (shuttle cartridge) with sealing cap

①

Size: 350 ml, 360 ml, 390 ml, 550 ml, 825 ml

Imprint: fischer FIS V Plus or FIS VS Plus Low Speed or FIS VW Plus High Speed, processing notes, shelf-life, hazard code, piston travel scale (optional), curing time and processing time (depending on temperature), size, volume

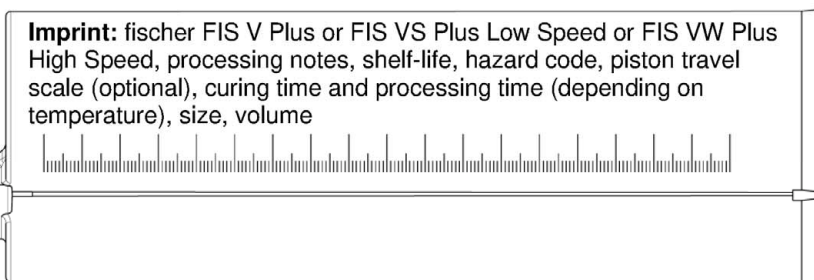




Mortar cartridge (coaxial cartridge) with sealing cap

①

Size: 100 ml, 150 ml, 300 ml, 380 ml, 400 ml, 410 ml

Imprint: fischer FIS V Plus or FIS VS Plus Low Speed or FIS VW Plus High Speed, processing notes, shelf-life, hazard code, piston travel scale (optional), curing time and processing time (depending on temperature), size, volume

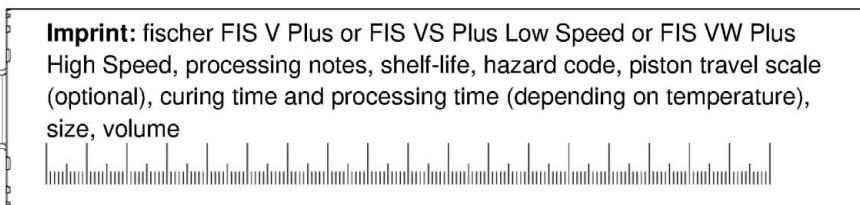

Static mixer MR Plus with injection adapter and center sleeve for aerated concrete

centring sleeve




Injection adapter




Static mixer



Extension tube



Cleaning brush BS

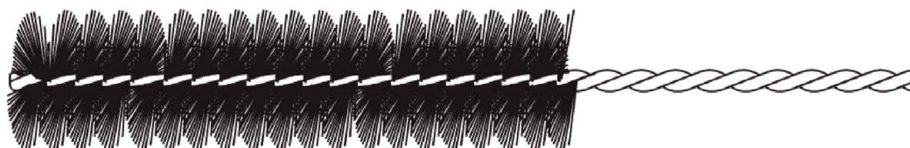

Blow-out pump ABG or ABP



Pictures not to scale

fischer injection system FIS V Plus for masonry

Product description

Overview system components part 1: cartridge / static mixer / cleaning tools

Annex A 3

Appendix 4 / 136

Overview system components part 2

fischer anchor rod

2



Size: M6, M8, M10, M12, M16

Internal threaded anchor FIS E

5



Size: 11x85 M6 / M8
15x85 M10 / M12

Perforated sleeve FIS H K

7



Size: FIS H 12x50 K
FIS H 12x85 K
FIS H 16x85 K
FIS H 20x85 K

7



Size: FIS H 16x130 K
FIS H 20x130 K
FIS H 20x200 K

Perforated sleeve FIS H K (push through anchorage)


7



Size: FIS H 18x130/200 K
FIS H 22x130/200 K

Washer

3



Hexagon nut

4



Pictures not to scale

fischer injection system FIS V Plus for masonry

Product description
Overview system components part 2: steel parts / perforated sleeve

Annex A 4

Table A5.1: Materials				
Part	Designation	Material		
1	Mortar cartridge	Mortar, hardener; filler		
		Steel	Stainless steel R	High corrosion-resistant steel HCR
		zinc plated	acc. to EN 10088-1:2014 Corrosion resistance class CRC III acc. to EN 1993-1-4:2015	acc. to EN 10088-1:2014 Corrosion resistance class CRC V acc. to EN 1993-1-4:2015
2	Anchor rod	Property class 4.6; 4.8; 5.8 oder 8.8; EN ISO 898-1: 2013 zinc plated ≥ 5µm, ISO 4042:2018 Zn5/An(A2K) or hot-dip galvanised EN ISO 10684:2004 f _{uk} ≤ 1000 N/mm ² A ₅ > 8% fracture elongation	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062; 1.4662; 1.4462; EN 10088-1:2014 f _{uk} ≤ 1000 N/mm ² A ₅ > 8% fracture elongation	Property class 50 or 80 EN ISO 3506-1:2009 or property class 70 with f _{yk} = 560 N/mm ² 1.4565; 1.4529 EN 10088-1:2014 f _{uk} ≤ 1000 N/mm ² A ₅ > 8% fracture elongation
3	Washer ISO 7089:2000	zinc plated ≥ 5µm, ISO 4042:2018 Zn5/An(A2K) or hot-dip galvanised EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	1.4565;1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2012 zinc plated ≥ 5µm, ISO 4042:2018 Zn5/An(A2K) or hot-dip galvanised ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
5	Internal threaded anchor FIS E	Property class 5.8; EN 10277-1:2008-06 zinc plated ≥ 5µm, ISO 4042:2018 Zn5/An(A2K)	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
6	Commercial standard screw or threaded rod for internal threaded anchor FIS E	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated ≥ 5µm, ISO 4042:2018 Zn5/An(A2K)	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
7	Perforated sleeve and centring sleeve	PP / PE		
fischer injection system FIS V Plus for masonry				Annex A 5 Appendix 6 / 136
Product description Materials				

Specifications of intended use (part 1)				
Table B1.1: Overview use and performance categories				
Anchorages subject to		fischer injection system FIS V Plus for masonry		
Hole drilling with hammer drill mode 		all bricks; without C28 to C48, C75 to C78		
Hole drilling with rotary drill mode 		all bricks		
Static and quasi static load, in masonry		all bricks		
Use category	dry or wet masonry	all bricks		
Installation	Pre-positioned anchorage	Anchor rod or internal threaded anchor (in solid brick masonry and autoclaved aerated concrete)	Perforated sleeve with anchor rod or internal threaded anchor (in perforated and solid brick masonry) Size: FIS H 12x50 K FIS H 12x85 K FIS H 16x85 K FIS H 16x130 K FIS H 20x85 K FIS H 20x130 K FIS H 20x200 K	
	Push through anchorage	Anchor rod; use only in cylindrical drill hole (in solid brick masonry and autoclaved aerated concrete)	Perforated sleeve with anchor rod (in perforated and solid brick masonry) Size: FIS H 18x130/200 K FIS H 22x130/200 K	
Installation conditions	category d/d	all bricks		
	category w/d			
	category w/w			
Installation direction		D3 (downward and horizontal and upwards (e.g. overhead) installation)		
Installation temperature		T _{i,min} = 0 °C bis T _{i,max} = +40 °C		
In-service temperature	Temperature range Tb	-40 °C to +80 °C	(max. short term temperature +80 °C max. long term temperature +50 °C)	
	Temperature range Tc	-40 °C to +120 °C	(max. short term temperature +120 °C; max. long term temperature +72 °C)	
fischer injection system FIS V Plus for masonry			Annex B 1 Appendix 7 / 136	
Intended Use Specifications (part 1)				

Specifications of intended use (part 2)

Anchorage subject to:

- Static and quasi-static loads

Base materials:

- Solid brick masonry (Use category b) and autoclaved aerated concrete (Use category d), acc. to Annex B 13 / B 14
- Hollow brick masonry (use category c), according to Annex B 13 / B 14
- For minimum thickness of masonry member is $h_{ef}+30\text{mm}$
- Mortar strength class of the masonry M2,5 at minimum according to EN 998-2:2010
- For other bricks in solid masonry, hollow or perforated masonry and autoclaved aerated concrete, the characteristic resistance of the anchor may be determined by job site tests according to EOTA Technical Report TR 053, Annex B under consideration of the β -factor according to Annex C 110, Table C110.1

Note (only applies to solid bricks and autoclaved aerated concrete):

The characteristic resistance is also valid for larger brick sizes, higher compressive strength and higher raw density of the masonry unit.

Temperature Range:

- **Tb:** From - 40°C to +80°C (max. short term temperature +80°C and max. long term temperature +50°C)
- **Tc:** From -40°C to +120°C (max. short term temperature +120°C and max. long term temperature +72°C)

Use conditions (Environmental conditions):

- **X1:** Structures subject to dry internal conditions exist
(zinc coated steel, stainless steel or high corrosion resistant steel)
- **X2:** Structures subject to external atmospheric exposure including industrial and marine environment or exposure to permanently damp internal condition, if no particular aggressive conditions exist
(stainless steel or high corrosion resistant steel)
- **X3:** Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

fischer injection system FIS V Plus for masonry

Intended Use
Specifications (part2)

Annex B 2

Appendix 8 / 136

Specifications of intended use (part 2 continued)

Design:

- The anchorages have to be designed in accordance with EOTA Technical Report TR 054, Design method A under the responsibility of an engineer experienced in anchorages and masonry work.

Applies to all bricks, if no other values are specified:

$$N_{Rk} = N_{Rk,b} = N_{Rk,p}$$

$$V_{Rk} = V_{Rk,b} = V_{Rk,c}$$

For the Calculation of pulling out a brick under tension load $N_{Rk,pb}$ or pushing out a brick under shear load $V_{Rk,pb}$ see EOTA Technical Report TR 054.

$N_{Rk,s}$, $V_{Rk,s}$ and $M^0_{Rk,s}$ see annex C1-C3

Factors for job site tests and displacements see Annex C110

- Verifiable calculation notes and drawings have to be prepared taking account the relevant masonry in the region of the anchorage, the loads to be transmitted and their transmission to the supports of the structure. The position of the anchor is indicated on the design drawings.

Installation:

- Category d/d: - Installation and use in dry structures
- Category w/w: - Installation and use in dry and wet structures
- Category w/d: - Installation in wet structures and use in dry structures
- Hole drilling see Annex C (drilling method)
- In case of aborted hole: The hole shall be filled with mortar
- Bridging of unbearing layer (e.g. plaster) at perforated brick masonry see Annex B 6, Table B6.1
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Fastening screws or anchor rods (including nut and washer) must comply with the appropriate material and property class of the fischer internal threaded anchor FIS E.
- minimum curing time see Annex B 8, Table B8.2
- Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

Material dimensions and mechanical properties of the metal parts according to the specifications are given in Annex A 5, Table 5.1

Conformation of material and mechanical properties of the metal parts by inspection certificate 3.1 according to EN 10204:2004, the documents shall be stored

Marking of the anchor rod with the envisage embedment depth. This may be done by the manufacturer of the rod or by a person on job site

fischer injection system FIS V Plus for masonry

Intended Use
Specifications (part2 continued)

Annex B 3

Appendix 9 / 136

Table B4.1: Installation parameters for anchor rods in solid bricks and autoclaved aerated concrete without perforated sleeves

Anchor rod	Thread	M6	M8	M10	M12	M16
Nominal drill hole diameter	d_0 [mm]	8	10	12	14	18
Effective anchorage depth $h_{ef}^{1)}$ in AAC cylindrical drill hole	$h_{0,min}=h_{ef,min}$ [mm]	100				
	$h_{0,max}=h_{ef,max}$ [mm]	200				
Effective anchorage depth $h_{ef}^{1)}$ in AAC conical drill hole	h_o [mm]	-	$h_{ef} + 5$			-
	$h_{ef,1}$ [mm]		75			
	$h_{ef,2}$ [mm]		95			
Effective anchorage depth $h_{ef}^{1)}$ in solid brick (depth of drill hole $h_0 = h_{ef}$)	$h_{ef,min}$ [mm]	50				
	$h_{ef,max}$ [mm]	$h-30, \leq 200$				
Diameter of clearance hole in the fixture	pre-position $d_r \leq$ [mm]	7	9	12	14	18
	push through $d_r \leq$ [mm]	9	11	14	16	20
Diameter of cleaning brush	$d_b \geq$ [mm]	see Table B8.1				
Maximum installation torque	T_{inst} [Nm]	see parameters of brick				

¹⁾ $h_{ef,min} \leq h_{ef} \leq h_{ef,max}$ is possible.

fischer anchor rods M6, M8, M10, M12, M16




Marking (on random place) fischer anchor rod:

Steel zinc plated PC ¹⁾ 8.8	• or +	Steel hot-dip galvanised PC ¹⁾ 8.8	•
High corrosion resistant steel HCR PC ¹⁾ 50	•	High corrosion resistant steel HCR PC ¹⁾ 70	—
High corrosion resistant steel HCR PC ¹⁾ 80	(	Stainless steel R property class 50	~
Stainless steel R property class 80	*		

Alternatively: Colour coding according to DIN 976-1: 2016;
property class 4.6 marking according to EN ISO 898-1:2013

¹⁾ PC = property class

Installation conditions:

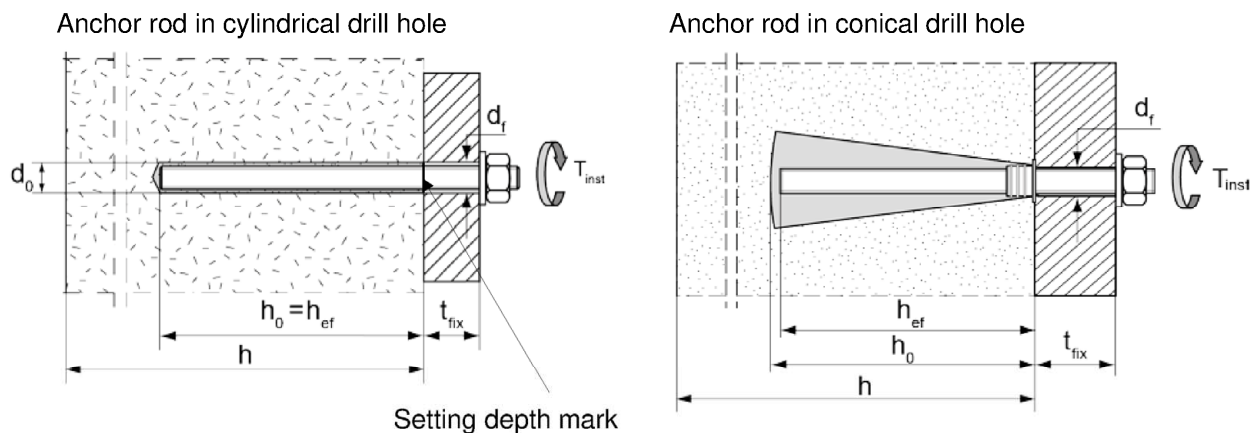

Pictures not to scale

fischer injection system FIS V Plus for masonry

Intended Use


Installation parameters for anchor rods without perforated sleeve

Annex B 4

Table B5.1: Installation parameters for internal threaded anchors FIS E in solid bricks and autoclaved aerated concrete without perforated sleeves

Internal threaded anchor FIS E		11x85 M6	11x85 M8	15x85 M10	15x85 M12
Diameter of anchor	d _H [mm]	11		15	
Nominal drill hole diameter	d ₀ [mm]	14		18	
Length of anchor	L _H [mm]	85			
Effective anchorage depth	h ₀ = h _{ef} [mm]	85			
Effective anchorage depth h _{ef} in AAC (conical drill hole)	h ₀ [mm]	100		-	
	h _{ef} [mm]	85			
Diameter of cleaning brush	d _b ≥ [mm]	see Table B8.1			
Maximum installation torque	T _{inst} [Nm]	see parameters of brick			
Diameter of clearance hole in the fixture	d _f [mm]	7	9	12	14
Screw-in depth	l _{E,min} [mm]	6	8	10	12
	l _{E,max} [mm]	60			


fischer Internal threaded anchor FIS E

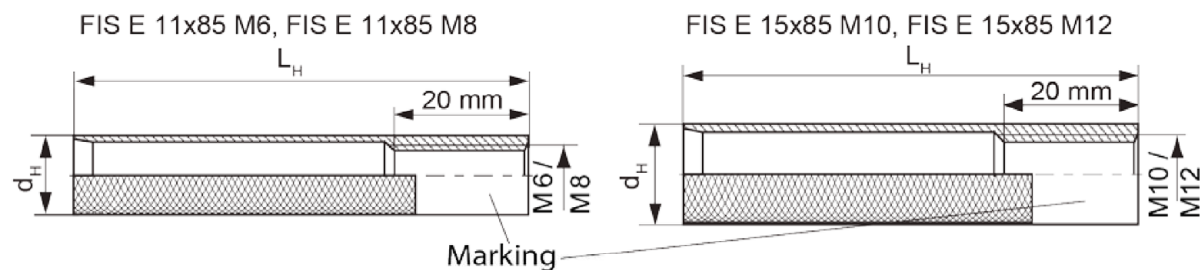

Marking:

Size, e.g. **M8**, Stainless steel R, e.g. **M8 R**, High corrosion-resistant steel: HCR, e.g. **M8 HCR**

Installation conditions:

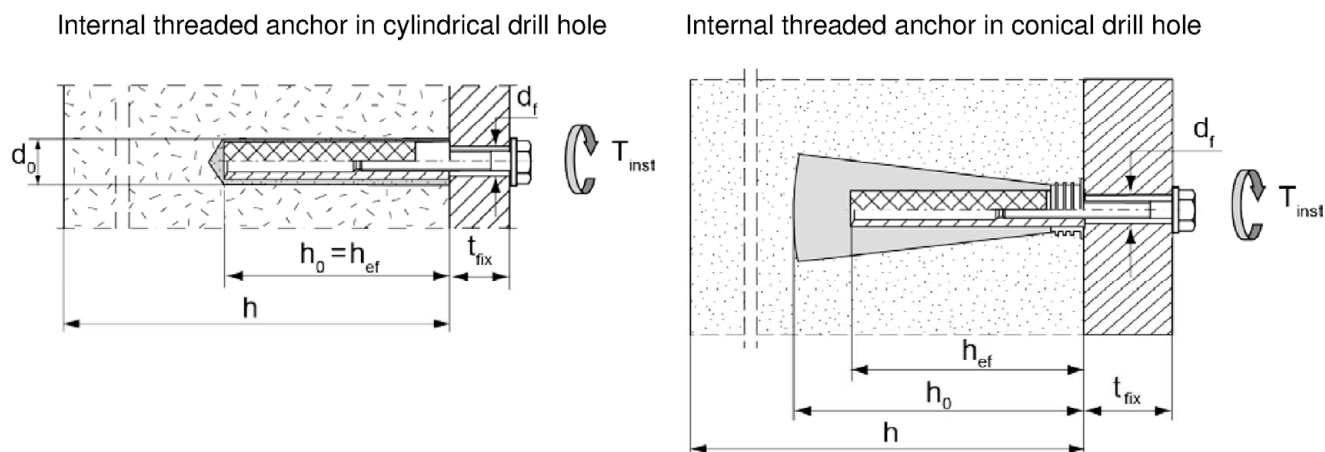

Pictures not to scale

fischer injection system FIS V Plus for masonry

Intended Use

Installation parameters for internal threaded rods FIS E without perforated sleeve

Annex B 5

Table B6.1: Installation parameters for anchor rods and internal threaded anchors FIS E with perforated sleeves (pre-positioned anchorage)

perforated sleeve FIS H K		12x50	12x85 ²⁾	16x85	16x130 ²⁾	20x85	20x130 ²⁾	20x200 ²⁾
Nominal drill hole diameter $d_0 = D_{\text{sleeve, nom}}$	d_0 [mm]	12		16		20		
Depth of drill hole	h_0 [mm]	55	90	90	135	90	135	205
Effective anchorage depth	$h_{\text{ef, min}}$ [mm]	50	65	85	110	85	110	180
	$h_{\text{ef, max}}$ [mm]	50	85	85	130	85	130	200
Size of threaded rod	[-]	M6 und M8		M8 und M10		M12 und M16		
Size of internal threaded anchor FIS E		-	-	11x85	-	15x85	-	-
Diameter of cleaning brush ¹⁾	$d_b \geq$ [mm]	see Table B8.1						
Maximum installation torque	T_{inst} [Nm]	see parameters of brick						

¹⁾ Only for solid areas in hollow bricks and solid bricks.


²⁾ Bridging of unbearing layer (e.g. plaster) is possible. When reducing the effective anchorage depth $h_{\text{ef, min}}$, the values of the next shorter perforated sleeve of the same diameter must be used. The smaller value of characteristic resistance must be taken.

Perforated sleeve


FIS H 12x50 K; FIS H 12x85 K; FIS H 16x85 K; FIS H 16x130 K;
FIS H 20x85 K; FIS H 20x130 K; FIS H 20x200 K

Marking:

Size $D_{\text{sleeve, nom}} \times L_{\text{sleeve}}$
(e.g.: 16x85)




$D_{\text{sleeve, nom}}$

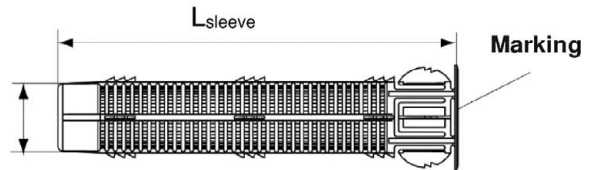


fischer Internal threaded anchor FIS E

FIS E 11x85 M6, FIS E 11x85 M8

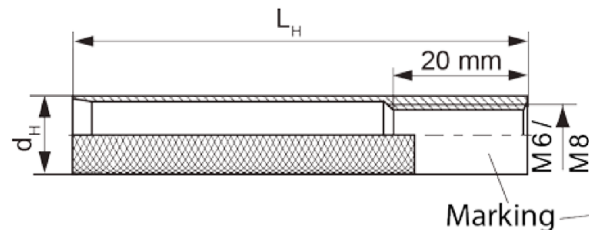


FIS E 15x85 M10, FIS E 15x85 M12

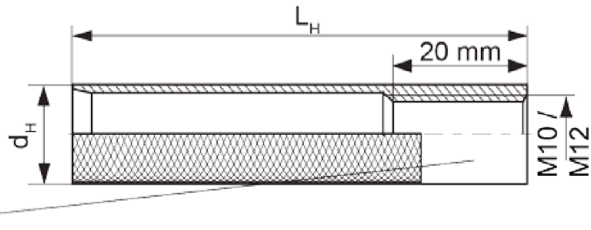


Installation conditions:

Anchor rod with perforated sleeve

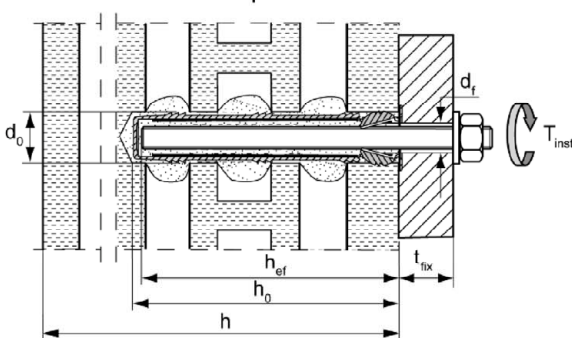

Internal threaded anchor with perforated sleeve

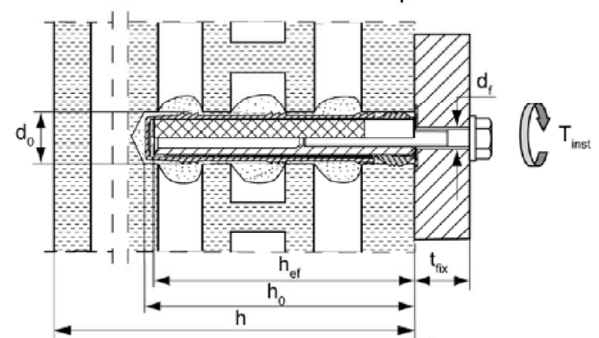

Pictures not to scale

fischer injection system FIS V Plus for masonry

Intended Use

Installation parameters for anchor rods and internal threaded anchors FIS E with perforated sleeve (pre-positioned anchorage)

Annex B 6

Appendix 12 / 136


Table B7.1: Installation parameters for anchor rods with perforated sleeves
(push through anchorage)

Perforated sleeve FIS H K		18x130/200		22x130/200
Nominal sleeve diameter	$D_{\text{sleeve,nom}}$ [mm]	16		20
Nominal drill hole diameter	d_0 [mm]	18		22
Depth of drill hole	h_0 [mm]	135		
Effective anchorage depth	h_{ef} [mm]	≥ 130		
Diameter of cleaning brush ¹⁾	$d_b \geq$ [mm]	Siehe Tabelle B8.1		
Size of threaded rod	[-]	M10	M12	M16
Maximum installation torque	T_{inst} [Nm]	see parameters of brick		
Thickness of fixture	$t_{\text{fix,max}}$ [mm]	200		

¹⁾ Only for solid areas in hollow bricks and solid bricks.


Perforated sleeve

FIS H 18x130/200 K; FIS H 22x130/200 K

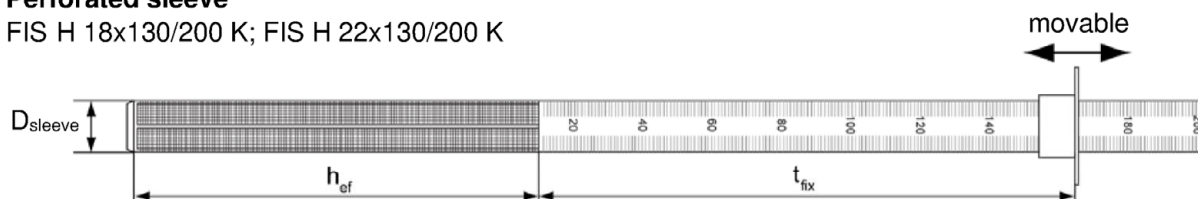

Installation conditions:

Anchor rod with perforated sleeve

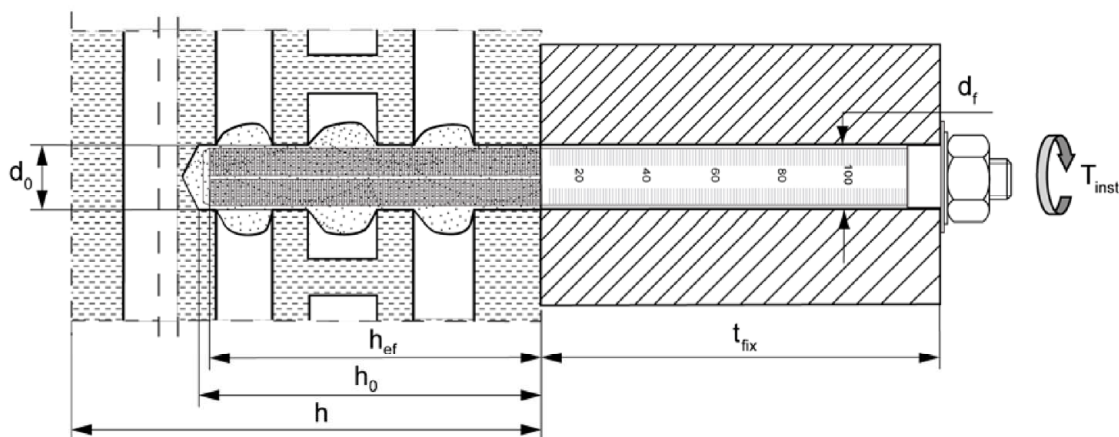

Pictures not to scale

fischer injection system FIS V Plus for masonry

Intended Use

Installation parameters for anchor rods with perforated sleeves
(push through anchorage)

Annex B 7

Appendix 13 / 136

Tabelle B8.1: Parameters of the cleaning brush BS (steel brush with steel bristles)

The size of the cleaning brush refers to the drill hole diameter

Drill hole diameter	d_0 [mm]	8	10	12	14	16	18	20	22
Brush diameter	d_b [mm]	9	11	14	16	20	20	25	25



Only for solid bricks and autoclaved aerated concrete

Table B8.2: Maximum processing times and minimum curing times
(During the curing time of the mortar the masonry temperature may not fall below the listed minimum temperature)

Temperature at anchoring base [°C]	Maximum processing time t_{work}			Minimum curing time ¹⁾ t_{cure}		
	FIS VW Plus High Speed ³⁾	FIS V Plus ²⁾	FIS VS Plus Low Speed ²⁾	FIS VW Plus High Speed ³⁾	FIS V Plus ²⁾	FIS VS Plus Low Speed ²⁾
> 0 to 5	5 min	13 min	20 min	3 h	3 h	6 h
> 5 to 10	3 min	9 min	20 min	50 min	90 min	3 h
> 10 to 20	1 min	5 min	10 min	30 min	60 min	2 h
> 20 to 30	-	4 min	6 min	-	45 min	60 min
> 30 to 40	-	2 min	4 min	-	35 min	30 min

¹⁾ For wet bricks the curing time must be doubled

²⁾ Minimum cartridge temperature +5°C

³⁾ Minimum cartridge temperature ±0°C

Pictures not to scale

fischer injection system FIS V Plus for masonry

Intended use

Cleaning brush (steel brush)










Maximum processing times and minimum curing times

Annex B 8

Appendix 14 / 136

Installation instruction part 1

Installation in solid brick and autoclaved aerated concrete (without perforated sleeve)

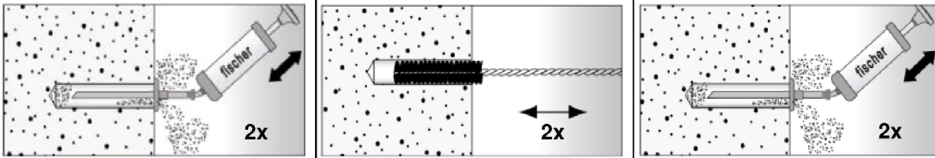1		Drill the hole (drilling method see Annex C of the respective brick) depth of drill hole h_0 and drill hole diameter d_0 see Table B4.1; B5.1		
2		Blow out the drill hole twice. Brush twice and blow out twice again.		
3		Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible)		
4		Place the cartridge into a suitable dispenser		Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed of.
5		Fill approximately 2/3 of the drill hole with mortar beginning from the bottom of the hole ¹⁾ . Avoid bubbles!		For push through anchorage fill the annular clearance with mortar.
6		Only use clean and oil-free metal parts. Mark the anchor rod for setting depth. Insert the anchor rod or internal threaded anchor FIS E by hand using light turning motions. When reaching the setting depth marking, excess mortar must emerge from the mouth of the drill hole.		
7		Do not touch. Minimum curing time see Table B8.2		Mounting the fixture. T_{inst} see parameter of brick.

¹⁾ Exact volume of mortar see manufacturer's specification.

fischer injection system FIS V Plus for masonry

Intended use








Installation instruction (without perforated sleeve) part 1

Annex B 9

Appendix 15 / 136

Installation instruction part 2










Installation in perforated or solid brick with perforated sleeve (pre-positioned anchorage)

1		Drill the hole (drilling method see Annex C of the respective brick). depth of drill hole h_0 and drill hole diameter d_0 see Table B6.1	When install perforated sleeves in solid bricks or solid areas of hollow bricks, also clean the hole by blowing out and brushing.	
2		Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible)		
3		Place the cartridge into a suitable dispenser.		Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed of.
4		Insert the perforated sleeve flush with the surface of the masonry or plaster.		Fill the perforated sleeve completely with mortar beginning from the bottom of the hole ¹⁾ .
5		Only use clean and oil-free metal parts. Mark the anchor rod for setting depth. Insert the anchor rod or the internal threaded anchor FIS E by hand using light turning motions until reaching the setting depth marking (anchor rod) or flush with the surface (internal threaded anchor).		
6		Do not touch. Minimum curing time see Table B8.2		Mounting the fixture. T_{inst} see parameter of brick.

¹⁾ Exact volume of mortar see manufacturer's specification.

Installation instruction part 3












Installation in perforated or solid brick with perforated sleeve (push through anchorage)

1		Push the movable stop up to the correct thickness of fixture and cut the overlap.		Drill the hole through the fixture. Depth of drill hole ($h_0 + t_{fix}$) and drill hole diameter see Table B7.1
2		Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible)		
3		Place the cartridge into a suitable dispenser.		Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed of.
4		Insert the perforated sleeve flush with the surface of the fixture into the drill hole.		Fill the sleeve with mortar beginning from the bottom of the hole. ¹⁾ For deep drill holes use an extension tube.
5		Only use clean and oil-free metal parts. Mark the anchor rod for setting depth. Insert the anchor rod or the internal threaded anchor FIS E by hand using light turning motions until reaching the setting depth marking (anchor rod) or flush with the surface (internal threaded anchor).		
6		Do not touch. Minimum curing time see Table B8.2		Mounting the fixture. T_{inst} see parameter of brick.

¹⁾ Exact volume of mortar see manufacturer's specification.

Installation instruction part 4

Installation in autoclaved aerated concrete with special conic drill bit PBB
(pre-positioned anchorage)

1		Position the movable drill bit arrester on the used drill hole depth (see Annex B 4, Table B4.1) For this, unlock the clamp screw and slide the arrester. Now fix the clamp screw.		
2		Drill the cylindrical hole with rotating drill until the arrester contact the material surface. (drilling method see Annex C of the respective brick)		
3		Deviate the working power drill circulate to generate an conic undercut in the material.		
4		Blow out the drill hole four times.		
5		Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible)		
6		Place the cartridge into a suitable dispenser.		Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed of.
7		Put the center sleeve into the drill hole and adapt the injection adapter onto the static mixer.		Fill the drill hole with injection mortar.
8			Only use clean and oil-free metal parts. Mark the anchor rod for setting depth. Insert the anchor rod or internal threaded anchor FIS E by hand using light turning motions. When reaching the setting depth marking, excess mortar must emerge from the mouth of the drill hole.	
9		Do not touch. Minimum curing time see Table B8.2		Mounting the fixture. T _{inst} see parameter of brick.

fischer injection system FIS V Plus for masonry

Intended use

Installation instruction for autoclaved aerated concrete with special conic drill bit PBB
(pre-positioned anchorage) part 4

Annex B 12

Appendix 18 / 136


Table B13.1: Overview of controlled bricks (part 1)

Kind of masonry	Brick format [mm]	Compressive strength f_b [N/mm ²]	Producing country	Density ρ [kg/dm ³]	Annex
Solid brick Mz					
Solid brick Mz	NF ≥240x115x71	12 - 20	Germany	≥1,8	C4 - C7
	2DF ≥240x115x113	10 - 16	Germany	≥1,8	C8/C9
	≥ 245x118x54	10 - 20	Italy	≥1,8	C10/C11
	≥ 230x108x55	10 - 20	Denmark	≥1,8	C12/C13
Solid sand- lime brick KS / perforated Sand- lime brick KSL					
Solid sand - lime brick KS	NF ≥240x115x71	12 - 28	Germany	≥2,0	C14/C15
	8DF ≥ 250x240x240	10 - 28	Germany	≥2,0	C16/C17
	≥ 997x214x538	10 - 36	Netherlands	≥1,8	C18/C19
Perforated sand - lime brick KSL	3DF 240x175x113	8 - 20	Germany	≥1,4	C20 - C23
Vertical perforated brick HLz					
Vertical perforated brick HLz	370x240x237	4 - 12	Germany	≥1,0	C24/C25
	500x175x237	4 - 12	Germany	≥1,0	C24/C25
	2DF 240x115x113	6 - 28	Germany	≥1,4	C26/C27
	248x365x248	4 - 8	Germany	≥0,6	C28 - C31
	248x365x249	8 - 12	Germany	≥0,7	C32 - C35
	248x365x249	4 - 6	Germany	≥0,5	C36 - C39
	248x425x248	4 - 8	Germany	≥0,8	C40 - C43
	248x425x248	4 - 8	Germany	≥0,6	C44 - C47
	500x200x315	4 - 8	France	≥0,6	C48 - C51
	500x200x300	4 - 10	France	≥0,7	C52 - C55
	500x200x315	2 - 8	France	≥0,7	C56 - C59
	560x200x275	4 - 8	France	≥0,7	C60/C61
	255x120x118	2 - 12	Italy	≥1,0	C62 - C64
	275x130x94	6 - 20	Spain	≥0,8	C65/C66
	220x190x290	6 - 10	Portugal	≥0,7	C67 - C70
	253x300x240	2 - 6	Austria	≥0,8	C71 - C74
	250x440x250	6 - 10	Austria	≥0,7	C75 - C78
	230x108x55	2 - 8	Denmark	≥1,4	C79/C80
Horizontal perforated brick LLz					
Horizontal perforated brick LLz	248x78x250	2 - 6	Italy	≥0,7	C81/C82
	128x88x275	2	Spain	≥0,8	C83/C84
Light-weight concrete hollow block Hbl					
Light-weight concrete hollow block Hbl	362x240x240	2 - 4	Germany	≥1,0	C85 - C88
	500x200x200	2 - 6	France	≥1,0	C89/C90
	440x215x215	4 - 10	Ireland	≥1,2	C91 - C94
fischer injection system FIS V Plus for masonry				Annex B 13 Appendix 19 / 136	
Intended use Overview of controlled bricks (part 1)					


Table B14.1: Overview of controlled bricks (part 2)					
Kind of masonry	Brick format [mm]	Compressive strength f_b [N/mm ²]	Producing country	Density ρ [kg/dm ³]	Annex
Light-weight concrete solid block Vbl					
Light-weight concrete solid block Vbl	≥ 372x300x254	2	Germany	≥0,6	C95/C96
	≥ 250x240x239	4 - 8	Germany	≥1,6	C97 - C100
	≥ 440x100x215	4 - 10	Ireland	≥2,0	C101/C102
	≥ 440x95x215	6 - 12	England	≥2,0	C103/C104
Autoclaved aerated concrete (AAC)					
PP2 / AAC	-	2	Germany	0,35	C105 - C109
PP4 / AAC	-	4	Germany	0,5	C105 - C109
PP6 / AAC	-	6	Germany	0,65	C105 - C109
fischer injection system FIS V Plus for masonry Intended use Overview of controlled bricks (part 2)					
				Annex B 14	
				Appendix 20 / 136	

Table B15.1: Overview dimensions of perforated and hollow bricks (part 1)


Solid sand-lime brick KS, 8DF, EN 771-2:2015
according to Annex C 16

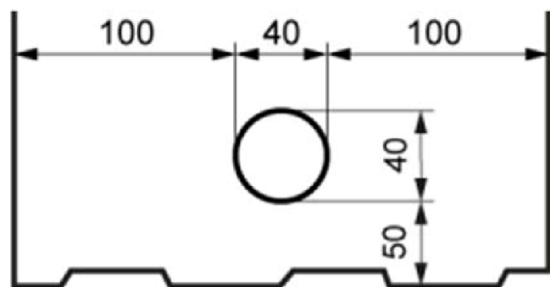


Perforated sand-lime brick KSL, 3DF, EN 771-2:2015; e.g. KS Wemding according to Annex C 20

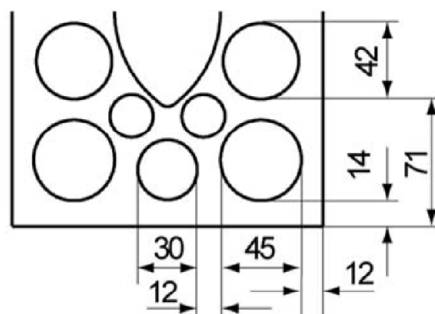


Vertical perforated brick HLz, EN 771-1:2015; e.g. Wienerberger, Poroton according to Annex C 24

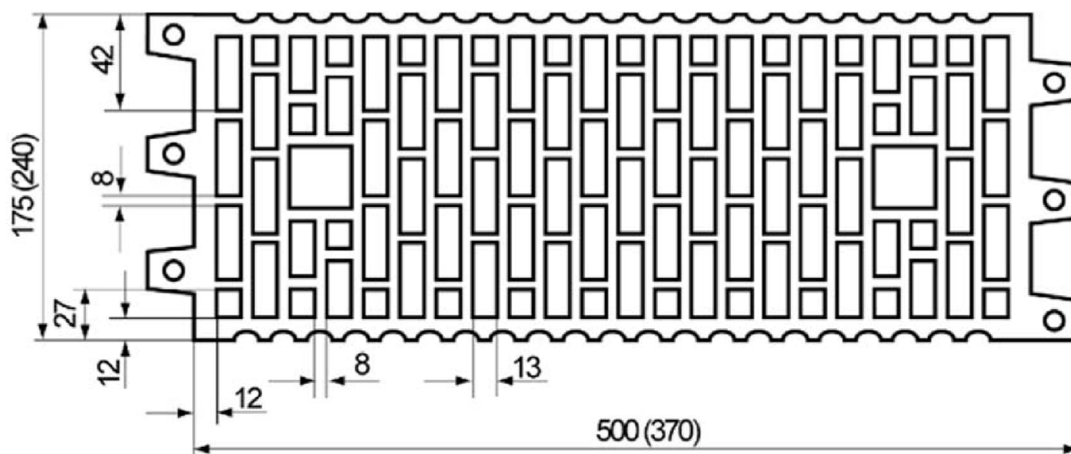

Vertical perforated brick HLz, 2DF, EN 771-1:2015; e.g. Wienerberger according to Annex C 26

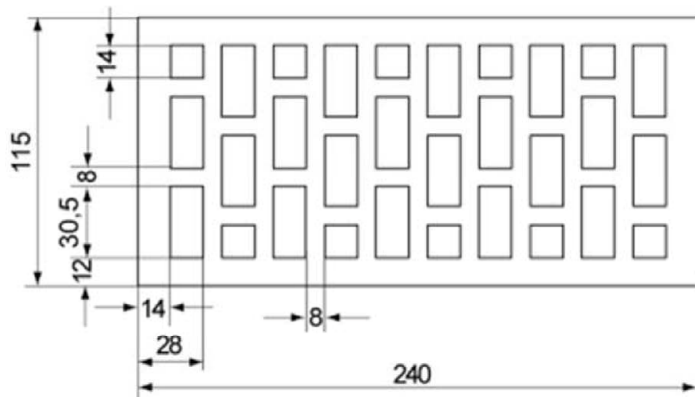

Vertical perforated brick HLz, T8, EN 771-1:2015; according to Annex C 28

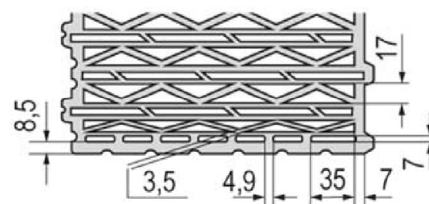

Pictures not to scale

fischer injection system FIS V Plus for masonry


Intended use
Overview dimensions of perforated and hollow bricks (part 1)

Annex B 15


Appendix 21 / 136

Table B16.1: Overview dimensions of perforated and hollow bricks (part 2)


Vertical perforated brick HLz, T10, T11, EN 771-1:2015; according to Annex C32

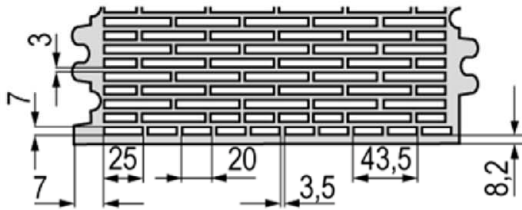


Vertical perforated brick HLz, T7 PF, filled with perlite,
EN 771-1:2015; according to Annex C 36

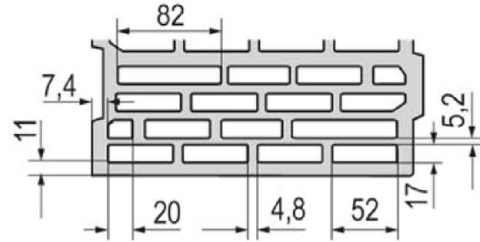


Vertical perforated brick HLz, S9 MW, filled with mineral wool, EN 771-1:2015; according to Annex C 40

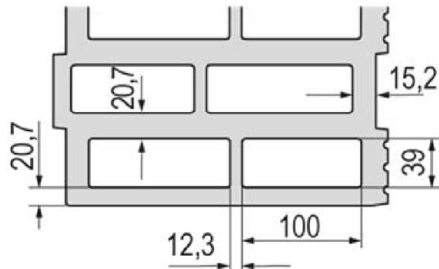

Vertical perforated brick HLz, T7 MW, filled with mineral wool, EN 771-1:2015; according to Annex C 44

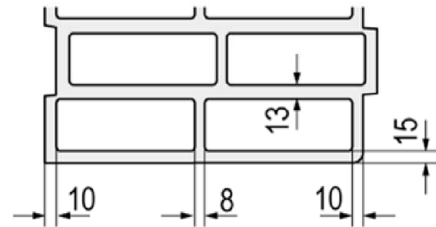

Vertical perforated brick HLz, EN 771-1:2015; e.g. Bouyer Leroux; According to Annex C 48

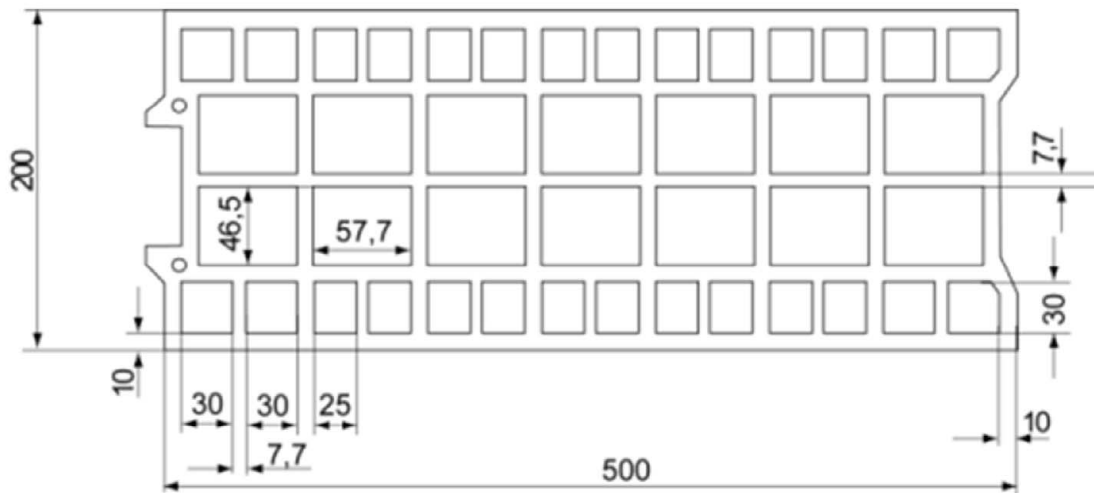

Pictures not to scale

fischer injection system FIS V Plus for masonry


Intended use
Overview dimensions of perforated and hollow bricks (part 2)

Annex B 16


Appendix 22 / 136

Table B17.1:Overview dimensions of perforated and hollow bricks (part 3)


Vertical perforated brick HLz, EN 771-1:2015; e.g. Wienerberger according to Annex C 52

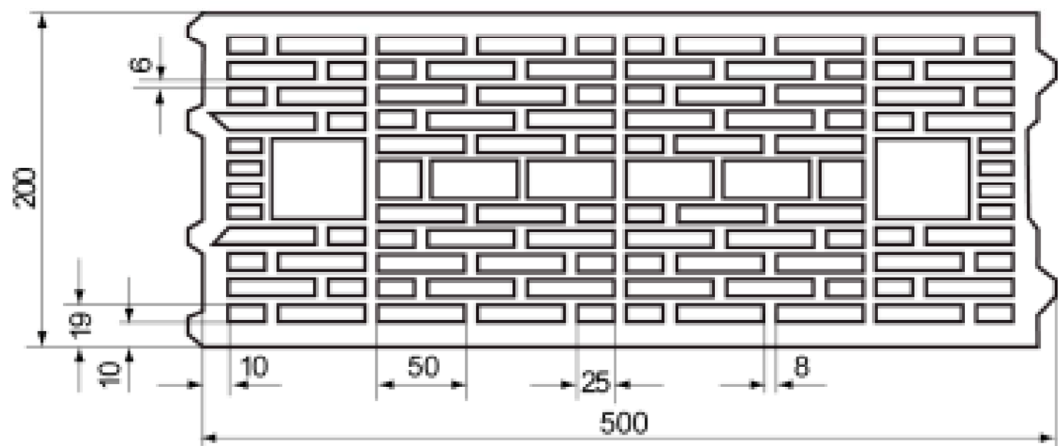

Vertical perforated brick HLz, EN 771-1:2015; e.g. Terreal according to Annex C 56

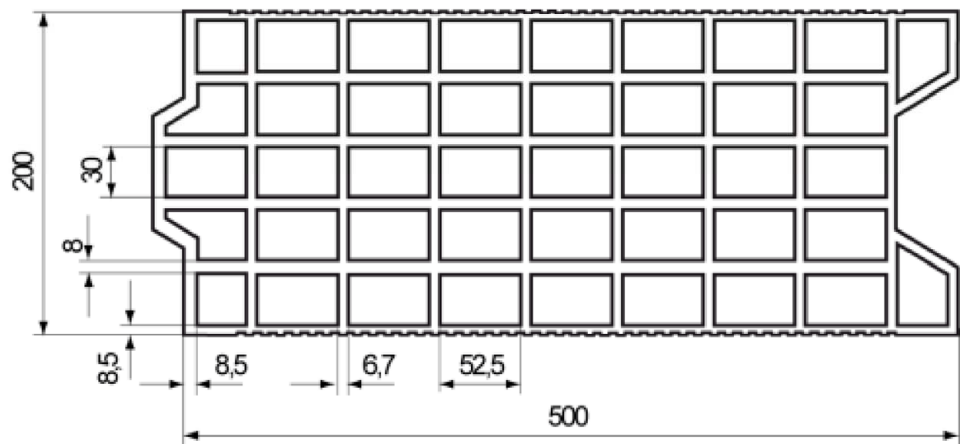

Vertical perforated brick HLz, EN 771-1:2015; e.g. Imery according to Annex C 60

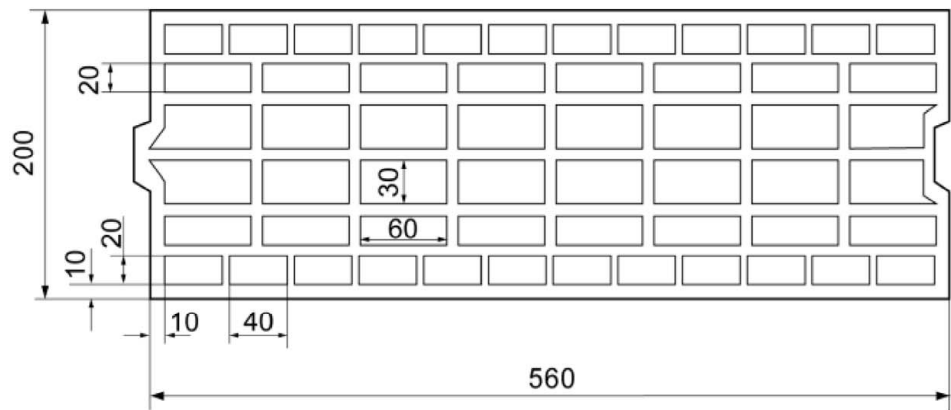

Pictures not to scale


fischer injection system FIS V Plus for masonry

Intended use
Overview dimensions of perforated and hollow bricks (part 3)


Annex B 17

Table B18.1: Overview dimensions of perforated and hollow bricks (part 4)


Vertical perforated brick HLz, EN 771-1:2015;
e.g. Wienerberger according to Annex C 62

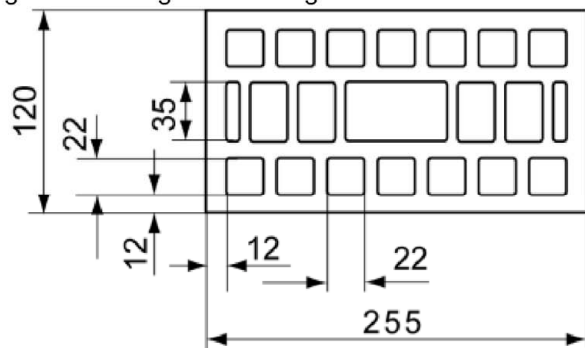


Vertical perforated brick HLz, EN 771-1:2015;
e.g. Germanica Farreny S.A. according to Annex C 65

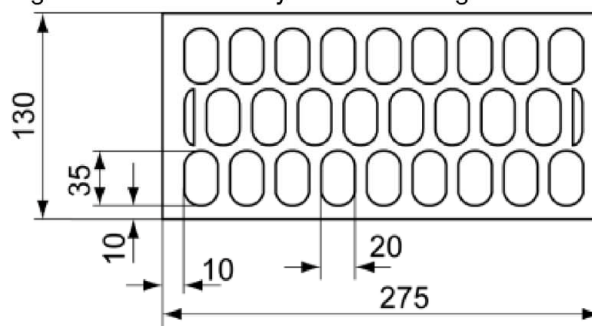


Vertical perforated brick HLz, EN 771-1:2015;
e.g. Perceram according to Annex C 67

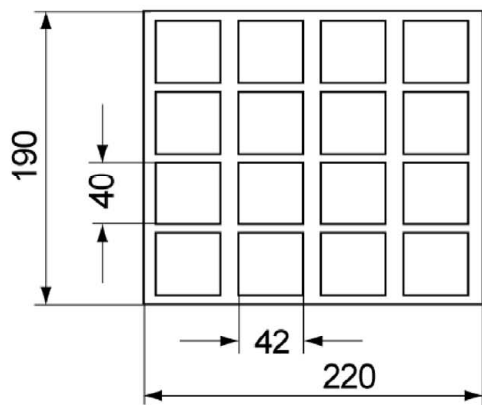


Vertical perforated brick HLz, EN 771-1:2015;
e.g. Ziegelwerk Brenna according to Annex C 71

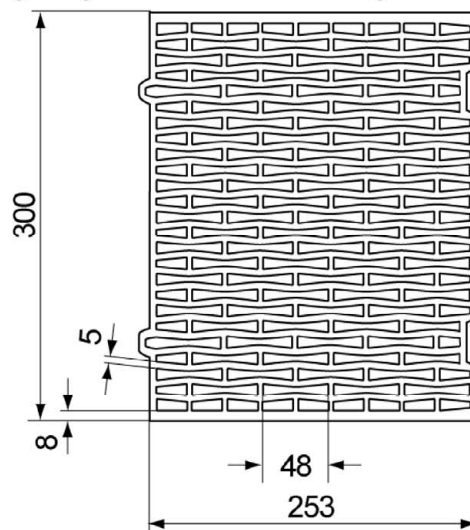

Vertical perforated brick HLz, Porotherm W 44, filled
with mineral wool, EN 771-1:2015 according to
Annex C 75

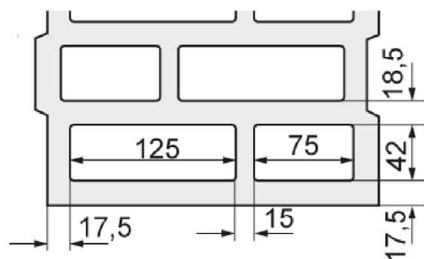

Vertical perforated brick HLz, EN 771-1:2015;
e.g. Wienerberger according to Annex C 79

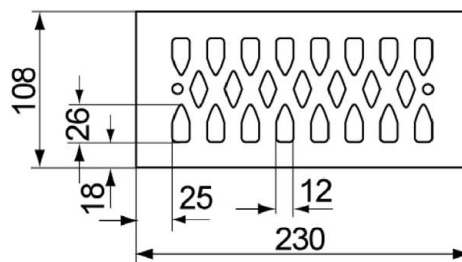

Pictures not to scale

fischer injection system FIS V Plus for masonry


Intended use
Overview dimensions of perforated and hollow bricks (part 4)

Annex B 18


Appendix 24 / 136

Table B19.1: Overview dimensions of perforated and hollow bricks (part 5)


Horizontal perforated brick LLz, EN 771-1:2015;
according to Annex C 81

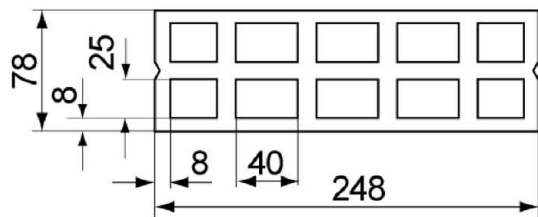


Horizontal perforated brick LLz, EN 771-1:2015;
e.g. Germanica Farreny S.A according to Annex C 83




Light-weight concrete hollow block Hbl,
EN 771-3:2015; according to Annex C 85

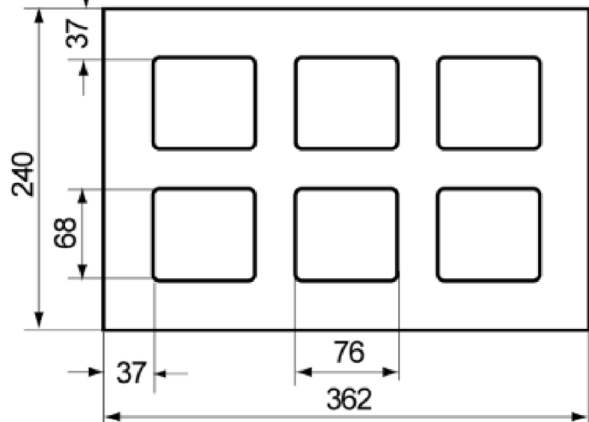


Light-weight concrete hollow block Hbl, EN 771-3:2015;
e.g. Sepa according to Annex C 89

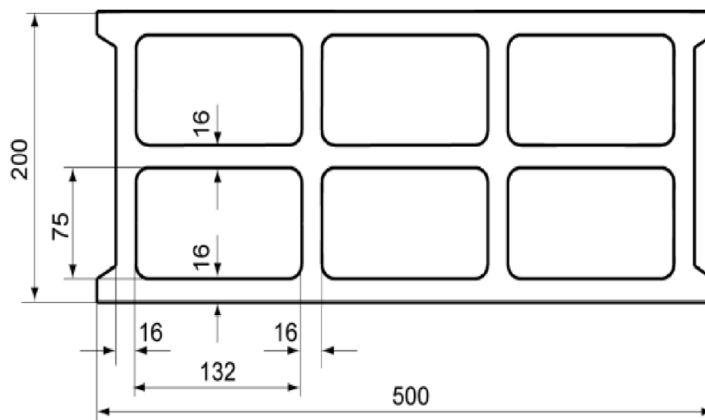

Light-weight concrete hollow block Hbl,
EN 771-3:2015;
e.g. Roadstone wood according to Annex C 91

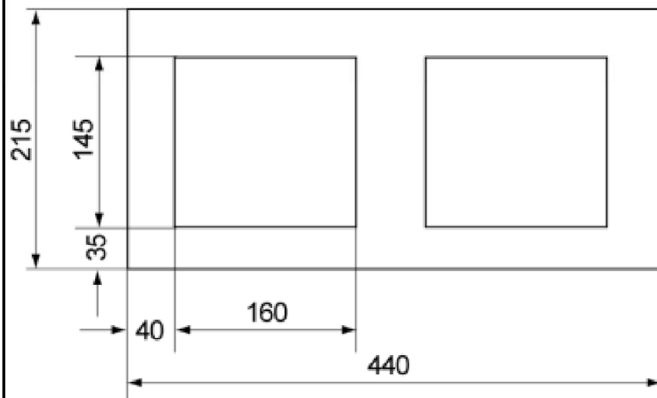

Light-weight concrete solid block Vbl, EN 771-3:2015;
e.g. Sepa according to Annex C 97

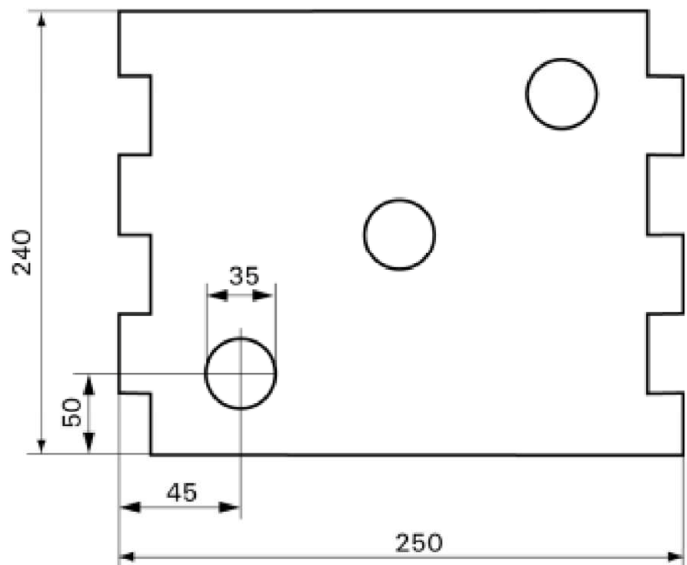

Pictures not to scale


fischer injection system FIS V Plus for masonry

Intended use
Overview dimensions of perforated and hollow bricks (part 5)

Annex B 19

Appendix 25 / 136

Spacing and edge distance

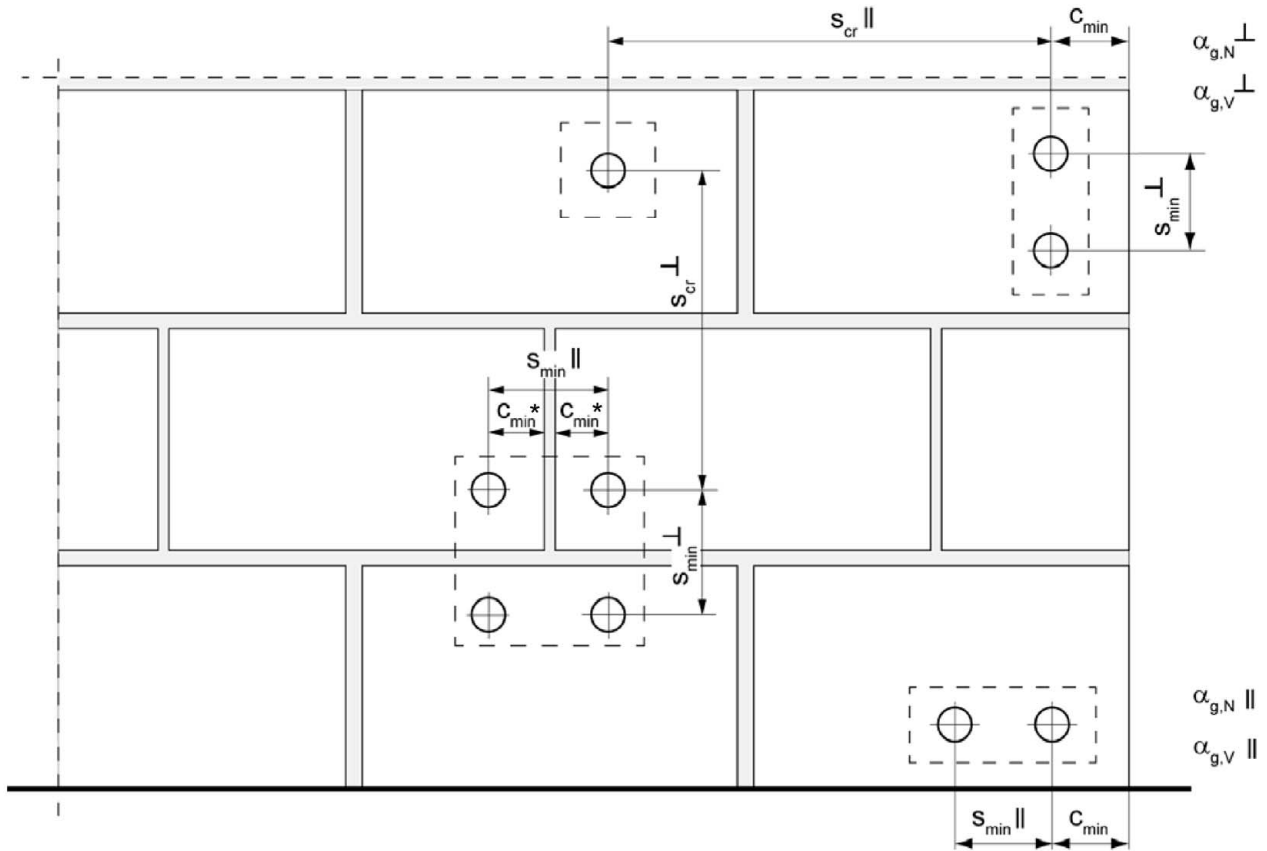

* Only, if vertical joints are not completely filled with mortar

$s_{min} \parallel$	=	Minimum spacing parallel to bed joint
$s_{min} \perp$	=	Minimum spacing vertical to bed joint
$s_{cr} \parallel$	=	Characteristic spacing parallel to bed joint
$s_{cr} \perp$	=	Characteristic spacing vertical to bed joint
$c_{cr} = c_{min}$	=	Edge distance
$\alpha_{g,N} \parallel$	=	Group factor for tension resistance, anchor group parallel to bed joint
$\alpha_{g,V} \parallel$	=	Group factor for shear resistance, anchor group parallel to bed joint
$\alpha_{g,N} \perp$	=	Group factor for tension resistance, anchor group vertical to bed joint
$\alpha_{g,V} \perp$	=	Group factor for shear resistance, anchor group vertical to bed joint

For $s \geq s_{cr}$ $\alpha_g = 2$

For $s_{min} \leq s < s_{cr}$ α_g according to installation parameters of brick

$N_{Rk}^g = \alpha_{g,N} \cdot N_{Rk}$; $V_{Rk}^g = \alpha_{g,V} \cdot V_{Rk}$ (Group of 2 anchors)

$N_{Rk}^g = \alpha_{g,N} \parallel \cdot \alpha_{g,N} \perp \cdot N_{Rk}$; $V_{Rk}^g = \alpha_{g,V} \parallel \cdot \alpha_{g,V} \perp \cdot V_{Rk}$ (Group of 4 anchors)

fischer injection system FIS V Plus for masonry

Intended use
Spacing and edge distance

Annex B 20

Appendix 26 / 136

Table C1.1: Characteristic values for the resistance to steel failure of anchor rods under tension load									
Anchor rod				M6	M8	M10	M12	M16	
Resistance under tension load, steel failure									
Characteristic resistance $N_{Rk,s}$	Steel zinc plated	Property class	4.6	[kN]	8	15(13) ³⁾	23(21) ³⁾	33	63
			4.8		8	15(13) ³⁾	23(21) ³⁾	33	63
			5.8		10	19(17) ³⁾	29(27) ³⁾	43	79
			8.8		16	29(27) ³⁾	47(43) ³⁾	68	126
	Stainless steel R and High corrosion resistant steel HCR		50		10	19	29	43	79
			70		14	26	41	59	110
			80		16	30	47	68	126
Partial factors ¹⁾									
Partial factor $\gamma_{Ms,N}$	Steel zinc plated	Property class	4.6	[-]	2,00				
			4.8		1,50				
			5.8		1,50				
			8.8		1,50				
	Stainless steel R and High corrosion resistant steel HCR		50		2,86				
			70		1,50 ²⁾ / 1,87				
			80		1,60				
¹⁾ In absence of other national regulations									
²⁾ Only for fischer FIS A made of high corrosion-resistant steel HCR									
³⁾ Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot dip galvanised standard threaded rods according to EN ISO 10684:2004+AC:2009									
fischer injection system FIS V Plus for masonry								Annex C 1	
Performance Characteristic resistance to steel failure of anchor rods under tension load									
								Appendix 27 / 136	

Table C2.1: Characteristic values for the resistance to steel failure of anchor rods under shear load								
Anchor rod			M6	M8	M10	M12	M16	
Resistance under shear load, steel failure								
without lever arm								
Characteristic resistance $V_{Rk,s}$	Steel zinc plated	4.6	[kN]	4	9(8) ³⁾	14(13) ³⁾	20	38
		4.8		4	9(8) ³⁾	14(13) ³⁾	20	38
		5.8		6	11(10) ³⁾	17(16) ³⁾	25	47
	Stainless steel R and High corrosion resistant steel HCR	8.8		8	15(13) ³⁾	23(21) ³⁾	34	63
		50		5	9	15	21	39
		70		7	13	20	30	55
		80		8	15	23	34	63
with lever arm								
Characteristic resistance $M^0_{Rk,s}$	Steel zinc plated	4.6	[Nm]	6	15(13) ³⁾	30(27) ³⁾	52	133
		4.8		6	15(13) ³⁾	30(27) ³⁾	52	133
		5.8		7	19(16) ³⁾	37(33) ³⁾	65	166
	Stainless steel R and High corrosion resistant steel HCR	8.8		12	30(26) ³⁾	60(53) ³⁾	105	266
		50		7	19	37	65	166
		70		10	26	52	92	232
		80		12	30	60	105	266
Partial factors ¹⁾								
Partial factor $\gamma_{Ms,V}$	Steel zinc plated	4.6	[-]	1,67				
		4.8		1,25				
		5.8		1,25				
	Stainless steel R and High corrosion resistant steel HCR	8.8		1,25				
		50		2,38				
		70		1,25 ²⁾ / 1,56				
		80		1,33				

¹⁾ In absence of other national regulations

²⁾ Only for fischer FIS A made of high corrosion-resistant steel HCR

³⁾ Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot dip galvanised standard threaded rods according to EN ISO 10684:2004+AC:2009.

fischer injection system FIS V Plus for masonry

Performance

Characteristic resistance to steel failure of anchor rods under shear load

Annex C 2

Table C3.1: Characteristic values for the **resistance to steel failure** of **internal threaded anchors FIS E** under tension / shear load

fischer internal threaded anchor FIS E				M6	M8	M10	M12
Resistance under tension load, steel failure							
Characteristic resistance with screw	$N_{Rk,s}$	Property class 5.8	[kN]	10	18	29	42
		R		14	26	41	59
		Property class 70 HCR		14	26	41	59
Partial factors ¹⁾							
Partial factor	$\gamma_{Ms,N}$	Property class 5.8	[-]	1,50			
		R		1,87			
		Property class 70 HCR		1,87			
Resistance under shear load, steel failure							
without lever arm							
Characteristic resistance with screw	$V_{Rk,s}$	Property class 5.8	[kN]	5	9	15	21
		R		7	13	20	30
		Property class 70 HCR		7	13	20	30
with lever arm							
Characteristic resistance	$M^0_{Rk,s}$	Property class 5.8	[Nm]	8	19	37	65
		R		11	26	52	92
		Property class 70 HCR		11	26	52	92
Partial factors ¹⁾							
Partial factor	$\gamma_{Ms,V}$	Property class 5.8	[-]	1,25			
		R		1,56			
		Property class 70 HCR		1,56			

¹⁾ In absence of other national regulations

fischer injection system FIS V Plus for masonry


Performance

Characteristic resistance to steel failure of fischer internal threaded anchor FIS E

Annex C 3

Appendix 29 / 136

Solid brick Mz, NF, EN 771-1:2015



Solid brick Mz, NF, EN 771-1:2015			
Producer	e.g. Wienerberger		
Nominal dimensions [mm]	length L	width W	height H
	≥ 240	≥ 115	≥ 71
Density ρ [kg/dm ³]	≥ 1,8		
Compressive strength f_b [N/mm ²]	12 / 20		
Standard or annex	EN 771-1:2015		

Table C4.1: Installation parameters for edge distance $c=100\text{mm}$

Anchor rod		M6	M8	M10	M12	-		-		
Internal threaded anchor FIS E		-	-	-	-	M6	M8	M10	M12	
						11x85		15x85		
Anchor rod and internal threaded anchor FIS E without perforated sleeve										
Effective anchorage depth h_{ef}	[mm]	50	50	50	50	85				
		80	80	80	80					
		200	200	200	200					
Max. installation torque T_{inst}	[Nm]	4	10			4	10			
General installation parameters										
Edge distance c_{min}	[mm]	100				100				
Edge distance $h_{ef}=200$ c_{min}		150				- ¹⁾				
Spacing		$s_{min II,N}$	60				60			
		$h_{ef}=200 s_{min II,N}$	240				- ¹⁾			
		$s_{min II,V}$	240				240			
		$s_{cr II}$	240				240			
		$s_{cr \perp} = s_{min \perp}$	75				75			
Drilling method										
Hammer drilling with hard metal hammer drill										

¹⁾ No performance assessed

Table C4.2: Group factors

Anchor rods		M6	M8	M10	M12	-		-	
Internal threaded anchor FIS E		-	-	-	-	M6	M8	M10	M12
						11x85		15x85	
Edge distance c_{min}	[mm]	100							
Group factor	$\alpha_{g,N II}$	[-]	1,5						
	$\alpha_{g,V II}$		2,0						
	$h_{ef}=200 \alpha_{g,N II}$		1,5						
	$h_{ef}=200 \alpha_{g,V II}$		2,0						
	$\alpha_{g,N \perp}$		2,0						
	$\alpha_{g,V \perp}$		2,0						
	$h_{ef}=200 \alpha_{g,N \perp}$		2,0						
	$h_{ef}=200 \alpha_{g,V \perp}$		2,0						

fischer injection system FIS V Plus for masonry

Performance

Solid brick Mz, NF, dimensions, installation parameters $c=100\text{mm}$

Annex C 4

Solid brick Mz, NF, EN 771-1:2015

Table C5.1: Characteristic resistance under tension load for edge distance $c=100\text{mm}$

Anchor rod			M6	M8	M10			M12			-		-	
Internal threaded anchor FIS E			-	-	-			-			M6	M8	M10	M12
											11x85		15x85	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)														
compressive strength f _b	use categorie		Effective anchorage depth h _{ef} [mm]											
			≥50	≥50	50	80	200	50	80	200	85			
12N/mm²	w/w	w/d	2,5	2,5	2	3	7,5	2	3,5	5	3,5			
	d/d		4	4	3,5	5	12	3	5,5	8	5,5			
20N/mm²	w/w	w/d	3,5	3,5	3	4,5	11	3	5	7	5			
	d/d		5,5	5,5	5	7	12	4,5	8	11,5	8			

Factor for temperature range 72/120°C: 0,83

Table C5.2: Characteristic resistance under shear load for edge distance $c=100\text{mm}$

Anchor rod		M6	M8	M10		M12		-		-	
Internal threaded anchor FIS E		-	-	-		-		M6	M8	M10	M12
								11x85		15x85	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)											
compressive strength f _b	use categorie		Effective anchorage depth h _{ef} [mm]								
			≥50	≥50	≥50	200	≥50	200	85		
12N/mm²	w/w	w/d	2,5	2,5	4	8,5	4	11,5	2,5		
	d/d										
20N/mm²	w/w	w/d	4,0	4,0	6	12	5,5	12	4		
	d/d										

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry

Performance

Solid brick Mz, NF, Characteristic resistance under tension and shear load $c=100\text{mm}$

Annex C 5

Solid brick Mz, NF, EN 771-1:2015

Table C6.1: Installation parameters for edge distance $c=60\text{mm}$

Anchor rod		M6	M8	M10	M12	M16	-		-	
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8	M10	M12
							11x85		15x85	
Anchor rod and internal threaded anchor FIS E without perforated sleeve										
Effective anchorage depth	h _{ef}	[mm]	50	50	50	50	50	85		
			100	100	100	100	100			
			200	200	200	200	200			
Max. installation torque	T _{inst}	[Nm]	4	10				4	10	

General installation parameters

Edge distance		c_{min}	60							
Edge distance		c_{min}	60							
Spacing	$s_{min II,N}$		80							
	$h_{ef}=200 s_{min II,N}$		80							
	$s_{min II,V}$		80							
	$s_{cr II}$		$3 \times h_{ef}$							
	$s_{min \perp}$		80							
	$s_{cr \perp}$		$3 \times h_{ef}$							

Drilling method

Hammer drilling with hard metal hammer drill

Table C6.2: Group factors

Anchor rods		M6	M8	M10	M12	M16	-		-	
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8	M10	M12
							11x85		15x85	
Edge distance	c_{min} [mm]	60								
Group factor	$\alpha_{g,N} \parallel$	[-]	0,6							
	$\alpha_{g,V} \parallel$		1,3							
	$h_{ef}=200 \alpha_{g,N} \parallel$		1,4							
	$h_{ef}=200 \alpha_{g,V} \parallel$		1,5							
	$\alpha_{g,N} \perp$		0,3							
	$\alpha_{g,V} \perp$		1,3							
	$h_{ef}=200 \alpha_{g,N} \perp$		2,0							
	$h_{ef}=200 \alpha_{g,V} \perp$		1,1							

--	--	--	--	--	--	--	--	--	--	--

fischer injection system FIS V Plus for masonry		Annex C 6 Appendix 32 / 136
Performance Solid brick Mz, NF, dimensions, installation parameters c=60mm		

Solid brick Mz, NF, EN 771-1:2015

Table C7.1: Characteristic resistance under tension load for edge distance c=60mm

Anchor rod		M6		M8		M10			M12			M16			-		-	
Internal threaded anchor FIS E		-		-		-			-			-			M6	M8	M10	M12
															11x85		15x85	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																		
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]															
			50	100	50	100	50	100	200	50	100	200	50	100	200	85		
12N/mm ²	w/w	w/d	1,5	2,0	2,0	2,0	2,5	- ¹⁾	2,0	2,5	- ¹⁾	2,0	5,5	- ¹⁾	- ¹⁾			
	d/d		2,5	3,0	4,0	3,0	4,0	9,5	3,0	4,0	9,5	3,0	8,5	9,5	- ¹⁾			
20N/mm ²	w/w	w/d	2,0	2,5	3,0	2,5	3,5	- ¹⁾	3,0	3,5	- ¹⁾	3,0	7,5	- ¹⁾	- ¹⁾			
	d/d		3,5	4,5	5,5	4,5	5,5	12	4,5	5,5	12	4,5	12	12	- ¹⁾			
28N/mm ²	w/w	w/d	2,5	3,0	4,0	3,0	4,0	- ¹⁾	3,5	4,0	- ¹⁾	3,5	9,0	- ¹⁾	- ¹⁾			
	d/d		4,0	5,5	6,5	5,5	6,5	12	5,5	6,5	12	5,5	12	12	- ¹⁾			

¹⁾ No performance assessed

Factor for temperature range 72/120°C: 0,83

Table C7.2: Characteristic resistance under shear load for edge distance c=60mm

Anchor rod	M6		M8		M10			M12			M16			-		-	
Internal threaded anchor FIS E	-		-		-			-			-			M6	M8	M10	M12
														11x85		15x85	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)																	
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]														
	50	100	50	100	50	100	200	50	100	200	50	100	200	85			
12N/mm ²	w/w	w/d	1,2	2,5	1,2	3,0	2,0	3,0	1,5	1,5	3,0	3,0	0,6	3,0	4,5	- ¹⁾	
	d/d																
20N/mm ²	w/w	w/d	1,5	3,5	1,5	4,5	3,0	4,5	2,5	2,0	4,5	4,5	0,9	4,5	6,0	- ¹⁾	
	d/d																
28N/mm ²	w/w	w/d	2,0	4,0	2,0	5,0	3,5	5,0	3,0	2,5	5,0	5,0	1,2	5,0	7,5	- ¹⁾	
	d/d																

¹⁾ No performance assessed

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Solid brick Mz, NF, Characteristic resistance under tension and shear load c=60mm

Annex C 7

Solid brick Mz, 2DF, EN 771-1:2015



Solid brick Mz, 2DF, EN 771-1:2015			
Producer	e.g. Wienerberger		
Nominal dimensions [mm]	length L	width W	height H
	≥ 240	≥ 115	≥ 113
Density ρ [kg/dm ³]	≥ 1,8		
Compressive strength f_b [N/mm ²]	10 / 16		
Standard or annex	EN 771-1:2015		

Table C8.1: Installation parameters

Anchor rod			M6		M8		M10		M12		M16		-		-	
Internal threaded anchor FIS E			-		-		-		-		-		M6	M8	M10	M12
													11x85		15x85	
Anchor rod and internal threaded anchor FIS E without perforated sleeve																
Effective anchorage depth	h_{ef}	[mm]	50	100	50	100	50	100	50	100	50	100	85			
Max. installation torque	T_{inst}	[Nm]	4		10								4	10		
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H 16x85 K																
Effective anchorage depth	h_{ef}	[mm]	_1)		85				_1)				85		_1)	
Max. installation torque	T_{inst}	[Nm]			10								4	10		
General installation parameters																
Edge distance	c_{min}	[mm]	60													
Spacing	$s_{min} \parallel$		120													
	$s_{scr} \parallel$		240													
	$s_{scr} \perp = s_{min} \perp$		115													
Drilling method																
Hammer drilling with hard metal hammer drill																

¹⁾ No performance assessed

Table C8.2: Group factors

Anchor rods			M6	M8	M10	M12	M16	-		-	
Internal threaded anchor FIS E			-	-	-	-	-	M6	M8	M10	M12
								11x85		15x85	
Group factor	$\alpha_{g,N} \parallel$	[-]	1,5								
	$\alpha_{g,V} \parallel$		1,4								
	$\alpha_{g,N} \perp$		2								
	$\alpha_{g,V} \perp$										

fischer injection system FIS V Plus for masonry

Performance

Solid brick Mz, 2DF, dimensions, installation parameters

Annex C 8

Solid brick Mz, 2DF, EN 771-1:2015

Table C9.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M10	M12	M16	-		-		M8	M10	-				
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8	M10	M12	-	-	M6	M8			
						11x85		15x85				11x85				
Perforated sleeve FIS H K	-	-	-	-	-	-		-		16x85						
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]													
			50	100	50	100	50	100	50	100	50	100	85			
10N/mm ²	w/w	w/d	1,5	2,5	1,5	2,5	1,5	3	2	3,5	2	3,5	2		1,5	
	d/d		3	4,0	3,0	4,0	3,0	4,5	3	5,5	3	5,5	3		3	
16N/mm ²	w/w	w/d	2,5	4	2,5	4	2,5	4,5	3,5	5,5	3,5	5,5	3,5		2,5	
	d/d		4,5	7,0	4,5	7,0	4,5	7,5	5,5	8	5,5	8	5,5		4,5	

Factor for temperature range 72/120°C: 0,83

Table C9.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M10	M12	M16	-		-		M8	M10	-			
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8	M10	M12	-	-	M6	M8		
						11x85		15x85				11x85			
Perforated sleeve FIS H K	-	-	-	-	-	-		-		16x85					
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)															
compressive strength f _b	use category	Effective anchorage depth h _{ef} [mm]													
		≥ 50					85								
10N/mm ²	w/w	w/d	2,5	3,0	3,0	3,5	3,0	2,5	3,0	3,0	3,0	3,0	3,5	2,5	3,0
	d/d														
16N/mm ²	w/w	w/d	4,0	5,0	5,5	5,5	5,0	4,0	5,0	5,0	5,0	5,0	6,0	4,0	5,0
	d/d														

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Solid brick Mz, 2DF, Characteristic resistance under tension and shear load

Annex C 9

Solid brick Mz, EN 771-1:2015

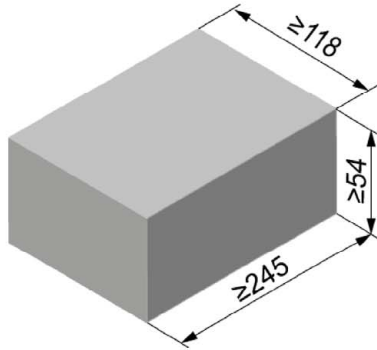

Solid brick Mz, EN 771-1:2015			
Producer	e.g. Nigra		
Nominal dimensions [mm]	length L	width W	height H
	≥ 245	≥ 118	≥ 54
Density ρ [kg/dm ³]	≥ 1,8		
Compressive strength f_b [N/mm ²]	10 / 20		
Standard or annex	EN 771-1:2015		

Table C10.1: Installation parameters

Anchor rod			M6		M8		M10		M12		M16		-		-	
Internal threaded anchor FIS E			-		-		-		-		-		M6	M8	M10	M12
													11x85		15x85	
Anchor rod and internal threaded anchor FIS E without perforated sleeve																
Effective anchorage depth	h_{ef}	[mm]	50	100	50	100	50	100	50	100	50	100	85			
Max. installation torque	T_{inst}	[Nm]	4		10								4	10		
General installation parameters																
Edge distance	C_{min}	[mm]	60													
Spacing	$S_{scr} \parallel = S_{min} \parallel$		245													
	$S_{scr} \perp = S_{min} \perp$		60													
Drilling method																
Hammer drilling with hard metal hammer drill																

Table C10.2: Group factors

Anchor rods			M6	M8	M10	M12	M16	-		-	
Internal threaded anchor FIS E			-	-	-	-	-	M6	M8	M10	M12
								11x85		15x85	
Group factor	$\alpha_{g,N} \parallel$	[-]	2								
	$\alpha_{g,V} \parallel$										
	$\alpha_{g,N} \perp$										
	$\alpha_{g,V} \perp$										

fischer injection system FIS V Plus for masonry

Performance

Solid brick Mz, dimensions, installation parameters

Annex C 10

Solid brick Mz, EN 771-1:2015

Table C11.1: Characteristic resistance under tension load

Anchor rod			M6	M8	M10	M12	M16	-		-	
Internal threaded anchor FIS E			-	-	-	-	-	M6	M8	M10	M12
								11x85		15x85	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)											
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]								
			≥ 50					85			
10N/mm ²	w/w	w/d	0,6	0,9	0,75	0,75	0,75	0,6	0,75		
	d/d		1,2	1,5	1,2	1,2	1,2	1,2	1,2		
20N/mm ²	w/w	w/d	0,9	1,5	1,2	1,2	1,2	0,9	1,2		
	d/d		1,5	2,5	2,0	2,0	2,0	1,5	2,0		

Factor for temperature range 72/120°C: 0,83

Table C11.2: Characteristic resistance under shear load

Anchor rod		M6	M8	M10	M12	M16	-		-		
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8	M10	M12	
							11x85		15x85		
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)											
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]								
			≥ 50				85				
10N/mm²	w/w	w/d	2,0	3,0	4,0	4,5	5,5	2,0	3,0	4,0	4,5
	d/d										
20N/mm²	w/w	w/d	2,5	4,0	5,5	6,0	8,0	2,5	4,0	5,5	6,0
	d/d										

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance

Solid brick Mz, Characteristic resistance under tension and shear load

Annex C 11

Appendix 37 / 136

Solid brick Mz, EN 771-1:2015

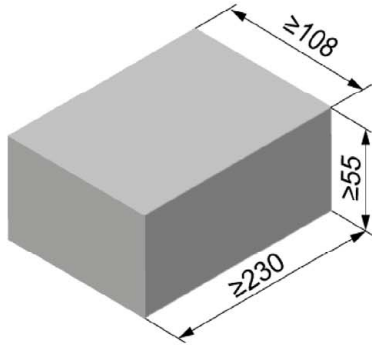

Solid brick Mz, EN 771-1:2015			
Producer	e.g. Wienerberger		
Nominal dimensions [mm]	length L	width W	height H
	≥ 230	≥ 108	≥ 55
Density ρ [kg/dm ³]	≥ 1,8		
Compressive strength f_b [N/mm ²]	10 / 20		
Standard or annex	EN 771-1:2015		

Table C12.1: Installation parameters

Anchor rod			M6		M8		M10		M12		M16		-		-	
Internal threaded anchor FIS E			-		-		-		-		-		M6	M8	M10	M12
													11x85		15x85	
Anchor rod and internal threaded anchor FIS E without perforated sleeve																
Effective anchorage depth	h_{ef}	[mm]	50	90	50	90	50	90	50	90	50	90	85			
Max. installation torque	T_{inst}	[Nm]	4		10								4	10		
General installation parameters																
Edge distance	c_{min}	[mm]	60													
Spacing	$s_{scr} \parallel = s_{min} \parallel$		230													
	$s_{scr} \perp = s_{min} \perp$		60													
Drilling method																
Hammer drilling with hard metal hammer drill																

Table C12.2: Group factors

Anchor rods			M6	M8	M10	M12	M16	-		-	
Internal threaded anchor FIS E			-	-	-	-	-	M6	M8	M10	M12
								11x85		15x85	
Group factor	$\alpha_{g,N} \parallel$	[-]	2								
	$\alpha_{g,V} \parallel$										
	$\alpha_{g,N} \perp$										
	$\alpha_{g,V} \perp$										

fischer injection system FIS V Plus for masonry

Performance

Solid brick Mz, dimensions, installation parameters

Annex C 12

Solid brick Mz, EN 771-1:2015

Table C13.1: Characteristic resistance under tension load

Anchor rod			M6	M8	M10	M12	M16	-		-	
Internal threaded anchor FIS E			-	-	-	-	-	M6	M8	M10	M12
								11x85		15x85	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)											
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]						85		
	≥ 50										
10N/mm²	w/w	w/d	0,6	0,9	0,75	0,75	0,75	0,75			
	d/d		1,2	1,5	1,2	1,2	1,2	1,2			
20N/mm²	w/w	w/d	0,9	1,5	1,2	1,2	1,2	1,2			
	d/d		1,5	2,5	2,0	2,0	2,0	2,0			

Factor for temperature range 72/120°C: 0,83

Table C13.2: Characteristic resistance under shear load

Anchor rod		M6	M8	M10	M12	M16	-		-		
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8	M10	M12	
							11x85		15x85		
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)											
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]								
			≥ 50				85				
10N/mm²	w/w	w/d	2,0	3,0	4,0	4,5	5,5	2,0	3,0	4,0	4,5
	d/d										
20N/mm²	w/w	w/d	2,5	4,0	5,5	6,0	8,0	2,5	4,0	5,5	6,0
	d/d										

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Solid brick Mz, Characteristic resistance under tension and shear load

Annex C 13

Solid sand-lime brick KS, NF, EN 771-2:2015

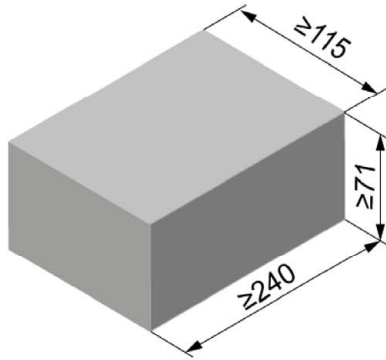

Solid sand-lime brick KS, NF, EN 771-2:2015			
Producer			
Nominal dimensions [mm]	length L	width W	height H
	≥ 240	≥ 115	≥ 71
Density ρ [kg/dm ³]	≥ 1,8		
Compressive strength f_b [N/mm ²]	12 / 20 / 28		
Standard or annex	EN 771-2:2015		

Table C14.1: Installation parameters

Anchor rod			M6		M8		M10		M12		M16		-		-	
Internal threaded anchor FIS E			-		-		-		-		-		M6	M8	M10	M12
													11x85		15x85	
Anchor rod and internal threaded anchor FIS E without perforated sleeve																
Effective anchorage depth	h _{ef}	[mm]	50	100	50	100	50	100	50	100	50	100	85		85	
							200		200		200					
Max. installation torque	T _{inst}	[Nm]	3		5		15		15		25		3	5	15	
General installation parameters																
Edge distance		C _{min}	[mm]	60												
Spacing	S _{min}			80												
	S _{cr}			80												
	S _{min} ⊥			3x h _{ef}												
	S _{cr} ⊥			3x h _{ef}												
Drilling method																
Hammer drilling with hard metal hammer drill																

Table C14.2: Group factors

Anchor rod		M6		M8		M10		M12		M16		-		-	
Internal threaded anchor FIS E		-		-		-		-		-		M6	M8	M10	M12
												11x85		15x85	
Group factor	$\alpha_{g,N} \parallel$	[-]													0,7
	$\alpha_{g,V} \parallel$														1,3
	$\alpha_{g,N} \perp$														2,0
	$\alpha_{g,V} \perp$														2,0

fischer injection system FIS V Plus for masonry

Performance
Solid sand-lime brick KS, NF, dimensions, installation parameters

Annex C 14

Appendix 40 / 136

Solid sand-lime brick KS, NF, EN 771-2:2015

Table C15.1: Characteristic resistance under tension load

Anchor rod			M6		M8		M10		M12		M16			-		-	
Internal threaded anchor FIS E			-		-		-		-		-			M6	M8	M10	M12
														11x85		15x85	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																	
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]														
			50	100	50	100	50	100	200	50	100	200	50	100	200	85	85
12N/mm ²	w/w	w/d	2,0	3,0	2,5	4,5	2,5	3,5	7,0	2,5	3,0	6,5	2,5	3,5	8,0	2,5	2,5
		d/d	4,0	5,5	4,0	8,0	4,0	5,5	12	4,0	4,5	12	4,5	5,5	12	4,0	4,0
20N/mm ²	w/w	w/d	3,0	4,5	3,5	6,5	3,5	4,5	10	3,5	4,0	9,5	4,0	5,0	11	3,5	3,5
		d/d	5,5	7,5	6,0	11	6,0	8,0	12	6,0	6,5	12	6,5	8,0	12	6,0	6,0
28N/mm ²	w/w	w/d	3,5	5,0	4,0	8,0	4,5	5,5	12	4,5	5,0	11	4,5	5,5	12	4,5	4,5
		d/d	6,5	9,0	7,0	12	7,0	9,0	12	7,0	7,5	12	7,5	9,5	12	7,0	7,0

Factor for temperature range 72/120°C: 0,83

Table C15.2: Characteristic resistance under shear load

Anchor rod		M6		M8		M10		M12		M16		-		-					
Internal threaded anchor FIS E		-		-		-		-		-		M6		M8		M10		M12	
												11x85		15x85					
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)																			
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]																
	50	100	50	100	50	≥100	50	≥100	50	≥100	50	≥100	85	85					
12N/mm ²	w/w	w/d	1,5	3,0	1,5	3,0	1,2	2,0	1,2	2,0	1,2	2,0	1,2	1,2					
	d/d																		
20N/mm ²	w/w	w/d	2,5	4,0	2,5	4,0	1,5	3,0	1,5	3,0	1,5	3,0	1,5	1,5					
	d/d																		
28N/mm ²	w/w	w/d	3,0	4,5	3,0	4,5	1,5	3,5	1,5	3,5	1,5	3,5	1,5	1,5					
	d/d																		

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Solid sand-lime brick KS, NF, Characteristic resistance under tension and shear load

Annex C 15

Solid sand-lime brick KS, 8DF, EN 771-2:2015

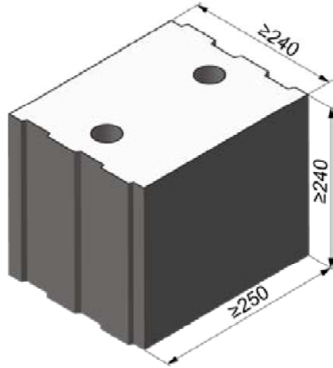

Solid sand-lime brick KS, 8DF, EN 771-2:2015			
Producer	-		
Nominal dimensions [mm]	length L	width W	height H
	≥ 250	≥ 240	≥ 240
Density ρ [kg/dm ³]	≥ 2,0		
Compressive strength f_b [N/mm ²]	10 / 20 / 28		
Standard or annex	EN 771-2:2015		



Dimension see also Annex B 15

Table C16.1: Installation parameters

Anchor rod	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8
						11x85	15x85

Anchor rod and internal threaded anchor FIS E without perforated sleeve

Effective anchorage depth h_{ef} [mm]	50	100	50	100	50	100	50	100	50	100	50	100	85
Max. installation torque T_{inst} [Nm]	4				10						4		10

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H 16x85 K

Effective anchorage depth h_{ef} [mm]	- ¹⁾	85	- ¹⁾	85	- ¹⁾
Max. installation torque T_{inst} [Nm]	- ¹⁾	10	- ¹⁾	10	- ¹⁾

General installation parameters

Edge distance c_{min}		60
Spacing	$s_{min} \parallel$	80
	$s_{scr} \parallel$ [mm]	3x h_{ef}
	$s_{min} \perp$	80
	$s_{scr} \perp$	3x h_{ef}

Drilling method

Hammer drilling with hard metal hammer drill

¹⁾ No performance assessed

Table C16.2: Group factors

Anchor rods	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8
						11x85	15x85
Group factors	$\alpha_{g,N} \parallel$	[-]	1,5				
	$\alpha_{g,V} \parallel$		1,2				
	$\alpha_{g,N} \perp$		1,5				
	$\alpha_{g,V} \perp$		1,2				

fischer injection system FIS V Plus for masonry	Annex C 16 Appendix 42 / 136
Performance Solid sand-lime brick KS, 8DF, dimensions, installation parameters	

Solid sand-lime brick KS, 8DF, EN 771-2:2015

Table C17.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M10	M12	M16	-		-		M8	M10	-		
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8	M10	M12	-	-	M6	M8	
						11x85		15x85				11x85		
Perforated sleeve FIS H K	-	-	-	-	-	-		-		16x85				
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)														
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]											
			≥ 50					85						
10N/mm ²	w/w	w/d	3,0	4,0	4,5	4,5	3,5	3,0	3,5		4,5		3,0	4,5
	d/d		5,0	7,0	7,0	7,0	5,5	5,0	5,5		8,0		5,0	8,0
20N/mm ²	w/w	w/d	4,5	6,0	6,0	6,0	5,0	4,5	5,0		6,5		4,5	6,5
	d/d		7,5	10,0	10,0	10,0	7,5	7,5	7,5		11,0		7,5	11
28N/mm ²	w/w	w/d	5,0	8,0	8,5	8,5	7,0	5,0	7,0		8,5		5,0	8,5
	d/d		8,5	12,0	12,0	12,0	11,0	8,5	11,0		12,0		8,5	12

Factor for temperature range 72/120°C: 0,83

Table C17.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M10	M12	M16	-		-		M8	M10	-			
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8	M10	M12	-	-	M6	M8		
						11x85		15x85				11x85			
Perforated sleeve FIS H K	-	-	-	-	-	-		-		16x85					
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)															
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]												
			≥ 50					85							
10N/mm²	w/w	w/d	2,5	4,5					2,5	4,5		4,5		2,5	4,5
	d/d														
20N/mm²	w/w	w/d	4,0	6,5					4,0	6,5		6,5		4,0	6,5
	d/d														
28N/mm²	w/w	w/d	5,0	9,0					5,0	9,0		9,0		5,0	9,0
	d/d														

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Solid sand-lime brick KS, 8DF, Characteristic resistance under tension and shear load

Annex C 17

Solid sand-lime brick KS, EN 771-2:2015

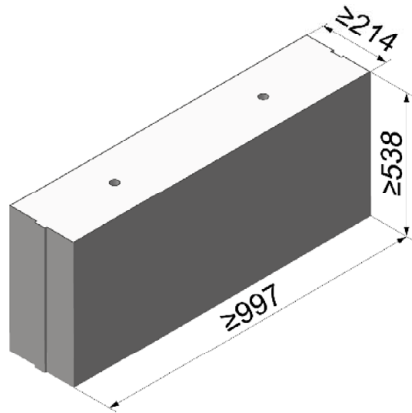

Solid sand-lime brick KS, EN 771-2:2015			
Producer	e.g. Calduran		
Nominal dimensions [mm]	length L	width W	height H
	≥ 997	≥ 214	≥ 538
Density ρ [kg/dm ³]	1,8		2,2
Compressive strength f_b [N/mm ²]	10 / 20		36
Standard or annex	EN 771-2:2015		

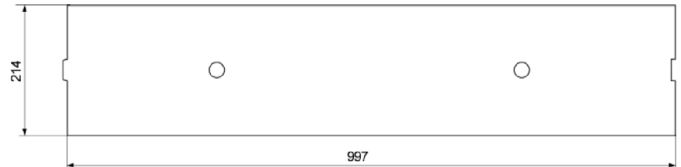


Table C18.1: Installation parameters

Anchor rod			M6		M8		M10		M12		M16		-		-		
Internal threaded anchor FIS E			-		-		-		-		-		M6		M8	M10	M12
													11x85		15x85		
Anchor rod and internal threaded anchor FIS E without perforated sleeve																	
Effective anchorage depth		h_{ef}	[mm]	50	100	50	100	50	100	50	100	50	100	85			
Max. installation torque		T_{inst}	[Nm]	4		10								4	10		
General installation parameters																	
Edge distance		C_{min}	[mm]	75													
Spacing		$S_{cr \parallel} = S_{min \parallel}$		3x h_{ef}													
		$S_{cr \perp} = S_{min \perp}$		3x h_{ef}													
Drilling method																	
Hammer drilling with hard metal hammer drill																	

Table C18.2: Group factors

Anchor rod			M6	M8	M10	M12	M16	-		-	
Internal threaded anchor FIS E			-	-	-	-	-	M6	M8	M10	M12
								11x85		15x85	
Group factors	$\alpha_{g,N} \parallel$	[-]	2								
	$\alpha_{g,V} \parallel$										
	$\alpha_{g,N} \perp$										
	$\alpha_{g,V} \perp$										

fischer injection system FIS V Plus for masonry

Performance
Solid sand-lime brick KS, dimensions, installation parameters

Annex C 18

Appendix 44 / 136

Solid sand-lime brick KS, EN 771-2:2015

Table C19.1: Characteristic resistance under tension load

Anchor rod		M6		M8		M10		M12		M16		-		-	
Internal threaded anchor FIS E		-		-		-		-		-		M6	M8	M10	M12
												11x85		15x85	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)															
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]												
			50	100	50	100	50	100	50	100	50	100	50	100	85
10N/mm ²	w/w	w/d	4,0		4,0	7,0	5,0	6,0	5,0	6,0	5,5	7,5	5,5		
	d/d		7,0		7,0	12,0	8,0	9,5	8,0	10,0	9,0	11,5	9,0		
20N/mm ²	w/w	w/d	5,5		6,0	10,0	7,0	8,5	7,0	9,0	8,0	11,0	8,0		
	d/d		8,5		10,5	12,0	11,5	12,0	11,0	12,0	12,0	12,0	12,0		
36N/mm ²	w/w	w/d	4,5		8,0	12,0	11,5	12,0	12,0	12,0	12,0	12,0	12,0		
	d/d		8,0		12,0	12,0	12,0	12,0	12,0	12,0	12,0	12,0	12,0		

Factor for temperature range 72/120°C: 0,83

Table C19.2: Characteristic resistance under shear load

Anchor rod		M6	M8	M10	M12	M16	-		-		
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8	M10	M12	
							11x85		15x85		
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)											
compressive strength f _b	use category	Effective anchorage depth h _{ef} [mm]									
		≥ 50						85			
10N/mm ²	w/w	w/d	3,0	5,0	5,5	4,0	4,0	3,0	5,0	5,5	4,0
	d/d										
20N/mm ²	w/w	w/d	4,5	7,0	7,5	6,0	6,0	4,5	7,0	7,5	6,0
	d/d										
36N/mm ²	w/w	w/d	4,5	9,0	11,0	12,0	12,0	4,5	9,0	11,0	12,0
	d/d										

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Solid sand-lime brick KS, Characteristic resistance under tension and shear load

Annex C 19

Perforated sand-lime brick KSL, 3DF, EN 771-2:2015

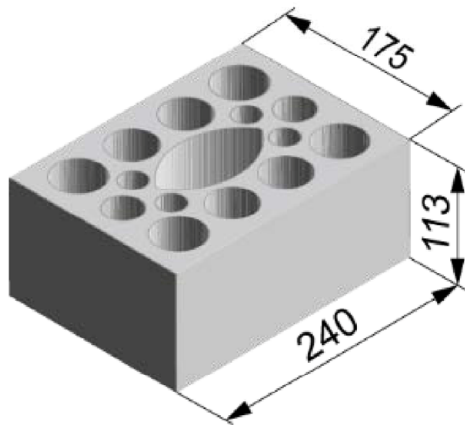

Perforated sand-lime brick KSL, 3DF, EN 771-2:2015			
Producer	e.g. KS Wemding		
Nominal dimensions [mm]	length L	width W	height H
	240	175	113
Density ρ [kg/dm ³]	$\geq 1,4$		
Compressive strength f_b [N/mm ²]	8 / 10 / 12 / 16 / 20		
Standard or annex	EN 771-2:2015		



Dimension see also Annex B 15

Tabelle C20.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																
Max. installation torque	T _{inst}	[Nm]	2													
General installation parameters																
Edge distance	C _{min}	[mm]	60				80									
Spacing	S _{min}		100													
	S _{scr}		240													
	S _{min} ⊥		115													
	S _{scr} ⊥		115													
Drilling method																
Hammer drilling with hard metal hammer drill																

Table C20.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 M8 11x85	-	-	-	-	M10 M12 15x85	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x85	20x85	20x130	20x130
Group factors	$\alpha_{g,N} \parallel = \alpha_{g,V} \parallel$				1,5									
	$\alpha_{g,N} \perp = \alpha_{g,V} \perp$				2,0									

fischer injection system FIS V Plus for masonry

Performance

Perforated sand-lime brick KSL, 3DF, dimensions, installation parameters

Annex C 20

Perforated sand-lime brick KSL, 3DF, EN 771-2:2015

Table C21.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	2	
General installation parameters				
Edge distance	C _{min}	[mm]	80	
Spacing	S _{min}		100	
	S _{scr}		240	
	S _{min} ⊥		115	
	S _{scr} ⊥		115	
Drilling method				
Hammer drilling with hard metal hammer drill				

Table C21.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N} \parallel$	[-]	1,5	
	$\alpha_{g,V} \parallel$			
	$\alpha_{g,N} \perp$		2,0	
	$\alpha_{g,V} \perp$			

fischer injection system FIS V Plus for masonry

Performance
Perforated sand-lime brick KSL, 3DF, dimensions, installation parameters

Annex C 21

Appendix 47 / 136

Perforated sand-lime brick KSL, 3DF, EN 771-2:2015

Table C22.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16		
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-			
					11x85						15x85							
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130			
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																		
compressive strength f _b	use category																	
8 N/mm ²	w/w	w/d	1,5				2,0				2,0		2,0				2,0	
	d/d		1,5				2,0				2,5		2,5				2,5	
10 N/mm ²	w/w	w/d	2,0				2,0				2,5		2,5				2,5	
	d/d		2,0				2,5				3,0		3,0				3,0	
12 N/mm ²	w/w	w/d	2,5				2,5				3,0		3,0				3,0	
	d/d		2,5				3,0				3,5		3,5				3,5	
16 N/mm ²	w/w	w/d	3,0				3,5				4,5		4,5				4,5	
	d/d		3,5				4,0				4,5		4,5				4,5	
20 N/mm ²	w/w	w/d	4,0				4,5				5,5		5,5				5,5	
	d/d		4,5				5,0				6,0		6,0				6,0	

Table C22.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)							
compressive strength f _b	use category						
8 N/mm²	w/w	w/d	2,0				
	d/d		2,5				
10 N/mm²	w/w	w/d	2,5				
	d/d		3,0				
12 N/mm²	w/w	w/d	3,0				
	d/d		3,5				
16 N/mm²	w/w	w/d	4,5				
	d/d		4,5				
20 N/mm²	w/w	w/d	5,5				
	d/d		6,0				

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Perforated sand-lime brick KSL, 3DF, Characteristic resistance under tension load

Annex C 22

Perforated sand-lime brick KSL, 3DF, EN 771-2:2015

Table C23.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)																
compressive strength f _b	use category															
8 N/mm ²	w/w	w/d	1,5					3,0					2,5	3,0	2,5	
	d/d															
10 N/mm ²	w/w	w/d	2,0					3,5								
	d/d															
12 N/mm ²	w/w	w/d	2,5					4,5					4,0	4,5	4,0	
	d/d															
16 N/mm ²	w/w	w/d	3,0	3,5	3,0	3,5	3,0	6,0					5,5	6,0	5,5	
	d/d															
20 N/mm ²	w/w	w/d	4,0	4,5	4,0	4,5	4,0	7,5					6,5	7,5	6,5	
	d/d															

Table C23.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)							
compressive strength f _b	use category						
8 N/mm ²	w/w	w/d	3,0			2,5	
	d/d						
10 N/mm ²	w/w	w/d	3,5			3,5	
	d/d						
12 N/mm ²	w/w	w/d	4,5			4,0	
	d/d						
16 N/mm ²	w/w	w/d	6,0			5,5	
	d/d						
20 N/mm ²	w/w	w/d	7,5			6,5	
	d/d						

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Perforated sand-lime brick KSL, 3DF, Characteristic resistance under shear load

Annex C 23

Vertical perforated brick HLz, EN 771-1:2015

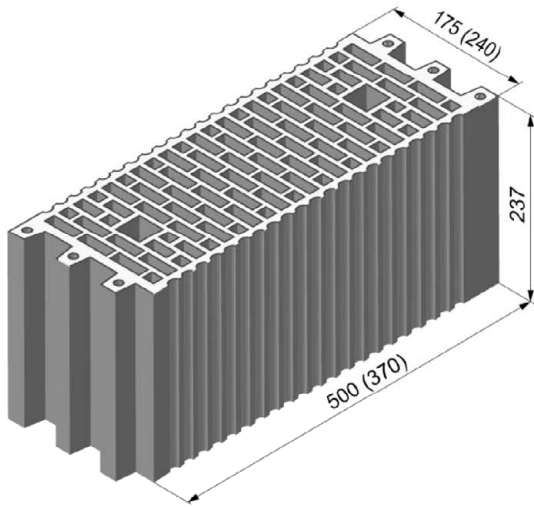

Vertical perforated brick HLz, EN 771-1:2015			
Producer	e.g. Wienerberger, Poroton		
Nominal dimensions [mm]	length L	width W	height H
	500	175	237
	370	240	237
Density ρ [kg/dm ³]	$\geq 1,0$		
Compressive strength f_b [N/mm ²]	4 / 6 / 8 / 10 / 12		
Standard or annex	EN 771-1:2015		

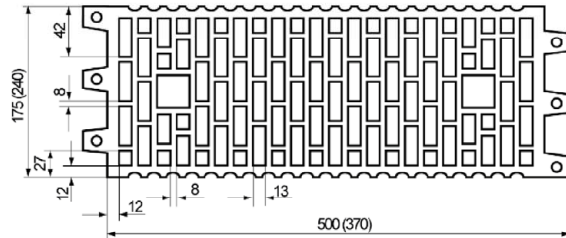

Dimension
see also
Annex B
15

Table C24.1: Installation parameters

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-	
						11x85						15x85					
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																	
Max. installation torque	T _{inst}	[Nm]	2														
General installation parameters																	
Edge distance	C _{min}	[mm]	100														
Spacing	S _{min}		100														
	S _{cr}		500 (370)														
	S _{min} ⊥		100														
	S _{cr} ⊥		240														
Drilling method																	
Hammer drilling with hard metal hammer drill																	

Table C24.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-
					11x85					15x85				
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	20x85	20x130						
Group factors	$\frac{\alpha_{g,N} \parallel = \alpha_{g,V} \parallel}{\alpha_{g,N} \perp = \alpha_{g,V} \perp}$	[-]		1										

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 24

Appendix 50 / 136

Vertical perforated brick HLz, EN 771-1:2015

Table C25.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																
compressive strength f _b	use category															
4 N/mm ²	w/w	w/d	0,3				0,9				1,2					
	d/d		0,4				0,9				1,2					
6 N/mm ²	w/w	w/d	0,5				1,5				2,0					
	d/d		0,6				1,5				2,0					
8 N/mm ²	w/w	w/d	0,75				2,0				2,5					
	d/d		0,75				2,0				2,5					
10 N/mm ²	w/w	w/d	0,9				2,5				3,0					
	d/d		0,9				2,5				3,5					
12 N/mm ²	w/w	w/d	0,9				3,0				3,5					
	d/d		1,2				3,0				4,0					

Factor for temperature range 72/120°C: 0,83

Table C25.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)																
compressive strength f _b	use category															
4 N/mm²	w/w	w/d	0,5						0,6		0,5				0,6	
	d/d															
6 N/mm²	w/w	w/d	0,75						0,9		0,75				0,9	
	d/d															
8 N/mm²	w/w	w/d	0,9						1,2		0,9				1,2	
	d/d															
10 N/mm²	w/w	w/d	1,2						1,5		1,2				1,5	
	d/d															
12 N/mm²	w/w	w/d	1,5						2,0		1,5				2,0	
	d/d															

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, Characteristic resistance under tension and shear load

Annex C 25

Vertical perforated brick HLz, 2DF, EN 771-1:2015

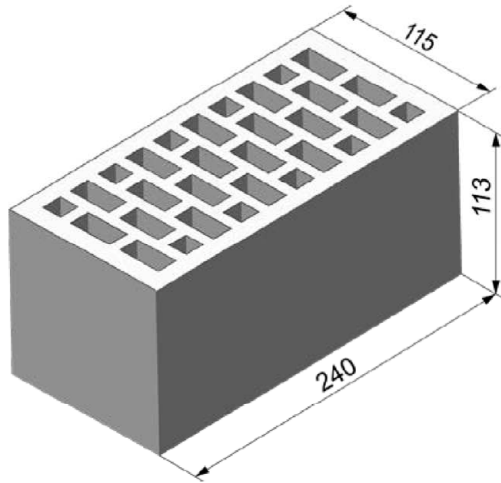

Vertical perforated brick HLz, 2DF, EN 771-1:2015			
Producer	e.g. Wienerberger		
Nominal dimensions [mm]	length L	width W	height H
	240	115	113
Density ρ [kg/dm ³]	$\geq 1,4$		
Compressive strength f_b [N/mm ²]	6 / 10 / 16 / 20 / 28		
Standard or annex	EN 771-1:2015		

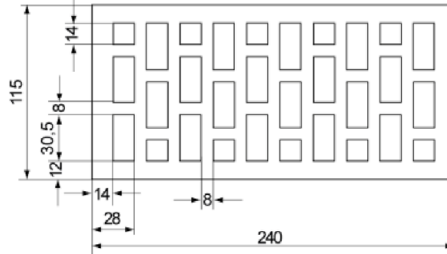

Dimension
see also
Annex B 15

Table C26.1: Installation parameters

Anchor rod		M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		M10	M12	-	
						11x85				15x85			
Perforated sleeve FIS H K		12x50		12x85		16x85				20x85			
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K													
Max. installation torque	T _{inst}	[Nm]	2										
General installation parameters													
Edge distance	C _{min}	[mm]	80										
Spacing	S _{cr} = S _{min}		240										
	S _{cr} ⊥ = S _{min} ⊥		115										
Drilling method													
Hammer drilling with hard metal hammer drill													

Table C26.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 M8 11x85	-	-	M10 M12 15x85	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x85	16x85	20x85	20x85	20x85
Group factors $\alpha_{g,N}$ $\alpha_{g,V}$ $\alpha_{g,N}$ $\alpha_{g,V}$ [-]	2									

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, 2DF, dimensions, installation parameters

Annex C 26

Vertical perforated brick HLz, 2DF, EN 771-1:2015

Table C27.1: Characteristic resistance under tension load

Anchor rod			M6	M8	M6	M8	-		M8	M10	-		M12	M16	
Internal threaded anchor FIS E			-		-		M6	M8	-		M10	M12	-		
							11x85				15x85				
Perforated sleeve FIS H K			12x50		12x85		16x85				20x85				
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)															
compressive strength f _b		use category													
6 N/mm ²		w/w	w/d	0,75		0,9		0,75				0,9			
		d/d		0,75		1,2		0,75				0,9			
10 N/mm ²		w/w	w/d	1,2		1,5		1,2				1,5			
		d/d		1,2		2,0		1,2				1,5			
16 N/mm ²		w/w	w/d	2,0		2,5		2,0				2,0			
		d/d		2,0		3,0		2,0				2,5			
20 N/mm ²		w/w	w/d	2,5		3,5		2,5				3,0			
		d/d		2,5		4,0		2,5				3,0			
28 N/mm ²		w/w	w/d	3,0		5,0		3,5				4,0			
		d/d		3,5		5,5		3,5				4,5			

Factor for temperature range 72/120°C: 0,83

Table C27.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		M10	M12	-	
					11x85				15x85			
Perforated sleeve FIS H K	12x50		12x85		16x85				20x85			
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)												
compressive strength f _b	use category											
6 N/mm²	w/w	w/d	1,2	1,5	1,2	2,0	1,2	1,5	2,5			
	d/d											
10 N/mm²	w/w	w/d	2,0	2,5	2,0	4,0	2,0	2,5	4,5			
	d/d											
16 N/mm²	w/w	w/d	3,0	3,5	3,0	6,0	3,0	3,5	7,0			
	d/d											
20 N/mm²	w/w	w/d	4,0	4,5	4,0	7,5	4,0	4,5	8,5			
	d/d											
28 N/mm²	w/w	w/d	5,0	6,5	5,0	9,5	5,0	6,5	12,0			
	d/d											

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, 2DF,
Characteristic resistance under tension and shear load

Annex C 27

Vertical perforated brick HLz, T8, EN 771-1:2015

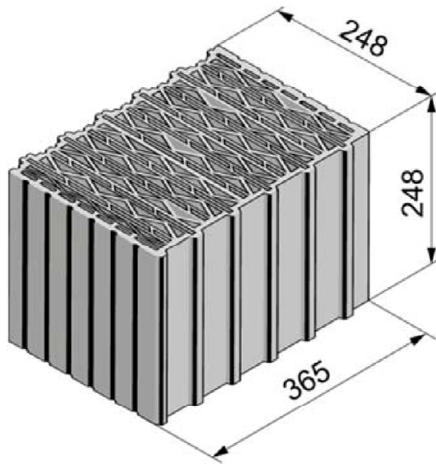

Vertical perforated brick HLz, T8, EN 771-1:2015			
Producer	-		
Nominal dimensions [mm]	length L	width W	height H
	248	365	248
Density ρ [kg/dm ³]	0,6		
Compressive strength f_b [N/mm ²]	4 / 6 / 8		
Standard or annex	EN 771-1:2015		

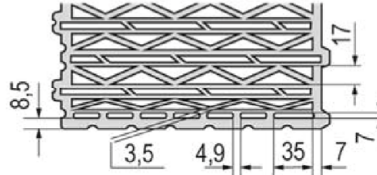

Dimension see also Annex B 15

Table C28.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-		-	
						11x85						15x85							
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130		20x200	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																			
Max. installation torque	T _{inst}	[Nm]	3	5	3	5	3	5	5										
General installation parameters																			
Edge distance	C _{min}	[mm]	60																
Spacing	S _{min}		80																
	S _{cr}		250																
	S _{min} ⊥		80																
	S _{cr} ⊥		250																
Drilling method																			
Rotary drilling with carbide drill																			

Table C28.2: Group factors

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-
Perforated sleeve FIS H K		12x50	12x85	12x85	12x85	16x85	16x85	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200
Group factors	$\alpha_{g,N} \parallel$	1,3															
	$\alpha_{g,V} \parallel$	1,2															
	$\alpha_{g,N} \perp$	1,3															
	$\alpha_{g,V} \perp$	1,0															

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T8, dimensions, installation parameters

Annex C 28

Vertical perforated brick HLz, T8, EN 771-1:2015

Table C29.1: Installation parameters

(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	5	
General installation parameters				
Edge distance	c _{min}	[mm]	60	
Spacing	s _{min}		80	
	s _{cr}		250	
	s _{min} ⊥		80	
	s _{cr} ⊥		250	
Drilling method				
Rotary drilling with carbide drill				

Table C29.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	[-]	1,3	
	$\alpha_{g,V \parallel}$		1,2	
	$\alpha_{g,N \perp}$		1,3	
	$\alpha_{g,V \perp}$		1,0	

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T8, dimensions, installation parameters

Annex C 29

Appendix 55 / 136

Vertical perforated brick HLz, T8, EN 771-1:2015

Table C30.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x85	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																
compressive strength f_b	use category															
4 N/mm ²	w/w	w/d	1,2	1,2												
	d/d		1,2	1,5												
6 N/mm ²	w/w	w/d	1,5	1,5												
	d/d		1,5	1,5												
8 N/mm ²	w/w	w/d	1,5	2,0												
	d/d		2,0	2,0												

Table C30.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)				
compressive strength f _b	use category			
4 N/mm²	w/w	w/d	1,2	
	d/d		1,5	
6 N/mm²	w/w	w/d	1,5	
	d/d		1,5	
8 N/mm²	w/w	w/d	2,0	
	d/d		2,0	

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T8, Characteristic resistance under tension load

Annex C 30

Appendix 56 / 136

Vertical perforated brick HLz, T8, EN 771-1:2015

Table C31.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	M16	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x85	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category		
4 N/mm ²	w/w	w/d	1,2
	d/d		
6 N/mm ²	w/w	w/d	1,5
	d/d		
8 N/mm ²	w/w	w/d	1,5
	d/d		

Table C31.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200	18x130/200	22x130/200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category		
4 N/mm ²	w/w	w/d	1,2
	d/d		
6 N/mm ²	w/w	w/d	1,5
	d/d		
8 N/mm ²	w/w	w/d	1,5
	d/d		

Factor for job site tests and displacements see annex C108

fischer injection system FIS V Plus for masonry


Performance

Vertical perforated brick HLz, T8, Characteristic resistance under shear load


Annex C 31

Appendix 57 / 136

Vertical perforated brick HLz, T10, T11, EN 771-1:2015

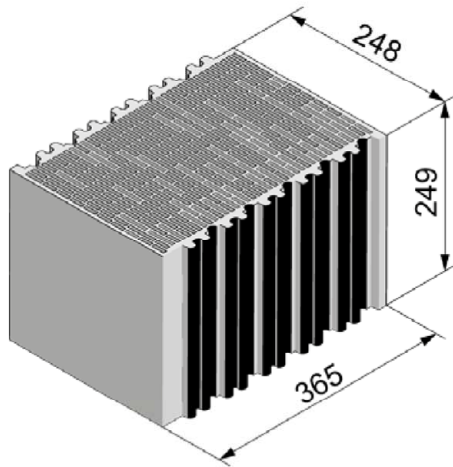

Vertical perforated brick HLz, T10, T11, EN 771-1:2015			
Producer	-		
Nominal dimensions [mm]	length L	width W	height H
	248	365	249
Density ρ [kg/dm ³]	0,7		
Compressive strength f_b [N/mm ²]	8 / 10 / 12		
Standard or annex	EN 771-1:2015		

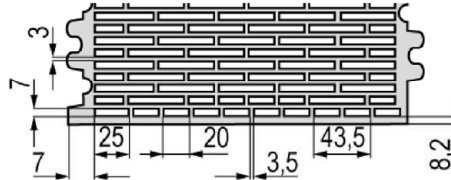

Dimension see also Annex B 16

Table C32.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-		-	
						11x85						15x85							
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130		20x200	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																			
Max. installation torque	T _{inst}	[Nm]	3						5	3	5								
General installation parameters																			
Edge distance	c _{min}	[mm]	60																
Spacing	s _{min}		80																
	s _{scr}		250																
	s _{min} ⊥		80																
	s _{scr} ⊥		250																
Drilling method																			
Rotary drilling with carbide drill																			

Table C32.2: Group factors

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-
Perforated sleeve FIS H K		12x50	12x85	12x85	12x85	16x85	16x85	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200
Group factors	$\alpha_{g,N} \parallel$							1,7									
	$\alpha_{g,V} \parallel$							0,5									
	$\alpha_{g,N} \perp$							1,3									
	$\alpha_{g,V} \perp$							0,5									

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T10, T11, dimensions, installation parameters

Annex C 32

Vertical perforated brick HLz, T10, T11, EN 771-1:2015

Table C33.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	5	
General installation parameters				
Edge distance	C _{min}	[mm]	60	
Spacing	S _{min}		80	
	S _{scr}		250	
	S _{min} ⊥		80	
	S _{scr} ⊥		250	
Drilling method				
Rotary drilling with carbide drill				

Table C33.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N} \parallel$	[-]	1,7	
	$\alpha_{g,V} \parallel$		0,5	
	$\alpha_{g,N} \perp$		1,3	
	$\alpha_{g,V} \perp$		0,5	

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T10, T11, dimensions, installation parameters

Annex C 33

Vertical perforated brick HLz, T10, T11, EN 771-1:2015

Table C34.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																
compressive strength f_b	use category															
8 N/mm ²	w/w	w/d	1,5	1,5												
	d/d		1,5	2,0												
10 N/mm ²	w/w	w/d	1,5	2,0												
	d/d		2,0	2,0												
12 N/mm ²	w/w	w/d	2,0	2,0												
	d/d		2,0	2,5												

Table C34.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)							
compressive strength f _b		use category					
8 N/mm ²	w/w	w/d	1,5			1,5	
	d/d		2,0			2,0	
10 N/mm ²	w/w	w/d	2,0			2,0	
	d/d		2,0			2,0	
12 N/mm ²	w/w	w/d	2,0			2,0	
	d/d		2,5			2,5	

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T10, T11, Characteristic resistance under tension load

Annex C 34

Vertical perforated brick HLz, T10, T11, EN 771-1:2015

Table C35.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	M16	M12	M16	M12	M16
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x130	20x130	20x130	20x130	20x200	20x200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category							
8 N/mm ²	w/w	w/d	0,9	1,5	2,0			
	d/d							
10 N/mm ²	w/w	w/d	0,9	1,5	2,0			
	d/d							
12 N/mm ²	w/w	w/d	1,2	2,0	2,0			
	d/d							

Table C35.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200	18x130/200	22x130/200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category															
8 N/mm ²	w/w	w/d	1,5							2,0						
	d/d															
10 N/mm ²	w/w	w/d	1,5							2,0						
	d/d															
12 N/mm ²	w/w	w/d	2,0							2,0						
	d/d															

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, T10, T11, Characteristic resistance under shear load

Annex C 35

Vertical perforated brick HLz, T7 PF, filled with perlite, EN 771-1:2015

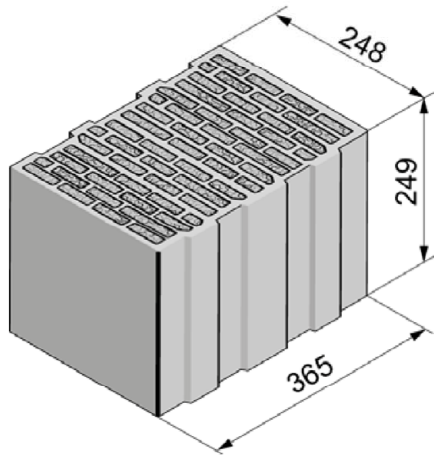

Vertical perforated brick HLz, T7 PF, filled with perlite, EN 771-1:2015			
Producer	-		
Nominal dimensions [mm]	length L	width W	height H
	248	365	249
Density ρ [kg/dm ³]	0,5		
Compressive strength f_b [N/mm ²]	4 / 6		
Standard or annex	EN 771-1:2015		

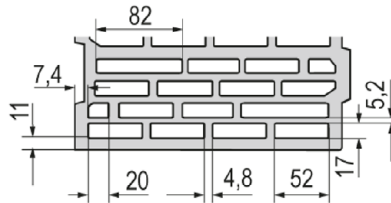

Dimension see also Annex B 16

Table C36.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 M8 11x85	-	-	-	-	M10 M12 15x85	-	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x85	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x130	20x200	20x200

Ankerstangen und Innengewindeanker FIS E mit Injektionsanker-Hülse FIS H K

Max. installation torque	T_{inst} [Nm]	2	5	2	5
--------------------------	-----------------	---	---	---	---

General installation parameters

Edge distance	C_{min}	[mm]	60
Spacing	$S_{min} \parallel$		80
	$S_{cr} \parallel$		250
	$S_{min} \perp$		80
	$S_{cr} \perp$		250

Drilling method

Rotary drilling with carbide drill

Table C36.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 M8 11x85	-	-	-	-	M10 M12 15x85	-	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x85	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x130	20x200	20x200

Group factors	$\alpha_{g,N} \parallel$	[-]	1,1
	$\alpha_{g,V} \parallel$		1,2
	$\alpha_{g,N} \perp$		1,1
	$\alpha_{g,V} \perp$		1,2

fischer injection system FIS V Plus for masonry	Annex C 36 Appendix 62 / 136
Performance Vertical perforated brick HLz, T7 PF, filled with perlite, dimensions, installation parameters	

Vertical perforated brick HLz, T7 PF, filled with perlite, EN 771-1:2015

Table C37.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	5	
General installation parameters				
Edge distance	c _{min}	[mm]	60	
Spacing	s _{min}		80	
	s _{cr}		250	
	s _{min} ⊥		80	
	s _{cr} ⊥		250	
Drilling method				
Rotary drilling with carbide drill				

Table C37.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N} \parallel$	[-]	1,1	
	$\alpha_{g,V} \parallel$		1,2	
	$\alpha_{g,N} \perp$		1,1	
	$\alpha_{g,V} \perp$		1,2	

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T7 PF, filled with perlite,
dimensions, installation parameters

Annex C 37

Appendix 63 / 136

Vertical perforated brick HLz, T7 PF, filled with perlite, EN 771-1:2015

Table C38.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x130	20x130	20x130	20x130	20x200	20x200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																
compressive strength f_b	use category															
4 N/mm ²	w/w	w/d	1,2				1,2	1,2	1,2	1,2	1,2	1,2	1,2	1,2	2,0	2,0
	d/d	d/d	1,5				1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	2,0	2,0
6 N/mm ²	w/w	w/d	1,5				1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	2,5	2,5
	d/d	d/d	1,5				2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0	3,0	3,0

Table C38.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)							
compressive strength f _b	use category						
4 N/mm ²	w/w	w/d	1,2			1,2	
	d/d		1,5			1,5	
6 N/mm ²	w/w	w/d	1,5			1,5	
	d/d		2,0			2,0	

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T7 PF, filled with perlite,
Characteristic resistance under tension load

Annex C 38

Vertical perforated brick HLz, T7 PF, filled with perlite, EN 771-1:2015

Table C39.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	M16	-	M12	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category			
4 N/mm ²	w/w d/d	0,9	1,5	1,2
6 N/mm ²	w/w d/d	1,2	2,0	1,5

Table C39.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200	18x130/200	22x130/200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category		
4 N/mm ²	w/w d/d	1,5	1,2
6 N/mm ²	w/w d/d	2,0	1,5

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, T7 PF, filled with perlite,
Characteristic resistance under shear load

Annex C 39

Vertical perforated brick HLz, S9 MW, filled with mineral wool, EN 771-1:2015

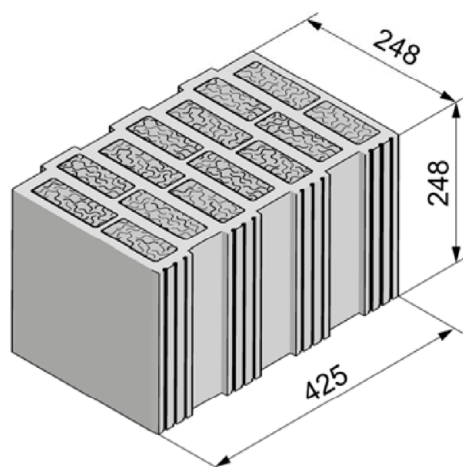

Vertical perforated brick HLz, S9 MW, filled with mineral wool, EN 771-1:2015			
Producer	-		
Nominal dimensions [mm]	length L	width W	height H
	248	425	248
Density ρ [kg/dm ³]	0,8		
Compressive strength f_b [N/mm ²]	4 / 6 / 8		
Standard or annex	EN 771-1:2015		



Dimension see also Annex B 16

Table C40.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-		-	
						11x85						15x85							
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130		20x200	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																			
Max. installation torque	T _{inst}	[Nm]	3						5	3	5								
General installation parameters																			
Edge distance	C _{min}	[mm]	60																
Spacing	S _{min}		80																
	S _{cr}		250																
	S _{min} ⊥		80																
	S _{cr} ⊥		250																
Drilling method																			
Rotary drilling with carbide drill																			

Table C40.2: Group factors

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	-
Perforated sleeve FIS H K		12x50	12x85	12x85	12x85	16x85	16x85	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200
Group factors	$\alpha_{g,N} \parallel$	1,3		1,3		1,3		1,3		1,3		1,3		1,3		1,3	
	$\alpha_{g,V} \parallel$	1,2		1,2		1,2		1,2		1,2		1,2		1,2		1,2	
	$\alpha_{g,N} \perp$	0,6		0,6		0,6		0,6		0,6		0,6		0,6		0,6	
	$\alpha_{g,V} \perp$	1,2		1,2		1,2		1,2		1,2		1,2		1,2		1,2	

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, S9 MW, filled with mineral wool, dimensions, installation parameters

Annex C 40

Appendix 66 / 136

Vertical perforated brick HLz, S9 MW, filled with mineral wool, EN 771-1:2015				
Table C41.1: Installation parameters (Push through anchorage with perforated sleeve FIS H K)				
Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	5	
General installation parameters				
Edge distance	c _{min}	[mm]	60	
Spacing	s _{min}		80	
	s _{cr}		250	
	s _{min} ⊥		80	
	s _{cr} ⊥		250	
Drilling method				
Rotary drilling with carbide drill				
Table C41.2: Group factors				
Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	α _{g,N}	[-]	1,3	
	α _{g,V}		1,2	
	α _{g,N} ⊥		0,6	
	α _{g,V} ⊥		1,2	

fischer injection system FIS V Plus for masonry		Annex C 41 Appendix 67 / 136
Performance Vertical perforated brick HLz, S9 MW, filled with mineral wool, dimensions, installation parameters		

Vertical perforated brick HLz, S9 MW, filled with mineral wool, EN 771-1:2015

Table C42.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x130	20x130	20x130	20x130	20x200	20x200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																
compressive strength f_b	use category															
4 N/mm ²	w/w	w/d	1,5		2,0		3,0		2,5		4,0					
	d/d		2,0		2,5		3,0		2,5		4,5					
6 N/mm ²	w/w	w/d	2,0		2,5		3,5		3,0		5,0					
	d/d		2,0		3,0		4,0		3,0		5,5					
8 N/mm ²	w/w	w/d	2,5		3,0		4,0		3,5		6,0					
	d/d		2,5		3,0		4,5		3,5		6,5					

Table C42.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod			M10	M12	M16
Perforated sleeve FIS H K			18x130/200		22x130/200
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)					
compressive strength f _b	use category				
4 N/mm²	w/w	w/d	3,0		4,0
	d/d		3,0		4,5
6 N/mm²	w/w	w/d	3,5		5,0
	d/d		4,0		5,5
8 N/mm²	w/w	w/d	4,0		6,0
	d/d		4,5		6,5

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, S9 MW, filled with mineral wool;
Characteristic resistance under tension load

Annex C 42

Appendix 68 / 136

Vertical perforated brick HLz, S9 MW, filled with mineral wool, EN 771-1:2015

Table C43.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	M16	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x85	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category															
4 N/mm ²	w/w d/d	w/d	2,0	2,0	2,5	2,0	1,5									
6 N/mm ²	w/w d/d	w/d	2,5	2,5	3,0	2,5	2,0									
8 N/mm ²	w/w d/d	w/d	2,5	3,0	4,0	3,0	2,5									

Table C43.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200	18x130/200	22x130/200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category															
4 N/mm ²	w/w d/d	w/d	2,5	2,5	3,0	4,0	2,0									
6 N/mm ²	w/w d/d	w/d	3,0	3,0	4,0	4,0	2,5									
8 N/mm ²	w/w d/d	w/d	4,0	4,0	4,0	4,0	3,0									

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance

Vertical perforated brick HLz, S9 MW, filled with mineral wool;
Characteristic resistance under shear load


Annex C 43

Appendix 69 / 136

Vertical perforated brick HLz, T7 MW, filled with mineral wool, EN 771-1:2015

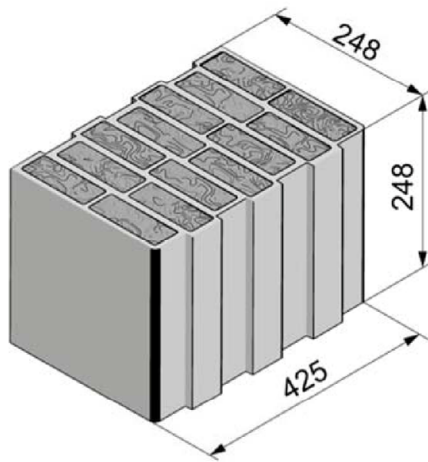

Vertical perforated brick HLz, T7 MW, filled with mineral wool, EN 771-1:2015			
Producer	-		
Nominal dimensions [mm]	length L	width W	height H
	248	425	248
Density ρ [kg/dm ³]	0,6		
Compressive strength f_b [N/mm ²]	4 / 6 / 8		
Standard or annex	EN 771-1:2015		



Dimension see also Annex B 16

Table C44.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-		-	
						11x85						15x85							
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130		20x200	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																			
Max. installation torque	T _{inst}	[Nm]	2						5	2	5								
General installation parameters																			
Edge distance	C _{min}	[mm]	60																
Spacing	S _{min}		80																
	S _{cr}		250																
	S _{min} ⊥		80																
	S _{cr} ⊥		250																
Drilling method																			
Rotary drilling with carbide drill																			

Table C44.2: Group factors

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	M16	-	-	-	-
Perforated sleeve FIS H K		12x50	12x85	12x85	12x85	16x85	16x85	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200
Group factors	$\alpha_{g,N} \parallel$	1,9		1,9		1,9		1,9		1,9		1,9		1,9		1,9	
	$\alpha_{g,V} \parallel$	0,9		0,9		0,9		0,9		0,9		0,9		0,9		0,9	
	$\alpha_{g,N} \perp$	1,0		1,0		1,0		1,0		1,0		1,0		1,0		1,0	
	$\alpha_{g,V} \perp$	0,7		0,7		0,7		0,7		0,7		0,7		0,7		0,7	

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T7 MW, filled with mineral wool;
dimensions, installation parameters

Annex C 44

Appendix 70 / 136

Vertical perforated brick HLz, T7 MW, filled with mineral wool, EN 771-1:2015

Table C45.1: Installation parameters

(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	5	
General installation parameters				
Edge distance	C _{min}	[mm]	60	
Spacing	s _{min}		80	
	s _{cr}		250	
	s _{min} ⊥		80	
	s _{cr} ⊥		250	
Drilling method				
Rotary drilling with carbide drill				

Table C45.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	[-]	1,9	
	$\alpha_{g,V \parallel}$		0,9	
	$\alpha_{g,N \perp}$		1,0	
	$\alpha_{g,V \perp}$		0,7	

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T7 MW, filled with mineral wool;
dimensions, installation parameters

Annex C 45

Appendix 71 / 136

Vertical perforated brick HLz, T7 MW, filled with mineral wool, EN 771-1:2015

Table C46.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x85	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																
compressive strength f_b	use category															
4 N/mm ²	w/w	w/d	0,6	0,75	1,5	2,0	1,2	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0
	d/d	d/d	0,6	0,9	1,5	2,0	1,5	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,5
6 N/mm ²	w/w	w/d	0,75	0,9	1,5	2,0	1,5	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,5
	d/d	d/d	0,9	0,9	2,0	2,5	2,0	2,5	2,5	2,0	2,0	2,0	2,0	2,0	2,0	3,0
8 N/mm ²	w/w	w/d	0,9	1,2	2,0	2,5	2,0	2,5	2,5	2,0	2,0	2,0	2,0	2,0	2,0	3,0
	d/d	d/d	0,9	1,2	2,0	3,0	2,0	3,0	3,0	2,0	2,0	2,0	2,0	2,0	2,0	3,5

Table C46.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod			M10	M12	M16
Perforated sleeve FIS H K			18x130/200		22x130/200
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)					
compressive strength f _b	use category				
4 N/mm²	w/w	w/d	2,0		2,0
	d/d		2,0		2,0
6 N/mm²	w/w	w/d	2,0		2,5
	d/d		2,5		2,5
8 N/mm²	w/w	w/d	2,5		2,5
	d/d		3,0		3,0

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, T7 MW, filled with mineral wool;
Characteristic resistance under tension load

Annex C 46

Appendix 72 / 136

Vertical perforated brick HLz, T7 MW, filled with mineral wool, EN 771-1:2015

Table C47.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x85	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category											
4 N/mm ²	w/w	w/d	1,2	1,5								1,5
	d/d											
6 N/mm ²	w/w	w/d	1,5	2,0								1,5
	d/d											
8 N/mm ²	w/w	w/d	1,5	2,5								2,0
	d/d											

Table C47.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200	18x130/200	22x130/200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category		
4 N/mm ²	w/w	w/d	1,5
	d/d		
6 N/mm ²	w/w	w/d	2,0
	d/d		
8 N/mm ²	w/w	w/d	2,5
	d/d		

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance

Vertical perforated brick HLz, T7 MW, filled with mineral wool;
Characteristic resistance under shear load


Annex C 47

Appendix 73 / 136

Vertical perforated brick HLz, EN 771-1:2015

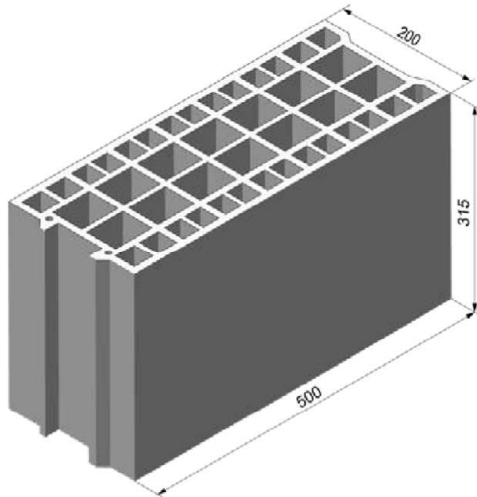

Vertical perforated brick HLz, EN 771-1:2015			
Producer	e.g. Bouyer Leroux		
Nominal dimensions [mm]	length L	width W	height H
	500	200	315
Density ρ [kg/dm ³]	$\geq 0,6$		
Compressive strength f_b [N/mm ²]	4 / 6 / 8		
Standard or annex	EN 771-1:2015		

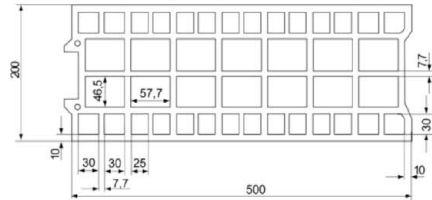

Dimension see also Annex B 16

Table C48.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-	
						11x85						15x85					
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																	
Max. installation torque	T _{inst}	[Nm]	2														
General installation parameters																	
Edge distance	C _{min}	[mm]	120														
Spacing	S _{min} II		120														
	S _{scr} II		500														
	S _{min} ⊥ = S _{scr} ⊥		315														
Drilling method																	
Hammer drilling with hard metal hammer drill																	

Table C48.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 M8 11x85	-	-	-	-	M10 M12 15x85	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x130
Group factors $\alpha_{g,N}$ II	1,3													
Group factors $\alpha_{g,V}$ II	1,7													
$\alpha_{g,N} \perp = \alpha_{g,V} \perp$	2													

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, dimensions, installation parameters

Annex C 48

Appendix 74 / 136

Vertical perforated brick HLz, EN 771-1:2015

Table C49.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	2	
General installation parameters				
Edge distance	c _{min}	[mm]	120	
Spacing	s _{min}		120	
	s _{cr}		500	
	s _{min} ⊥ = s _{cr} ⊥		315	
Drilling method				
Hammer drilling with hard metal hammer drill				

Table C49.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	[-]	1,3	
	$\alpha_{g,V \parallel}$		1,7	
	$\alpha_{g,N \perp} = \alpha_{g,V \perp}$		2	

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 49

Vertical perforated brick HLz, EN 771-1:2015

Table C50.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																
compressive strength f _b	use category															
4 N/mm ²	w/w	w/d	0,5		1,5				0,75		1,5				1,5	
	d/d		0,6		1,5				0,9		1,5				2,0	
6 N/mm ²	w/w	w/d	0,75		2,0				1,2		2,0				2,5	
	d/d		0,9		2,5				1,2		2,5				2,5	
8 N/mm ²	w/w	w/d	0,9		3,0				1,5		3,0				3,5	
	d/d		1,2		3,0				2,0		3,0				3,5	

Table C50.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)							
compressive strength f _b		use category					
4 N/mm²	w/w	w/d	0,75			1,5	
	d/d		0,9			2,0	
6 N/mm²	w/w	w/d	1,2			2,5	
	d/d		1,2			2,5	
8 N/mm²	w/w	w/d	1,5			3,5	
	d/d		2,0			3,5	

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Characteristic resistance under tension load

Annex C 50

Vertical perforated brick HLz, EN 771-1:2015

Table C51.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category							
4 N/mm ²	w/w	w/d	1,5	0,9	1,5	2,5	0,9	
	d/d							
6 N/mm ²	w/w	w/d	2,5	1,5	2,5	3,5	1,5	
	d/d							
8 N/mm ²	w/w	w/d	3,5	2,0	3,5	4,5	2,0	
	d/d							

Table C51.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category		
4 N/mm ²	w/w	w/d	0,9
	d/d		
6 N/mm ²	w/w	w/d	1,5
	d/d		
8 N/mm ²	w/w	w/d	2,0
	d/d		

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance

Vertical perforated brick HLz, Characteristic resistance under shear load


Annex C 51

Appendix 77 / 136

Vertical perforated brick HLz, EN 771-1:2015

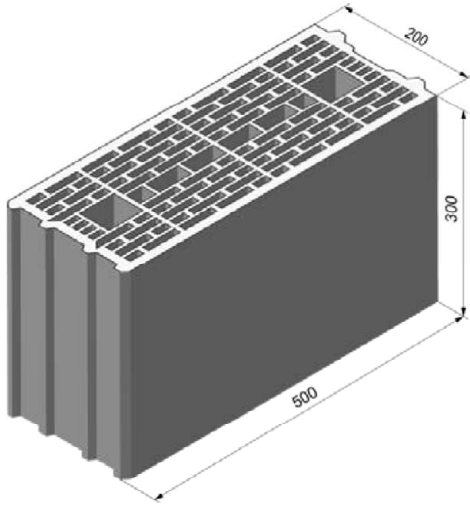

Vertical perforated brick HLz, EN 771-1:2015			
Producer	e.g. Wienerberger		
Nominal dimensions [mm]	length L	width W	height H
	500	200	300
Density ρ [kg/dm ³]	$\geq 0,7$		
Compressive strength f_b [N/mm ²]	4 / 6 / 8 / 10		
Standard or annex	EN 771-1:2015		

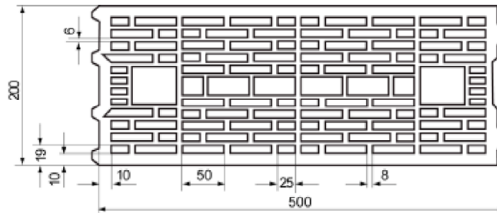

Dimension see also Annex B 17

Table C52.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-	
						11x85						15x85					
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																	
Max. installation torque	T _{inst}	[Nm]	2														
General installation parameters																	
Edge distance	C _{min}	[mm]	50							80			50	80			
Spacing	S _{min}		100														
	S _{scr}		500														
	S _{min} ⊥ = S _{scr} ⊥		300														
Drilling method																	
Hammer drilling with hard metal hammer drill																	

Table C52.2: Group factors

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-	
						11x85						15x85					
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130	
Group factors	$\alpha_{g,N} \parallel$	[-]	1,4														
	$\alpha_{g,V} \parallel$		2														
	$\alpha_{g,N} \perp = \alpha_{g,V} \perp$																

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 52

Vertical perforated brick HLz, EN 771-1:2015

Table C53.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	2	
General installation parameters				
Edge distance	C _{min}	[mm]	80	
Spacing	S _{min}		100	
	S _{cr}		500	
	S _{min} ⊥ = S _{cr} ⊥		300	
Drilling method				
Hammer drilling with hard metal hammer drill				

Table C53.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N} \parallel$	[-]	1,4	
	$\alpha_{g,V} \parallel$		2	
	$\alpha_{g,N} \perp = \alpha_{g,V} \perp$			

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 53

Appendix 79 / 136

Vertical perforated brick HLz, EN 771-1:2015

Table C54.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																
compressive strength f _b	use category															
4 N/mm²	w/w	w/d	0,5			0,6			1,2		0,75			1,5		
	d/d		0,6			0,75			1,2		0,9			1,5		
6 N/mm²	w/w	w/d	0,75			0,9			1,5		1,2			2,0		
	d/d		0,9			1,2			2,0		1,2			2,5		
8 N/mm²	w/w	w/d	0,9			1,2			2,0		1,5			2,5		
	d/d		1,2			1,5			2,5		1,5			3,0		
10 N/mm²	w/w	w/d	1,2			1,5			2,5		2,0			3,5		
	d/d		1,5			2,0			3,0		2,0			4,0		

Table C54.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)							
compressive strength f _b		use category					
4 N/mm²	w/w	w/d	1,2			1,5	
	d/d		1,2			1,5	
6 N/mm²	w/w	w/d	1,5			2,0	
	d/d		2,0			2,5	
8 N/mm²	w/w	w/d	2,0			2,5	
	d/d		2,5			3,0	
10 N/mm²	w/w	w/d	2,5			3,5	
	d/d		3,0			4,0	

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Characteristic resistance under tension load

Annex C 54

Appendix 80 / 136

Vertical perforated brick HLz, EN 771-1:2015

Table C55.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)																
compressive strength f _b	use category															
4 N/mm²	w/w	w/d	0,9	1,2	0,9	1,2	0,6	2,0				0,6				
	d/d															
6 N/mm²	w/w	w/d	1,2	1,5	1,2	1,5	0,9	3,0				0,9				
	d/d															
8 N/mm²	w/w	w/d	1,5	2,0	1,5	2,0	1,2	4,0				1,2				
	d/d															
10 N/mm²	w/w	w/d	2,0	3,0	2,0	3,0	1,5	5,0				1,5				
	d/d															

Table C55.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)							
compressive strength f _b	use category						
4 N/mm²	w/w	w/d	0,6				
	d/d						
6 N/mm²	w/w	w/d	0,9				
	d/d						
8 N/mm²	w/w	w/d	1,2				
	d/d						
10 N/mm²	w/w	w/d	1,5				
	d/d						

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance

Vertical perforated brick HLz, Characteristic resistance under shear load


Annex C 55

Appendix 81 / 136

Vertical perforated brick HLz, EN 771-1:2015

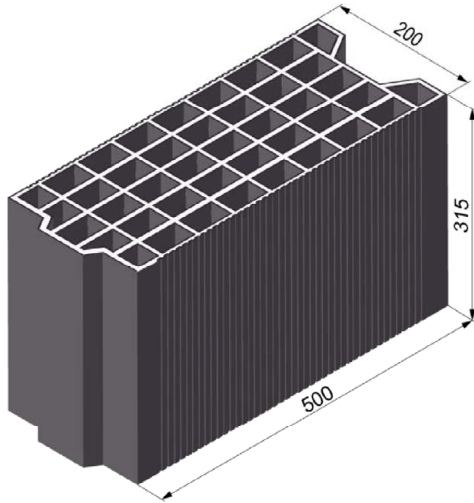

Vertical perforated brick HLz, EN 771-1:2015			
Producer	e.g. Terreal		
Nominal dimensions [mm]	length L	width W	height H
	500	200	315
Density ρ [kg/dm ³]	$\geq 0,7$		
Compressive strength f_b [N/mm ²]	2 / 4 / 6 / 8		
Standard or annex	EN 771-1:2015		

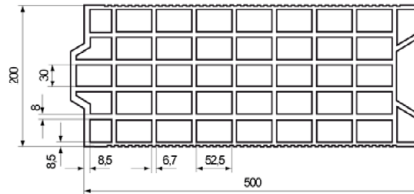

Dimension see also Annex B 17

Table C56.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-	
						11x85						15x85					
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																	
Max. installation torque	T _{inst}	[Nm]	2														
General installation parameters																	
Edge distance	C _{min}	[mm]	50							80		50				80	
Spacing	S _{min}		100														
	S _{scr}		500														
	S _{min} ⊥		100														
	S _{scr} ⊥		315														
Drilling method																	
Hammer drilling with hard metal hammer drill																	

Table C56.2: Group factors

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-	
						11x85						15x85					
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130	
Group factors	$\alpha_{g,N} \parallel$	[-]	1,1														
	$\alpha_{g,V} \parallel$		1,2														
	$\alpha_{g,N} \perp$		1,1														
	$\alpha_{g,V} \perp$		1,2														

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 56

Vertical perforated brick HLz, EN 771-1:2015

Table C57.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	2	
General installation parameters				
Edge distance	C _{min}	[mm]	80	
Spacing	S _{min}		100	
	S _{scr}		500	
	S _{min} ⊥		100	
	S _{scr} ⊥		315	
Drilling method				
Hammer drilling with hard metal hammer drill				

Table C57.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N} \parallel$	[-]	1,1	
	$\alpha_{g,V} \parallel$		1,2	
	$\alpha_{g,N} \perp$		1,1	
	$\alpha_{g,V} \perp$		1,2	

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 57

Appendix 83 / 136

Vertical perforated brick HLz, EN 771-1:2015

Table C58.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																
compressive strength f _b	use category															
2 N/mm²	w/w	w/d	0,5													
	d/d		0,5						0,6		0,5				0,6	
4 N/mm²	w/w	w/d	0,9													
	d/d		0,9		1,2											
6 N/mm²	w/w	w/d	1,5													
	d/d		1,5													
8 N/mm²	w/w	w/d	2,0													
	d/d		2,0													

Table C58.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)							
compressive strength f _b	use category						
2 N/mm²	w/w	w/d	0,5				
	d/d		0,6				
4 N/mm²	w/w	w/d	0,9				
	d/d		1,2				
6 N/mm²	w/w	w/d	1,5				
	d/d		1,5				
8 N/mm²	w/w	w/d	2,0				
	d/d		2,0				

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Characteristic resistance under tension load

Annex C 58

Vertical perforated brick HLz, EN 771-1:2015

Table C59.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)																
compressive strength f _b	use category															
2 N/mm²	w/w	w/d	0,3	0,6	0,3	0,6	0,6	0,6	0,9	0,75						
	d/d															
4 N/mm²	w/w	w/d	0,75	1,2	0,75	1,2	1,2	1,2	2,0	1,5						
	d/d															
6 N/mm²	w/w	w/d	0,9	2,0	0,9	2,0	1,5	1,5	3,0	2,0						
	d/d															
8 N/mm²	w/w	w/d	1,5	2,5	1,5	2,5	2,0	2,0	4,0	3,0						
	d/d															

Table C59.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)							
compressive strength f _b	use category						
2 N/mm²	w/w	w/d	0,6		0,75		
	d/d						
4 N/mm²	w/w	w/d	1,2		1,5		
	d/d						
6 N/mm²	w/w	w/d	1,5		2,0		
	d/d						
8 N/mm²	w/w	w/d	2,0		3,0		
	d/d						

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance

Vertical perforated brick HLz, Characteristic resistance under shear load

Annex C 59

Appendix 85 / 136

Vertical perforated brick HLz, EN 771-1:2015

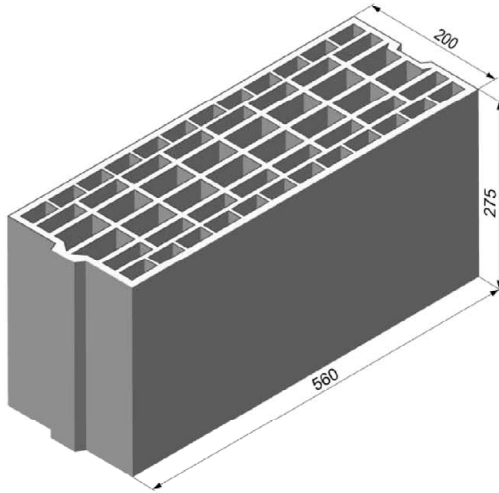

Vertical perforated brick HLz, EN 771-1:2015			
Producer	e.g. Imery		
Nominal dimensions [mm]	length L	width W	height H
	560	200	275
Density ρ [kg/dm ³]	$\geq 0,7$		
Compressive strength f_b [N/mm ²]	4 / 6 / 8		
Standard or annex	EN 771-1:2015		

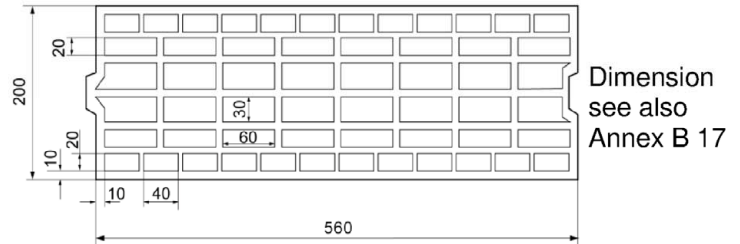


Table C60.1: Installation parameters

Anchor rod		M8	M10	M10	M12	M12	M16	M16
Perforated sleeve FIS H K		16x130		18x130/200		20x130		22x130/200
Anchor rod with perforated sleeve FIS H K								
Max. installation torque	T _{inst}	[Nm]	2					
General installation parameters								
Edge distance	C _{min}	[mm]	80					
Spacing	S _{min} = S _{cr}		560					
	S _{min} ⊥ = S _{cr} ⊥		275					
Drilling method								
Hammer drilling with hard metal hammer drill								

Table C60.2: Group factors

Anchor rod		M8	M10	M10	M12	M12	M16	M16
Perforated sleeve FIS H K		16x130		18x130/200		20x130		22x130/200
Group factors	$\alpha_{g,N} \parallel$	[-]	2					
	$\alpha_{g,V} \parallel$							
	$\alpha_{g,N} \perp$							
	$\alpha_{g,V} \perp$							

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 60

Vertical perforated brick HLz, EN 771-1:2015

Table C61.1: Characteristic resistance under tension load

Anchor rod			M8	M10	M10	M12	M12	M16	M16
Perforated sleeve FIS H K			16x130		18x130/200		20x130		22x130/200
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)									
compressive strength f _b		use category							
4 N/mm²	w/w	w/d	0,9				1,2		
	d/d		1,2				1,5		
6 N/mm²	w/w	w/d	1,5				2,0		
	d/d		1,5				2,0		
8 N/mm²	w/w	w/d	2,0				2,5		
	d/d		2,5				3,0		

Factor for temperature range 72/120°C: 0,83

Table C61.2: Characteristic resistance under shear load

Anchor rod		M8	M10	M10	M12	M12	M16	M16
Perforated sleeve FIS H K		16x130		18x130/200		20x130		22x130/200
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)								
compressive strength f _b	use category							
4 N/mm ²	w/w	w/d	0,9					
	d/d							
6 N/mm ²	w/w	w/d	1,5					
	d/d							
8 N/mm ²	w/w	w/d	2,0					
	d/d							

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, Characteristic resistance under tension and shear load

Annex C 61

Vertical perforated brick HLz, EN 771-1:2015

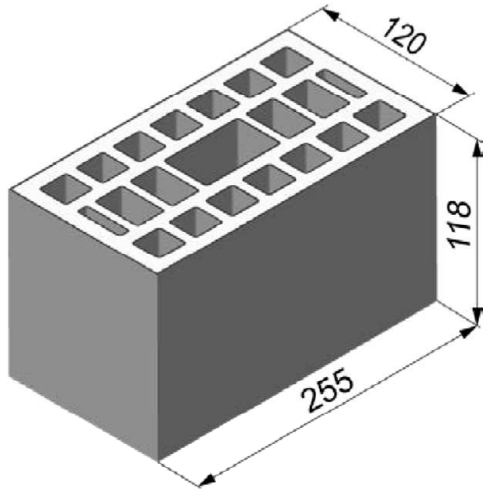

Vertical perforated brick HLz, EN 771-1:2015			
Producer	e.g. Wienerberger		
Nominal dimensions [mm]	length L	width W	height H
	255	120	118
Density ρ [kg/dm ³]	$\geq 1,0$		
Compressive strength f_b [N/mm ²]	2 / 4 / 6 / 8 / 10 / 12		
Standard or annex	EN 771-1:2015		

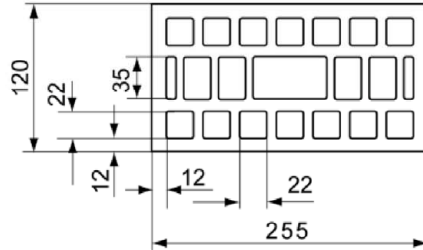

Dimension see also Annex B 18

Table C62.1: Installation parameters

Anchor rod	M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		M10	M12	-	
					11x85				15x85			
Perforated sleeve FIS H K	12x50		12x85		16x85				20x85			
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K												
Max. installation torque	T _{inst}	[Nm]	2									
General installation parameters												
Edge distance	C _{min}	[mm]	60									
Spacing	S _{cr} = S _{min}		255									
	S _{cr} ⊥ = S _{min} ⊥		120									
Drilling method												
Hammer drilling with hard metal hammer drill												

Table C62.2: Group factors

Anchor rod			M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E			-		-		M6	M8	-		M10	M12	-	
							11x85				15x85			
Perforated sleeve FIS H K			12x50		12x85		16x85				20x85			
Group factors	$\alpha_{g,N} \parallel$	[-]	2											
	$\alpha_{g,V} \parallel$													
	$\alpha_{g,N} \perp$													
	$\alpha_{g,V} \perp$													

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 62

Vertical perforated brick HLz, EN 771-1:2015

Table C63.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		M10	M12	-	
					11x85				15x85			
Perforated sleeve FIS H K	12x50		12x85		16x85				20x85			
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)												
compressive strength f _b	use category											
2 N/mm²	w/w	w/d	0,4	0,5				_1)				
	d/d		0,5	0,5				_1)				
4 N/mm²	w/w	w/d	0,9	0,9				0,5				
	d/d		0,9	1,2				0,5				
6 N/mm²	w/w	w/d	1,2	1,5				0,75				
	d/d		1,5	1,5				0,75				
8 N/mm²	w/w	w/d	1,5	2,0				0,9				
	d/d		2,0	2,0				0,9				
10 N/mm²	w/w	w/d	2,0	2,5				1,2				
	d/d		2,5	2,5				1,2				
12 N/mm²	w/w	w/d	2,5	3,0				1,5				
	d/d		3,0	3,5				1,5				

¹⁾ No performance assesses

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Characteristic resistance under tension load

Annex C 63

Appendix 89 / 136

Vertical perforated brick HLz, EN 771-1:2015

Table C64.1: Characteristic resistance under shear load

Anchor rod	M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		M10	M12	-	
					11x85				15x85			
Perforated sleeve FIS H K	12x50		12x85		16x85				20x85			
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)												
compressivestren gth f _b	use category											
2 N/mm²	w/w	w/d	0,6	0,75	0,6	0,75	0,9					
	d/d											
4 N/mm²	w/w	w/d	1,2	1,5	1,2	1,5	2,0					
	d/d											
6 N/mm²	w/w	w/d	2,0	2,0	2,0	2,0	2,5					
	d/d											
8 N/mm²	w/w	w/d	2,5	3,0	2,5	3,0	3,5					
	d/d											
10 N/mm²	w/w	w/d	3,0	3,5	3,0	3,5	4,5					
	d/d											
12 N/mm²	w/w	w/d	4,0	4,5	4,0	4,5	5,5					
	d/d											

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, Characteristic resistance under shear load

Annex C 64

Vertical perforated brick HLz, EN 771-1:2015

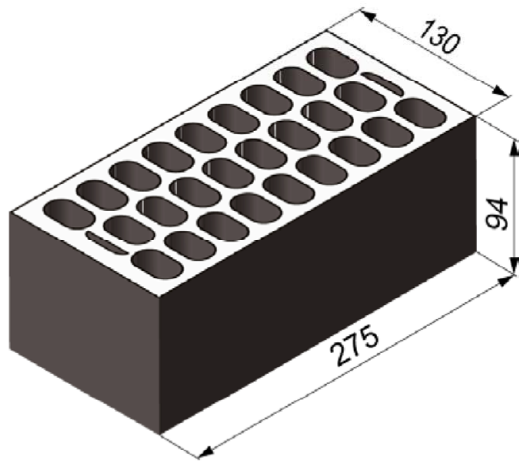

Vertical perforated brick HLz, EN 771-1:2015			
Producer	e.g. Cermanica Farreny S.A.		
Nominal dimensions [mm]	length L	width W	height H
	275	130	94
Density ρ [kg/dm ³]	$\geq 0,8$		
Compressive strength f_b [N/mm ²]	6 / 8 / 12 / 16 / 20		
Standard or annex	EN 771-1:2015		

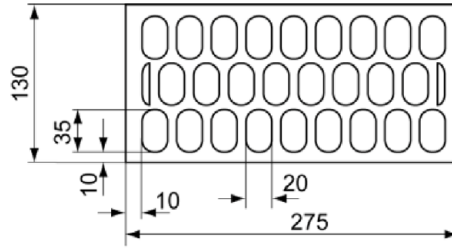

Dimension see also Annex B 18

Table C65.1: Installation parameters

Anchor rod		M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		M10	M12	-	
						11x85				15x85			
Perforated sleeve FIS H K		12x50		12x85		16x85				20x85			
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K													
Max. installation torque	T _{inst}	[Nm]	2										
General installation parameters													
Edge distance	C _{min}	[mm]	100							120			
Spacing	S _{cr} = S _{min}		275										
	S _{cr} ⊥ = S _{min} ⊥		95										
Drilling method													
Hammer drilling with hard metal hammer drill													

Table C65.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	-	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	M10	M12	-
					11x85			15x85		
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x85	16x85	20x85	20x85	20x85
Group factors $\alpha_{g,N}$ [-]	2									

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 65

Vertical perforated brick HLz, EN 771-1:2015

Table C66.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		M10	M12	-	
					11x85				15x85			
Perforated sleeve FIS H K	12x50		12x85		16x85				20x85			
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)												
compressive strength f _b	use category											
6 N/mm²	w/w	w/d	0,4		0,9							
	d/d		0,4		0,9							
8 N/mm²	w/w	w/d	0,5		1,2							
	d/d		0,6		1,2							
12 N/mm²	w/w	w/d	0,75		1,5							
	d/d		0,9		2,0							
16 N/mm²	w/w	w/d	0,9		2,0							
	d/d		1,2		2,5							
20 N/mm²	w/w	w/d	1,2		3,0							
	d/d		1,5		3,0							

Factor for temperature range 72/120°C: 0,83

Table C66.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		M10	M12	-	
					11x85				15x85			
Perforated sleeve FIS H K	12x50		12x85		16x85				20x85			
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)												
compressive strength f _b	use category											
6 N/mm²	w/w	w/d	1,2		1,2							
	d/d											
8 N/mm²	w/w	w/d	1,5		1,5							
	d/d											
12 N/mm²	w/w	w/d	2,0		2,5							
	d/d											
16 N/mm²	w/w	w/d	3,0		3,0							
	d/d											
20 N/mm²	w/w	w/d	4,0		4,0							
	d/d											

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, Characteristic resistance under tension and shear load

Annex C 66

Vertical perforated brick HLz, EN 771-1:2015

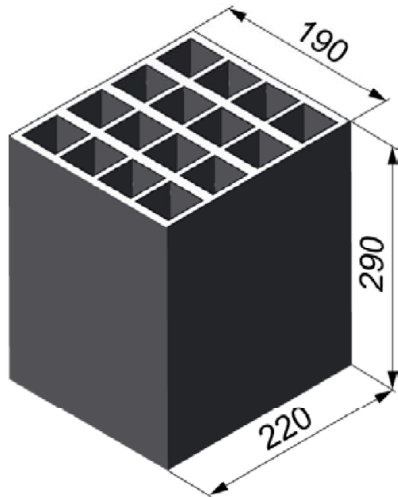

Vertical perforated brick HLz, EN 771-1:2015			
Producer	e.g. Perceram		
Nominal dimensions [mm]	length L	width W	height H
	220	190	290
Density ρ [kg/dm ³]	$\geq 0,7$		
Compressive strength f_b [N/mm ²]	6 / 8 / 10		
Standard or annex	EN 771-1:2015		



Dimension see also Annex B 18

Table C67.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																
Max. installation torque	T _{inst}	[Nm]	2													
General installation parameters																
Edge distance	C _{min}	[mm]	110													
Spacing	S _{min} = S _{cr}		220													
	S _{min} ⊥ = S _{cr} ⊥		290													
Drilling method																
Hammer drilling with hard metal hammer drill																

Table C67.2: Group factors

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-	
						11x85						15x85					
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130	
Group factors	$\alpha_{g,N} \parallel$	[-]	2														
	$\alpha_{g,V} \parallel$																
	$\alpha_{g,N} \perp$																
	$\alpha_{g,V} \perp$																

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, dimensions, installation parameters

Annex C 67

Appendix 93 / 136

Vertical perforated brick HLz, EN 771-1:2015

Table C68.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	2	
General installation parameters				
Edge distance	c _{min}	[mm]	110	
Spacing	s _{min} = s _{cr}		220	
	s _{min} ⊥ = s _{cr} ⊥		290	
Drilling method				
Hammer drilling with hard metal hammer drill				

Table C68.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	[-]	2	
	$\alpha_{g,V \parallel}$			
	$\alpha_{g,N \perp}$			
	$\alpha_{g,V \perp}$			

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 68

Appendix 94 / 136

Vertical perforated brick HLz, EN 771-1:2015

Table C69.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																
compressive strength f _b	use category															
6 N/mm²	w/w	w/d	0,3	1,2	1,2				1,5		1,2				1,5	
	d/d		0,4	1,5	1,5				1,5		1,5				1,5	
8 N/mm²	w/w	w/d	0,5	1,5	1,5				2,0		1,5				2,0	
	d/d		0,5	2,0	2,0				2,5		2,0				2,5	
10 N/mm²	w/w	w/d	0,6	2,0	2,0				2,5		2,0				2,5	
	d/d		0,6	2,5	2,5				3,0		2,5				3,0	

Table C69.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)				
compressive strength f _b	use category			
6 N/mm ²	w/w	w/d	1,5	
	d/d		1,5	
8 N/mm ²	w/w	w/d	2,0	
	d/d		2,5	
10 N/mm ²	w/w	w/d	2,5	
	d/d		3,0	

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Characteristic resistance under tension load

Annex C 69

Vertical perforated brick HLz, EN 771-1:2015

Table C70.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)																
compressive strength f _b	use category															
6 N/mm²	w/w	w/d	1,5	1,5	1,5				2,5		1,5				2,0	
	d/d															
8 N/mm²	w/w	w/d	2,0	2,0	2,0				3,5		2,0				3,0	
	d/d															
10 N/mm²	w/w	w/d	2,5	3,0	3,0				4,5		3,0				3,5	
	d/d															

Table C70.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)				
compressive strength f _b	use category			
6 N/mm ²	w/w	w/d	2,0	
	d/d			
8 N/mm ²	w/w	w/d	3,0	
	d/d			
10 N/mm ²	w/w	w/d	3,5	
	d/d			

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Characteristic resistance under shear load

Annex C 70

Vertical perforated brick HLz, EN 771-1:2015

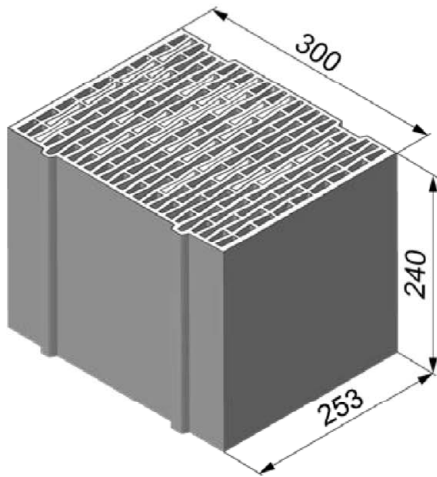

Vertical perforated brick HLz, EN 771-1:2015			
Producer	e.g. Ziegelwerk Brenna		
Nominal dimensions [mm]	length L	width W	height H
	253	300	240
Density ρ [kg/dm ³]	$\geq 0,8$		
Compressive strength f_b [N/mm ²]	2 / 4 / 6		
Standard or annex	EN 771-1:2015		

Dimension see also Annex B 18




Table C71.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-	
						11x85						15x85					
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																	
Max. installation torque		T _{inst}	[Nm]	2													
General installation parameters																	
Edge distance		C _{min}	[mm]	60													
Spacing		S _{min} = S _{cr}		255													
		S _{min} ⊥ = S _{cr} ⊥		240													
Drilling method																	
Hammer drilling with hard metal hammer drill																	

Table C71.2: Group factors

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-	
						11x85						15x85					
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130	
Group factors	$\alpha_{g,N} \parallel$	[-]	2														
	$\alpha_{g,V} \parallel$																
	$\alpha_{g,N} \perp$																
	$\alpha_{g,V} \perp$																

fischer injection system FIS V Plus for masonry

Performance
Vertical perforated brick HLz, dimensions, installation parameters

Annex C 71

Appendix 97 / 136

Vertical perforated brick HLz, EN 771-1:2015

Table C72.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	2	
General installation parameters				
Edge distance	C _{min}	[mm]	60	
Spacing	S _{min} = S _{scr}		255	
	S _{min} ⊥ = S _{scr} ⊥		240	
Drilling method				
Hammer drilling with hard metal hammer drill				

Table C72.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	[-]	2	
	$\alpha_{g,V \parallel}$			
	$\alpha_{g,N \perp}$			
	$\alpha_{g,V \perp}$			

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 72

Vertical perforated brick HLz, EN 771-1:2015

Table C73.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																
compressive strength f _b	use category															
2 N/mm²	w/w	w/d	- ¹⁾		0,5		0,5		0,4		0,5				0,4	
	d/d		0,3		0,5		0,5		0,5		0,5				0,5	
4 N/mm²	w/w	w/d	0,5		0,9		0,9		0,9		0,9				0,9	
	d/d		0,6		0,9		0,9		0,9		0,9				0,9	
6 N/mm²	w/w	w/d	0,75		1,5		1,5		1,2		1,5				1,2	
	d/d		0,9		1,5		1,5		1,5		1,5				1,5	

¹⁾ No performance assessed

Table C73.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)							
compressive strength f _b	use category						
2 N/mm ²	w/w	w/d	0,4				
	d/d		0,5				
4 N/mm ²	w/w	w/d	0,9				
	d/d		0,9				
6 N/mm ²	w/w	w/d	1,2				
	d/d		1,5				

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Characteristic resistance under tension load

Annex C 73

Vertical perforated brick HLz, EN 771-1:2015

Table C74.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category			
2 N/mm ²	w/w	w/d	0,5	0,6
	d/d			
4 N/mm ²	w/w	w/d	0,9	1,2
	d/d			
6 N/mm ²	w/w	w/d	1,5	1,5
	d/d			

Table C74.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category			
2 N/mm ²	w/w	w/d	0,5	0,6
	d/d			
4 N/mm ²	w/w	w/d	0,9	1,2
	d/d			
6 N/mm ²	w/w	w/d	1,5	1,5
	d/d			

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, Characteristic resistance under shear load

Annex C 74

Vertical perforated brick HLz, Porothersm W 44, filled with mineral wool, EN 771-1:2015

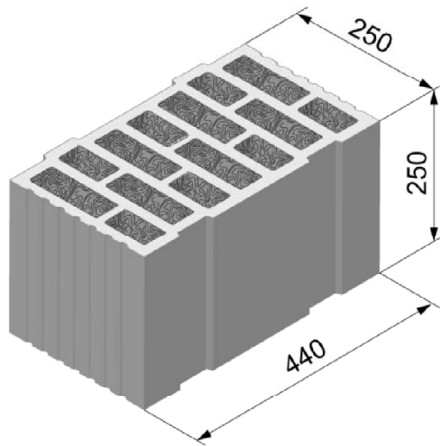

Vertical perforated brick HLz, Porothersm W 44, filled with mineral wool, EN 771-1:2015			
Producer	-		
Nominal dimensions [mm]	length L	width W	height H
	250	440	250
Density ρ [kg/dm ³]	0,7		
Compressive strength f_b [N/mm ²]	6 / 8 / 10		
Standard or annex	EN 771-1:2015		



Dimension see also Annex B 18

Table C75.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-		-	
						11x85						15x85							
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130		20x200	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																			
Max. installation torque	T _{inst}	[Nm]	2						5	2	5			6					
General installation parameters																			
Edge distance		C _{min}	[mm]	60															
Spacing		S _{min}		80															
		S _{scr}		250															
		S _{min} ⊥		80															
		S _{scr} ⊥		250															
Drilling method																			
Rotary drilling with carbide drill																			

Table C75.2: Group factors

Anchor rod		M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	-
Perforated sleeve FIS H K		12x50	12x85	12x85	12x85	11x85	11x85	11x85	11x85	11x85	11x85	15x85	15x85	15x85	15x85	15x85	15x85
Group factors	$\alpha_{g,N} \parallel$	1,3		1,3		1,3		1,3		1,3		1,3		1,3		1,3	
	$\alpha_{g,V} \parallel$	1,3		1,3		1,3		1,3		1,3		1,3		1,3		1,3	
	$\alpha_{g,N} \perp$	0,8		0,8		0,8		0,8		0,8		0,8		0,8		0,8	
	$\alpha_{g,V} \perp$	1,3		1,3		1,3		1,3		1,3		1,3		1,3		1,3	

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Porothersm W 44, filled with mineral wool;
dimensions, installation parameters

Annex C 75

Vertical perforated brick HLz, Porothersm W 44, filled with mineral wool, EN 771-1:2015**Table C76.1:** Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	5	6
General installation parameters				
Edge distance	C _{min}	[mm]	60	
Spacing	S _{min}		80	
	S _{scr}		250	
	S _{min} ⊥		80	
	S _{scr} ⊥		250	
Drilling method				
Rotary drilling with carbide drill				

Table C76.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N} \parallel$	[-]	1,3	
	$\alpha_{g,V} \parallel$		1,3	
	$\alpha_{g,N} \perp$		0,8	
	$\alpha_{g,V} \perp$		1,3	

fischer injection system FIS V Plus for masonry

PerformanceVertical perforated brick HLz, Porothersm W 44, filled with mineral wool;
dimensions, installation parameters**Annex C 76**

Vertical perforated brick HLz, Porothersm W 44, filled with mineral wool, EN 771-1:2015

Table C77.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16	
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-		
					11x85						15x85						
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85			20x130		20x200	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																	
compressive strength f _b	use category																
6 N/mm ²	w/w	w/d	0,75	1,5	1,2				1,5					2,5			
	d/d		0,9	1,5	1,2				1,5					2,5			
8 N/mm ²	w/w	w/d	0,9	1,5	1,2				1,5					2,5			
	d/d		0,9	2,0	1,5				2,0					3,0			
10 N/mm ²	w/w	w/d	0,9	2,0	1,5				2,0					3,0			
	d/d		1,2	2,0	1,5				2,0					3,5			

Table C77.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)							
compressive strength f _b	use category						
6 N/mm ²	w/w	w/d	1,5				
	d/d		1,5				
8 N/mm ²	w/w	w/d	1,5				
	d/d		2,0				
10 N/mm ²	w/w	w/d	2,0				
	d/d		2,0				

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Porothersm W 44, filled with mineral wool,
Characteristic resistance under tension load

Annex C 77

Vertical perforated brick HLz, Porothersm W 44, filled with mineral wool, EN 771-1:2015

Table C78.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6 11x85	M8	-		-	M10 15x85	M12	-		-		-
Perforated sleeve FIS H K	12x50		12x85		16x85			16x130		20x85			20x130		20x200	

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category						
6 N/mm ²	w/w	w/d	0,9	1,2	0,9	1,2	1,2
	d/d						
8 N/mm ²	w/w	w/d	0,9	1,5	0,9	1,5	1,2
	d/d						
10 N/mm ²	w/w	w/d	1,2	1,5	1,2	1,5	1,5
	d/d						

Table C78.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category			
6 N/mm ²	w/w	w/d	1,2	1,2
	d/d			
8 N/mm ²	w/w	w/d	1,5	1,5
	d/d			
10 N/mm ²	w/w	w/d	1,5	1,5
	d/d			

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Vertical perforated brick HLz, Porothersm W 44, filled with mineral wool;
Characteristic resistance under shear load

Annex C 78

Vertical perforated brick HLz, EN 771-1:2015

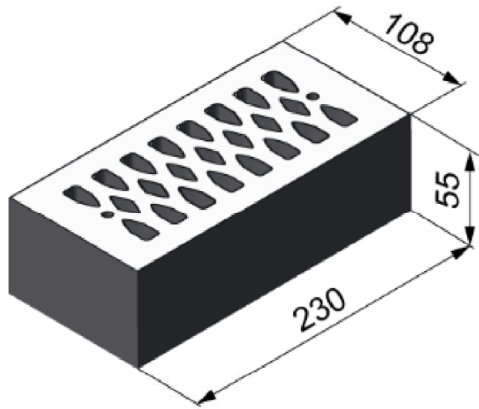

Vertical perforated brick HLz, EN 771-1:2015			
Producer	e.g. Wienerberger.		
Nominal dimensions [mm]	length L	width W	height H
	230	108	55
Density ρ [kg/dm ³]	$\geq 1,4$		
Compressive strength f_b [N/mm ²]	2 / 4 / 6 / 8		
Standard or annex	EN 771-1:2015		

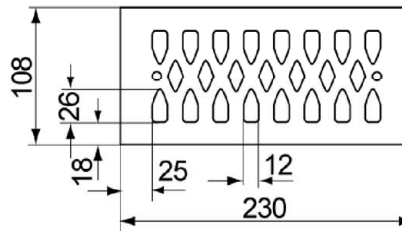

Dimension see also Annex B 18

Table C79.1: Installation parameters

Anchor rod		M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		M10	M12	-	
						11x85				15x85			
Perforated sleeve FIS H K		12x50		12x85		16x85				20x85			
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K													
Max. installation torque	T _{inst}	[Nm]	2										
General installation parameters													
Edge distance	C _{min}	[mm]	60										
Spacing	S _{min}		80										
	S _{cr}		230										
	S _{min} ⊥		60										
	S _{cr} ⊥		60										
Drilling method													
Hammer drilling with hard metal hammer drill													

Table C79.2: Group factors

Anchor rod			M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E			-		-		M6	M8	-		M10	M12	-	
							11x85				15x85			
Perforated sleeve FIS H K			12x50		12x85		16x85				20x85			
Group factors	$\alpha_{g,N} \parallel$	[-]	2											
	$\alpha_{g,V} \parallel$													
	$\alpha_{g,N} \perp$													
	$\alpha_{g,V} \perp$													

fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, dimensions, installation parameters

Annex C 79

Vertical perforated brick HLz, EN 771-1:2015

Table C80.1: Characteristic resistance under tension load ¹⁾

Anchor rod	M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		M10	M12	-	
					11x85				15x85			
Perforated sleeve FIS H K	12x50		12x85		16x85				20x85			
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)												
compressive strength f _b	use category											
2 N/mm²	w/w	w/d	0,3	0,9	0,75				0,5			
	d/d		0,3	0,9	0,9				0,6			
4 N/mm²	w/w	w/d	0,6	1,5	1,5				0,9			
	d/d		0,75	2,0	1,5				1,2			
6 N/mm²	w/w	w/d	0,9	2,5	2,5				1,5			
	d/d		0,9	3,0	2,5				1,5			
8 N/mm²	w/w	w/d	1,2	3,5	3,0				2,0			
	d/d		1,5	4,0	3,5				2,5			

¹⁾ If the fixing is in a solid area, for w/w, the characteristic value shall be reduced with the factor 0,64.

Factor for temperature range 72/120°C: 0,83

Table C80.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M6	M8	-		M8	M10	-		M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		M10	M12	-	
					11x85				15x85			
Perforated sleeve FIS H K	12x50		12x85		16x85				20x85			
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)												
compressive strength f _b	use category											
2 N/mm²	w/w	w/d	0,6						0,4			
	d/d											
4 N/mm²	w/w	w/d	1,2						0,9			
	d/d											
6 N/mm²	w/w	w/d	1,5						1,2			
	d/d											
8 N/mm²	w/w	w/d	2,5						1,5			
	d/d											

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Vertical perforated brick HLz, Characteristic resistance under tension and shear load

Annex C 80

Horizontal perforated brick LLz, EN 771-1:2015

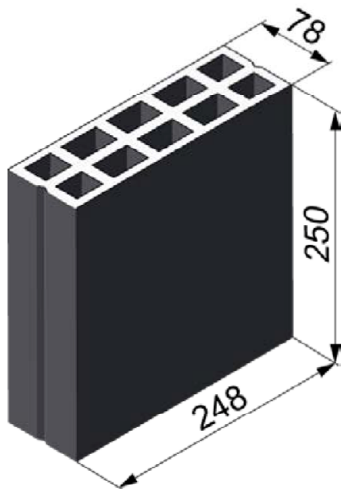

Horizontal perforated brick LLz, EN 771-1:2015			
Producer	-		
Nominal dimensions [mm]	length L	width W	height H
	250	78	248
Density ρ [kg/dm ³]	$\geq 0,7$		
Compressive strength f_b [N/mm ²]	2 / 4 / 6		
Standard or annex	EN 771-1:2015		

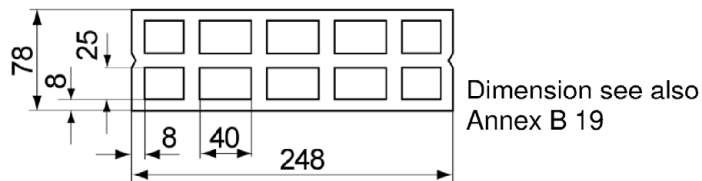


Table C81.1: Installation parameters

Anchor rod		M6		M8	
Perforated sleeve FIS H K		12x50			
Anchor rod with perforated sleeve FIS H K					
Max. installation torque	T _{inst}	[Nm]	2		
General installation parameters					
Edge distance	C _{min}	[mm]	100		
Spacing	S _{min}		75		
	S _{scr}		250		
	S _{min} ⊥ = S _{scr} ⊥		250		
Drilling method					
Hammer drilling with hard metal hammer drill					

Table C81.2: Group factors

Anchor rod		M6	M8
Perforated sleeve FIS H K		12x50	
Group factors	$\alpha_{g,N} \parallel$	1,6	
	$\alpha_{g,V} \parallel$	1,1	
	$\alpha_{g,N} \perp$	2,0	
	$\alpha_{g,V} \perp$		

fischer injection system FIS V Plus for masonry

Performance

Horizontal perforated brick LLz, dimensions, installation parameters

Annex C 81

Horizontal perforated brick LLz, EN 771-1:2015

Table C82.1: Characteristic resistance under tension load

Anchor rod		M6		M8	
Perforated sleeve FIS H K		12x50			
N _{RK} = N _{RK,p} = N _{RK,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)					
compressive strength f _b	use category				
2 N/mm²	w/w	w/d	0,5		
	d/d		0,6		
4 N/mm²	w/w	w/d	0,9		
	d/d		1,2		
6 N/mm²	w/w	w/d	1,5		
	d/d		1,5		

Factor for temperature range 72/120°C: 0,83

Table C82.2: Characteristic resistance under shear load

Anchor rod		M6		M8	
Perforated sleeve FIS H K		12x50			
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)					
compressive strength f _b	use category				
2 N/mm²	w/w	w/d	0,5		
	d/d				
4 N/mm²	w/w	w/d	0,9		
	d/d				
6 N/mm²	w/w	w/d	1,5		
	d/d				

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Horizontal perforated brick LLz, Characteristic resistance under tension and shear load

Annex C 82

Horizontal perforated brick LLz, EN 771-1:2015

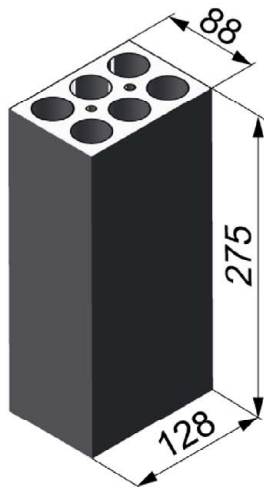

Horizontal perforated brick LLz, EN 771-1:2015			
Producer	e.g. Cermanica Farreny S.A.		
Nominal dimensions [mm]	length L	width W	height H
	275	88	128
Density ρ [kg/dm ³]	$\geq 0,8$		
Compressive strength f_b [N/mm ²]	2		
Standard or annex	EN 771-1:2015		



Dimension see also Annex B 19

Table C83.1: Installation parameters

Anchor rod		M6		M8	
Perforated sleeve FIS H K		12x50			
Anchor rod with perforated sleeve FIS H K					
Max. installation torque	T _{inst}	[Nm]	2		
General installation parameters					
Edge distance	C _{min}	[mm]	60		
Spacing	S _{min}		75		
	S _{scr}		275		
	S _{min} ⊥		75		
	S _{scr} ⊥		130		
Drilling method					
Hammer drilling with hard metal hammer drill					

Table C83.2: Group factors

Anchor rod		M6	M8
Perforated sleeve FIS H K		12x50	
Group factors	$\alpha_{g,N} \parallel$	[-]	1,3
	$\alpha_{g,V} \parallel$		1,5
	$\alpha_{g,N} \perp$		1,3
	$\alpha_{g,V} \perp$		1,5

fischer injection system FIS V Plus for masonry

Performance

Horizontal perforated brick LLz, dimensions, installation parameters

Annex C 83

Horizontal perforated brick LLz, EN 771-1:2015

Table C84.1: Characteristic resistance under tension load

Anchor rod		M6		M8	
Perforated sleeve FIS H K		12x50			
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)					
compressive strength f _b	use category				
2 N/mm ²	w/w	w/d	1,5		
	d/d				

Factor for temperature range 72/120°C: 0,83

Table C84.2: Characteristic resistance under shear load

Anchor rod		M6		M8	
Perforated sleeve FIS H K		12x50			
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)					
compressive strength f _b	use category				
2 N/mm²	w/w	w/d	1,2		
	d/d				

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance


Horizontal perforated brick LLz, Characteristic resistance under tension and shear load

Annex C 84

Light-weight concrete hollow block Hbl, EN 771-3:2015

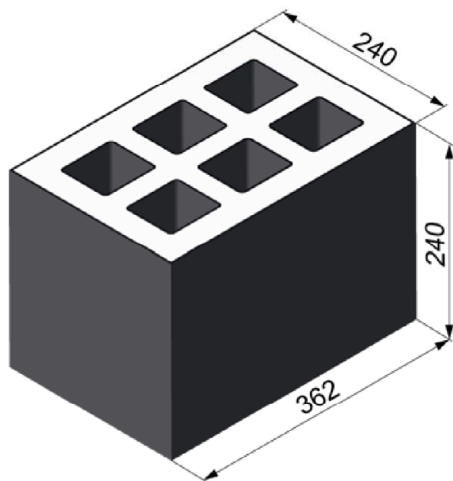

Light-weight concrete hollow block Hbl, EN 771-3:2015			
Producer	-		
Nominal dimensions [mm]	Länge L	Breite B	Höhe H
	362	240	240
Density ρ [kg/dm ³]	$\geq 1,0$		
Compressive strength f_b [N/mm ²]	2 / 4		
Standard or annex	EN 771-3:2015		



Dimension see also Annex B 19

Table C85.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		M10	M12	-		-		-	
						11x85						15x85							
Perforated sleeve FIS H K		12x50		12x85		16x85				16x130		20x85				20x130		20x200	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																			
Max. installation torque	T _{inst}	[Nm]	2																
General installation parameters																			
Edge distance	C _{min}	[mm]	60																
	S _{min}		100																
Spacing	S _{scr}		362																
	S _{min} ⊥ = S _{scr} ⊥		240																
Drilling method																			
Hammer drilling with hard metal hammer drill																			

Table C85.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	-
					11x85					15x85						
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x130	20x200	20x200
Group factors	$\alpha_{g,N} \parallel$	1,2														
	$\alpha_{g,V} \parallel$	1,1														
	$\alpha_{g,N} \perp$	2,0														
	$\alpha_{g,V} \perp$															

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete hollow block Hbl, dimensions, installation parameters

Annex C 85

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C86.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	2	
General installation parameters				
Edge distance	C _{min}	[mm]	60	
	S _{min}		100	
Spacing	S _{scr}		362	
	S _{min} ⊥ = S _{scr} ⊥		240	
Drilling method				
Hammer drilling with hard metal hammer drill				

Table C86.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	[-]	1,2	
	$\alpha_{g,V \parallel}$		1,1	
	$\alpha_{g,N \perp}$		2,0	
	$\alpha_{g,V \perp}$			

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete hollow block Hbl, dimensions, installation parameters

Annex C 86

Appendix 112 / 136

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C87.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																
compressive strength f_b	use category															
2 N/mm ²	w/w	w/d	1,2	1,5											2,5	
	d/d		1,2	1,5											2,5	
4 N/mm ²	w/w	w/d	2,0	3,0											5,0	
	d/d		2,5	3,0											5,5	

Table C87.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)				
compressive strength f _b	use category			
2 N/mm²	w/w	w/d	1,5	
	d/d		1,5	
4 N/mm²	w/w	w/d	3,0	
	d/d		3,0	

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete hollow block Hbl, Characteristic resistance under tension load

Annex C 87

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C88.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	M16	-	M12	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x130	20x130	20x200	20x200	20x200	20x200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category	
2 N/mm ²	w/w d/d	0,9
4 N/mm ²	w/w d/d	2,0

Table C88.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200	18x130/200	22x130/200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category	
2 N/mm ²	w/w d/d	0,9
4 N/mm ²	w/w d/d	2,0

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete hollow block Hbl, Characteristic resistance under shear load

Annex C 88

Light-weight concrete hollow block Hbl, EN 771-3:2015

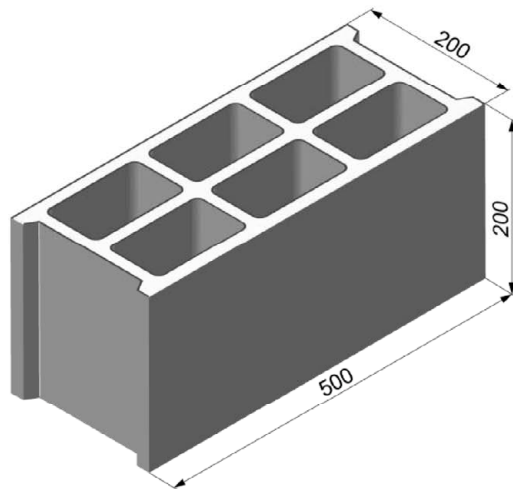

Light-weight concrete hollow block Hbl, EN 771-3:2015			
Producer	e.g. Sepa		
Nominal dimensions [mm]	length L	width W	height H
	500	200	200
Density ρ [kg/dm ³]	$\geq 1,0$		
Compressive strength f_b [N/mm ²]	2 / 4 / 6		
Standard or annex	EN 771-1:2015		

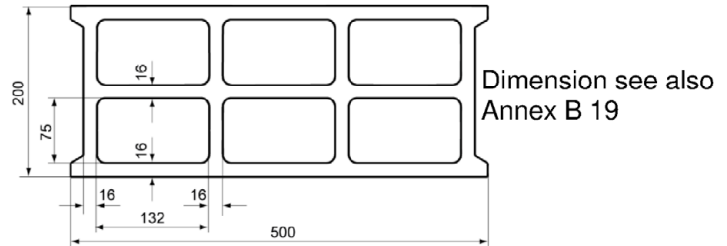


Table C89.1: Installation parameters

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	M10	M12	-		M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		-		M10	M12	-	
					11x85								15x85			
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		18x130/200		20x85			
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																
Max. installation torque	T _{inst}	[Nm]	1				2									
General installation parameters																
Edge distance	C _{min}	[mm]	100													
Spacing	S _{min} = S _{scr}		500													
	S _{min} ⊥ = S _{scr} ⊥		200													
Drilling method																
Hammer drilling with hard metal hammer drill																

Table C89.2: Group factors

Anchor rod		M6	M8	M6	M8	-		M8	M10	M8	M10	M10	M12	-		M12	M16
Internal threaded anchor FIS E		-		-		M6	M8	-		-		-		M10	M12	-	
						11x85	15x85										
Perforated sleeve FIS H K		12x50		12x85		16x85			16x130		18x130/200		20x85				
Group factors	$\alpha_{g,N} \parallel$	[-]	2														
	$\alpha_{g,V} \parallel$																
	$\alpha_{g,N} \perp$																
	$\alpha_{g,V} \perp$																

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete hollow block Hbl, dimensions, installation parameters

Annex C 89

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C90.1: Characteristic resistance under tension load

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	M10	M12	-		M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		-		M10	M12	-	
					11x85								15x85			
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		18x130/200		20x85			

$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)

compressive strength f_b	use category		
2 N/mm ²	w/w	w/d	0,4
	d/d		0,5
4 N/mm ²	w/w	w/d	0,9
	d/d		0,9
6 N/mm ²	w/w	w/d	1,2
	d/d		1,5

Factor for temperature range 72/120°C: 0,83

Table C90.2: Characteristic resistance under shear load

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	M10	M12	-		M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		-		M10	M12	-	
					11x85								15x85			
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		18x130/200		20x85			

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category		
2 N/mm ²	w/w	w/d	0,9
	d/d		
4 N/mm ²	w/w	w/d	1,5
	d/d		
6 N/mm ²	w/w	w/d	2,5
	d/d		

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance

Light-weight concrete hollow block Hbl,
Characteristic resistance under tension and shear load


Annex C 90

Appendix 116 / 136

Light-weight concrete hollow block Hbl, EN 771-3:2015

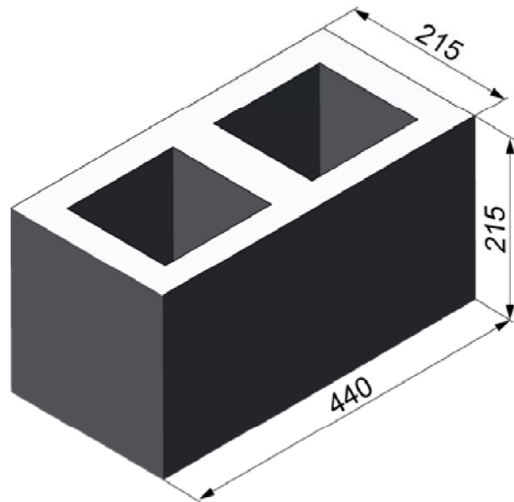

Light-weight concrete hollow block Hbl, EN 771-3:2015			
Producer	e.g. Roadstone wood		
Nominal dimensions [mm]	length L	width W	height H
	440	215	215
Density ρ [kg/dm ³]	$\geq 1,2$		
Compressive strength f_b [N/mm ²]	4 / 6 / 8 / 10		
Standard or annex	EN 771-3:2015		

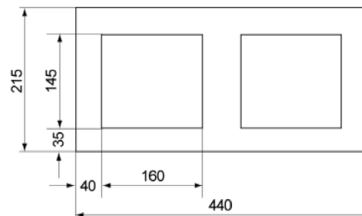

Dimension see also Annex B 19

Table C91.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 M8 11x85	-	-	-	-	M10 M12 15x85	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x130

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	T _{inst}	[Nm]	2
General installation parameters			
Edge distance	C _{min}	[mm]	110
Spacing	S _{min}		100
	S _{cr}		440
	S _{min} ⊥		100
	S _{cr} ⊥		215

Drilling method

Hammer drilling with hard metal hammer drill

Table C91.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 M8 11x85	-	-	-	-	M10 M12 15x85	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x130
Group factors	$\alpha_{g,N} \parallel$	[-]	1,4											
	$\alpha_{g,V} \parallel$		2,0											
	$\alpha_{g,N} \perp$		1,4											
	$\alpha_{g,V} \perp$		1,2											

fischer injection system FIS V Plus for masonry

Performance
Light-weight concrete hollow block Hbl, dimensions, installation parameters

Annex C 91

Appendix 117 / 136

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C92.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	2	
General installation parameters				
Edge distance	C _{min}	[mm]	110	
Spacing	S _{min}		100	
	S _{scr}		440	
	S _{min} ⊥		100	
	S _{scr} ⊥		215	
Drilling method				
Hammer drilling with hard metal hammer drill				

Table C92.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N} \parallel$	[-]	1,4	
	$\alpha_{g,V} \parallel$		2,0	
	$\alpha_{g,N} \perp$		1,4	
	$\alpha_{g,V} \perp$		1,2	

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete hollow block Hbl, dimensions, installation parameters

Annex C 92

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C93.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																
compressive strength f _b	use category															
4 N/mm²	w/w	w/d	0,9				1,2				2,0					
	d/d		1,2				1,5				2,0					
6 N/mm²	w/w	w/d	1,5				2,0				3,0					
	d/d		1,5				2,0				3,0					
8 N/mm²	w/w	w/d	2,0				2,5				3,5					
	d/d		2,0				3,0				4,0					
10 N/mm²	w/w	w/d	2,5				3,0				4,5					
	d/d		3,0				3,5				5,0					

Table C93.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)							
compressive strength f _b	use category						
4 N/mm²	w/w	w/d	1,2			2,0	
	d/d		1,5			2,0	
6 N/mm²	w/w	w/d	2,0			3,0	
	d/d		2,0			3,0	
8 N/mm²	w/w	w/d	2,5			3,5	
	d/d		3,0			4,0	
10 N/mm²	w/w	w/d	3,0			4,5	
	d/d		3,5			5,0	

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete hollow block Hbl, Characteristic resistance under tension load

Annex C 93

Light-weight concrete hollow block Hbl, EN 771-3:2015

Table C94.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-	
					11x85						15x85					
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130	

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category							
4 N/mm ²	w/w	w/d	0,75	1,2	0,75	1,2	0,75	1,2
	d/d							
6 N/mm ²	w/w	w/d	1,2	2,0	1,2	2,0	1,2	2,0
	d/d							
8 N/mm ²	w/w	w/d	1,5	2,5	1,5	2,5	1,5	2,5
	d/d							
10 N/mm ²	w/w	w/d	2,0	3,0	2,0	3,0	2,0	3,0
	d/d							

Table C94.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category		
4 N/mm ²	w/w	w/d	1,2
	d/d		
6 N/mm ²	w/w	w/d	2,0
	d/d		
8 N/mm ²	w/w	w/d	2,5
	d/d		
10 N/mm ²	w/w	w/d	3,0
	d/d		

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete hollow block Hbl, Characteristic resistance under shear load

Annex C 94

Light-weight concrete solid block Vbl, EN 771-3:2015

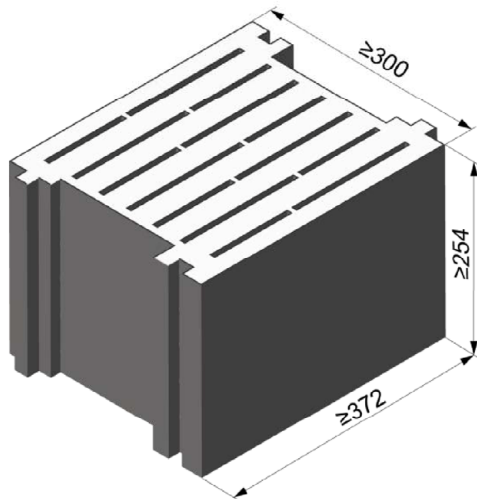

Light-weight concrete solid block Vbl, EN 771-3:2015			
Producer	e.g. Sepa		
Nominal dimensions [mm]	length L	width W	height H
	≥ 372	≥ 300	≥ 254
Density ρ [kg/dm ³]	≥ 0,6		
Compressive strength f_b [N/mm ²]	2		
Standard or annex	EN 771-3:2015		




Table C95.1: Installation parameters

Anchor rod		M8	M10	M10	M12	M12	M16	M16	M12	M16	
Perforated sleeve FIS H K		16x130		18x130/200		20x130		22x130/200		20x200	
Anchor rod with perforated sleeve FIS H K											
Max. installation torque		T _{inst}	[Nm]	4							
General installation parameters											
Edge distance		C _{min}	[mm]	130							
Spacing	s _{min} = s _{cr}			370							
	s _{min} ⊥ = s _{cr} ⊥			250							
Drilling method											
Hammer drilling with hard metal hammer drill											

Table C95.2: Group factors

Anchor rod		M8	M10	M10	M12	M12	M16	M16	M12	M16	
Perforated sleeve FIS H K		16x130		18x130/200		20x130		22x130/200		20x200	
Group factors	$\alpha_{g,N} \parallel$	[-]	2								
	$\alpha_{g,V} \parallel$										
	$\alpha_{g,N} \perp$										
	$\alpha_{g,V} \perp$										

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl, dimensions, installation parameters

Annex C 95

Light-weight concrete solid block Vbl, EN 771-3:2015

Table C96.1: Characteristic resistance under tension load

Anchor rod			M8	M10	M10	M12	M12	M16	M16	M12	M16	
Perforated sleeve FIS H K			16x130		18x130/200		20x130		22x130/200		20x200	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)												
compressive strength f _b		use category										
2 N/mm²	w/w	w/d	2,0				2,5				3,0	
	d/d		2,0				3,0				4,0	

Factor for temperature range 72/120°C: 0,83

Table C96.2: Characteristic resistance under shear load

Anchor rod		M8	M10	M10	M12	M12	M16	M16	M12	M16	
Perforated sleeve FIS H K		16x130		18x130/200		20x130		22x130/200		20x200	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)											
compressive strength f _b		use category									
2 N/mm²	w/w	w/d	4,5					6,5			
	d/d										

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance

Light-weight concrete solid block Vbl,
Characteristic resistance under tension and shear load


Annex C 96

Appendix 122 / 136

Light-weight concrete solid block Vbl, EN 771-3:2015

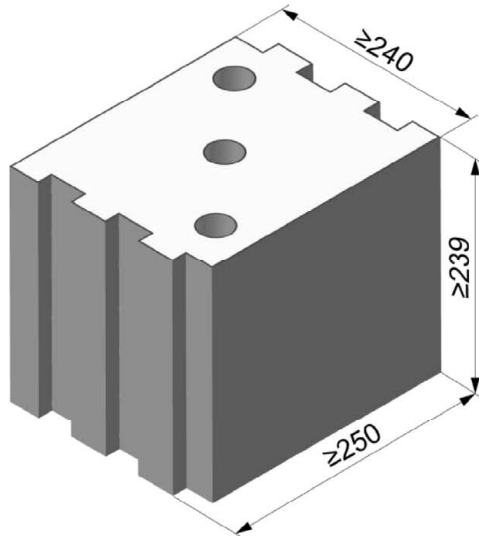

Light-weight concrete solid block Vbl, EN 771-3:2015			
Producer	KLB		
Nominal dimensions [mm]	length L	width W	height H
	≥ 250	≥ 240	≥ 239
Density ρ [kg/dm ³]	≥ 1,6		
Compressive strength f_b [N/mm ²]	4 / 6 / 8		
Standard or annex	EN 771-3:2015		



Dimension see also Annex B 19

Table C97.1: Installation parameters
(Pre-positioned anchorage with perforated sleeve FIS H K)

Anchor rod	M6	M8	M6	M8	-		M8	M10	M8	M10	-		M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-		-		M6	M8	-		-		M10	M12	-		-		-	
					11x85						15x85							
Perforated sleeve FIS H K	12x50		12x85		16x85				16x130		20x85				20x130		20x200	
Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K																		
Max. installation torque	T _{inst}	[Nm]	4															
General installation parameters																		
Edge distance	C _{min}	[mm]	130															
Spacing	S _{min} = S _{cr}		250															
	S _{min} ⊥ = S _{cr} ⊥		250															
Drilling method																		
Hammer drilling with hard metal hammer drill																		

Table C97.2: Group factors

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6	M8	-	-	-	M10	M12	-	-	-	-	-
					11x85					15x85						
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200
Group factors $\alpha_{g,N}$ [mm]	2,0															
$\alpha_{g,V}$ [mm]																
$\alpha_{g,N}$ [mm]																
$\alpha_{g,V}$ [mm]																

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl, dimensions, installation parameters

Annex C 97

Light-weight concrete solid block Vbl, EN 771-3:2015

Table C98.1: Installation parameters
(Push through anchorage with perforated sleeve FIS H K)

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K				
Max. installation torque	T _{inst}	[Nm]	2	
General installation parameters				
Edge distance	c _{min}	[mm]	130	
Spacing	s _{min} = s _{scr}		250	
	s _{min} ⊥ = s _{scr} ⊥		250	
Drilling method				
Hammer drilling with hard metal hammer drill				

Table C98.2: Group factors

Anchor rod		M10	M12	M16
Perforated sleeve FIS H K		18x130/200		22x130/200
Group factors	$\alpha_{g,N \parallel}$	[-]	2,0	
	$\alpha_{g,V \parallel}$			
	$\alpha_{g,N \perp}$			
	$\alpha_{g,V \perp}$			

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl, dimensions, installation parameters

Annex C 98

Appendix 124 / 136

Light-weight concrete solid block Vbl, EN 771-3:2015

Table C99.1: Characteristic resistance under tension load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	-	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x130	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)																
compressive strength f_b	use category															
4 N/mm ²	w/w	w/d	1,2	2,0	2,5						3,0					
	d/d		2,0	3,5	4,0						5,0					
6 N/mm ²	w/w	w/d	1,5	3,0	4,0						5,0					
	d/d		3,0	5,0	6,5						7,5					
8 N/mm ²	w/w	w/d	2,0	4,0	5,0						6,5					
	d/d		4,0	7,0	8,5						9,0					

Table C99.2: Characteristic resistance under tension load (Push through anchorage)

Anchor rod		M10		M12		M16	
Perforated sleeve FIS H K		18x130/200				22x130/200	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)							
compressive strength f _b	use category						
4 N/mm²	w/w	w/d	2,5			3,0	
	d/d		4,0			5,0	
6 N/mm²	w/w	w/d	4,0			5,0	
	d/d		6,5			7,5	
8 N/mm²	w/w	w/d	5,0			6,5	
	d/d		8,5			9,0	

Factor for job site tests and displacements see annex C110

Factor for temperature range 72/120°C: 0,83

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl, Characteristic resistance under tension load

Annex C 99

Light-weight concrete solid block Vbl, EN 771-3:2015

Table C100.1: Characteristic resistance under shear load (Pre-positioned anchorage)

Anchor rod	M6	M8	M6	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	-	-	M6 11x85	M8	-	-	-	M10 15x85	M12	M16	-	-	-	-
Perforated sleeve FIS H K	12x50	12x85	12x85	12x85	16x85	16x85	16x130	16x130	16x130	20x85	20x85	20x130	20x130	20x200	20x200	20x200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category															
4 N/mm ²	w/w d/d	2,0	3,0	2,0	3,0	2,0	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5
6 N/mm ²	w/w d/d	3,0	4,5	3,0	4,5	3,0	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5
8 N/mm ²	w/w d/d	4,0	6,0	4,0	6,0	4,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0

Table C100.2: Characteristic resistance under shear load (Push through anchorage)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200	18x130/200	22x130/200

$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)

compressive strength f_b	use category															
4 N/mm ²	w/w d/d	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5	3,5
6 N/mm ²	w/w d/d	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5
8 N/mm ²	w/w d/d	7,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0	7,0

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl, Characteristic resistance under shear load

Annex C 100

Light-weight concrete solid block Vbl, EN 771-3:2015

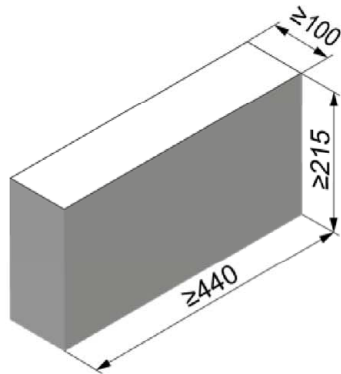

Light-weight concrete solid block Vbl, EN 771-3:2015

Producer	Roadstone wood		
Nominal dimensions [mm]	length L	width W	height H
	≥ 440	≥ 100	≥ 215
Density ρ [kg/dm ³]	≥ 2,0		
Compressive strength f_b [N/mm ²]	4 / 6 / 8 / 10		
Standard or annex	EN 771-3:2015		

Table C101.1: Installation parameters

Anchor rod			M6		M8		M10		M12		M16	
Anchor rod without perforated sleeve												
Effective anchorage depth	h_{ef}	[mm]	50	70	50	70	50	70	50	70	50	70
Max. installation torque	T_{inst}	[Nm]	4		10							
General installation parameters												
Edge distance	c_{min}	[mm]	100									
Spacing	$s_{min} \parallel$		75									
	$s_{cr} \parallel$		$3 \times h_{ef}$									
	$s_{min} \perp$		75									
	$s_{cr} \perp$		$3 \times h_{ef}$									
Drilling method												
Hammer drilling with hard metal hammer drill												

Table C101.2: Group factors

Anchor rod			M6	M8	M10	M12	M16
Group factors	$\alpha_{g,N} \parallel$	[-]	1,6				
	$\alpha_{g,V} \parallel$		1,3				
	$\alpha_{g,N} \perp$		1,4				
	$\alpha_{g,V} \perp$		1,3				

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl, dimensions, installation parameters

Annex C 101

Light-weight concrete solid block Vbl, EN 771-3:2015

Table C102.1: Characteristic resistance under tension load

Anchor rod		M6	M8	M10	M12	M16
$N_{Rk} = N_{Rk,p} = N_{Rk,b}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C)						
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm] ≥ 50				
4 N/mm ²	w/w w/d	1,2	1,2			
	d/d	2,0	2,0			
6 N/mm ²	w/w w/d	1,5	2,0			
	d/d	3,0	3,5			
8 N/mm ²	w/w w/d	2,0	2,5			
	d/d	4,0	4,5			
10N/mm ²	w/w w/d	3,0	3,5			
	d/d	5,0	5,5			

Factor for temperature range 72/120°C: 0,83

Table C102.2: Characteristic resistance under shear load

Anchor rod		M6	M8	M10	M12	M16
$V_{Rk} = V_{Rk,b} = V_{Rk,c}$ [kN] depending on the compressive strength f_b (temperature range 50/80°C and 72/120°C)						
compressive strength f_b	use category	Effective anchorage depth h_{ef} [mm] ≥ 50				
4 N/mm ²	w/w w/d	1,2	1,5	1,5	1,5	1,5
	d/d					
6 N/mm ²	w/w w/d	2,0	2,0	2,5	2,5	2,5
	d/d					
8 N/mm ²	w/w w/d	2,5	2,5	3,0	3,0	3,5
	d/d					
10N/mm ²	w/w w/d	3,0	3,5	4,0	4,0	4,5
	d/d					

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl,
Characteristic resistance under tension and shear load

Annex C 102

Light-weight concrete solid block Vbl, EN 771-3:2015

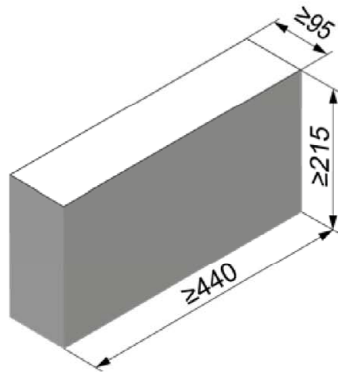

Light-weight concrete solid block Vbl, EN 771-3:2015			
Producer	Tramac		
Nominal dimensions [mm]	length L	width W	height H
	≥ 440	≥ 95	≥ 215
Density ρ [kg/dm ³]	≥ 2,0		
Compressive strength f_b [N/mm ²]	6 / 8 / 10 / 12		
Standard or annex	EN 771-3:2015		

Table C103.1: Installation parameters

Anchor rod			M6		M8		M10		M12		M16	
Anchor rod without perforated sleeve												
Effective anchorage depth	h_{ef}	[mm]	50	70	50	70	50	70	50	70	50	70
Max. installation torque	T_{inst}	[Nm]	4		10							
General installation parameters												
Edge distance	c_{min}	[mm]	60									
Spacing	$s_{min} \parallel$		75									
	$s_{scr} \parallel$		3x h_{ef}									
	$s_{min} \perp$		75									
	$s_{scr} \perp$		3x h_{ef}									
Drilling method												
Hammer drilling with hard metal hammer drill												

Table C103.2: Group factors

Anchor rod			M6	M8	M10	M12	M16
Group factors	$\alpha_{g,N} \parallel$	[-]	1,9				
	$\alpha_{g,V} \parallel$		1,4				
	$\alpha_{g,N} \perp$		1,9				
	$\alpha_{g,V} \perp$		1,4				

fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl, dimensions, installation parameters

Annex C 103

Light-weight concrete solid block Vbl, EN 771-3:2015

Table C104.1: Characteristic resistance under tension load

Anchor rod			M6		M8		M10		M12		M16	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)												
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]									
			50	70	50	70	50	70	50	70	50	70
6 N/mm ²	w/w	w/d	1,5	2,0	1,5	2,0	1,5	2,0	1,5	2,0	1,5	2,0
	d/d		2,5	3,5	2,5	3,5	2,5	3,5	2,5	3,5	2,5	3,5
8 N/mm ²	w/w	w/d	2,0	2,5	2,0	2,5	2,0	3,0	2,0	3,0	2,0	3,0
	d/d		3,5	4,5	3,5	4,5	3,5	5,0	3,5	5,0	3,5	5,0
10N/mm ²	w/w	w/d	2,5	3,5	2,5	3,5	2,5	3,5	2,5	3,5	2,5	3,5
	d/d		4,5	6,0	4,5	6,0	4,5	6,0	4,5	6,0	4,5	6,0
12N/mm ²	w/w	w/d	3,0	4,0	3,0	4,0	3,0	4,5	3,0	4,5	3,0	4,5
	d/d		5,0	7,0	5,0	7,0	5,0	7,5	5,0	7,5	5,0	7,5

Factor for temperature range 72/120°C: 0,83

Table C104.2: Characteristic resistance under shear load

Anchor rod			M6		M8		M10		M12		M16	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)												
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm] ≥ 50									
	w/w	w/d	2,0	2,0	2,0	1,5	1,5					
6 N/mm²	d/d											
8 N/mm²	w/w	w/d	2,5	2,5	3,0	2,5	2,5					
	d/d											
10N/mm²	w/w	w/d	3,5	3,5	4,0	3,0	3,0					
	d/d											
12N/mm²	w/w	w/d	4,0	4,0	4,5	3,5	3,5					
	d/d											

Factor for job site tests and displacements see annex C110


fischer injection system FIS V Plus for masonry

Performance

Light-weight concrete solid block Vbl,
Characteristic resistance under tension and shear load

Annex C 104

Autoclaved aerated concrete (cylindrical drill hole), EN 771-4:2015



Autoclaved aerated concrete, EN 771-4:2015				
Producer		e.g. Ytong		
Density ρ	[kg/dm ³]	0,35	0,5	0,65
Compressive strength f_b	[N/mm ²]	2	4	6
Standard or annex		EN 771-4:2015		

Table C105.1: Installation parameters

Anchor rod	M6	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	-	M6	M8
						11x85	15x85

Anchor rod and internal threaded anchor FIS E without perforated sleeve														
Effective anchorage depth	h_{ef}	[mm]	100	200	100	200	100	200	100	200	100	200	85	
Max. installation torque	T_{inst}	[Nm]	1	4	1	8	2	12	2	16	2	20	1	2

General installation parameters													
Spacing	Edge distance	c_{min}	100										
	$s_{cr \parallel} = s_{min \parallel}$	[mm]	250										
	$h_{ef}=200mm$		80										
	$s_{min \parallel}$		3x h_{ef}										
	$h_{ef}=200mm$		250										
	$s_{cr \perp} = s_{min \perp}$		80										
	$h_{ef}=200mm$		3x h_{ef}										
	$s_{min \perp}$												

Drilling method													
Hammer drilling with hard metal hammer drill													

--	--	--	--	--	--	--	--	--	--	--	--	--	--

fischer injection system FIS V Plus for masonry	Annex C 105 Appendix 131 / 136
Performance Autoclaved aerated concrete (cylindrical drill hole), dimensions, installation parameters	

Table C106.1: Group factors for autoclaved aerated concrete (Compressive strength $f_b = 2 \text{ N/mm}^2$)										
Anchor rod		M6	M8	M10	M12	M16	-		-	
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8	M10 M12	
							11x85		15x85	
Group factors	$h_{ef}=200 \alpha_{g,N} \parallel$	[-]	1,6				_1)		_1)	
	$h_{ef}=200 \alpha_{g,V} \parallel$		1,1				_1)		_1)	
	$\alpha_{g,N} \parallel, \alpha_{g,V} \parallel$		2							
	$h_{ef}=200 \alpha_{g,N} \perp$		1,6				_1)		_1)	
	$h_{ef}=200 \alpha_{g,V} \perp$		0,8				_1)		_1)	
	$\alpha_{g,N} \perp, \alpha_{g,V} \perp$		2							

¹⁾ No performance assessed

Table C106.2: Group factors for autoclaved aerated concrete (Compressive strength $f_b=4$ N/mm ²)									
Anchor rod		M6	M8	M10	M12	M16	-		-
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8	M10 M12
							11x85		15x85
Group factors	$h_{ef}=200 \alpha_{g,N} \parallel$	[-]	0,7				_1)		_1)
	$h_{ef}=200 \alpha_{gV} \parallel$		2,0				_1)		_1)
	$\alpha_{g,N} \parallel, \alpha_{gV} \parallel$		2						
	$h_{ef}=200 \alpha_{g,N} \perp$		0,7				_1)		_1)
	$h_{ef}=200 \alpha_{g,V} \perp$		1,2				_1)		_1)
	$\alpha_{g,N} \perp, \alpha_{gV} \perp$		2						

¹⁾ No performance assessed

Table C106.3: Group factors for autoclaved aerated concrete (Compressive strength $f_b = 6 \text{ N/mm}^2$)									
Anchor rod		M6	M8	M10	M12	M16	-		-
Internal threaded anchor FIS E		-	-	-	-	-	M6	M8	M10 M12
							11x85		15x85
Group factors	$h_{ef}=200 \alpha_{g,N} \parallel$	[-]	0,7				_1)		_1)
	$h_{ef}=200 \alpha_{g,v} \parallel$		2,0				_1)		_1)
	$\alpha_{g,N} \parallel, \alpha_{g,v} \parallel$		2						
	$h_{ef}=200 \alpha_{g,N} \perp$		0,7				_1)		_1)
	$h_{ef}=200 \alpha_{g,v} \perp$		1,2				_1)		_1)
	$\alpha_{g,N} \perp, \alpha_{g,v} \perp$		2						

¹⁾ No performance assessed

fischer injection system FIS V Plus for masonry		Annex C 106 Appendix 132 / 136
Performance Autoclaved aerated concrete (cylindrical drill hole), Group factors		

Autoclaved aerated concrete (cylindrical drill hole), EN 771-4:2015

Table C107.1: Characteristic resistance under tension load

Anchor rod			M6		M8		M10		M12		M16		-		-	
Internal threaded anchor FIS E			-		-		-		-		-		M6	M8	M10	M12
													11x85		15x85	
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)																
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]													
			100	200	100	200	100	200	100	200	100	200	85			
2 N/mm²	w/w	w/d	1,2	1,2	1,5	2,0	1,5	3,0	1,5	3,0	2,0	3,0	1,5	1,5		
	d/d		1,5	3,0	1,5	3,0	1,5	3,5	2,0	4,0	2,0	4,0	1,5	1,5		
4 N/mm²	w/w	w/d	1,2	- ¹⁾	2,0	1,5	2,5	3,5	2,5	3,5	2,0	3,5	2,0	1,5		
	d/d		1,5	- ¹⁾	2,0	3,0	3,0	5,0	2,5	5,0	2,0	5,0	2,0	1,5		
6 N/mm²	w/w	w/d	1,5	- ¹⁾	3,0	2,5	4,5	5,0	4,5	7,0	3,0	8,5	3,5	2,5		
	d/d		1,5	- ¹⁾	3,5	4,0	5,0	7,0	5,0	9,0	3,0	11,5	3,5	2,5		

¹⁾ No performance assessed

Factor for temperature range 72/120°C: 0,83

Table C107.2: Characteristic resistance under shear load

Anchor rod		M6		M8		M10		M12		M16		-		-	
Internal threaded anchor FIS E		-		-		-		-		-		M6	M8	M10	M12
												11x85		15x85	
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)															
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]												
			100	200	100	200	100	200	100	200	100	200	85		
2 N/mm²	w/w	w/d	1,2	1,2	1,2	1,2	1,2	1,2	1,5	1,2	1,2	1,2	1,2		1,5
	d/d														
4 N/mm²	w/w	w/d	2,0	- ¹⁾	2,5	2,0	2,0	2,0	2,5	2,0	2,0	2,0	2,0	2,0	2,5
	d/d														
6 N/mm²	w/w	w/d	2,5	- ¹⁾	3,0	2,5	3,0	3,0	3,5	4,0	4,5	4,5	2,5	2,5	3,5
	d/d														

¹⁾ No performance assessed

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry


Performance

Autoclaved aerated concrete (cylindrical drill hole),
Characteristic resistance under tension and shear load

Annex C 107

Autoclaved aerated concrete (conical drill hole with special drill bit PBB),

EN 771-4:2015



Autoclaved aerated concrete, EN 771-4:2015				
Producer		e.g. Ytong		
Density ρ	[kg/dm ³]	0,35	0,5	0,65
Compressive strength f_b	[N/mm ²]	2	4	6
Standard or annex		EN 771-4:2015		

Table C108.1: Installation parameters

Anchor rod		M8		M10		M12		-	
Internal threaded anchor FIS E		-	-	-	-	-	-	M6	M8
								11x85	
Anchor rod and internal threaded anchor FIS E without perforated sleeve									
Effective anchorage depth	h_{ef}	[mm]	75	95	75	95	75	95	85
Max. installation torque	T_{inst}	[Nm]	2						
General installation parameters									
Edge distance	c_{min}	[mm]	120	150	120	150	120	150	150
Spacing	$s_{cr \parallel} = s_{min \parallel}$		240	300	240	300	240	300	300
	$s_{cr \perp} = s_{min \perp}$		240	250	240	250	240	250	250
Drilling method									
Hammer drilling with hard metal hammer drill									

Table C108.2: Group factors

Anchor rod		M8		M10		M12		-
Internal threaded anchor FIS E		-	-	-	-	-	-	M6 M8 11x85
Group factors	$\alpha_{g,N \parallel}$	[-]	2					
	$\alpha_{g,V \parallel}$							
	$\alpha_{g,N \perp}$							
	$\alpha_{g,V \perp}$							

fischer injection system FIS V Plus for masonry

Performance

Autoclaved aerated concrete (conical drill hole with special drill bit PBB), dimensions, installation parameters

Annex C 108

Autoclaved aerated concrete (conical drill hole with special drill bit PBB),

EN 771-4:2015

Table C109.1: Characteristic resistance under tension load

Anchor rod		M8		M10		M12		-	
Internal threaded anchor FIS E		-	-	-	-	-	-	M6	M8
									11x85
N _{Rk} = N _{Rk,p} = N _{Rk,b} [kN] depending on the compressive strength f _b (temperature range 50/80°C)									
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]						
			75	95	75	95	75	95	85
2 N/mm²	w/w	w/d	2,0	2,5	2,0	2,5	2,0	2,5	2,0
	d/d		2,0	2,5	2,0	2,5	2,0	2,5	2,0
4 N/mm²	w/w	w/d	3,0	3,5	3,0	3,5	3,0	3,5	3,0
	d/d		3,0	3,5	3,0	3,5	3,0	3,5	3,0
6 N/mm²	w/w	w/d	3,5	4,0	3,5	4,0	3,5	4,0	3,5
	d/d		4,0	4,5	4,0	4,5	4,0	4,5	4,0

Factor for temperature range 72/120°C: 0,83

Table C109.2: Characteristic resistance under shear load

Anchor rod		M8		M10		M12		-	
Internal threaded anchor FIS E		-	-	-	-	-	-	M6	M8
		11x85							
V _{Rk} = V _{Rk,b} = V _{Rk,c} [kN] depending on the compressive strength f _b (temperature range 50/80°C and 72/120°C)									
compressive strength f _b	use category		Effective anchorage depth h _{ef} [mm]						
			75	95	75	95	75	95	85
2 N/mm²	w/w	w/d	2,5						
	d/d								
4 N/mm²	w/w	w/d	4,5						
	d/d								
6 N/mm²	w/w	w/d	6,0						
	d/d								

Factor for job site tests and displacements see annex C110

fischer injection system FIS V Plus for masonry

Performance

Autoclaved aerated concrete (conical drill hole with special drill bit PBB),
Characteristic resistance under tension and shear load

Annex C 109

β-factors for job site tests; displacements

Table C110.1: β-factors for job site tests

use category		w/w and w/d		d/d	
temperature range		50/80	72/120	50/80	72/120
Material	Size				
solid units	M6	0,55	0,46	0,96	0,80
	M8	0,57	0,51		
	M10	0,59	0,52		
	M12 FIS E 11x85	0,6	0,54		
	M16 FIS E 15x85	0,62	0,52		
	FIS H 16x85 K	0,55	0,46		
hollow units	all sizes	0,86	0,72	0,96	0,8
Autoclaved aerated concrete cylindrical drill hole	all sizes	0,73	0,73	0,81	0,81
Autoclaved aerated concrete conical drill hole	all sizes	0,66	0,59	0,73	0,66

Table C110.2: Displacements

Material	N [kN]	δN ₀ [mm]	δN _∞ [mm]	V [kN]	δV ₀ [mm]	δV _∞ [mm]
solid units and autoclaved aerated concrete h _{ef} =100mm	$\frac{N_{Rk}}{1,4 * \gamma_{Mm}}$	0,03	0,06	$\frac{V_{Rk}}{1,4 * \gamma_{Mm}}$	0,82	0,88
hollow units	$\frac{N_{Rk}}{1,4 * \gamma_{Mm}}$	0,48	0,06	$\frac{V_{Rk}}{1,4 * \gamma_{Mm}}$	1,71	2,56
solid brick Mz NF annex C 4 - C 7	$\frac{N_{Rk}}{1,4 * \gamma_{Mm}}$	0,74	1,48	$\frac{V_{Rk}}{1,4 * \gamma_{Mm}}$	1,23	1,85
solid brick KS NF annex C 14 / C 15	$\frac{N_{Rk}}{1,4 * \gamma_{Mm}}$	0,2	0,4	$\frac{V_{Rk}}{1,4 * \gamma_{Mm}}$	0,91	1,37
AAC h _{ef} =200 mm annex C 105 - C 107	$\frac{N_{Rk}}{1,4 * \gamma_{Mm}}$	1,03	2,06	$\frac{V_{Rk}}{1,4 * \gamma_{Mm}}$	1,25	1,88
brick Annex C 89 / C 90	$\frac{N_{Rk}}{1,4 * \gamma_{Mm}}$	0,03	0,06	$\frac{V_{Rk}}{1,4 * \gamma_{Mm}}$	6,44	9,66

For anchorage in autoclaved aerated concrete, the partial factor γ_{MAAC} shall be used instead of γ_{Mm} .

fischer injection system FIS V Plus for masonry

Performance

β-factors for job site tests; displacements

Annex C 110

Appendix 136 / 136