



DICHIARAZIONE DI PRESTAZIONE



DoP: 0092

per Fissaggio prolungato fischer SXR/SXRL (Fissaggio plastico per l'utilizzo in calcestruzzo e muratura) – IT

1. Codice di identificazione unico del prodotto-tipo: **DoP: 0092**
2. Usi previsti: **Per l'utilizzo in sistemi come facciate per il fissaggio o il supporto dei elementi che contribuiscono alla stabilità dei sistemi, vedere l'appendice, specialmente gli Annessi B 1 a B 5**
3. Fabbricante: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Straße 1, 72178 Waldachtal, Germania**
4. Mandatario: --
5. Sistemi di VVCP: **2+**
6. Documento per la valutazione europea: **ETAG 020, 2012-03**

Valutazione tecnica europea: **ETA-07/0121; 2017-03-30**

Organismo di valutazione tecnica: **DIBt**

Organismi notificati: **1343 – MPA Darmstadt**

7. Prestazioni dichiarate:

Sicurezza in caso di incendio (BWR 2)

- **Reazione al fuoco:** Gli ancoraggi soddisfano i requisiti per la Classe A1
- **Resistenza al fuoco:** Vedere appendice, specialmente Annesso C 2

Sicurezza e accessibilità (BWR 4), Resistenza meccanica e stabilità (BWR 1)

- **Resistenza caratteristica per azioni di trazione e di taglio:** Vedere appendice, specialmente gli Annessi C 1, C 3 – C 20
- **Resistenza caratteristica del momento flettente:** Vedere appendice, specialmente Annesso C 1
- **Spostamenti sotto azioni di trazione e di taglio:** Vedere appendice, specialmente gli Annessi C 2
- **Distanze dell'ancorante e dimensioni dei supporti:** Vedere appendice, specialmente Annesso B 3 – B 4

8. Documentazione tecnica appropriata e/o documentazione tecnica specifica: ---

La prestazione del prodotto sopra identificato è conforme all'insieme delle prestazioni dichiarate. La presente dichiarazione di responsabilità viene emessa, in conformità al regolamento (UE) n. 305/2011, sotto la sola responsabilità del fabbricante sopra identificato.

Firmato a nome e per conto del fabbricante da:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

i.V. A. Bucher

i.V. W. Hengesbach

Tumlingen, 2017-04-06

- Questa Dichiarazione di Prestazione (DoP) è stata preparata in diverse lingue. In caso di divergenza d'interpretazione avrà sempre prevalenza la versione inglese.
- L'appendice include informazioni volontarie e complementari in lingua inglese (lingua specificata neutrale) eccetto i requisiti di legge

Specific part**1 Technical description of the product**

The fischer frame fixing in the range SXR 8, SXRL 8, SXR 10, SXRL 10 and SXRL 14 is a plastic anchor consisting of a plastic sleeve made of polyamide and an accompanying specific screw of galvanised steel, of galvanised steel with an additional Duplex-coating or of stainless steel.

The plastic sleeve is expanded by screwing in the specific screw which presses the sleeve against the wall of the drilled hole.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchors of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment**3.1 Mechanical resistance and stability (BWR 1)**

The essential characteristics regarding mechanical resistance and stability are included under the Basic Works Requirement Safety in use.

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A 1
Resistance to fire	See Annex C 2

3.3 Safety and accessibility (BWR 4)

Essential characteristic	Performance
Characteristic resistance for tension and shear loads	See Annexes C 1, C 3 – C 20
Characteristic resistance for bending moments	See Annex C 1
Displacements under shear and tension loads	See Annex C 2
Anchor distances and dimensions of members	See Annex B 3, B 4

3.4 General aspects

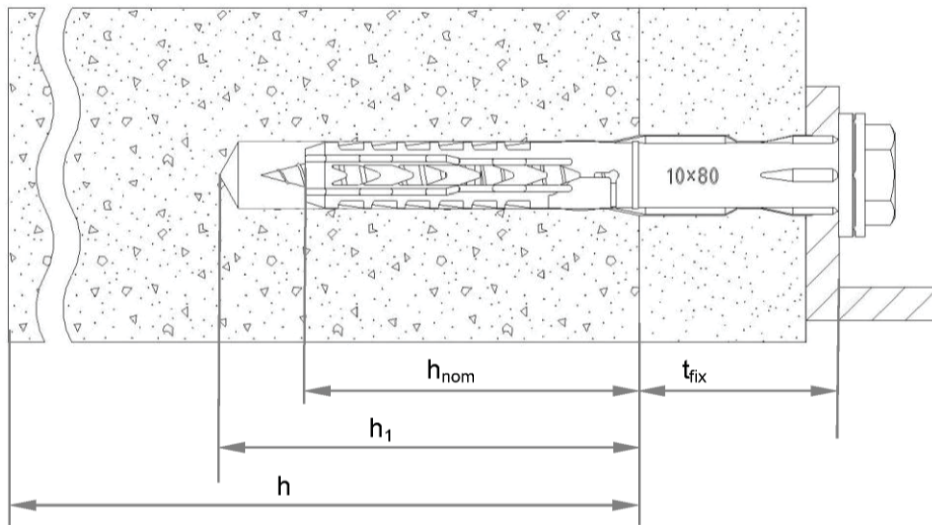
The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with guideline for European technical approval ETAG 020, March 2012 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: 97/463/EC.

The system to be applied is: 2+

SXR



SXRL (e.g. with h_{nom2})

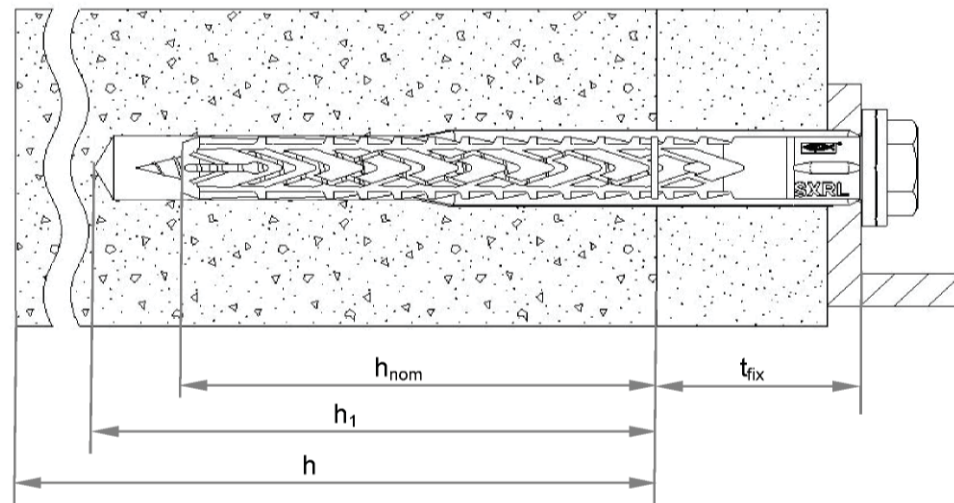

Legend

- h_{nom} = overall plastic anchor embedment depth in the base material
- h_1 = depth of drill hole to deepest point
- h = thickness of member (wall)
- t_{fix} = thickness of fixture and / or non-load bearing layer

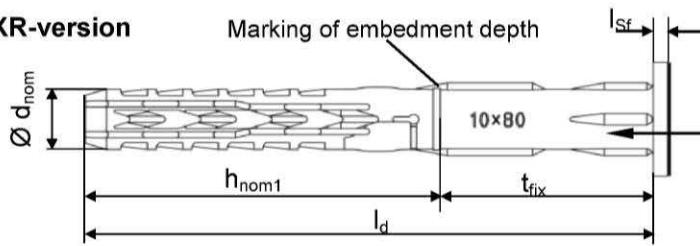
fischer frame fixing SXR / SXRL

Product description
Installed anchor

Annex A 1

Anchor sleeves – flat collar versions of SXR and SXRL

SXR-version



Marking:

Brand

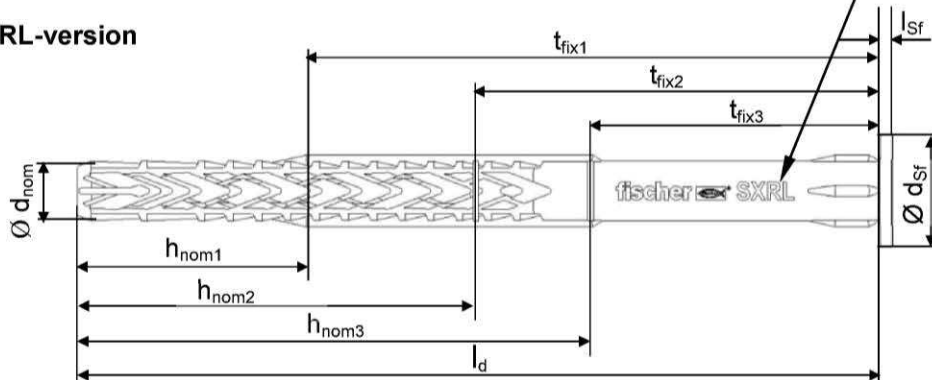
Anchor type

Size

e.g.  SXR 10x80

e.g.  SXRL 14x100



SXRL-version




Countersunk sleeve version also available for both versions



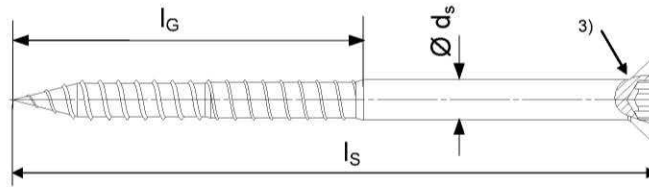
Countersunk screws




Hexagonal screw with washer

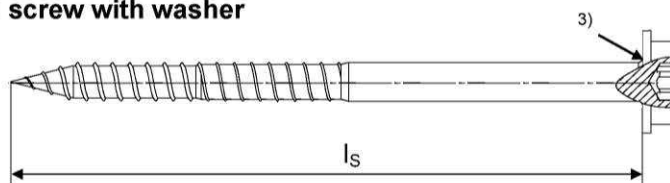

Hexagonal screw

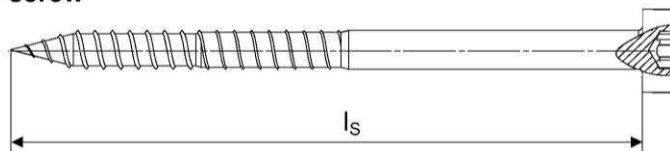

Stud screw



- 1) Additional marking for the special screw, stainless steel version: „A4“.
- 2) Internal driving feature for Torx bit is optional for hexagonal head and for stud screw
- 3) Optional additional version with underhead ribs

fischer frame fixing SXR / SXRL

Product description
Anchor types / special screws

Annex A 2

Table A3.1: Dimensions [mm]

Anchor type	Anchor sleeve									Special screw		
	h_{nom1} [mm]	h_{nom2} [mm]	h_{nom3} [mm]	$\varnothing d_{nom}$ [mm]	t_{fix} [mm]	min. l_d [mm]	max. l_d [mm]	$l_{sf}^{1)}$ [mm]	$\varnothing d_{sf}$ [mm]	$\varnothing d_s$ [mm]	l_G [mm]	l_s [mm]
SXR 8	50	-	-	8	≥ 1	51	360	1,8	> 15,0	6,0	≥ 55	$\geq l_d + 6$
SXRL 8	50	70	90	8	≥ 1	51	360	1,8	> 15,0	6,0	≥ 55	$\geq l_d + 6$
SXR 10	50	-	-	10	≥ 1	51	360	2,2	> 18,5	7,0	≥ 57	$\geq l_d + 7$
SXRL 10	50 ²⁾	70	90	10	≥ 1	51	360	2,2	> 18,5	7,0	≥ 77	$\geq l_d + 7$
SXRL 14	-	70	90	14	≥ 1	71	600	3,1	> 24,0	9,6	≥ 63	$\geq l_d + 10$

¹⁾ Only valid for flat collar version

²⁾ Marking optional

Table A3.2: Materials

Name	Material
Anchor sleeve	Polyamide, PA6, colour grey
Special screw	- Steel gvz A2G or A2F acc. to EN ISO 4042:2001 <u>or</u> - Steel gvz A2G or A2F acc. to EN ISO 4042:2001+ Duplex-coating type Delta-Seal in three layers (total layer thickness $\geq 6 \mu m$) <u>or</u> - Stainless steel acc. to EN 10 088-3:2014, e.g. 1.4401, 1.4571, 1.4578, 1.4362

fischer frame fixing SXR / SXRL

Product description
Dimensions and materials

Annex A 3

Specifications of intended use

Anchorage subject to:

- Static and quasi-static loads.
- Multiple fixing of non-structural applications.

Base materials:

- Reinforced or unreinforced normal weight concrete with strength classes $\geq$ C12/15 (use category "a"), according to EN 206-1:2000.
- Solid brick masonry (use category "b"), according to Annex C3 – C7.
Note: The characteristic resistance is also valid for larger brick sizes and higher compressive strength of the masonry unit.
- Hollow brick masonry (use category "c"), according to Annex C7 – C19.
- Autoclaved aerated concrete (use category "d"), according to Annex C20.
- Mortar strength class of the masonry $\geq$ M2,5 according to EN 998-2:2010.
- For other base materials of the use categories "a", "b", "c" and "d" the characteristic resistance of the anchor may be determined by job site tests according to ETAG 020, Annex B, Edition March 2012.

Temperature Range:

SXR 8 and 10 and SXRL 8

- c: - 40 °C to 50 °C (max. short term temperature + 50 °C and max long term temperature + 30 °C)
- b: - 40 °C to 80 °C (max. short term temperature + 80 °C and max long term temperature + 50 °C)

SXRL 10 and 14

- c: - 20 °C to 50 °C (max. short term temperature + 50 °C and max long term temperature + 30 °C)
- b: - 20 °C to 80 °C (max. short term temperature + 80 °C and max long term temperature + 50 °C)

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel).
- The specific screw made of galvanised steel or galvanised steel with an additional Duplex-coating may also be used in structures subject to external atmospheric exposure, if the area of the head of the screw is protected against moisture and driving rain after mounting of the fixing unit in this way, that intrusion of moisture into the anchor shaft is prevented. Therefore there shall be an external cladding or a ventilated rainscreen mounted in front of the head of the screw and the head of the screw itself shall be coated with a soft plastic, permanently elastic bitumen-oil-combination coating (e.g. undercoating or body cavity protection for cars).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel).
Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Design:

- The anchorages are to be designed in accordance with the ETAG 020, Annex C under the responsibility of an engineer experienced in anchorages and masonry work.
- Verifiable calculation notes and drawings shall be prepared taking account of the loads to be anchored, the nature and strength of the base materials and the dimensions of the anchorage members as well as of the relevant tolerances. The position of the anchor is indicated on the design drawings.
- Fasteners are only to be used for multiple use for non-structural application, according to ETAG 020, Edition March 2012.

Installation:

- Hole drilling by the drilling method according to Annex C3 – C20 for use categories "b", "c" and "d".
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Installation temperature from SXR 8/10, SXRL 8 and SXRL 14:

SXRL 10:	- 5 °C to + 40 °C
	- 20 °C to + 40 °C
- Exposure to UV due to solar radiation of the not protected anchor $\leq$ 6 weeks.

fischer frame fixing SXR / SXRL

Intended use
Specifications

Annex B 1

Table B2.1: Installation parameters

Anchor type		SXR 8	SXRL 8	SXR 10	SXRL 10	SXRL 14
Drill hole diameter	$d_0 = [\text{mm}]$	8	8	10	10	14
Cutting diameter of drill bit	$d_{\text{cut}} \leq [\text{mm}]$	8,45	8,45	10,45	10,45	14,45
Overall plastic anchor embedment depth in the base material ^{1) 2)}	$h_{\text{nom}1} \geq [\text{mm}]$	50	50	50	50	-
	$h_{\text{nom}2} \geq [\text{mm}]$	-	70	-	70	70
	$h_{\text{nom}3} \geq [\text{mm}]$	-	90	-	90	90
Depth of drill hole to deepest point ¹⁾	$h_{1,1} \geq [\text{mm}]$	60	60	60	60	-
	$h_{1,2} \geq [\text{mm}]$	-	80	-	80	85
	$h_{1,3} \geq [\text{mm}]$	-	100	-	100	105
Diameter of clearance hole in the fixture	$d_f \leq [\text{mm}]$	8,5	9,5	10,5/12,5 ³⁾	10,5/12,5 ³⁾	15,4

¹⁾ See Annex A1.

²⁾ For hollow and perforated masonry: If the embedment depth is higher than h_{nom} given in the Table B2.1, job site tests have to be carried out according to ETAG 020, Annex B.

³⁾ See Table C2.1.

Table B2.2: Assignment of h_{nom} , l_d and t_{fix} for use in thin concrete slabs (e.g. weather resistant shells of external wall panels) and pre-stressed concrete core slabs

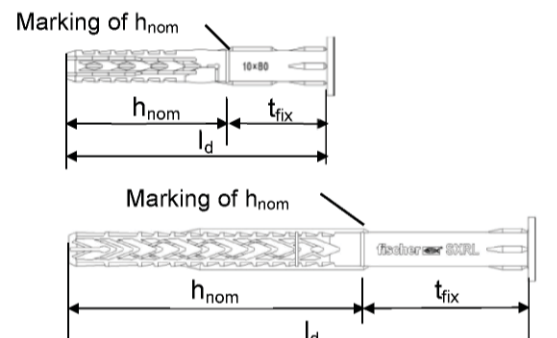
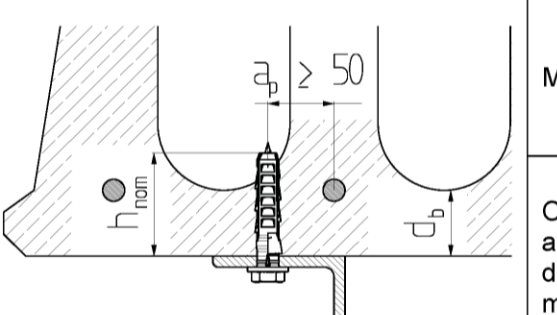
Anchor type		SXR 10 / SXRL 10			
Use category "a"		l_d		$h_{\text{nom}} \geq 50 \text{ mm}$	
		SXR	SXRL	$t_{\text{fix, min}}$	$t_{\text{fix, max}}$
		52	-	1	2
		60	-	1	10
		80	80	21	30
		100	100	41	50
		120	120	61	70
		140	140	81	90
		160	160	101	110
		180	180	121	130
		200	200	141	150
		230	230	171	180
		260	260	201	210
		-	290	231	240
		[mm]			

Table B2.3: Installation parameters for use in pre-stressed hollow concrete core slabs

Anchor type		SXRL 10			
	Mirror thickness	d_b	$\geq$	[mm]	30
	Overall plastic anchor embedment depth in the base material	h_{nom}		[mm]	50 to 59

fischer frame fixing SXR / SXRL
Intended use

Installation parameters, parameters for use in thin skins (weather resistant concrete skins of external wall panels) and pre-stressed hollow concrete core slabs

Annex B 2

Table B3.1: Minimum thickness of member, edge distance and spacing in concrete

Anchor Type	$h_{nom} \geq$ [mm]	Concrete Strength class	Min. thickness of member h_{min} [mm]	Characteristic edge distance $c_{cr,N}$ [mm]	Characteristic spacing $s_{cr,N}$ [mm]	Min. spacing and edge distances ¹⁾ [mm]
SXR 8	50	$\geq C16/20$	100	50	65	$s_{min} = 50$ for $c \geq 50$ $c_{min} = 50$ for $s \geq 50$
		C12/15		70	70	$s_{min} = 70$ for $c \geq 70$ $c_{min} = 70$ for $s \geq 70$
SXRL 8	50	$\geq C16/20$	80	60	75	$s_{min} = 60$ for $c \geq 60$ $c_{min} = 60$ for $s \geq 60$
		C12/15		85	90	$s_{min} = 85$ for $c \geq 85$ $c_{min} = 85$ for $s \geq 85$
	70	$\geq C16/20$	100	60	90	$s_{min} = 60$ for $c \geq 60$ $c_{min} = 60$ for $s \geq 60$
		C12/15		85	105	$s_{min} = 85$ for $c \geq 85$ $c_{min} = 85$ for $s \geq 85$
SXR 10	50	$\geq C16/20$	100 ⁴⁾	100	90	$s_{min} = 50$ for $c \geq 150$ $c_{min} = 60$ for $s \geq 70$
		C12/15		140	100	$s_{min} = 70$ for $c \geq 210$ $c_{min} = 85$ for $s \geq 100$
SXRL 10	50	$\geq C16/20$	100 ⁴⁾	100	105	$s_{min} = 50$ for $c \geq 100$ $c_{min} = 50$ for $s \geq 125$
		C12/15		140	120	$s_{min} = 70$ for $c \geq 140$ $c_{min} = 70$ for $s \geq 175$
	70 ²⁾	$\geq C16/20$		100	105	$s_{min} = 50$ for $c \geq 100$ $c_{min} = 50$ for $s \geq 125$
		C12/15		140	120	$s_{min} = 70$ for $c \geq 140$ $c_{min} = 70$ for $s \geq 175$
SXRL 14	70 ³⁾	$\geq C16/20$	110	100	120	$s_{min} = 60$ for $c \geq 100$ $c_{min} = 60$ for $s \geq 125$
		C12/15		140	135	$s_{min} = 85$ for $c \geq 140$ $c_{min} = 85$ for $s \geq 175$

¹⁾ Intermediate values by linear interpolation.

²⁾ Values valid for reinforced concrete.

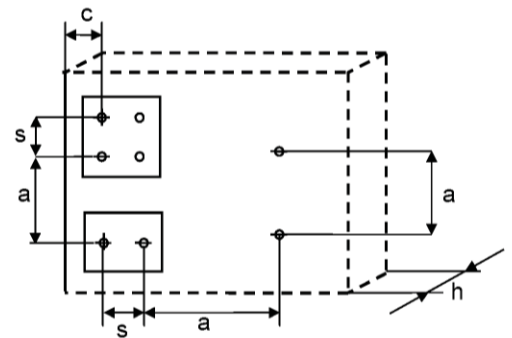
Please note: Values for non-reinforced concrete are $h_{min} = 110$ mm and $c_{min} = s_{min} = 80$ mm for concrete $\geq C16/20$ and $c_{min} = s_{min} = 110$ mm for C12/15.

³⁾ Please note: Values for non-reinforced concrete are $h_{min} = 110$ mm and $c_{min} = 100$ and $s_{min} = 80$ mm for concrete $\geq C16/20$ and $c_{min} = 140$ and $s_{min} = 110$ mm for C12/15.

⁴⁾ Also valid for thin concrete slabs $h \geq 40$ mm, $h_{nom} = 50$ mm to 59 mm

Fixing points with a spacing $a \leq s_{cr,N}$ are considered as a group with a max. characteristic resistance $N_{Rk,p}$ acc. to Table C1.3. For a spacing $a > s_{cr,N}$ the anchors are considered as single anchors, each with a characteristic resistance $N_{Rk,p}$ acc. to Table C1.3.

Scheme of distance and spacing in concrete



fischer frame fixing SXR / SXRL


Intended use

Edge distances and spacings for use in concrete

Annex B 3

Table B4.1: Minimum thickness of member, edge distance and spacing in masonry

Anchor type		SXR 8	SXRL 8	SXR 10	SXRL 10	SXRL 14
Minimum thickness of member	$h_{\min}$ [mm]	100	115	100	110	115
Single anchor						
Minimum spacing	$a_{\min}$ [mm]	250	250	250	250	250
Minimum edge distance	$c_{\min}$ [mm]	100	100	100	100	100
Anchor group						
Minimum spacing perpendicular to free edge	$s_{1,\min}$ [mm]	100	100	100	100	100
Minimum spacing parallel to free edge	$s_{2,\min}$ [mm]	100	100	100	100	100
Minimum edge distance	$c_{\min}$ [mm]	100	100	100	100	100
Distance between anchor groups and / or single anchors	a [mm]	250				

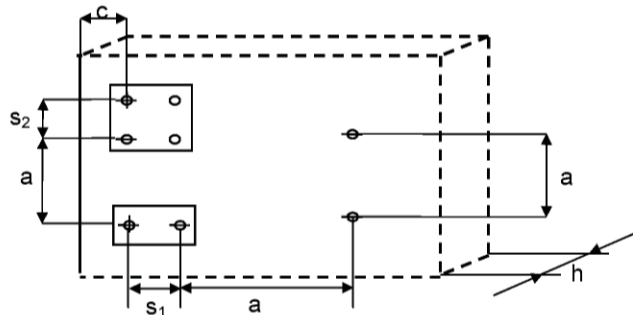Scheme of distance and spacing in masonry and aerated concrete AAC**Table B4.2: Minimum thickness of member, edge distance and spacing in aerated concrete AAC**


Anchor type			SXRL 8		SXR 10	SXRL 10		SXRL 14		
Compressive strength	f_b	[N/mm ²]	≥ 2 to < 6	≥ 6	≥ 2	≥ 2		≥ 2 to < 4		≥ 4
Nominal embedment depth	$h_{nom} \geq$	[mm]	70 and 90		50	70	90	70	90	70 90
Minimum thickness of member	h_{min}	[mm]	175		100	100	120	175		300
Single anchor										
Minimum spacing	a_{min}	[mm]	250	250	250	250		250		
Minimum edge distance	c_{min}	[mm]	60	80	100	120		80		100 120
Anchor group										
Minimum spacing perpendicular to free edge	$s_{1,min}$	[mm]	80	110	200	100 / 120 ¹⁾		80		80 100
Minimum spacing parallel to free edge	$s_{2,min}$	[mm]	80	110	400 ²⁾	100 / 120 ¹⁾		80	100	80 125
Minimum edge distance	c_{min}	[mm]	90	110	100	120		120		120 150
Distance between anchor groups and / or single anchors	a	[mm]	250 ²⁾							

¹⁾ Valid for AAC ≥ 600 kg/m³²⁾ For SXR 10 $a \geq 400$ mm**fischer frame fixing SXR / SXRL****Intended use**


Edge distances and spacing for use in masonry and in autoclaved aerated concrete AAC

Annex B 4


Installation instructions (the following pictures show fixing through timber)




1. Drill the bore hole acc. to Table B2.1 using the drill method described in the corresponding Annex C.




2. Use category „a“, „b“, „d“: Remove dust from borehole.




3. Insert anchor (screw and plug) by using a hammer until the collar of the plastic sleeve is flush with the surface of the fixture.



4. The screw is screwed-in until the head of the screw touches the sleeve. The anchor is correctly mounted, when the head of the screw fits tight on the surface and cannot be screwed-in any further.



5. Correctly installed anchor in hollow masonry.



6. Correctly installed anchor in concrete.

fischer frame fixing SXR / SXRL

Intended use
Installation instructions

Annex B 5

Table C1.1: Characteristic bending resistance of the screw

Anchor type	SXR 8 / SXRL 8		SXR 10 / SXRL 10		SXRL 14			
Material	galvanised steel	stainless steel	galvanised steel	stainless steel	galvanised steel	stainless steel	galvanised steel	stainless steel
Overall plastic anchor embedment depth in the base material					h_{nom2} 70mm	h_{nom3} 90mm	h_{nom2} 70mm	h_{nom3} 90mm
Characteristic bending resistance $M_{Rk,s}$ [Nm]	12,4	12,0	20,6 23,6 ²⁾	20,6	48,7	62,5	47,0	60,5
Partial safety factor γ_{Ms} ¹⁾	1,25	1,29	1,29	1,29	1,25		1,29	

¹⁾ In absence of other national regulations.²⁾ Only for SXRL 10: "High load" screw version on request only for countersunk screws – head marking is ●●**Table C1.2: Characteristic resistance of the screw**

Failure of expansion element (special screw)		SXR 8 / SXRL 8		SXR 10 / SXRL 10		SXRL 14	
		galvanised steel	stainless steel	galvanised steel	stainless steel	galvanised steel	stainless steel
Characteristic tension resistance $N_{Rk,s}$ [kN]		14,8	14,3	21,7 24,9 ²⁾	21,7	43,4	42,0
Partial safety factor γ_{Ms} ¹⁾		1,50	1,45	1,55	1,55	1,50	1,55
Characteristic shear resistance $V_{Rk,s}$ [kN]		7,4	7,1	10,8 12,4 ²⁾	10,8	21,7	21,0
Partial safety factor γ_{Ms} ¹⁾		1,25	1,29	1,29	1,29	1,25	1,29

¹⁾ In absence of other national regulations.²⁾ Only for SXRL 10: "High load" screw version on request only for countersunk screws – head marking is ●●**Table C1.3: Characteristic resistance for use in concrete (use cat. "a")**

Pull-out failure (plastic sleeve)				SXR 8	SXRL 8		SXR 10	SXRL 10		SXRL 14
Embedment depth h_{nom} [mm]				50	50	70	50	50	70	70
Concrete $\geq$ C12/15										
Characteristic resistance 30/50 °C	$N_{Rk,p}$	[kN]		3,0	4,0	5,0	5,0	5,5	6,5	8,5
Characteristic resistance 50/80 °C	$N_{Rk,p}$	[kN]		2,5 3,0 ²⁾	4,0	5,0	4,5	5,0	6,5	8,5
Concrete $\geq$ C12/15 (e.g. weather resistant shells of external wall panels)										
Characteristic resistance 30/50 °C	N_{Rk}	[kN]	$h \geq 40$ mm	-	-	-	3,5	2,5 3,0 ²⁾	-	-
Characteristic resistance 50/80 °C	N_{Rk}	[kN]	$h \geq 40$ mm	-	-	-	3,0	2,5 3,0 ²⁾	-	-
Concrete $\geq$ C45/55 in pre-stressed concrete core slabs										
Characteristic resistance 50/80 °C	N_{Rk}	[kN]	$d_b \geq 30$ mm	-	-	-		3,5 4,0 ³⁾	-	-
			$d_b \geq 40$ mm	-	-	-		5,5 6,0 ³⁾	-	-
Partial safety factor γ_{Mc} ¹⁾				1,8						

¹⁾ In absence of other national regulations.²⁾ Value corresponds to concrete class $\geq$ C16/20.³⁾ only valid for temperature range 30 / 50 °C**fischer frame fixing SXR / SXRL****Performances**

Characteristic resistance and characteristic bending resistance of the screw
 Characteristic resistance for use in concrete

Annex C 1

Table C2.1: Displacements¹⁾ under tension and shear loading in concrete and masonry

Anchor type	h _{nom} [mm]	F [kN]	Tension load ²⁾		Shear load ²⁾	
			δ _{NO} [mm]	δ _{N∞} [mm]	δ _{VO} [mm]	δ _{V∞} [mm]
SXR 8	50	1,2	0,65	1,30	1,02	1,53
SXRL 8	50	1,6	0,56	1,12	2,00	3,00
	70	2,0	0,64	1,28	2,30	3,45
SXR 10	50	2,0	1,29	2,58	1,15/3,05 ³⁾	1,74/4,58 ³⁾
SXRL 10	50	2,2	0,58	1,16	1,96	2,94
	70	2,6	1,67	3,34	1,15/3,05 ³⁾	1,74/4,58 ³⁾
SXRL 14	70	3,40	0,39	0,63	2,79	4,19

¹⁾ Valid for all ranges of temperatures.²⁾ Intermediate values by linear interpolation.³⁾ Valid for diameter in the clearance hole ≤ 12,5 mm (see Table B2.1).**Table C2.2: Displacements¹⁾ under tension and shear loading in autoclaved aerated concrete AAC**

Anchor type	f _b [N/mm ²]	h _{nom} [mm]	F [kN]	Tension load ²⁾		Shear load ²⁾	
				δ _{NO} [mm]	δ _{N∞} [mm]	δ _{VO} [mm]	δ _{V∞} [mm]
SXRL 8	≥ 2	70/90	0,14/0,21	0,45/0,55	0,90/1,10	0,28/0,42	0,42/0,63
	≥ 6	70/90	1,07	0,73/0,80	1,46/1,60	2,14	3,21
SXR 10	≥ 2	50	0,32	0,03	0,06	0,21	0,31
SXRL 10	≥ 2	70/90	0,32	0,23	0,46	0,64	0,96
	≥ 6	70/90	1,43	0,65	1,30	2,86	4,29
SXRL 14	≥ 2	70/90	0,32/0,43	0,19/0,25	0,38/0,50	0,64/0,86	0,96/1,29
	≥ 3	70/90	0,60/0,77	0,23/0,31	0,45/0,63	1,19/1,54	1,79/2,31
	≥ 4	70/90	0,88/1,11	0,26/0,38	0,53/0,76	1,75/2,22	2,62/3,33
	≥ 6	70/90	1,43/1,79	0,34/0,51	0,68/1,02	2,86/3,58	4,29/5,37

¹⁾ Valid for all ranges of temperatures.²⁾ Intermediate values by linear interpolation.**Table C2.3: Values under fire exposure in concrete C20/25 to C50/60 in any load direction, no permanent centric tension load and without lever arm**

Anchor type	Fire resistance class	F ¹⁾
SXR 10 / SXRL 10 / SXRL 14	R 90	≤ 0,8 kN

¹⁾ F_{Rk} / (γ_m × γ_F)

fischer frame fixing SXR / SXRL

PerformancesDisplacements under tension and shear loading in concrete, masonry and aerated concrete
Characteristic values under fire exposure in concrete**Annex C 2**

Table C3.1: Characteristic resistance F_{Rk} in [kN] in solid masonry (use category “b”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C									
		SXR 8	SXRL 8				SXR 10	SXRL 10		SXRL 14	
		h_{nom} [mm]									
		≥ 50	≥ 50	≥ 70	≥ 90	≥ 50	≥ 50	≥ 70	≥ 70	≥ 90	
Clay brick Mz, acc. to EN 771-1:2011 <i>e.g. Schlagmann</i> 3 DF (240x175x113) by hammer drilling	20/1,8	3,0	-	-	-	2,0 4,0 ⁴⁾ 4,5 ⁶⁾	-	-	-	-	
	10/1,8	2,0	-	-	-	1,5 3,0 ⁴⁾	-	-	-	-	
Clay brick Mz, acc. to EN 771-1:2011 <i>e.g. Schlagmann</i> <i>e.g. Ebersdobler</i> NF (240x115x71) by hammer drilling	36/1,8	2,5	3,0	4,0 4,5 ³⁾	⁸⁾	5,0	3,5	4,0 5,5 ³⁾	4,0 6,0 ⁴⁾ 7,0 ⁶⁾	⁸⁾	
	20/1,8	2,5	3,0	4,0 4,5 ³⁾	⁸⁾	3,0 3,5 ²⁾	3,5	4,0 5,5 ³⁾	4,0 6,0 ⁴⁾ 7,0 ⁶⁾	⁸⁾	
	12/1,8	2,0	2,0	2,5	⁸⁾	2,0	2,0	4,0 5,5 ³⁾	3,0 4,5 ⁴⁾ 5,0 ⁶⁾	⁸⁾	
	10/1,8	2,0	2,0	2,5	⁸⁾	2,0	-	3,5 4,5 ³⁾	3,0 4,5 ⁴⁾ 5,0 ⁶⁾	⁸⁾	
Clay brick Mz, acc. to EN 771-1:2011 <i>e.g. Wienerberger, DK</i> DF (240x115x52) by hammer drilling	28/1,8	3,0	2,5	3,0 3,5 ²⁾	⁸⁾	3,0	3,0 4,5 ³⁾ 5,0 ⁵⁾	5,5 6,5 ³⁾	-	-	
	20/1,8	2,0	2,5	3,0 3,5 ²⁾	⁸⁾	2,0	3,0 4,5 ³⁾ 5,0 ⁵⁾	4,0 4,5 ³⁾	-	-	
	16/1,8	1,5	2,5	3,0 3,5 ²⁾	⁸⁾	1,5	3,0 4,5 ³⁾ 5,0 ⁵⁾	3,0 3,5 ³⁾	-	-	
	12/1,8	1,5	1,5 2,0 ²⁾	2,0 2,5 ²⁾	⁸⁾	1,2	2,5 3,5 ³⁾	2,5 3,0 ³⁾	-	-	
	10/1,8	1,5	1,2 1,5 ²⁾	⁸⁾	⁸⁾	1,2	-	2,5 3,0 ³⁾	-	-	
Partial safety factor γ_{Mm} ¹⁾		2,5									

1) In absence of other national regulations.

2) Only valid for temperature range 30/50° C.

3) Only valid for edge distance $c \geq 150$ mm; intermediate values by linear interpolation.4) Only valid for edge distance $c \geq 200$ mm; intermediate values by linear interpolation.5) Only valid for edge distance $c \geq 150$ mm for temperature range 30/50° C; intermediate values by linear interpolation.6) Only valid for edge distance $c \geq 200$ mm for temperature range 30/50° C; intermediate values by linear interpolation.8) Values of lower h_{nom} can also be taken for next higher h_{nom} .

fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in solid masonry

Annex C 3

Table C.4.1. Characteristic resistance F_{RK} for use in solid masonry (see category 2)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C									
		SXR 8	SXRL 8		SXR 10		SXRL 10		SXRL 14		
		h_{nom} [mm]									
		≥ 50	≥ 50	≥ 70	≥ 90	≥ 50	≥ 50	≥ 70	≥ 70	≥ 90	
Calcium silicate solid brick KS, acc. to EN 771-2:2011 <i>e.g. KS Wemding</i> NF (240x115x71) by hammer drilling	36/2,0	-	-	-	-	5,0	3,5 4,0 ³⁾	⁸⁾	-	-	
	20/2,0	-	-	-	-	3,0 3,5 ²⁾	3,5 4,0 ³⁾	⁸⁾	-	-	
	20/1,8	2,5	2,5	3,0	⁸⁾	2,5 4,0 ⁴⁾	-	3,5	4,5 5,0 ⁴⁾ 6,0 ⁶⁾	⁸⁾	
	10/2,0	-	-	-	-	2,0	2,0 2,5 ³⁾	⁸⁾	-	-	
	10/1,8	2,0	2,0	2,0	⁸⁾	1,5	-	2,5	3,0 3,5 ⁴⁾ 4,0 ⁶⁾	⁸⁾	
Calcium silicate solid brick KS, acc. to EN 771-2:2011 <i>e.g. KS Wemding</i> 12 DF (495x175x240) by hammer drilling	28/2,0	3,0	-	-	-	5,0	-	-	-	-	
	20/2,0	3,0	-	-	-	4,5	-	-	-	-	
	20/1,8	-	-	-	-	-	-	6,5 8,5 ⁴⁾	4,0 11,0 ⁴⁾ 11,5 ⁶⁾	⁸⁾	
	16/1,8	-	-	-	-	-	-	6,5 8,5 ⁴⁾	4,0 11,0 ⁴⁾ 11,5 ⁶⁾	⁸⁾	
	12/1,8	-	-	-	-	-	-	6,5 8,5 ⁴⁾	4,0 11,0 ⁴⁾ 11,5 ⁶⁾	⁸⁾	
	10/2,0	2,5	-	-	-	3,0	-	-	-	-	
	10/1,8	-	-	-	-	-	-	5,5 7,0 ⁴⁾	3,5 9,0 ⁴⁾ 9,5 ⁶⁾	⁸⁾	
	8/1,8	-	-	-	-	-	-	4,0 5,5 ⁴⁾	2,5 7,5 ⁴⁾	⁸⁾	
Partial safety factor	γ_{Mm} ¹⁾	2,5									

1) In absence of other national regulations.

2) Only valid for temperature range 30/50° C.

3) Only valid for edge distance $c \geq 150$ mm; intermediate values by linear interpolation.4) Only valid for edge distance $c \geq 200$ mm; intermediate values by linear interpolation.5) Only valid for edge distance $c \geq 150$ mm for temperature range 30/50° C; intermediate values by linear interpolation.6) Only valid for edge distance $c \geq 200$ mm for temperature range 30/50° C; intermediate values by linear interpolation.8) Values of lower h_{nom} can also be taken for next higher h_{nom} .

fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in solid masonry

Annex C 4

Table C5.1: Characteristic resistance F_{Rk} in [kN] in solid masonry (use category “b”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C									
		SXR 8	SXRL 8			SXR 10	SXRL 10		SXRL 14		
		h_{nom} [mm]									
		≥ 50	≥ 50	≥ 70	≥ 90	≥ 50	≥ 50	≥ 70	≥ 70	≥ 90	
Calcium silicate solid brick KS , acc. to EN 771-2:2011 <i>e.g. KS Wemding</i> 8 DF (495x115x240) by hammer drilling	16/2,0	-	3,0 4,5³⁾ 5,0⁶⁾	3,5 5,0³⁾ 6,0⁴⁾ 6,5⁶⁾	⁸⁾	-	3,5 5,0³⁾ 6,0⁴⁾ 6,5⁶⁾	⁸⁾	-	-	
	12/2,0	-	2,5 3,0³⁾ 3,5⁵⁾	2,5 4,0³⁾ 4,5⁴⁾ 5,0⁶⁾	⁸⁾	-	2,5 4,0³⁾ 4,5⁴⁾ 5,0⁶⁾	⁸⁾	-	-	
Lightweight solid brick Vbl , acc. to EN 771-3:2011 <i>e.g. KLB</i> 2 DF (240x115x113) by hammer drilling	4/1,4	-	-	-	-	0,75	-	2,5	-	-	
	2/1,4	-	-	-	-	0,4	-	1,2	-	-	
	2/1,2	0,9	0,4 0,5²⁾	0,9 1,2²⁾	⁸⁾	0,75 0,9³⁾	0,4	⁸⁾	0,9 1,2²⁾	⁸⁾	
Lightweight solid brick Vbl , acc. to EN 771-3:2011 <i>e.g. KLB</i> 8 DF (490x240x115) by hammer drilling	12/1,8	2,5	-	-	-	-	-	3,0 4,5³⁾	-	-	
	10/1,8	2,5	-	-	-	-	-	2,5 3,5³⁾	-	-	
	8/1,8	2,5	-	-	-	-	-	2,0 3,0³⁾	-	-	
	8/1,6	-	-	-	-	3,0	-	-	-	-	
	6/1,8	2,0	-	-	-	-	-	1,5 2,0³⁾	-	-	
	6/1,6	-	-	-	-	2,0	-	-	-	-	
	4/1,8	1,2	-	-	-	-	-	0,9 1,5³⁾	-	-	
	2/1,2	-	-	-	-	1,2	-	-	-	-	
	2/1,0	1,2	-	-	-	-	-	-	-	-	
Partial safety factor	γ_{Mm} ¹⁾	2,5									

1) In absence of other national regulations.

2) Only valid for temperature range 30/50° C.

3) Only valid for edge distance $c \geq 150$ mm; intermediate values by linear interpolation.4) Only valid for edge distance $c \geq 200$ mm; intermediate values by linear interpolation.5) Only valid for edge distance $c \geq 150$ mm for temperature range 30/50° C; intermediate values by linear interpolation.6) Only valid for edge distance $c \geq 200$ mm for temperature range 30/50° C; intermediate values by linear interpolation.8) Values of lower h_{nom} can also be taken for next higher h_{nom} .

fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in solid masonry

Annex C 5

Table C6.1: Characteristic resistance F_{RK} in [kN] in solid masonry (use category “b”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C									
		SXR 8	SXRL 8			SXR 10	SXRL 10		SXRL 14		
		h_{nom} [mm]									
		≥ 50	≥ 50	≥ 70	≥ 90	≥ 50	≥ 50	≥ 70	≥ 70	≥ 90	
Lightweight solid brick Vbl, acc. to EN 771-3:2011 <i>e.g. KLB</i> 8 DF (245x240x240) by hammer drilling	10/1,6	-	2,0 2,5 ²⁾	3,0 4,0 ⁵⁾	⁸⁾	2,5	3,0 3,5 ⁵⁾	7,5	3,5 6,0 ⁴⁾ 7,0 ⁶⁾	⁸⁾	
	8/1,6	-	1,5 2,0 ²⁾	2,5 3,5 ⁵⁾	⁸⁾	2,5	2,5 3,0 ⁵⁾	6,0	3,0 5,0 ⁴⁾ 6,0 ⁶⁾	⁸⁾	
	6/1,6	-	1,2 1,5 ²⁾	2,0 2,5 ⁵⁾	⁸⁾	2,5	2,0	4,5	2,0 3,5 ⁴⁾ 4,5 ⁶⁾	⁸⁾	
	6/1,4	0,9	-	-	-	-	-	-	-	-	
	4/1,6	-	0,75 0,9 ²⁾	1,2 1,5 ⁵⁾	⁸⁾	0,9	1,2 1,5 ⁵⁾	3,0	1,5 2,5 ⁴⁾ 3,0 ⁶⁾	⁸⁾	
	4/1,4	0,6 0,75 ²⁾	-	-	-	-	-	-	-	-	
	2/1,6	-	0,4 0,5 ²⁾	0,6 0,9 ⁵⁾	⁸⁾	0,5	0,6	1,5	-	-	
Lightweight solid brick Vbl, acc. to EN 771-3:2011, <i>e.g. Liapor Super-K</i> 16 DF (500x240x248) by hammer drilling	2/0,8	-	-	-	-	-	-	0,5	-	-	
Lightweight solid brick Vbl, acc. to EN 771-3:2011, <i>e.g. Tarmac</i> (440x100x215) by hammer drilling	6/1,4	-	-	-	-	2,0 2,5 ⁴⁾	-	2,0 3,0 ³⁾	-	-	
	4/1,4	-	-	-	-	1,2 1,5 ⁴⁾	-	1,2 2,0 ³⁾	-	-	
Partial safety factor γ_{Mm} ¹⁾		2,5									

¹⁾ In absence of other national regulations.

²⁾ Only valid for temperature range 30/50° C.

³⁾ Only valid for edge distance $c \geq 150$ mm; intermediate values by linear interpolation.

⁴⁾ Only valid for edge distance $c \geq 200$ mm; intermediate values by linear interpolation.

⁵⁾ Only valid for edge distance $c \geq 150$ mm for temperature range 30/50° C; intermediate values by linear interpolation.

⁶⁾ Only valid for edge distance $c \geq 200$ mm for temperature range 30/50° C; intermediate values by linear interpolation.

⁸⁾ Values of lower h_{nom} can also be taken for next higher h_{nom} .

fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in solid masonry


Annex C 6

Table C7.1: Characteristic resistance F_{Rk} in [kN] in solid masonry (use category “b”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C									
		SXR 8	SXRL 8				SXR 10	SXRL 10		SXRL 14	
		h_{nom} [mm]									
		≥ 50	≥ 50	≥ 70	≥ 90	≥ 50	≥ 50	≥ 70	≥ 70	≥ 90	
Solid brick normal concrete Vbn, acc. to EN 771-3:2011 <i>e.g. Adolf Blatt</i> (240x245x240) by hammer drilling	20/1,8	2,5	-	-	-	4,5	-	-	-	-	
	16/1,8	2,5	-	-	-	3,5	-	-	-	-	
	12/1,8	2,5	-	-	-	3,0	-	-	-	-	
	10/1,8	1,5	-	-	-	3,0	-	-	-	-	
	8/1,8	1,5	-	-	-	-	-	-	-	-	
	4/1,8	0,75	-	-	-	-	-	-	-	-	
Solid brick normal concrete Vbn, acc. to EN 771-3:2011 <i>e.g. Tarmac GB</i> (440x100x215) by hammer drilling	16/1,8	-	-	-	-	4,0 4,5 ²⁾	-	5,5	-	-	
	10/1,8	-	-	-	-	2,5 3,0 ²⁾	-	3,5	-	-	
Partial safety factor γ_{Mm} ¹⁾		2,5									

Footnotes see C7.2

Table C7.2: Characteristic resistance F_{Rk} in [kN] in hollow or perforated masonry (use category “c”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. compressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C									
		SXR 8	SXRL 8				SXR 10	SXRL 10		SXRL 14	
		h_{nom} [mm]									
		50	50	70	90	50	50	70	70	90	
Perforated clay brick HLz Form B , acc. to EN 771-1:2011 <i>e.g. Wienerberger</i> 	20/1,2	1,2	-	-	-	2,5 3,0⁵⁾	-	2,0	-	-	
	20/1,0	-	-	-	-	2,0	-	-	-	-	
	12/1,2	-	-	-	-	-	-	1,2	-	-	
	10/1,2	-	-	-	-	1,5 2,0²⁾	-	-	-	-	
	10/1,0	-	-	-	-	1,2	-	-	-	-	
	8/1,2	0,5	-	-	-	-	-	-	-	-	
Partial safety factor γ_{Mm} ¹⁾		2,5									

¹⁾ In absence of other national regulations.²⁾ Only valid for temperature range 30/50° C.⁵⁾ Only valid for edge distance $c \geq 150$ mm at temperature range 30/50° C; intermediate values by linear interpolation.




fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in solid masonry and in hollow or perforated masonry

Annex C 7

Table C8.1: Characteristic resistance F_{Rk} in [kN] in hollow or perforated masonry (use category "c")

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C										
		SXR 8	SXRL 8 ⁷⁾				SXR 10	SXRL 10		SXRL 14 ⁷⁾		
			h_{nom} [mm]									
			50	50	70	90		50	50	70	70	90
Perforated clay brick HLz acc. to EN 771-1:2011 <i>e.g. Wienerberger</i> 	28/1,2		1,2 1,5 ²⁾	1,5 2,0 ²⁾	1,5 2,0 ²⁾	-	-	2,0	-	-		
	20/1,2		0,9 1,2 ²⁾	0,9 1,2 ²⁾	1,2 1,5 ²⁾	-	-	1,2	-	-		
	12/1,0	0,6	-	-	-	0,9	-	0,75	-	-		
	10/1,2	-	0,6	0,6 0,75 ²⁾	0,6 0,9 ²⁾	-	-	-	-	-		
	10/1,0	-	-	-	-	0,75	-	0,6	-	-		
	8/1,0	0,4	-	-	-	0,6	-	-	-	-		
Perforated clay brick VHLz acc. to EN 771-1:2011, <i>e.g. Wienerberger</i> 	48/1,6	-	-	-	-	-	-	-	4,5 5,0 ²⁾	4,5 5,0 ²⁾		
	28/1,6	-	-	-	-	-	-	-	2,5 3,0 ²⁾	2,5 3,0 ²⁾		
	20/1,6	-	-	-	-	-	-	-	1,5 2,0 ²⁾	1,5 2,0 ²⁾		
Perforated clay brick VHLz acc. to EN 771-1:2011, <i>e.g. Wienerberger</i> 	48/1,6	-	2,5	2,5	1,5 2,0 ²⁾	2,5	-	4,5	-	-		
	36/1,6	-	2,0	2,0	1,2 1,5 ²⁾	2,0	-	3,0	-	-		
	28/1,6	-	1,5	1,5	0,9 1,2 ²⁾	1,5	-	2,5	-	-		
	20/1,6	-	0,9	0,9	0,6 0,9 ²⁾	0,9	-	1,5	-	-		
	12/1,6	-	0,6	0,6	0,4 0,5 ²⁾	0,6	-	0,9	-	-		
	10/1,6	-	-	-	-	-	-	0,9	-	-		
Partial safety factor γ_{Mm} ¹⁾		2,5										

¹⁾ In absence of other national regulations.

²⁾ Only valid for temperature range 30/50° C.

³⁾ Only valid for edge distance $c \geq 150$ mm; intermediate values by linear interpolation.

⁴⁾ Only valid for edge distance $c \geq 200$ mm; intermediate values by linear interpolation.

⁵⁾ Only valid for edge distance $c \geq 150$ mm at temperature range 30/50° C; intermediate values by linear interpolation.

⁶⁾ Only valid for edge distance $c \geq 200$ mm at temperature range 30/50° C; intermediate values by linear interpolation.

⁷⁾ The lowest load of two consecutive embedment depths may be used for the intermediate embedment depths.




fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 8

Table C9.1: Characteristic resistance F_{Rk} in [kN] in hollow or perforated masonry (use category “c”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C								
		SXR 8	SXRL 8		SXR 10	SXRL 10		SXRL 14		
		h_{nom} [mm]								
		50	50	70	90	50	50	70	70	90
Perforated clay brick HLz acc. to EN 771 -1:2011+A1:2014, <i>e.g. Wienerberger, BS</i> 	28/1,5	2,5	-	-	-	2,5	-	-	-	-
	20/1,5	1,2 1,5 ²⁾	-	-	-	2,0	-	-	-	-
	10/1,5	0,6 0,9 ²⁾	-	-	-	1,2	-	-	-	-
Perforated clay brick HLz Form B, acc. to EN 771-1:2011 <i>e.g. Schlagmann</i> 	8/0,9	0,9	-	-	-	-	-	-	-	-
	6/0,9	0,6	-	-	-	-	-	-	-	-
10 DF (260x240x440) by rotary drilling	4/0,9	0,4	-	-	-	-	-	-	-	-
Perforated clay brick HLz acc. to EN 771-1:2011 <i>e.g. Schlagmann</i> <i>Poroton T14</i> 	6/0,7	-	-	-	-	0,3 0,4 ²⁾	-	0,5	-	-
10 DF (300x240x240) by rotary drilling										
Partial safety factor	γ_{Mm} ¹⁾	2,5								

1) In absence of other national regulations.

2) Only valid for temperature range 30/50° C.



fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 9

Table C10.1: Characteristic resistance F_{RK} in [kN] in hollow or perforated masonry (use category “c”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. compressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C								
		SXR 8	SXRL 8		SXR 10		SXRL 10		SXRL 14	
		h_{nom} [mm]								
		50	50	70	90	50	50	70	70	90
Perforated clay brick HLz Form B , acc. to EN 771-1:2011, <i>e.g. Schlagmann</i> <i>Planfüllziegel</i> 	6/0,7	1,2	-	-	-	2,0	-	-	-	-
	4/0,7	0,75	-	-	-	-	-	-	-	-
	2/0,7	0,4	-	-	-	-	-	-	-	-
12 DF (380x240x240) by rotary drilling										
Perforated clay brick HLz acc. to EN 771-1:2011 <i>e.g. Schlagmann</i> 	12/1,0	-	-	-	-	-	-	-	2,0	2,5
	10/1,0	-	-	-	-	-	-	-	2,0	2,0
	8/1,0	-	-	-	-	-	-	-	1,5	1,5
	6/1,0	-	-	-	-	-	-	-	1,2	1,2
3 DF (240x175x113) by rotary drilling										
Perforated clay brick HLz acc. to EN 771-1:2011, <i>e.g. Schlagmann</i> <i>Poroton S11</i> 	8/0,8	-	-	-	-	-	-	1,5	-	-
	6/0,8	-	-	-	-	-	-	1,2	-	-
	4/0,8	-	-	-	-	-	-	0,75	-	-
12 DF (365x250x240) by rotary drilling										
Partial safety factor γ_{Mm} ¹⁾		2,5								

¹⁾ In absence of other national regulations.

fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 10

Table C11.1: Characteristic resistance F_{Rk} in [kN] in hollow or perforated masonry (use category “c”)







Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C								
		SXR 8	SXRL 8		SXR 10	SXRL 10		SXRL 14		
		h_{nom} [mm]								
		50	50	70	90	50	50	70	70	90
Perforated clay brick HLz acc. to EN 771-1:2011 <i>e.g. Schlagmann</i> <i>Poroton S10</i> 	6/0,7	-	-	-	-	-	-	1,5	-	-
	4/0,7	-	-	-	-	-	-	0,9	-	-
10 DF (300x250x240) by rotary drilling										
Perforated clay brick HLz acc. to EN 771-1:2011 <i>e.g. Schlagmann</i> <i>Poroton T8</i> 	4/0,6	-	-	-	-	-	-	1,2	-	-
	2/0,6	-	-	-	-	-	-	0,6	-	-
12 DF (365x248x240) by rotary drilling										
Perforated clay brick HLz acc. to EN 771-1:2011, <i>e.g. Hörl & Hartmann</i> <i>Coriso WS 09</i> 	6/0,8	-	-	-	-	-	-	0,9	-	-
	4/0,8	-	-	-	-	-	-	0,6	-	-
	2/0,8	-	-	-	-	-	-	0,3	-	-
(360x245x240) by rotary drilling										
Partial safety factor	γ_{Mm} ¹⁾	2,5								

Table C12.1: Characteristic resistance F_{Rk} in [kN] in hollow or perforated masonry (use category “c”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C								
		SXR 8	SXRL 8 ⁷⁾			SXR 10	SXRL 10		SXRL 14 ⁷⁾	
		h_{nom} [mm]								
		50	50	70	90	50	50	70	70	90
Perforated clay brick HLz acc. to EN 771-1:2011 <i>e.g. Doppio Uni IT</i> <i>Wienerberger</i>  (250x120x190) by rotary drilling	20/0,9	-	1,2	0,9 1,5 ²⁾	1,5 2,0 ²⁾	-	-	-	-	-
	16/0,9	-	0,9	0,9 1,2 ²⁾	1,2 1,5 ²⁾	-	-	-	-	-
	12/0,9	-	0,75	0,6 0,75 ²⁾	0,9 1,2 ²⁾	-	-	-	-	-
Perforated clay brick HLz acc. to EN 771-1:2011, <i>e.g. Imerys Gelimatic</i>  (500x200x270) by rotary drilling	6/0,6	-	-	-	-	0,6 0,75 ⁶⁾	-	1,5	-	-
	4/0,6	-	-	-	-	-	-	0,9	-	-
	2/0,6	-	-	-	-	-	-	0,5	-	-
Perforated clay brick HLz acc. to EN 771-1:2011, <i>e.g. Imerys Optibric</i>  (560x200x275) by rotary drilling	10/0,6	-	-	-	-	1,2	-	1,5	-	-
	8/0,6	-	-	-	-	-	-	1,2	-	-
	6/0,6	-	-	-	-	-	-	0,9	-	-
	4/0,6	-	-	-	-	-	-	0,6	-	-
Partial safety factor γ_{Mm} ¹⁾		2,5								

1) In absence of other national regulations.

2) Only valid for temperature range 30/50° C.

6) Only valid for edge distance $c \geq 200$ mm for temperature range 30/50° C; intermediate values by linear interpolation.

7) The lowest load of two consecutive embedment depths may be used for the intermediate embedment depths.




fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 12

Table C13.1: Characteristic resistance F_{Rk} in [kN] in hollow or perforated masonry (use category “c”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C								
		SXR 8	SXRL 8		SXR 10		SXRL 10		SXRL 14	
		h_{nom} [mm]								
		50	50	70	90	50	50	70	70	90
Perforated clay brick HLz acc. to EN 771-1:2011, <i>e.g.</i> <i>Bouyer Leroux BGV</i> (570x200x315)  by rotary drilling	6/0,6	-	-	-	-	0,75 0,9³⁾ 1,2⁵⁾	-	0,9	-	-
Perforated clay brick HLz acc. to EN 771-1:2011, <i>e.g. Wienerberger</i> <i>Porothersm 30 R</i>  (370x300x250) by rotary drilling	10/0,7	-	-	-	-	0,5 0,6³⁾	-	-	-	-
Perforated clay brick HLz acc. to EN 771-1:2011, <i>e.g. Wienerberger</i> <i>Porothersm GF R20</i>  (560x200x275) by rotary drilling	10/0,7	-	-	-	-	0,6 0,75³⁾	-	0,9	-	-
Partial safety factor	γ_{Mm} ¹⁾	2,5								

¹⁾ In absence of other national regulations.

³⁾ Only valid for edge distance $c \geq 150$ mm; intermediate values by linear interpolation.

⁵⁾ Only valid for edge distance $c \geq 150$ mm for temperature range 30/50° C; intermediate values by linear interpolation.

⁷⁾ The lowest load of two consecutive embedment depths may be used for the intermediate embedment depths.




fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 13

Table C14.1: Characteristic resistance F_{RK} in [kN] in hollow or perforated masonry (use category “c”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C								
		SXR 8	SXRL 8		SXR 10	SXRL 10		SXRL 14		
		h_{nom} [mm]								
		50	50	70	90	50	50	70	70	90
Perforated clay brick HLz acc. to EN 771-1:2011, <i>e.g. Terreal Calibric</i> 	8/0,7	-	-	-	-	0,6 0,75⁶⁾	-	0,9	-	-
	6/0,7	-	-	-	-	-	-	0,75	-	-
	4/0,7	-	-	-	-	-	-	0,4	-	-
Perforated clay ceiling brick acc. to DIN 4159:2014-05, <i>e.g. Hörl & Hartmann ceiling block</i> 	10/0,7	-	-	-	-	-	-	2,0	-	-
	8/0,7	-	-	-	-	-	-	1,5	-	-
	6/0,7	-	-	-	-	-	-	1,2	-	-
Perforated clay ceiling brick acc. to EN 15037-3:2011, <i>e.g. Hörl & Hartmann block for beam-and-block ceilings</i> 	8/0,7	-	-	-	-	-	-	1,5	-	-
	6/0,7	-	-	-	-	-	-	1,2	-	-
	4/0,7	-	-	-	-	-	-	0,9	-	-
Partial safety factor γ_{Mm} ¹⁾		2,5								

1) In absence of other national regulations.

3) Only valid for edge distance $c \geq 150$ mm; intermediate values by linear interpolation.6) Only valid for edge distance $c \geq 200$ mm for temperature range 30/50°C; intermediate values by linear interpolation.




fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 14

Table C15.1: Characteristic resistance F_{Rk} in [kN] in hollow or perforated masonry (use category “c”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. compressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C								
		SXR 8	SXRL 8 ⁷⁾		SXR 10	SXRL 10		SXRL 14 ⁷⁾		
		h_{nom} [mm]								
		50	50	70	90	50	50	70	70	90
Hollow calcium silicate brick KSL acc. to EN 771-2:2011 <i>e.g. KS Wemding</i> 	20/1,4	-	2,0	2,5	2,5	-	-	-	-	-
	12/1,4	2,0	1,2	1,5	1,5	2,0 2,5 ²⁾	-	2,5	1,5 2,0 ²⁾	2,5
	10/1,4	1,5	-	-	-	2,0	-	2,0	1,5	2,0
	8/1,4	1,2	-	-	-	1,5	-	1,5	1,2	1,5
	6/1,4	0,9	-	-	-	-	-	-	0,9	1,2
Hollow calcium silicate brick KSL acc. to EN 771-2:2011 <i>e.g. KS Wemding</i> 	20/1,4	1,2 1,5 ²⁾	-	-	-	-	-	-	-	-
	16/1,4	0,9 1,2 ²⁾	-	-	-	-	-	2,0	-	-
	12/1,4	0,75 0,9 ²⁾	-	-	-	-	-	1,5	-	-
	10/1,4	0,6 0,75 ²⁾	-	-	-	-	-	1,2	-	-
	8/1,4	0,5 0,6 ²⁾	-	-	-	-	-	1,0	-	-
	6/1,4	-	-	-	-	-	-	0,75	-	-
Hollow calcium silicate brick KSL acc. to EN 771-2:2011 <i>e.g. KS Wemding</i> 	20/1,4	-	0,6 0,75 ²⁾	1,5 2,0 ²⁾	0,9 1,2 ²⁾	-	-	3,5	3,5 4,0 ²⁾	1,5 2,0 ²⁾
	12/1,4	-	0,4 0,5 ²⁾	0,9 1,2 ²⁾	0,5 0,75 ²⁾	-	-	2,0	2,0 2,5 ²⁾	0,9 1,2 ²⁾
	10/1,4	-	-	-	-	-	-	2,0	1,5 2,0 ²⁾	0,75 0,9 ²⁾
Partial safety factor	γ_{Mm} ¹⁾	2,5								

¹⁾ In absence of other national regulations.

²⁾ Only valid for temperature range 30/50° C.

7) The lowest load of two consecutive embedment depths may be used for the intermediate embedment depths.




fischer frame fixing SXR / SXRL

~~Performances~~

Characteristic resistance for use in hollow or perforated masonry

Annex C 15

Table C16.1: Characteristic resistance F_{Rk} in [kN] in hollow or perforated masonry (use category “c”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C								
		SXR 8	SXRL 8		SXR 10	SXRL 10		SXRL 14		
		h_{nom} [mm]								
		50	50	70	90	50	50	70	70	90
Hollow calcium silicate brick KSL acc. to EN 771-2:2011 <i>e.g. KS Wemding</i>  5 DF (300x240x113) by hammer drilling	16/1,4	2,0	-	-	-	3,0 3,5⁵⁾	-	-	-	-
	12/1,4	1,5	-	-	-	-	-	-	-	-
	10/1,4	1,2	-	-	-	1,5	-	-	-	-
	8/1,4	0,9	-	-	-	-	-	-	-	-
	6/1,4	0,75 0,9²⁾	-	-	-	-	-	-	-	-
Hollow calcium silicate brick KSL acc. to EN 771-2:2011 <i>e.g. KS Wemding, P10</i>  (495x98x245) by hammer drilling	6/1,2	1,2 1,5²⁾	-	-	-	1,5 2,0³⁾ 2,5⁵⁾	-	-	-	-
	4/1,2	0,75 0,9²⁾	-	-	-	-	-	-	-	-
	2/1,2	0,4 0,5²⁾	-	-	-	-	-	-	-	-
Hollow calcium silicate brick KSL acc. to EN 771-2:2011 <i>e.g. KS Wemding</i>  9 DF (250x238x240) by hammer drilling	12/1,4	-	-	-	-	-	-	2,0	-	-
	10/1,4	-	-	-	-	-	-	1,5	-	-
	8/1,4	-	-	-	-	-	-	1,2	-	-
	6/1,4	-	-	-	-	-	-	0,9	-	-
Partial safety factor γ_{Mm} ¹⁾		2,5								

¹⁾ In absence of other national regulations.

²⁾ Only valid for temperature range 30/50° C.

³⁾ Only valid for edge distance $c \geq 150$ mm; intermediate values by linear interpolation.

⁵⁾ Only valid for edge distance $c \geq 150$ mm for temperature range 30/50° C; intermediate values by linear interpolation.




fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 16

Table C17.1: Characteristic resistance F_{RK} in [kN] in hollow or perforated masonry (use category “c”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C								
		SXR 8	SXRL 8 ⁷⁾		SXR 10	SXRL 10		SXRL 14 ⁷⁾		
h_{nom} [mm]										
50	50	70	90	50	50	70	70	90		
Hollow brick light-weight concrete Hbl acc. to EN 771-3, <i>e.g. KLB</i>  (300x240x240) by hammer drilling	2/1,2	-	-	-	-	1,5	-	-	-	-
Hollow brick light-weight concrete Hbl acc. to EN 771-3, <i>e.g. Roadstone masonry</i>  (440x210x215) by hammer drilling	10/1,2	2,5	2,0	2,0 2,5 ²⁾	0,4 0,6 ²⁾	-	-	2,5	3,0	-
8/1,2	2,0	1,5	1,5 2,0 ²⁾	0,3 0,5 ²⁾	2,5	-	2,0	2,5	-	
6/1,2	1,5	1,2	1,2 1,5 ²⁾	0,3	2,0	-	1,5	2,0	-	
4/1,2	-	-	-	-	-	-	0,9	1,2	-	
2/1,2	-	-	-	-	-	-	0,5	0,6	-	
Hollow brick light-weight concrete Hbl acc. to EN 771-3, <i>e.g. Knobel</i>  (500x240x240) by rotary drilling	6/0,8	-	1,5	2,5	1,5 2,0 ²⁾	-	2,5	-	-	-
4/0,8	-	0,9	1,5	0,9 1,2 ²⁾	-	1,5	-	-	-	
2/0,8	-	0,5	0,75	0,5 0,6 ²⁾	-	0,75	-	-	-	
2/0,7	-	1,5 2,0 ²⁾	2,0 2,5 ²⁾	1,5 2,0 ²⁾	-	2,0 2,5 ²⁾	2,5	1,2 1,5 ²⁾	0,75	
Partial safety factor γ_{Mm} ¹⁾		2,5								

1) In absence of other national regulations.

2) Only valid for temperature range 30/50° C.

7) The lowest load of two consecutive embedment depths may be used for the intermediate embedment depths.




fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 17

Table C18.1: Characteristic resistance F_{Rk} in [kN] in hollow or perforated masonry (use category “c”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm²] / bulk density ρ [kg/dm³]	Characteristic resistance F_{RK} [kN] 50/80°C								
		SXR 8	SXRL 8		SXR 10	SXRL 10		SXRL 14		
		h_{nom} [mm]								
		50	50	70	90	50	50	70	70	90
Hollow brick light-weight concrete Hbl acc. to EN 771-3, <i>e.g. KLB</i>  (360x250x250) by hammer drilling	2/0,9	-	-	-	-	-	-	0,75	-	-
Hollow brick light-weight concrete Hbl acc. to EN 771-3:2011, <i>e.g. KLB</i>  (360x240x240) by hammer drilling	6/1,0	1,5	-	-	-	-	-	-	-	-
Hollow brick light-weight concrete Hbl acc. to EN 771-3:2011, <i>e.g. Sepa Parpaing</i>  (500x200x200) by rotary drilling	6/0,9	-	-	-	-	-	-	0,5	-	-
	4/0,9	0,3 0,4²⁾	-	-	-	0,9 1,2⁴⁾ 1,5⁶⁾	-	0,3	-	-
Partial safety factor $\gamma_{Mm}^{1)}$		2,5								

1) In absence of other national regulations.

2) Only valid for temperature range 30/50° C.

4) Only valid for edge distance $c \geq 200$ mm; intermediate values by linear interpolation.6) Only valid for edge distance $c \geq 200$ mm for temperature range 30/50° C; intermediate values by linear interpolation.



fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 18

Table C19.1: Characteristic resistance F_{Rk} in [kN] in hollow or perforated masonry (use category “c”)

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm²] / bulk density ρ [kg/dm³]	Characteristic resistance F_{RK} [kN] 50/80°C								
		SXR 8	SXRL 8		SXR 10	SXRL 10		SXRL 14		
		h_{nom} [mm]								
		50	50	70	90	50	50	70	70	90
Hollow brick normal concrete Hbn acc. to EN 771-3, <i>e.g. Adolf Blatt</i> 	6/1,6	-	-	-	-	2,5	-	2,0	-	-
	4/1,6	-	-	-	-	1,5	-	1,2	-	-
	2/1,6	-	-	-	-	0,75	-	0,6	-	-
(300x240x240) by hammer drilling										
Heat insulation brick WDB <i>e.g. Gisoton</i> 	2/0,7	--	-	-	-	1,5	-	-	-	-
(390x240x240) by hammer drilling										
Partial safety factor	$\gamma_{Mm}^{1)}$	2,5								

¹⁾ In absence of other national regulations.

²⁾ Only valid for temperature range 30/50° C.

⁴⁾ Only valid for edge distance $c \geq 200$ mm; intermediate values by linear interpolation.

⁶⁾ Only valid for edge distance $c \geq 200$ mm for temperature range 30/50° C; intermediate values by linear interpolation.

fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in hollow or perforated masonry

Annex C 19

Table C20.1: Characteristic resistance F_{Rk} in [kN] in autoclaved aerated concrete (AAC), use category "d"

Base material [Supplier Title] Geometry, DF or nom. size (L x W x H) [mm] and drilling method	Min. com- pressive strength f_b [N/mm ²] / bulk density ρ [kg/dm ³]	Characteristic resistance F_{RK} [kN] 50/80°C									
		SXR 8	SXRL 8		SXR 10	SXRL 10		SXRL 14			
		h_{nom} [mm]									
		≥ 50	≥ 50	≥ 70	≥ 90	≥ 50	≥ 70	≥ 90	≥ 70	≥ 90	
Autoclaved aerated concrete, AAC acc. to EN 771-4:2011 e.g. (500x120x300) e.g. (500x250x300) by hammer drilling	≥ 6	-	-	1,5 3,0 ⁵⁾	2,0 3,0 ⁵⁾	0,75 0,9 ²⁾	2,0 2,5 ⁶⁾ 3,0 ⁴⁾	2,5 3,0 ⁶⁾ 4,0 ⁴⁾	4,0	5,0	
	≥ 4	-	-	0,9 1,5 ⁵⁾	1,2 1,5 ⁵⁾	0,75 0,9 ²⁾	1,2 1,5 ⁶⁾ 2,0 ⁴⁾	1,5 2,5 ⁴⁾	2,5	3,0	
	≥ 3	-	-	0,6 0,9 ⁵⁾	0,9 1,2 ⁵⁾	0,4 ³⁾ 0,5 ²⁾³⁾	0,9 1,2 ⁴⁾	0,9 1,2 ⁶⁾ 1,5 ⁴⁾	1,5	2,0	
	≥ 2	-	-	0,4	0,6	0,4 ³⁾ 0,5 ²⁾³⁾	0,5 0,75 ⁴⁾	0,6 0,9 ⁴⁾	0,9	1,2	
Partial safety factor γ_{MAAC} ¹⁾		2,0									

¹⁾ In absence of other national regulations.

²⁾ Only valid for temperature range 30/50°C.

³⁾ For the fixing in autoclaved aerated concrete with a nominal compressive strength $f_{ck} < 4$ N/mm² the hole is made by using the accompanying AAC hole punch according Table C20.2.


⁴⁾ Values valid for member thickness $h_{min} \geq 175$ mm.

⁵⁾ Only valid for edge distance $c \geq 120$ mm.

⁶⁾ Only valid for edge distance $c \geq 180$ mm.

Table C20.2: Assignment AAC hole punch type – anchor type (length) only for AAC $f_b < 4$ N/mm² SXR 10

Hole punch only for SXR 10 $h_{nom} = 50$ mm in AAC $f_b < 4$ N/mm ²					Anchor type (length)
Type	a_1	a_2	b	l	
GBS 10 x 80	9	10	80	85	SXR 10 x 52 SXR 10 x 60 SXR 10 x 80
GBS 10 x 100			90	105	SXR 10 x 100
GBS 10 x 135				140	SXR 10 x 120
GBS 10 x 160				165	SXR 10 x 140 SXR 10 x 160
GBS 10 x 185				190	SXR 10 x 180
GBS 10 x 230				235	SXR 10 x 200 SXR 10 x 230



fischer frame fixing SXR / SXRL

Performances

Characteristic resistance for use in autoclaved aerated concrete

Annex C 20