



DICHIARAZIONE DI PRESTAZIONE

DoP 0370

per vite per calcestruzzo fischer ULTRACUT FBS II R (ancorante meccanico per l'utilizzo nel calcestruzzo)

IT

1. Codice di identificazione unico del prodotto-tipo:

DoP 0370
2. Usi previsti:

Fissaggio post-installato in calcestruzzo fessurato o non fessurato, vedi appendice, in particolare gli allegati da B1 - B5.
3. Fabbricante:

fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Germany
4. Mandatario:

-
5. Sistemi di VVCP:

1
6. Documento per la valutazione europea:

EAD 330232-01-0601
- Valutazione tecnica europea:

ETA-17/0740; 2025-01-08
- Organismo di valutazione tecnica:

ETA-Danmark A/S
- Organismi notificati:

2873 TU Darmstadt

7. Prestazioni dichiarate:
- Resistenza meccanica e stabilità (BWR 1)

Resistenza caratteristica al carico di tensione (carico statico e quasi-statico) Metodo A:

Resistenza alla rottura dell'acciaio: Allegato C1

Resistenza alla rottura per sfilamento: Allegato C1

Resistenza alla rottura del cono di calcestruzzo: Allegato C1

Robustezza: Allegato C1

Distanza dal bordo e interassi minimi: Allegato C4

Distanza dal bordo per evitare lo splitting sotto carico: Allegato C1

Resistenza caratteristica al carico di taglio (carico statico e quasi statico):

Resistenza alla rottura dell'acciaio (carico di taglio): Allegato C1

Resistenza alla rottura per pry-out: Allegato C1

Resistenza caratteristica per una progettazione semplificata:

Metodo B: NPD

Metodo C: NPD

Spostamenti:

Spostamenti sotto azioni statiche e quasi statiche: Allegato C4

Resistenza e spostamenti caratteristici per le categorie di prestazione sismica C1 e C2:

Resistenza al carico di trazione, spostamenti, categoria C1: Allegato C2

Resistenza al carico di trazione, spostamenti, categoria C2: Allegato C2

Resistenza al carico di taglio, spostamenti, categoria C1: Allegato C2

Resistenza al carico di taglio, spostamenti, categoria C2: Allegato C2

Fattore spazio anulare: Allegato C2

- Sicurezza in caso di incendio (BWR 2)

Reazione al fuoco: Classe (A1)
- Resistenza al fuoco:

Resistenza al fuoco alla rottura dell'acciaio (carico di trazione): Allegato C3

Resistenza al fuoco alla rottura per sfilamento (carico di trazione): Allegato C3

Resistenza la fuoco alla rottura dell'acciaio (carico di taglio): Allegato C3

- Durabilità:

Durabilità: Allegati B1



8. Documentazione tecnica appropriata e/o -
documentazione tecnica specifica:

La prestazione del prodotto sopra identificato è conforme all'insieme delle prestazioni dichiarate. La presente dichiarazione di prestazione è emessa, in conformità al regolamento (UE) n. 305/2011, sotto la sola responsabilità del fabbricante sopra identificato.

Firmato a nome e per conto del fabbricante da:

Dr. Ronald Mihala, Responsabile della gestione dello sviluppo e della produzione
Tumlingen, 2025-02-03

Dieter Pfaff, Capo della Federazione Internazionale della Produzione e Gestione della Qualità

Questa Dichiarazione di Prestazione (DoP) è stata preparata in varie lingue. In caso di contestazioni sull'interpretazione, prevarrà sempre la versione inglese.

L'Appendice include informazioni volontarie e complementari in lingua inglese che superano i requisiti di legge (lingua specificata in modo neutrale).

Translation guidance Essential Characteristics and Performance Parameters for Annexes

Guida alla traduzione delle Caratteristiche Essenziali e dei Parametri di Prestazione per gli Annessi

Mechanical resistance and stability (BWR 1)		
Resistenza meccanica e stabilità (BWR 1)		
Characteristic resistance under static and quasi-static loading, Method A		
Resistenza caratteristica al carico di tensione (carico statico e quasi-statico) Metodo A:		
1	Resistance to steel failure: Resistenza alla rottura dell'acciaio:	$N_{Rk,s}$ [kN], E_s [N/mm ²]
2	Resistance to pull- out failure: Resistenza alla rottura per sfilamento:	$N_{Rk,p}$ [kN], ψ_c
3	Resistance to concrete cone failure: Resistenza alla rottura del cono di calcestruzzo:	$k_{cr,N}$, $k_{ucr,N}$ [-], h_{ef} , $c_{cr,N}$ [mm]
4	Robustness: Robustezza:	γ_{inst} [-]
5	Minimum edge distance and spacing: Distanza dal bordo e interassi minimi:	c_{min} , s_{min} , h_{min} [mm]
6	Edge distance to prevent splitting under load: Distanza dal bordo per evitare lo splitting sotto carico:	$N^0_{Rk,sp}$ [kN], $c_{cr,sp}$ [mm]
Characteristic resistance to shear load (static and quasi-static loading), Method A		
Resistenza caratteristica al carico di taglio (carico statico e quasi statico):		
7	Resistance to steel failure under shear load: Resistenza alla rottura dell'acciaio (carico di taglio):	$V^0_{Rk,s}$ [kN], $M^0_{Rk,s}$ [Nm], k_7 [-]
8	Resistance to pry-out failure: Resistenza alla rottura per pry-out:	k_8 [-]
Characteristic Resistance for simplified design		
Resistenza caratteristica per una progettazione semplificata:		
9	Method B: Metodo B:	F^0_{Rk} [kN], c_{cr} , s_{cr} [mm]
10	Method C: Metodo C:	F_{Rk} [kN]
Displacements		
Spostamenti:		
11	Displacements under static and quasi-static loading: Spostamenti sotto azioni statiche e quasi statiche:	δ_{N0} , $\delta_{N\infty}$, δ_{V0} , $\delta_{V\infty}$ [mm]
12	Stiffness characteristics for tension loading for non-linear spring models:	$k_{1,ucr}$, $k_{2,ucr}$, $k_{3,ucr}$, $k_{4,ucr}$, $k_{1,cr}$, $k_{2,cr}$, $k_{3,cr}$, $k_{4,cr}$ [kN/mm]
Characteristic resistance and displacements for seismic performance categories C1 and C2		
Resistenza e spostamenti caratteristici per le categorie di prestazione sismica C1 e C2:		
13	Resistance to tension load, displacements, category C1: Resistenza al carico di trazione, spostamenti, categoria C1:	$N_{Rk,s,C1}$ [kN], $N_{Rk,p,C1}$ [kN]
	Resistance to tension load, displacements, category C2: Resistenza al carico di trazione, spostamenti, categoria C2:	$N_{Rk,s,C2}$ [kN], $N_{Rk,p,C2}$ [kN], $\delta_{N,C2}$ [mm]
14	Resistance to shear load, displacements, category C1: Resistenza al carico di taglio, spostamenti, categoria C1:	$V_{Rk,s,C1}$ [kN]
	Resistance to shear load, displacements, category C2: Resistenza al carico di taglio, spostamenti, categoria C2:	$V_{Rk,s,C2}$ [kN], $\delta_{V,C2}$ [mm]
15	Factor for annular gap Fattore spazio anulare:	α_{gap} [-]
Safety in case of fire (BWR 2)		
Sicurezza in caso di incendio (BWR 2)		
16	Reaction to fire: Reazione al fuoco:	Class
Resistance to fire:		
Resistenza al fuoco:		
17	Fire resistance to steel failure (tension load): Resistenza al fuoco alla rottura dell'acciaio (carico di trazione):	$N_{Rk,s,fi}$ [kN]
18	Fire resistance to pull-out failure (tension load): Resistenza al fuoco alla rottura per sfilamento (carico di trazione):	$N_{Rk,p,fi}$ [kN]
19	Fire resistance to steel failure (shear load): Resistenza la fuoco alla rottura dell'acciaio (carico di taglio):	$V_{Rk,s,fi}$ [kN], $M^0_{Rk,s,fi}$ [Nm]
Aspects of durability		
Durabilità:		
20	Durability: Durabilità:	Class

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product

fischer concrete screw UltraCut FBS II R is a concrete screw made of stainless steel. The anchor is installed in a drilled hole and anchored by mechanical interlock.

An illustration of the product is given in Annex A.

The characteristic material values, dimensions and tolerances of the anchors not indicated in Annexes shall correspond to the respective values laid down in the technical documentation of this European Technical Assessment.

The anchors are intended to be used with embedment depth given in Annex B, Table B2.1. The intended use specifications of the product are detailed in the Annex B1.

2 Specification of the intended use in accordance with the applicable European Assessment Document (hereinafter EAD)

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Characteristics of product

Mechanical resistance and stability (BWR 1):

The essential characteristics are detailed in the Annex C1, C2 and C4.

Safety in case of fire (BWR 2):

The essential characteristics are detailed in the Annex C3.

Durability:

See annex B1.

Other Basic Requirements are not relevant.

3.2 Methods of assessment


The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirement 1 has been made in accordance with EAD 330232-01-0601; Mechanical fasteners for use in concrete.

4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base.


4.1 AVCP system

According to the decision 1996/582/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No. 305/2011) is 1.


Product in the installed condition

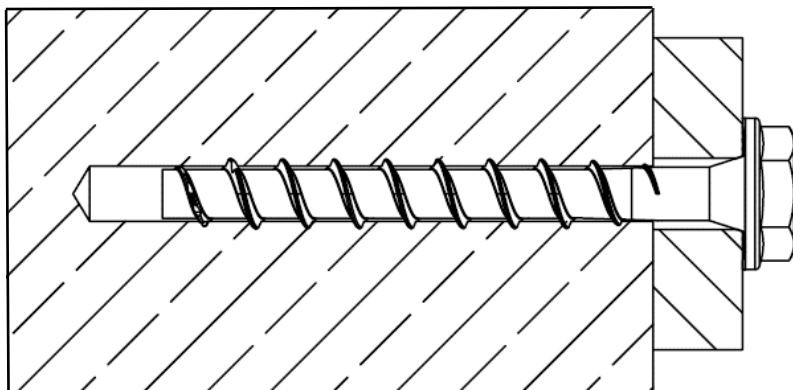

FBS II US R/
FBS II US TX R

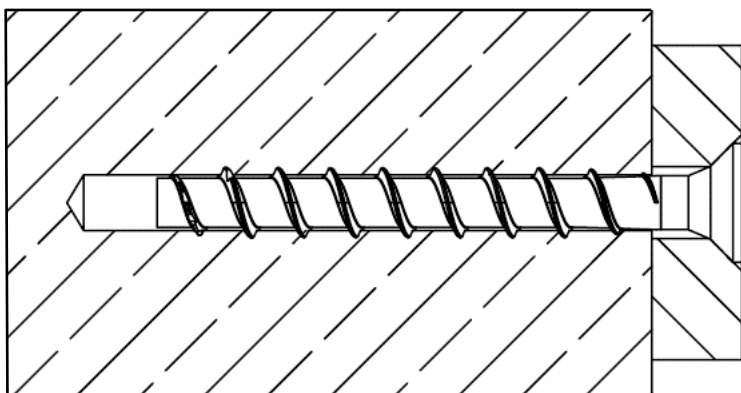

FBS II SK R

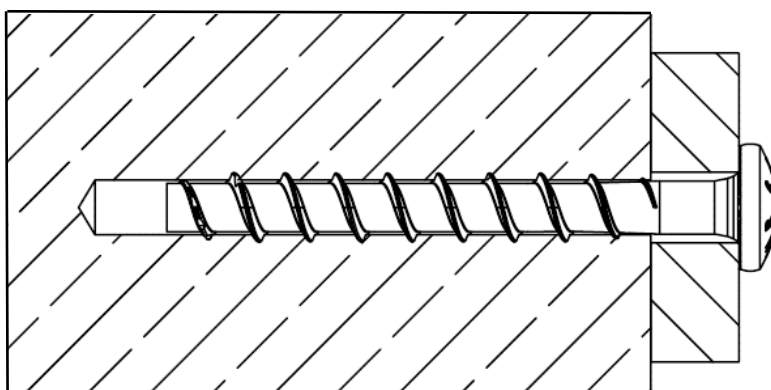

FBS II P R

(Figure not to scale)

fischer concrete screw UltraCut FBS II R

Product description


Product in the installed condition

Annex A 1

Appendix 4 / 14

Table A2.1: Geometry and material						
Type of screw / size			FBS II US R / FBS II SK R / FBS II P R			
			6	8	10	12
Thread outer diameter	d _a	[mm]	7,8	10,3	12,5	14,6
Core diameter	d _k		5,6	7,5	9,4	11,1
Shaft diameter	d _s		6,0	8,0	9,9	11,7
Material			Tip: hardened steel; Shaft and head: stainless steel EN 10088-1:2023			
Coating			Tip: red colour			
Hexagon head with formed washer (US/US TX)						
Pan head (P)						
Countersunk Head (SK)						
Head Marking (example) FBS II: Product short name R: Material type XXX: Screw length L e.g. 10: Screw size (Figure not to scale)						
fischer concrete screw UltraCut FBS II R					Annex A 2 Appendix 5 / 14	
Product description Geometry and material						

Specification of intended use:

Size	FBS II R									
	6		8		10			12		
Nominal embedment depth [mm]	60		50	65	55	65	85	60	75	100
Hammer drilling 	✓									
Hollow drilling 	- 1)		✓							
Diamond drilling 										
Static and quasi-static loads	✓									
Cracked and uncracked concrete										
Fire exposure										
Seismic performance category C1	✓	- 1)	✓	- 1)	✓	- 1)	✓	- 1)	✓	
Seismic performance category C2	- 1)									

¹⁾ No performance assessed

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres (cracked or uncracked) according to EN 206:2013+A2:2021
- Strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021

Use conditions (Environmental conditions):

- Structures subjected to dry internal conditions (FBS II R)
- For all other conditions according to EN 1993-1-4:2006 + A1:2015, corresponding to corrosion resistance class
- CRC III: for FBS II R

Design:

- The structural design according to EN 1992-4:2018 are conducted under responsibility of a designer experienced in the field of anchorages and concrete works.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the screw relative to reinforcement or to supports, etc.).
- Design of fastenings according to EN 1992-4:2018 and EOTA Technical Report TR 055:2018

fischer concrete screw UltraCut FBS II R

Intended use

Specification of intended use


Annex B 1

Appendix 6 / 14

Table B2.1: Installation parameters

FBS II R			6	8		10			12		
Nominal embedment depth	h_{nom}	[mm]	60	50	65	55	65	85	60	75	100
Nominal drill hole diameter	d_0		6	8		10			12		
Cutting diameter of drill bits	$d_{cut} \leq$		6,40	8,45		10,45			12,50		
Cutting diameter for diamond drillers			- 1)	8,10		10,30			12,30		
Clearance hole diameter			d_f	8,0	10,6 – 12,0		12,8 – 14,0			14,8 – 16,0	
Wrench size (US)	SW		10 / 13	13		15			17		
TX-size (SK / P / US TX))	TX	[-]	30	40		50			-		
Countersunk head diameter	d_h	[mm]	13,3	18		21					
Countersunk diameter in fixture	d_c		15,2	20		23					
Drill hole depth	$h_1 \geq$		70	60	75	65	75	95	70	85	110
Drill hole depth (with adjustable setting)			- 1)	70	85	75	85	105	80	95	120
Thickness of fixture			$t_{fix} \leq$	L - h_{nom}							
Length of screw	$L_{min} =$		65	50	65	55	65	85	60	75	100
	$L_{max} =$	400	400	415	405	415	435	410	425	450	
Torque impact screw driver	$T_{imp,max}$	[Nm]	240	450					650		
Torque impact screw driver (with adjustable setting process)	$T_{imp,max}$		- 1)	300					450		

1) No performance assessed

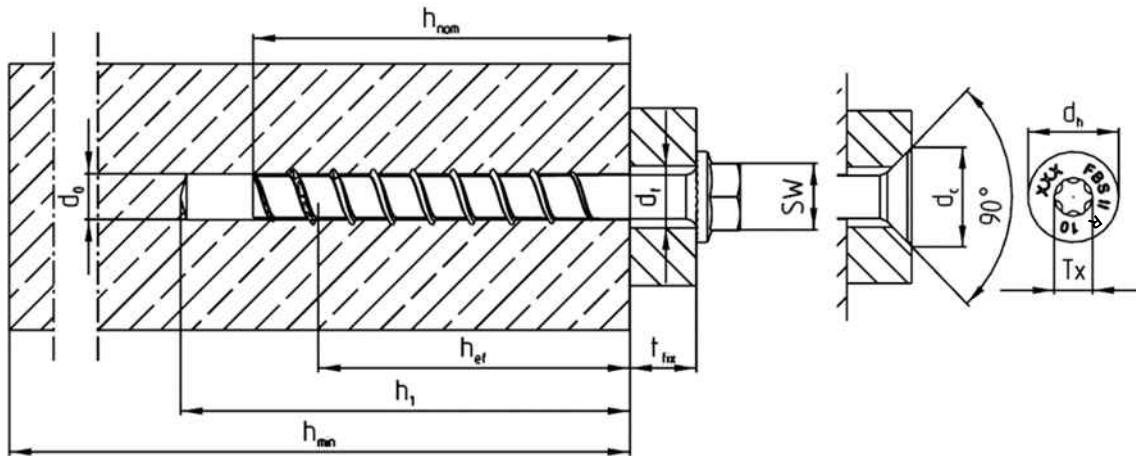

(Figure not to scale)


fischer concrete screw UltraCut FBS II R

Intended use
Installation parameters

Annex B 2

Appendix 7 / 14


Installation instruction part 1 FBS II 8/10/12 R



Step 1: Drilling of the hole:



Drill the hole using hammer drill, hollow drill or diamond core drill

Drill hole diameter d_0 and drill hole depth h_1 according to table B2.1





Step 2: Cleaning of the drill hole - horizontal:

Clean the drill hole. This step can be omitted in the preparation of the hole by using a hollow drill bit or diamond core drill. (recommendation: use the fischer FHD hollow drill bit)



Step 2: Cleaning of the drill hole - vertical:

Cleaning of the drill hole can be omitted, if drilling vertically upwards or if drilling vertically downwards and the hole depth has been increased. It is recommended to increase the drill hole depth by an additional $3 \times \text{drilling } \varnothing$ when drilling vertically downwards.




Step 3: Installation:

Turn in until the head is in contact with the fixture.

Installation with any torque impact screw driver up to the maximum mentioned torque moment ($T_{\text{imp,max}}$ according to table B2.1).

Alternatively, all other tools without an indicated torque moment are allowed (e.g. ratchet spanner). The indicated torque moments $T_{\text{imp,max}}$ for impact screw driver are not decisive for manual installation.



Step 4: Checking of the correct installation:




After installation a further turning of the screw must not be possible. The head of the screw must be in contact with the fixture and is not damaged

fischer concrete screw UltraCut FBS II R

Intended use
Installation Instructions

Annex B 3

Appendix 8 / 14



Adjustment


Optional:

It is permissible to adjust the screw twice.

Therefore, the screw may be untightened to a maximum of $L_{adj} = 20 \text{ mm}$ off the surface of the initial fixture. The total permissible thickness of shims added during the adjustment process

is $t_{adj} = 10 \text{ mm}$.

The required nominal anchoring depth h_{nom} must be kept after the adjustment process. (see also annex B 3)



Filling of the annular gap

For seismic performance category C2 applications:

The gap between screw shaft and fixture must be filled with mortar; mortar compressive strength $\geq 50 \text{ N/mm}^2$

(e. g. FIS V Plus, FIS HB, FIS SB or FIS EM Plus). As an aid for filling the gap, the filling disc FFD is recommended.

fischer concrete screw UltraCut FBS II R


Intended use

Installation Instructions

Annex B 4

Appendix 9 / 14


Installation instruction FBS II 6 R



Step 1: Drilling of the hole:


Drill the hole using hammer drill

Drill hole diameter d_0 and
drill hole depth h_1 according to table B2.1



Step 2: Cleaning of the drill hole:


Clean the drill hole.



Step 3: Installation:

Turn in until the head is in contact with the fixture.

Installation with any torque impact screw driver up to the
maximum mentioned torque moment ($T_{imp,max}$ according to
table B2.1).



Step 4: Checking of the correct installation:

After installation a further turning of the screw must not be
possible. The head of the screw must be in contact with the
fixture and is not damaged

fischer concrete screw UltraCut FBS II R

Intended use
Installation Instructions

Annex B 5

Appendix 10 / 14

Table C1.1: Characteristic values for static and quasi-static action													
FBS II R				6		8		10			12		
Nominal embedment depth		h_{nom}	[mm]	60		50	65	55	65	85	60	75	100
Steel failure for tension load and shear load													
Characteristic resistance		$N_{Rk,s}$	[kN]	19,3		27,8		43,8			67,7		
Partial factor		$\gamma_{Ms,N}$	-	1,5									
Characteristic resistance		$V^0_{Rk,s}$	[kN]	12,6		18,0	27,8	13,2	19,3	36,6	20,4	40,1	45,8
Partial factor		$\gamma_{Ms,V}$	[-]	1,25									
Factor for ductility		k_7		0,75									
Characteristic bending resistance		$M^0_{Rk,s}$	[Nm]	16,1		31,3		68,5			112,8		
Pullout failure													
Characteristic resistance in concrete C20/25	uncracked	$N_{Rk,p}$	[kN]	10,0		7,0	14,0	8,5	14,0	$\geq N^0_{Rk,c^{(1)}}$	10,0	12,0	$\geq N^0_{Rk,c^{(1)}}$
	cracked	$N_{Rk,p}$	[kN]	4,0		4,0	9,0	4,5	6,0	16,0	4,5	11,0	$\geq N^0_{Rk,c^{(1)}}$
Increasing factors concrete	C25/30	ψ_c	[-]	1,07		1,12							
	C30/37			1,13		1,22							
	C35/45			1,18		1,32							
	C40/50			1,23		1,41							
	C45/55			1,28		1,50							
	C50/60			1,32		1,58							
Installation factor		γ_{inst}	[-]	1,4		1,0							
Concrete cone failure and splitting failure; concrete pryout failure													
Effective embedment depth		h_{ef}	[mm]	37		40	52	43	51	68	47	60	81
Factor for uncracked concrete		$k_{ucr,N}$	[-]	11,0									
Factor for cracked concrete		$k_{cr,N}$		7,7									
Characteristic edge distance		$c_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$									
Characteristic spacing		$s_{cr,N}$		$3 \cdot h_{ef}$									
Characteristic resistance for splitting		$N^0_{Rk,sp}$	[kN]	$\min\{N^0_{Rk,c}, N_{Rk,p}\}$		12,0	18,4	13,0	17,9	$\geq N^0_{Rk,c^{(1)}}$	15,8	22,9	$\geq N^0_{Rk,c^{(1)}}$
Characteristic edge distance for splitting		$c_{cr,sp}$	[mm]	$1,78 \cdot h_{ef}$		$1,5 \cdot h_{ef}$							
Characteristic spacing for splitting		$s_{cr,sp}$		$3 \cdot h_{ef}$									
Factor for pryout failure		k_8	[-]	2,6		1,0			2,0	1,0	2,0		
Installation factor		γ_{inst}		$1,4^{(2)}$		1,0							
Concrete edge failure													
Effective length in concrete		l_f	[mm]	46		50	65	55	65	85	60	75	100
Nominal diameter of screw		d_{nom}		6		8		10			12		
Adjustment													
Maximum thickness of shims		t_{adj}	[mm]	- ³⁾		10							
Maximum number of adjustments		n_a	[-]	- ³⁾		2							
¹⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018													
²⁾ Only for concrete cone failure and splitting failure; concrete pryout failure according to EN 1992-4:2018, Table 4.1													
³⁾ No performance assessed													
fischer concrete screw UltraCut FBS II R									Annex C 1				
Performances													
Characteristic values for static and quasi-static action													
									Appendix 11 / 14				

Table C2.1: Characteristic values for Seismic Performance Category C1							
FBS II R			6	8	10	12	
Nominal embedment depth		h_{nom}	[mm]	60	65	85	100
Steel failure for tension load and shear load C1							
Characteristic resistance		$N_{Rk,s,C1}$	[kN]	19,3	27,8	43,8	67,7
		$V_{Rk,s,C1}$		7,5	18,1	29,3	36,6
Without filling of the annular gap		α_{gap}	[-]	0,5			
With filling of the annular gap ¹⁾				1,0			
Pullout failure							
Characteristic resistance in cracked concrete		$N_{Rk,p,C1}$	[kN]	3,5	9,0	16,0	$\geq N^0_{Rk,c}$ ²⁾
Concrete cone failure							
Effective embedment depth		h_{ef}	[mm]	37	52	68	81
Concrete cone failure	Edge distance	$c_{cr,N}$		$1,5 \cdot h_{ef}$			
	Spacing	$s_{cr,N}$		$3 \cdot h_{ef}$			
Installation factor		γ_{inst}	[-]	1,4	1,0		
Concrete pryout failure							
Factor for pryout failure		k_8	[-]	2,6	1,0	2,0	
Concrete edge failure							
Effective length in concrete		l_f	[mm]	46	65	85	100
Nominal diameter of screw		d_{nom}		6	8	10	12
¹⁾ Filling of the annular gap according to annex B 4							
²⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018							

Table C2.2: Characteristic values for Seismic Performance Category C2							
FBS II R			6	8	10	12	
Nominal embedment depth		h_{nom}	[mm]	- ²⁾	65	85	100
Steel failure for tension load and shear load C2							
Characteristic resistance		$N_{Rk,s,C2}$	[kN]	- ²⁾	27,8	43,8	67,7
		$V_{Rk,s,C2}$			9,7	8,8	19,7
With filling of the annular gap ¹⁾		α_{gap}	[-]	1,0			
Pullout failure							
Characteristic resistance in cracked concrete		$N_{Rk,p,C2}$	[kN]	- ²⁾	2,8	5,0	7,3
Concrete cone failure							
Effective embedment depth		h_{ef}	[mm]	- ²⁾	52	68	81
Concrete cone failure	Edge distance	$c_{cr,N}$		- ²⁾	$1,5 \cdot h_{ef}$		
	Spacing	$s_{cr,N}$			$3 \cdot h_{ef}$		
Installation factor		γ_{inst}	[-]	1,0			
Concrete pryout failure							
Factor for pryout failure		k_8	[-]	- ²⁾	1,0	2,0	
Concrete edge failure							
Effective length in concrete		$l_f = h_{nom}$	[mm]	- ²⁾	65	85	100
Nominal diameter of screw		d_{nom}			8	10	12
¹⁾ Filling of the annular gap according to annex B 4. Application without filling of the annular gap not allowed.							
²⁾ No performance assessed							

fischer concrete screw UltraCut FBS II R		Annex C 2
Performances		
Characteristic values for Seismic Performance Category C1 and C2		Appendix 12 / 14

Table C3.1: Characteristic values for resistance to fire													
FBS II R				6		8		10			12		
Nominal embedment depth		h_{nom}	[mm]	60	50	65	55	65	85	60	75	100	
Steel failure for tension load and shear load ($F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}$)													
Characteristic resistance for the head shapes	US US TX ≥SW13	$F_{Rk,s,fi}$	R30	[kN]	2,1	2,3	6,4	3,5		11,0	4,6	15,2	
			R60		1,7	1,8	4,7	2,7		8,1	3,7	11,2	
			R90		1,2	1,3	2,9	2,0		5,2	2,7	7,3	
			R120		1,0	1,0	2,0	1,6		3,8	2,2	5,3	
	SK/P ¹⁾ US SW10 ¹⁾	$F_{Rk,s,fi}$	R30	[kN]	1,8	2,1		3,0		No performance assessed			
			R60		1,4	1,7		2,3					
			R90		1,1	1,2		1,6					
			R120		0,9	1,0		1,2					
	US US TX ≥SW13	$M^0_{Rk,s,fi}$	R30	[Nm]	1,7	2,6	7,2	7,6		15,4	16,8	25,3	
			R60		1,4	2,0	5,2	6,0		11,4	13,3	18,7	
			R90		1,0	1,5	3,3	4,4		7,3	9,8	12,1	
			R120		0,8	1,2	2,3	3,6		5,3	8,0	8,8	
	SK/P ¹⁾ US SW10 ¹⁾	$M^0_{Rk,s,fi}$	R30	[Nm]	1,5	2,4		4,2		No performance assessed			
			R60		1,2	1,9		3,2					
			R90		0,9	1,4		2,2					
			R120		0,7	1,1		1,7					

Pullout failure												
Characteristic resistance	$N_{Rk,p,fi}$	R30	[kN]	1,0	1,7	2,4	2,1	3,5	4,3	2,5	3,0	6,3
		R60										
		R90										
		R120										
Concrete cone failure												
Characteristic resistance	$N_{Rk,c,fi}$	R30	[kN]	1,4	1,6	3,4	2,1	3,2	6,6	2,6	4,8	10,2
		R60										
		R90										
		R120										
Edge distance												
R30 to R120		$C_{cr,fi}$	[mm]	$2 \cdot h_{ef}$								
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm												
Spacing												
R30 to R120		$S_{cr,fi}$	[mm]	$2 \cdot C_{cr,fi}$								
Concrete pryout failure												
R30 to R120		k_8	[-]	2,6	1,0			2,0	1,0	2,0		
The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given value.												
1) Only FBS II 6 R												

fischer concrete screw UltraCut FBS II R							Annex C 3					
Performances Characteristic values for resistance to fire												
							Appendix 13 / 14					

Table C4.1: Displacements due to tension loads (static and quasi-static)

FBS II R			6	8		10			12		
Nominal embedment depth	h_{nom}	[mm]	60	50	65	55	65	85	60	75	100
Tension load in uncracked concrete	N	[kN]	5,0	3,5	7,1	4,2	7,0	11,9	5,0	6,0	17,1
Displacement in uncracked concrete	δ_{N0}	[mm]	0,1	0,5	0,7	0,4	0,6	0,8	1,0	0,9	1,25
	$\delta_{N\infty}$		0,4	0,7	0,7	0,8	0,8	0,8	1,25	1,25	1,25
Tension load in cracked concrete	N	[kN]	2,8	3,5	4,5	4,2	7,0	8,1	5,0	6,0	12,0
Displacement in cracked concrete	δ_{N0}	[mm]	0,1	0,6	0,4	0,4	0,6	0,7	0,9	0,9	1,4
	$\delta_{N\infty}$		0,5	1,5	1,1	1,0	1,8	1,8	1,4	1,7	1,9

Table C4.2: Displacements due to shear loads (static and quasi-static)

FBS II R			6	8		10			12		
Nominal embedment depth	h_{nom}	[mm]	60	50	65	55	65	85	60	75	100
Shear load in cracked and uncracked concrete	V	[kN]	7,8	11,0	15,9	10,4	11,9	20,9	12,7	24,9	26,2
Displacement (the gap between fastener and fixture is subtracted)	δ_{V0}	[mm]	2,2	4,1	2,7	1,2	1,2	3,5	1,1	2,5	2,9
	$\delta_{V\infty}$		3,4	6,2	4,1	1,8	1,8	5,3	1,7	3,8	4,4

Table C4.3: Displacements due to tension loads (Seismic Performance Category C2)

FBS II R			6	8	10	12
Nominal embedment depth	h_{nom}	[mm]	- ¹⁾	65	85	100
Displacement DLS	$\delta_{N,C2}$ (DLS)			0,9	0,9	1,1
Displacement ULS	$\delta_{N,C2}$ (ULS)			2,5	2,7	3,2

Table C4.4: Displacements due to shear loads (Seismic Performance Category C2)

FBS II R			6	8	10	12
Nominal embedment depth	h_{nom}	[mm]	- ¹⁾	65	85	100
Displacement DLS	$\delta_{V,C2}$ (DLS)			1,6	1,7	2,6
Displacement ULS	$\delta_{V,C2}$ (ULS)			5,0	3,8	6,6

¹⁾ No performance assessed

Table C4.5: Minimum thickness of concrete members, minimum spacing and edge distance

FBS II R			6	8		10			12		
Nominal embedment depth	h_{nom}	[mm]	60	50	65	55	65	85	60	75	100
Minimum thickness of concrete member	h_{min}		100	100	120	100	120	140	110	130	150
Minimum spacing	s_{min}		35			40			50		
Minimum edge distance	c_{min}		35			40			50		

fischer concrete screw UltraCut FBS II R

Performances

Displacements due to tension and shear loads;
Minimum thickness of concrete members, minimum spacing and edge distance

Annex C 4

Appendix 14 / 14