DEKLARACJA WŁAŚCIWOŚCI UŻYTKOWYCH

DoP: 0141

dla fischer FIF-CS-8 (Łączniki tworzywowe do zastosowania w betonie i w murach) – **PL**

1. Niepowtarzalny kod identyfikacyjny typu wyrobu: **DoP: 0141**

2. Zamierzone zastosowanie: **Do zastosowania w złożonych systemach izolacji cieplnej ścian zewnętrznych (ETICS), zobacz dodatek, w szczególności aneksy B 1 do B 3**

3. Producent: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Straße 1, 72178 Waldachtal, Niemcy**

4. Upoważniony przedstawiciel: **--**

5. System(-y) oceny i weryfikacji stałości właściwości użytkowych: **2+**

6. Europejski dokument oceny: **330196-01-0604**

   Europejska ocena techniczna: **ETA-15/0006; 2018-05-31**

   Jednostka dsoceny technicznej: **ETA-Danmark A/S**

   Jednostka lub jednostki notyfikowane: **1343 – MPA Darmstadt**

7. Deklarowane właściwości użytkowe:

Wytrzymałość mechaniczna i stabilność osadzenia (BWR 1), Bezpieczeństwo użytkowania (BWR 4)

- **Istotne właściwości wyrobu: Zobacz dodatek, w szczególności aneksy C 1 do C 3**

Ochrona przeciwpożarowa (BWR 2)

- **EAD nie zapewnia kryteriów oceny, dlatego nie jest możliwa ocena.**

8. Odpowiednia dokumentacja techniczna lub specjalna dokumentacja techniczna: ---

Właściwości użytkowe określonego powyżej wyrobu są zgodne z zestawem deklarowanych właściwości użytkowych. Niniejsza deklaracja właściwości użytkowych wydana zostaje zgodnie z rozporządzeniem (UE) nr 305/2011 na wyłączną odpowiedzialność producenta określonego powyżej.

W imieniu producenta podpisał(-a):

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

Tumlingen, 2018-06-07

- Niniejsza Deklaracja Właściwości Użytkowych została przygotowana w różnych językach. W razie wątpliwości w interpretacji, wersja angielska jest zawsze miarodajna.
- Dodatek zawierający dobrowolne i uzupełniające informacje w języku angielskim, (neutralne językowo) a wykraczające poza wymagania prawne.

ETA-Danmark A/S
Göteborg Plads 1
DK-2150 Nordhavn
Tel. +45 72 24 59 00
Fax +45 72 24 59 04
Internet ww.etadanmark.dk

Authorised and notified according to Article 29 of the Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011

MEMBER OF EOTA

European Technical Assessment ETA-15/0006 of 2018/05/31

I General Part

Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011: ETA-Danmark A/S	
Trade name of the construction product:	fischer FIF-CS-8
Product family to which the above construction product belongs:	Screwed-in plastic anchor for fixing of external thermal insulation composite systems with rendering in concrete and masonry
Manufacturer:	fischerwerke GmbH & Co. KG Klaus-Fischer-Straße 1 DE-72178 Waldachtal
Manufacturing plant:	fischerwerke
This European Technical Assessment contains:	14 pages including 3 annexes which form an integral part of the document
This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of:	EAD 330196-01-0604 Plastic anchors made of virgin or non-virgin material for fixing of external thermal insulation composite systems with rendering
This version replaces:	The ETA with the same number issued on 2015-03-25

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (except the confidential Annexes referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product
The screwed-in anchor fischer FIF - CS 8 for fixing of external thermal insulation composite systems (ETICS) consists of an anchor sleeve made of polypropylene with a diameter of 8 mm and an insulation plate made of glass-fiber reinforced polyamide with a diameter of 60 mm. The color of the anchor sleeve is grey. The special compound screw is made of galvanized steel and glass-fiber reinforced polyamide. The anchor is expanded by screwing the screw into the sleeve. It is possible to install the anchor flush to the surface of the insulation.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable EAD

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B1 to B3

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 25 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Characteristics of product

Mechanical resistance and stability (BWR 1):
The essential characteristics regarding mechanical resistance and stability are included under the Basic Works Requirement Safety in use.

Safety in case of fire (BWR 2):
No Performance determined

Safety in use (BWR4):
The essential characteristics are detailed in the Annex from C1 to C3.

Sustainable use of natural resources (BWR7)
No performance determined

Other Basic Requirements are not relevant.

General aspects
The verification of durability is part of testing of the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

3.2 Methods of assessment

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Basic Requirements 4 has been made in accordance with the EAD 330196-01-0604 Plastic anchors made of virgin or non-virgin material for fixing of external thermal insulation composite systems with rendering.

4 Assessment and verification of constancy of performance (AVCP)

4.1 AVCP system

According to the decision 97/463/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 2+.


5 Technical details necessary for the implementation of the AVCP system, as foreseen in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark prior to CE marking


Issued in Copenhagen on 2018-05-31 by

Thomas Bruun
Managing Director, ETA-Danmark

FIF-CS 8 / 60-180

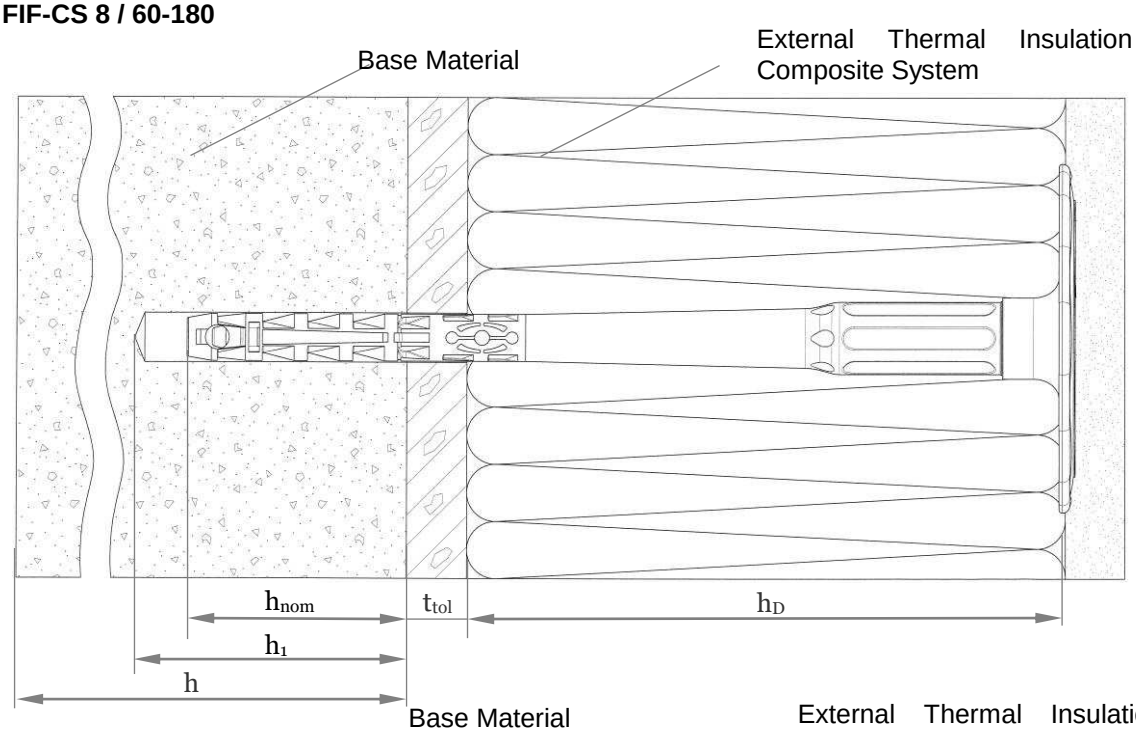

FIF-CS 8 / 200-340

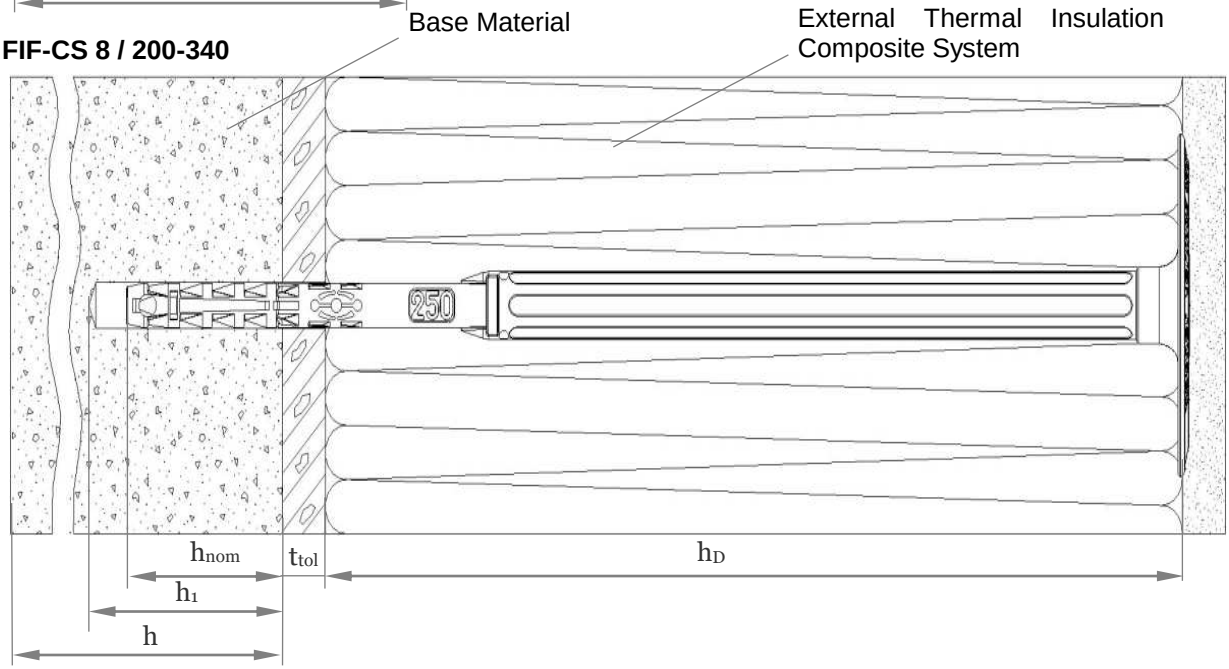

Legend

h_{nom} = Overall plastic anchor embedment depth in the base material

h_1 = Depth of drilled hole to deepest point


h = Thickness of member (wall)


h_D = Thickness of insulation material

t_{tol} = Thickness of equalizing layer or non–load bearing coating

fischer FIF-CS-8	**Annex A1** of European Technical Assessment ETA-15/0006
Product description - Installed anchor	

Anchor sleeve / Specific screw for FIF-CS 8 / 60-180

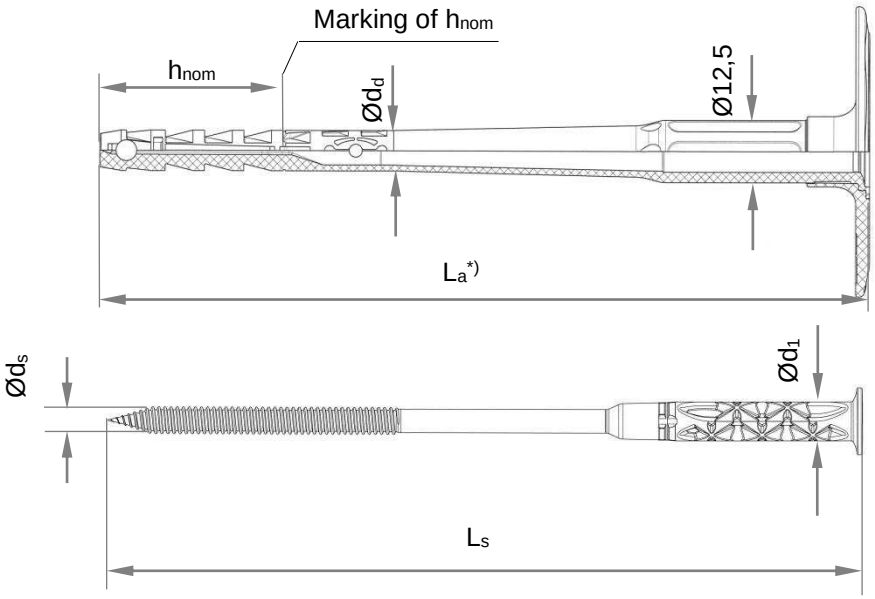


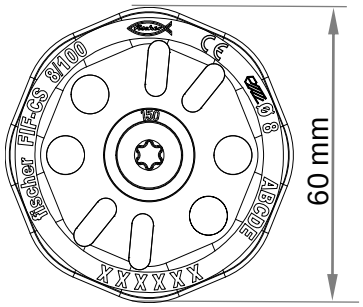


*) FIF-CS 8 / 60-180:
$110 \le L_a \le 230$

Thickness of insulation material:
$h_D = L_a - h_{nom} - t_{tol}$


Shaft / Anchor sleeve / Specific screw for FIF-CS 8 / 200-340

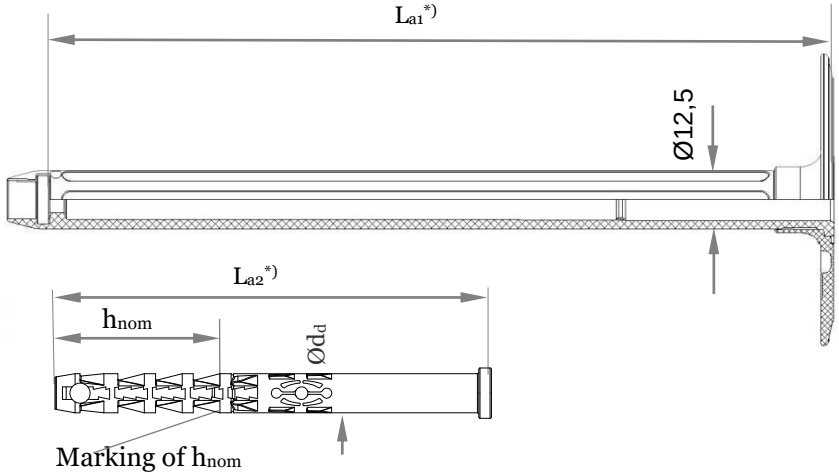

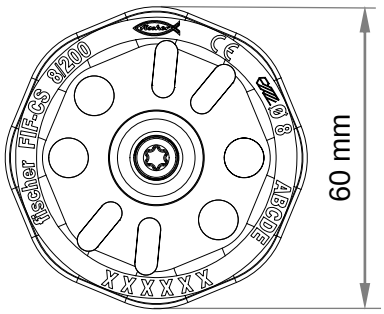


*) FIF-CS 8 / 200-340:
$250 \le L_a \le 390$

Thickness of insulation material: $h_D = (L_{a1} + L_{a2}) - h_{nom} - t_{tol}$

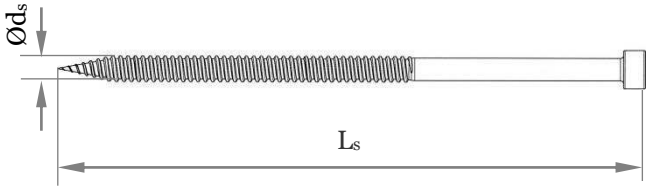

Optional: plain surface setting
Setting tool with long bit adapter or hexagonal adapter available



fischer FIF-CS-8	**Annex A2**
Product description - Installed anchor	of European Technical Assessment ETA-15/0006

Table A3.1: Marking

	Designation
Name and size of anchor	FIF-CS-8
Example	**fischer FIF-CS-8 (optional) CE (optional) Ø 8 ABCDE (optional) and xxxxx additional marks possible**

Table A3.2: Dimensions [mm]

Anchor type	**Anchor sleeve**		**Shaft**		**Specific screw**			**Length of bits l_b**	
	Ø d_d	h_{nom}	L_a	(L_{a1}+L_{a2})	Ø d_s	l_s	Ø d_1	l_b [mm]	size
FIF-CS 8 / 60-180	8	35	110-230	-	5,4	L_a	8	30	T30
FIF-CS 8 / 200-340	8	35	-	250-390	5,4	(L_{a1} + L_{a2}) – 155mm	-	180	T25
FIF-CS Renovation type 8 / 200-260	8	35	-	250-310	5,4	(L_{a1} + L_{a2}) – 75mm	-	100	T25

Table A3.3: Materials

Designation	**Material**
Anchor sleeve	PP colour: grey
Shaft (FIF-CS-8 / 200-340)	PA6 GF colour: grey
Specific compound screw (FIF-CS-8 / 60-180) or specific screw (FIF-CS-8 / 200-340)	PA6 GF with Steel gal Zn A2G or A2F acc. to EN ISO 4042 Steel gal Zn A2G or A2F according to EN ISO 4042 or stainless steel 1.4362 duplex coating, 1.4401, 1.4571, 1.4529 acc. to EN 10088
Anchor plate	PA6 GF colour: grey

Drawing of the slip-on plates

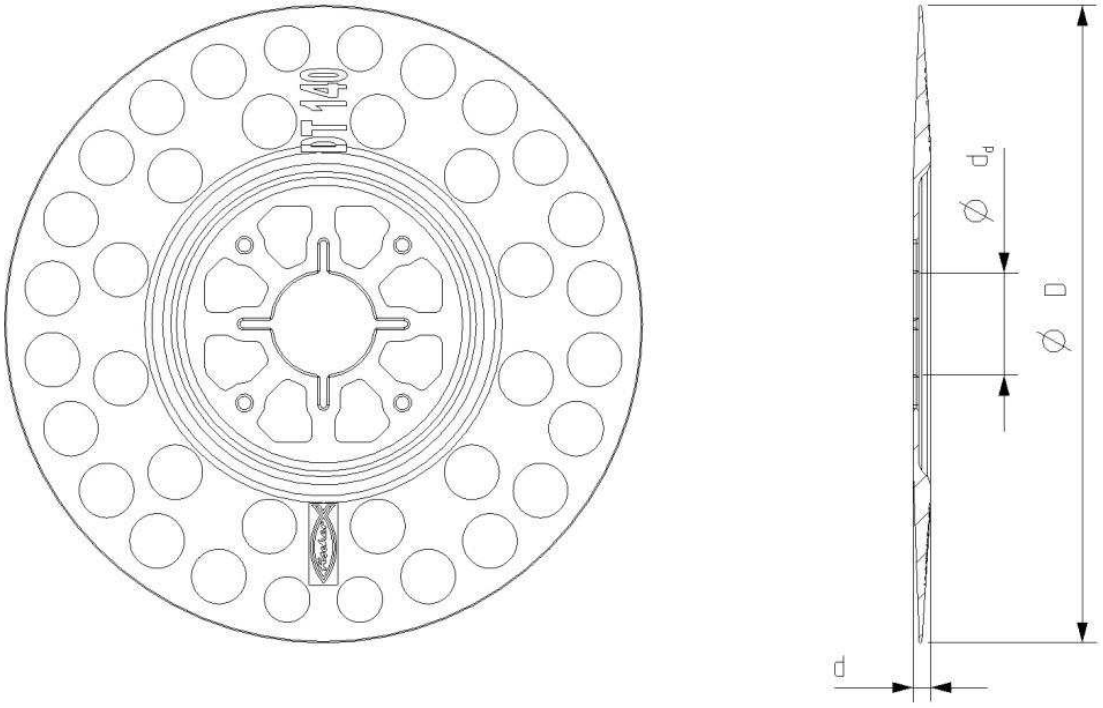


Table A4.1: Slip-on plates, diameters and material

Slip-on plate	Ø D [mm]	Ø d_d [mm]	d [mm]	Material
DT 90 / 110 / 140	90 / 110 / 140	22,5	3,9	PA 6 GF

Specifications of intended use

Anchorages subject to:

- The anchor may only be used for transmission of wind suction loads and shall not be used for the transmission of dead loads of the thermal insulation composite system.

Base materials:

- Normal weight concrete (use category A) according to Annex C1.
- Solid masonry (use category B), according to Annex C1.
- Hollow or perforated masonry (use category C), according to Annex C1.
- Hollow or perforated masonry (use category D), according to Annex C1.
- Hollow or perforated masonry (use category E), according to Annex C1.
- For other base materials of the use categories A, B, C, D or E the characteristic resistance of the anchor may be determined by job site tests according to EOTA Technical Report TR 051.

Temperature Range:

- 0℃ to +40℃ (max. short term temperature +40℃ and max. long term temperature +24℃).

Design:

- The anchorages are designed under the responsibility of an engineer experienced in anchorages and masonry work with the partial safety factors γ_M = 2,0 and γ_F = 1,5, if there are no other national regulations.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchors is indicated on the design drawings.
- Fasteners are only to be used for multiple fixings of ETICS.

Installation:

- Drilling method according to Annex C1.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on the site.
- Installation temperature from 0℃ to +40℃
- Exposure to UV due to solar radiation of the anchor not protected by rendering ≤ 6 weeks

Table B2.1: Installation parameters for use categories A, B, C, D and E

Anchor type				**FIF-CS-8**
Nominal drill hole diameter	d_0	=	[mm]	**8**
Cutting diameter of drill bit	d_{cut}	≤	[mm]	**8,45**
Depth of drill hole to deepest point	h_1	≥	[mm]	**45**
Overall plastic anchor embedment depth in the base material	h_{nom}	≥	[mm]	**35**

Table B2.2: Installation parameters for cat. "C" only valid for tested masonry units (see Annex C1


Anchor type				**FIF-CS**
Nominal drill hole diameter	d_0	=	[mm]	**8**
Cutting diameter of drill bit	d_{cut}	≤	[mm]	**8,45**
Depth of drill hole to deepest point	h_1	≥	[mm]	**35**
Overall plastic anchor embedment depth in the base material	h_{nom}	≥	[mm]	**25**

Table B2.3: Anchor distances and dimensions of members

Anchor type				**FIF-CS**
Minimum thickness of member	$h^{1)}$	≥	[mm]	**100**
Minimum spacing	s_{min}	=	[mm]	**100**
Minimum edge distance	c_{min}	=	[mm]	**100**

1) not valid for weather shells acc. to C1


Scheme of distances and spacing

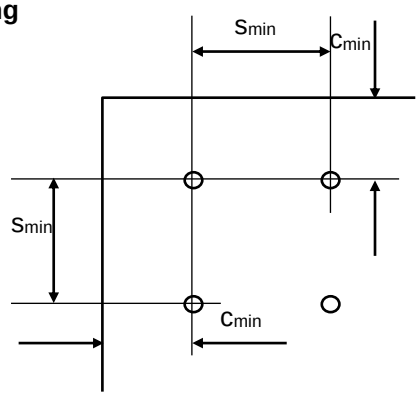


fischer FIF-CS-8	**Annex B2** of European Technical Assessment ETA-15/0006
Installation parameters for use categories	

Installation instructions


Standard setting of anchor (plain surface)




1. Drill hole by corresponding drilling method



2. Insert anchor manually




3. Set anchor by machine




4. Correctly installed anchor

Optional:


Setting of anchor by setting tool

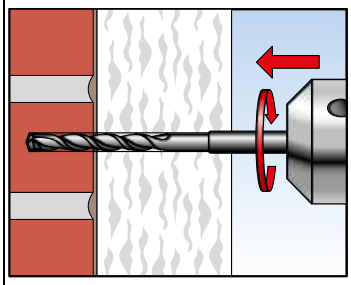


1. Drill hole by corresponding drilling method



2. Insert anchor manually



3. Set anchor by setting tool with the machine



4 .Correctly installed anchor

fischer FIF-CS-8	**Annex B3** of European Technical Assessment ETA-15/0006
Procedure	

Table C1.1: Char. resistance to tension loads NRk in concrete, masonry, LAC and AAC for a single anchor in kN

Base material	Use Cat.	Bulk density class ρ [kg/dm³]	Minimum compressive strength f_b [N/mm²]	Remarks	Drill mode[1)]	Characteristic resistance FIF CS N_{Rk} [kN]
Concrete ≥ C 12/15 - C 50/60	A	-		EN 206-1:2000	H	**1,2**
Solid Clay bricks e.g. acc. to DIN 105-100:2012-01, EN 771-1:2011, Mz	B	≥ 1,8	20	Cross section reduced up to 15% by perforation vertically to the resting area	H	**1,2**
Vertically perforated clay bricks e.g. acc. to DIN 105-100:2012-01, EN 771-1:2011, HLz	C	≥ 1,0	12	Cross section between 15% and 50% by perforation vertically to the resting area. Exterior web thickness ≥ 12 mm	R	**0,6[3)]**
Lightweight Aggregate Concrete ≥ LAC 6	D	≥ 0,9	6	DIN EN 1520	H	**0,6**
Autoclaved aerated concrete blocks, e.g. AAC acc. to DIN V 4165-100:2005-10, EN 771-4 hnom = 35mm	E	≥ 0,50	4	DIN V 4165-100	R	**0,3**
Partial safety factor					γ_M[2)]	**2,0**

1) H = Hammer drilling, R = Rotary drilling
2) In absence of other national regulations
3) Values also valid for reduced anchorage depth 25 mm (see Table B2.2)

Table C2.1: Point thermal transmittance acc. to EOTA Technical Report TR 025:2007-06

Anchor type	Thickness of insulation material h_D [mm]	Point thermal transmittance χ [W/K]
FIF-CS 8 / 60 – 180 flush mounted	60 - 80	0,001
	100 - 180	0,002
FIF-CS 8 / 200 – 340 flush mounted	200 - max.	0,001
FIF-CS 8 / 200 - 260*) flush mounted	200 - 220	0,001
	240 - 260	0,002

*) Renovation type

Table C2.2: Plate stiffness acc. to EOTA Technical Report TR 026:2007-06

Anchor type	Max. size of the anchor plate [mm]	Load resistance of the anchor plate [kN]	Plate stiffness [kN/mm]
FIF-CS-8	60	1,63	0,6

Table C4: Displacements

Base material	Tension load F_{Rd} [kN]	Displacements δ_m [mm]
Concrete ≥ C12/15 to C 50/60 (EN 206-1:2000)	0,40	< 0,3
Clay brick DIN 105-100:2012-01, EN 771-1:2011, Mz 20	0,40	< 0,3
Vertically perforated Clay brick acc. to 105-100:2012-01, EN 771-1:2011, Hlz 12	0,20	< 0,2
Lightweight Aggregate Concrete ≥ LAC 6 DIN EN 1520	0,20	< 0,2
Autoclaved aerated concrete blocks acc. to DIN V 4165-100:2005-10 EN 771-4, AAC 4, h_{nom} = 35 mm	0,10	< 0,1