

DECLARAÇÃO DE DESEMPENHO

DoP 0325

para fischer TermoZ PN 8 (Âncoras plásticas para betão e alvenaria)

PT

1. <u>Código de identificação único do produto-tipo:</u>	DoP 0325		
2. <u>Utilização(ões) prevista(s):</u>	Bucha plástica pregado para fixar sistemas compósitos de isolamento térmico exterior (ETICS) com reboco em betão e alvenaria, Ver anexoss, especialmente anexos B1- B3.		
3. <u>Fabricante:</u>	fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Alemanha		
4. <u>Representante autorizado:</u>	-		
5. <u>Sistema(s) de avaliação e verificação da regularidade do desempenho (AVCP):</u>	2+		
6. <u>Documento de Avaliação Europeu:</u>	EAD 330196-01-0604, Edition 10/2017		
Avaliação Técnica Europeia:	ETA-09/0171; 2022-10-18		
Organismo de Avaliação Técnica:	DIBt- Deutsches Institut für Bautechnik		
Organismo(s) notificado(s):	2873 TU Darmstadt		
7. <u>Desempenho(s) declarado(s):</u>			
Segurança em uso (BWR 4)			
Capacidade de carga característica:	Resistência característica sob cargas de tração:	Anexo C1	
	Distância ao bordo mínima:	Anexo B2	
	Espaçamento mínimo:	Anexo B2	
Deslocamentos:	Carga de tração com fator de segurança parcial:	Anexo C2	
	Deslocamentos:	Anexo C2	
Rigidez da placa:	Diâmetro da placa de ancoragem:	Anexo C2	
	Resistência da placa de ancoragem:	Anexo C2	
	Rigidez da placa:	Anexo C2	
Economia de energia e retenção de calor (BWR 6)			
Transmitância térmica:	Ponto de transmissão térmica de uma ancoragem:	Anexo C2	
	Espessura da camada isolamento do ETICS:	Anexo C2	
8. <u>Documentação Técnica Adequada e/ou Documentação Técnica Específica:</u>	-		

O desempenho do produto identificado acima está em conformidade com o conjunto de desempenhos declarados. A presente declaração de desempenho é emitida, em conformidade com o Regulamento (UE) n.o 305/2011, sob a exclusiva responsabilidade do fabricante identificado acima.

Assinado por e em nome do fabricante por:



Dr.-Ing. Oliver Geibig, Diretor Administrativo de Unidades de Negócios e Engenharia
Tumlingen, 2022-11-14



Jürgen Grün, Diretor Administrativo de Química e Qualidade

Este DoP foi preparado em diferentes línguas. Em caso de litígio sobre a interpretação, a versão em inglês prevalecerá sempre.

O Anexo inclui informações voluntárias e complementares em inglês que excedem os requisitos legais (linguisticamente especificados).

Specific part

1 Technical description of the product

The fischer nailed-in anchor TermoZ PN 8 consists of a plastic sleeve made of polypropylene, a plate and an accompanying specific nail made of glass fibre reinforced polyamide.

The anchor may in addition be combined with the anchor plates DT 90, DT 110 and DT 140.

The Product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verification and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 25 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Safety and accessibility in use (BWR 4)

Essential characteristic	Performance
Characteristic load bearing capacity - Characteristic resistance under tension load - Minimum edge distance and spacing	See Annex C 1 See Annex B 2
Displacements	See Annex C 2
Plate stiffness	See Annex C 2


3.2 Energy economy and heat retention (BWR 6)

Essential characteristic	Performance
Point thermal transmittance	See Annex C 2

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330196-01-0604, the applicable European legal act is: [97/463/EC].

The system to be applied is: 2+

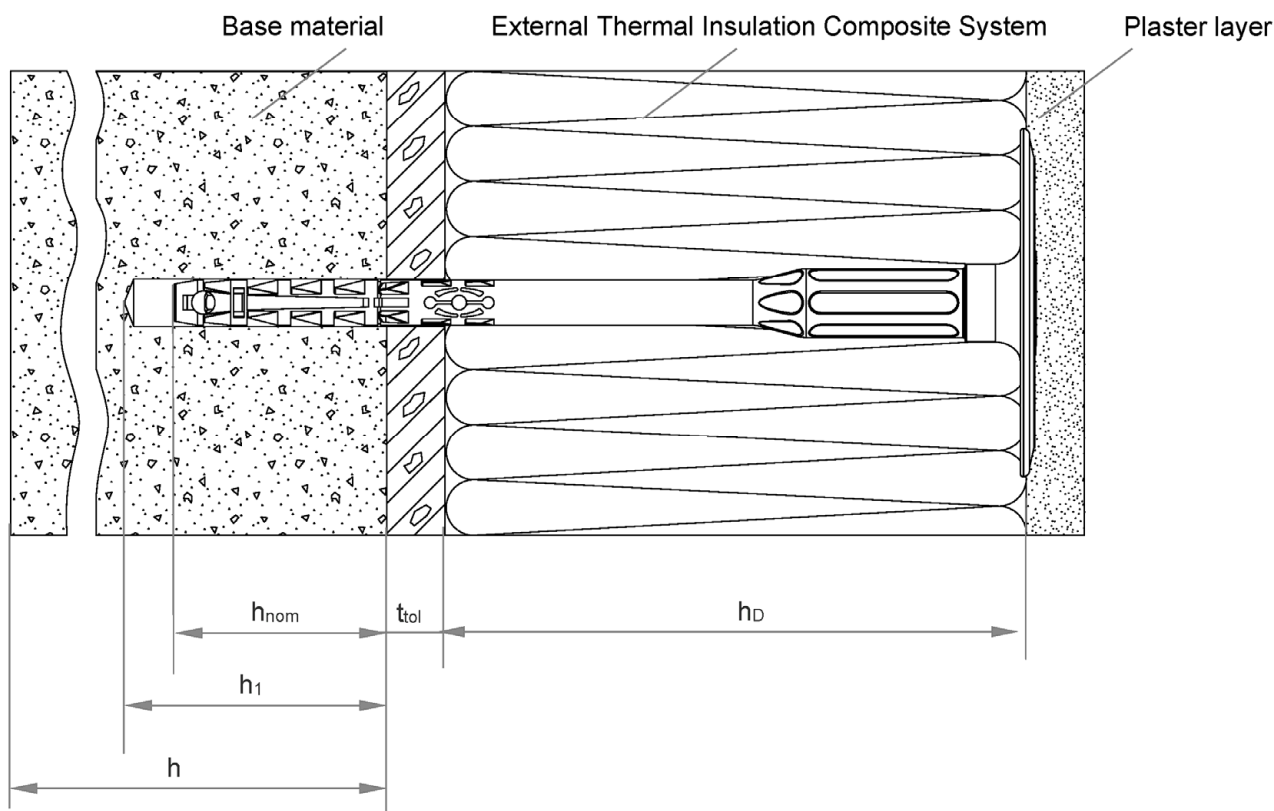

Legend


- h_{nom} = Overall plastic anchor embedment depth in the base material
- h_1 = Depth of drilled hole to deepest point
- h = Thickness of member (wall)
- h_D = Thickness of insulation material
- t_{tol} = Thickness of equalising layer and / or non-load bearing coating

Figure not to scale

fischer TermoZ PN 8

Product description
Installed anchor

TermoZ PN 8

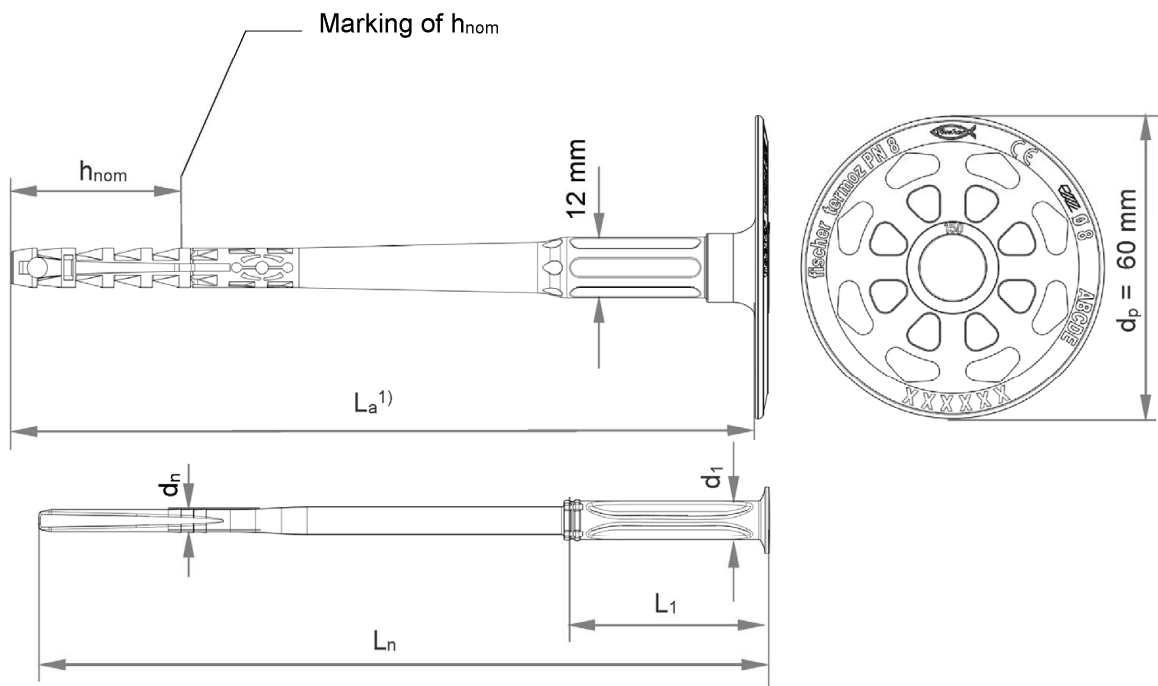

1) Various length of the anchors are possible.

TermoZ PN 8 :

$L_{a\ min} \geq 110\text{ mm}$; $L_{a\ max} \leq 230\text{ mm}$

L_a = length of accompanying specific nail $L_n + 5\text{ mm}$

Table A2.1: Dimensions

Anchor typep	Anchor sleeve		Accompanying specific plastic nail		
	d_d [mm]	h_{nom} [mm]	d_n [mm]	L_1 [mm]	d_1 [mm]
TermoZ PN 8	8	35/55 ²⁾	4,4	40	8

2) Only for base material group „D“ and „E“.

Determination of max. thickness of insulation:

e.g. for TermoZ PN 8x150:
 $L_a = 148\text{ mm}$, $h_{nom} = 35\text{ mm}$, $t_{tol} = 10\text{ mm}$

$max.\ h_D = L_a - h_{nom} - t_{tol}$

 $max\ h_D = 148 - 35 - 10 = 103\text{ mm}$
recommended $h_D = 100\text{ mm}$

Figures not to scale

fischer TermoZ PN 8	Annex A 2 Appendix 3 / 9
Product description Dimensions	

Table A3.1: Material	
Designation	Material
Anchor sleeve	PP, colour: grey
Specific plastic nail	PA6 GF, colour: nature
Anchor plate / Slip-on plate	PA6, GF colour: grey, orange, red, green, yellow, blue, mocca-latte, black

Drawing of the slip-on-plate (e.g. DT 140)

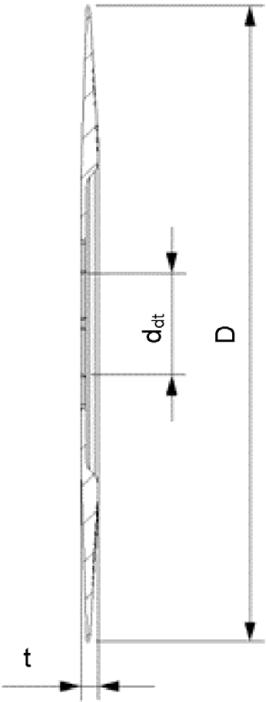
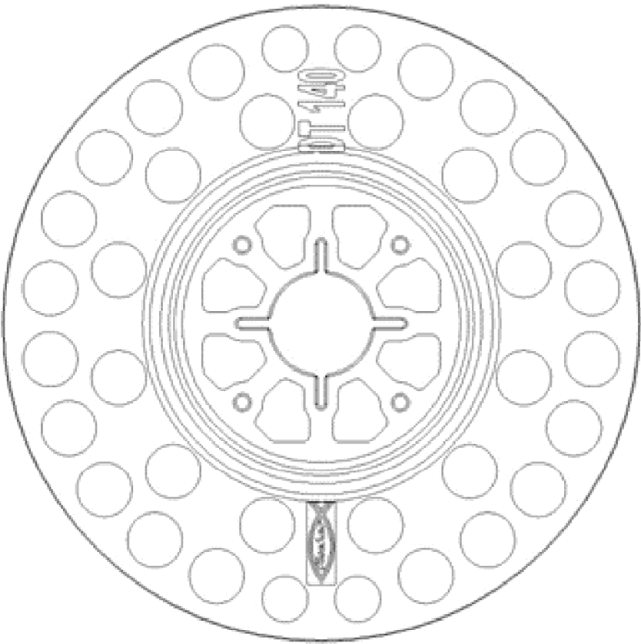


Table A3.2: Slip-on plate, dimensions and material

Slip-on plate	D [mm]	d _{dt} [mm]	t [mm]
DT 90 / 110 / 140	90 / 110 / 140	22,5	3,9

Figures not to scale

fischer TermoZ PN 8	Annex A 3 Appendix 4 / 9
Product description	
Material Dimensions of slip-on plate for the combination with TermoZ PN 8	

Specifications of intended use

Anchorage subject to:

- The anchor may only be used for transmission of wind suction loads and shall not be used for the transmission of dead loads of the external thermal insulation composite system (ETICS).

Base materials:

- Compacted normal weight concrete without fibres, strength classes $\geq C12/15$ (base material group "A"), in accordance with EN 206, see Annex C1.
- Solid brick masonry (base material group "B") as per EN 771-1, EN 771-2 or EN 771-3, see Annex C1.
- Hollow brick masonry (base material group "C"), as per EN 771-1, EN 771-2 or EN 771-3, see Annex C1.
- Prefabricated reinforced components of lightweight aggregate concrete with open structure (base material group "D") as per EN 1520, see Annex C1.
- Unreinforced autoclaved aerated concrete (base material group "E") as per EN 771-4 and reinforced autoclaved aerated concrete (base material group "E") as per EN 12602, see Annex C1.
- For other comparable base materials of the base material group "A", "B", "C", "D" and "E" the characteristic resistance of the anchor may be determined by job site tests in accordance with EOTA Technical Report TR 051.

Temperature Range:

- 0 °C to + 40 °C (max. short term temperature + 40 °C and max. long term temperature + 24 °C) of the base material.

Design:

- The anchorages are designed under the responsibility of an engineer experienced in anchorages and masonry work with the partial safety factors for material related resistances $\gamma_M = 2,0$ and for action loads $\gamma_F = 1,5$ in absence of other national regulations.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchors is indicated on the design drawings.
- Fasteners are only to be used for multiple fixings of external thermal insulation composite system.

Installation:

- Drilling method according to Annex C1.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on the site.
- Installation temperature from 0 °C to + 40 °C.
- Exposure to UV due to solar radiation of the anchor not protected by rendering ≤ 6 weeks.

fischer TermoZ PN 8

Intended use
Specifications

Annex B 1

Appendix 5 / 9

Table B2.1: Installation parameters for base material groups “A” concrete, “B” solid bricks, “C” hollow or perforated bricks, “D” lightweight aggregate concrete and “E” autoclaved aerated concrete

Anchor type			TermoZ PN 8
Nominal drill hole diameter	d_0	= [mm]	8
Cutting diameter of drill bit	d_{cut}	≤ [mm]	8,45
Depth of drilled hole to deepest point	h_1	≥ [mm]	45/65 ¹⁾
Overall plastic anchor embedment depth in the base material	h_{nom}	≥ [mm]	35/55 ¹⁾

¹⁾ Only for base material group “D” and “E”.

Table B2.2: Minimum thickness of member, edge distances and spacing in all regulated base material groups

Anchor type			TermoZ PN 8
Minimum thickness of member	h_{min}	= [mm]	100
Minimum spacing	s_{min}	= [mm]	100
Minimum edge distance	c_{min}	= [mm]	100

Scheme of edge distances and spacing

for base material group “A”, concrete, group “B” solid bricks, group “C” hollow or perforated masonry, group “D” lightweight aggregate concrete, group “E” autoclaved aerated concrete

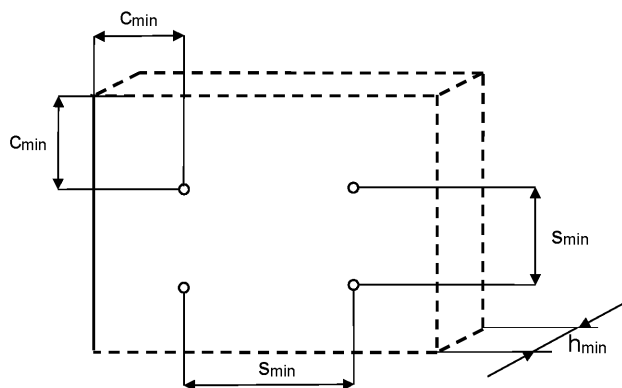


Figure not to scale

fischer TermoZ PN 8


Intended use

Installation parameters depending on the base material groups
Minimum thickness of member, edge distances and spacings


Annex B 2

Appendix 6 / 9


Installation instruction

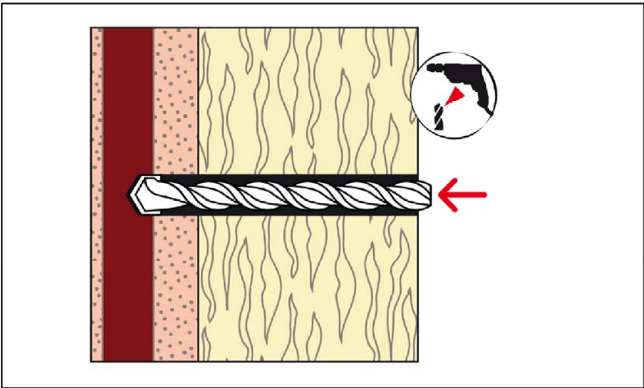


1. Drill hole by corresponding drilling method defined for each stone according to Table C1.1 and drill hole diameter d_0 and depth h_1 according to Table B2.1.

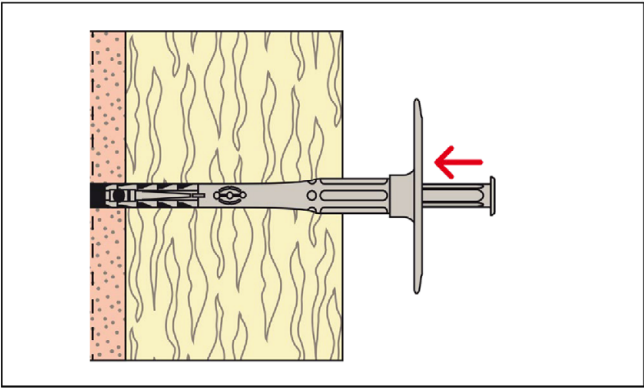

2. Insert anchor manually.

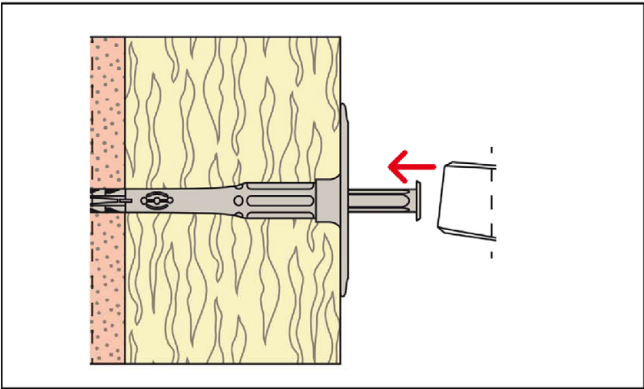

3. Set anchor by hammer blows.

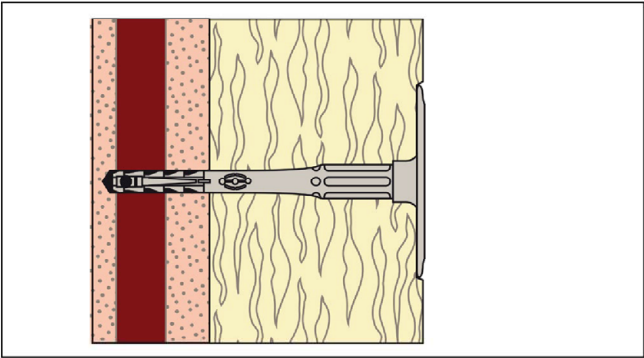

4. Correctly installed anchor.

fischer TermoZ PN 8

Intended use
Installation instruction

Table C1.1: Characteristic resistance N_{Rk} to tension loads for single anchor TermoZ PN 8

Base material	Group	Bulk density ρ [kg/dm ³]	Mean compressive strength / minimum compressive strength single brick as per EN 771 ⁴⁾ [N/mm ²]	Remarks	Drilling method ¹⁾	Characteristic resistance to tension loads N_{Rk} [kN]
Concrete, C12/15 - C50/60 as per EN 206	A	-	-	-	H	0,50
Solid Clay bricks, Mz as per EN 771-1	B ²⁾	$\geq 2,0$	15/12	-	H	0,60
Calcium silicate solid bricks, KS as per EN 771-2	B ²⁾	$\geq 1,8$	15/12	-	H	0,60
Vertically perforated clay, HLz bricks as per EN 771-1	C ³⁾	$\geq 1,0$	15/12	Exterior web thickness ≥ 12 mm.	R	0,40
Hollow calcium silicate brick, KSL as per EN 771-2	C ³⁾	$\geq 1,4$	15/12	Exterior web thickness ≥ 23 mm.	H	0,40
Lightweight concrete hollow blocks, Hbl as per EN 771-3	C ³⁾	$\geq 1,2$	12,5/10	Exterior web thickness ≥ 38 mm.	H	0,50
Lightweight aggregate concrete, LAC as per EN 1520	D ³⁾	$\geq 0,9$	5/4	Minimum thickness of brick $h = 100$ mm or minimum exterior web thickness $t = 50$ mm.	H	0,30
			7,5/6			0,40
Unreinforced autoclaved aerated concrete members, AAC as per EN 771-4 Reinforced autoclaved aerated concrete blocks, AAC as per EN 12602	E	$\geq 0,5$	5/4	-	R	0,30
		$\geq 0,6$	7,5/6			0,40

¹⁾ H = Hammer drilling, R = Rotary drilling.

²⁾ Vertically perforation $\leq 15\%$; cross section reduced by perforation vertically to the resting area.

³⁾ Vertically perforation $> 15\%$ and $\leq 50\%$, cross section reduced by perforation vertically to the resting area.

⁴⁾ The compressive strength of the single brick must not be less than 80% of the mean compressive strength.

fischer TermoZ PN 8
Performances

Characteristic resistance to tension load for single anchor

Annex C 1

Appendix 8 / 9

Table C2.1: Point thermal transmittance according to EOTA Technical Report TR 025

Anchor type	Thickness of insulation material h_D [mm]	Point thermal transmittance χ [W/K]
TermoZ PN 8	60 - 180	0,000

Table C2.2: Plate stiffness according to EOTA Technical Report TR 026

Anchor type	Maximum size of anchor plate d_p [mm]	Load resistance of anchor plate [kN]	Plate stiffness c [kN/mm]
TermoZ PN 8	60	1,7	0,6

Table C2.3: Displacements TermoZ PN 8

Base material	Mean compressive strength / minimum compressive strength single brick as per EN 771 ¹⁾ [N/mm ²]	Tension load N [kN]	Displacements $\Delta\delta_N$ [mm]
Concrete, C12/15 – C50/60 as per EN 206	-	0,15	0,20
Clay brick, Mz as per EN 771-1	15/12	0,20	0,20
Calcium silicate solid bricks, KS as per EN 771-2	15/12	0,20	0,30
Vertically perforated clay brick, Hlz as per EN 771-1	15/12	0,15	0,40
Hollow calcium silicate brick, KSL as per EN 771-2	15/12	0,15	0,20
Hollow brick lightweight concrete, Hbl as per EN 771-3	12,5/10	0,15	0,20
Lightweight aggregate concrete, LAC as per EN 1520	5/4	0,10	0,20
	7,5/6	0,13	
Unreinforced autoclaved aerated concrete members, AAC as per EN 771-4 and reinforced autoclaved aerated concrete members, AAC as per EN 12602	5/4	0,10	0,10
	7,5/6	0,13	0,20

¹⁾ The compressive strength of the single brick must not be less than 80% of the mean compressive strength.

fischer TermoZ PN 8	Annex C 2 Appendix 9 / 9
Performances	
Point thermal transmittance and plate stiffness Displacements	