

DECLARAȚIA DE PERFORMANȚĂ

DoP 0379

pentru bulonul de ancorare fischer FWA Plus (Ancore din metal pentru utilizare în beton)

RO

- Cod unic de identificare al produsului-tip: **DoP 0379**
- Utilizare (utilizări) preconizată (preconizate): **Prindere cu instalare ulterioară în beton nefisurat., consultați suplimentul, în special anexele B1 - B3.**
- Fabricant: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Germany**
- Reprezentant autorizat: **-**
- Sistemul (sistemele) de evaluare și de verificare a constantei performanței: **1**
- Documentul de evaluare european: **EAD 330232-01-0601**
Evaluarea tehnică europeană: **ETA-24/0714; 2025-04-22**
Organismul de evaluare tehnică: **ETA-Danmark A/S**
Organism (organisme) notificat(e): **2873 TU Darmstadt**

7. Performanța (performanțe) declarată (declarate):

Rezistență mecanică și stabilitate (BWR 1)

Rezistența caracteristică la întindere (pentru încărcări statice și cvasistatice) Metoda A:

Rezistența la cedarea oțelului: Anexele C1

Rezistența la smulgere: Anexele C1

Rezistența la cedarea conului de beton: Anexele C1

Robustețe: Anexele C1

Distanța minimă față de margine și între ancore: Anexele C2

Distanța față de margine pentru a preveni fisuri sub încărcare: Anexele C1

Rezistența caracteristică la forfecare (pentru încărcări statice și cvasistatice):

Rezistența la cedarea oțelului (rezistența la forfecare): Anexele C2

Rezistența la cedarea cu braț de levier: Anexele C2

Rezistență caracteristică pentru un design simplificat:

Metoda B: NPD

Metoda C: NPD

Deplasări:

Deplasări sub încărcări statice și cvasistatice: Anexele C2

Rezistență caracteristică și Deplasări pentru performanță seismică de categoriile C1 și C2:

Rezistența la întindere, deplasări, categoria C1: NPD

Rezistența la întindere, deplasări, categoria C2: NPD

Rezistența la forfecare, deplasări, categoria C1: NPD

Rezistența la forfecare, deplasări, categoria C2: NPD

Factor gol circular: NPD

Siguranța în caz de incendiu (BWR 2)

Reacție la foc: Clasa (A1)

Rezistența la incendiu:

Rezistența la foc în ipoteza cedării oțelului (rezistența la întindere) NPD

Rezistența la foc în ipoteza cedării prin smulgere (rezistența la întindere) NPD

Rezistența la foc în ipoteza cedării oțelului (rezistența la forfecare) NPD

Durabilitate:

Durabilitate: Anexele A3, B1


8. Documentație tehnică adecvată și/sau documentație tehnică specifică: -

Performanța produsului identificat mai sus este în conformitate cu setul de performanțe declarate. Această declarație de performanță este eliberată în conformitate cu Regulamentul (UE) nr. 305/2011, pe răspunderea exclusivă a fabricantului identificat mai sus.

Semnata pentru și în numele fabricantului de către:



Dr. Ronald Mihala, Șef al departamentului de dezvoltare și management al producției
Tumlingen, 2025-05-02



Dieter Pfaff, Șeful Federației Internaționale de Producție și Managementul Calității

Această declarație de performanță a fost întocmită în mai multe limbi. În cazul unei divergențe de interpretare, versiunea în limba engleză prevalează întotdeauna.

Suplimentul include informații voluntare și complementare în limba engleză, în afara cerințelor legale (specificate neutru din punct de vedere al limbii).

Translation guidance Essential Characteristics and Performance Parameters for Annexes

Ghid de traducere a caracteristicilor esențiale și a parametrilor de performanță pentru anexe

Mechanical resistance and stability (BWR 1)		
Rezistență mecanică și stabilitate (BWR 1)		
Characteristic resistance under static and quasi-static loading, Method A		
Rezistența caracteristică la întindere (pentru încărcări statice și cvasistatice) Metoda A:		
1	Resistance to steel failure: Rezistența la cedarea oțelului:	$N_{Rk,s}$ [kN], E_s [N/mm ²]
2	Resistance to pull-out failure: Rezistența la smulgere:	$N_{Rk,p}$ [kN], ψ_c
3	Resistance to concrete cone failure: Rezistența la cedarea conului de beton:	$k_{cr,N}$, $k_{ucr,N}$ [-], h_{ef} , $c_{cr,N}$ [mm]
4	Robustness: Robustețe:	γ_{inst} [-]
5	Minimum edge distance and spacing: Distanța minimă față de margine și între ancore:	c_{min} , s_{min} , h_{min} [mm]
6	Edge distance to prevent splitting under load: Distanța față de margine pentru a preveni fisuri sub încărcare:	$N^0_{Rk,sp}$ [kN], $c_{cr,sp}$ [mm]
Characteristic resistance to shear load (static and quasi-static loading), Method A		
Rezistența caracteristică la forfecare (pentru încărcări statice și cvasistatice):		
7	Resistance to steel failure under shear load: Rezistența la cedarea oțelului (rezistența la forfecare):	$V^0_{Rk,s}$ [kN], $M^0_{Rk,s}$ [Nm], k_7 [-]
8	Resistance to pry-out failure: Rezistența la cedarea cu braț de levier:	k_8 [-]
Characteristic Resistance for simplified design		
Rezistență caracteristică pentru un design simplificat:		
9	Method B: Metoda B:	F^0_{Rk} [kN], c_{cr} , s_{cr} [mm]
10	Method C: Metoda C:	F_{Rk} [kN]
Displacements		
Deplasări:		
11	Displacements under static and quasi-static loading: Deplasări sub încărcări statice și cvasistatice:	δ_{N0} , $\delta_{N\infty}$, δ_{V0} , $\delta_{V\infty}$ [mm]
12	Stiffness characteristics for tension loading for non-linear spring models:	$k_{1,ucr}$, $k_{2,ucr}$, $k_{3,ucr}$, $k_{4,ucr}$, $k_{1,cr}$, $k_{2,cr}$, $k_{3,cr}$, $k_{4,cr}$ [kN/mm]
Characteristic resistance and displacements for seismic performance categories C1 and C2		
Rezistență caracteristică și Deplasări pentru performanță seismică de categoriile C1 și C2:		
13	Resistance to tension load, displacements, category C1: Rezistența la întindere, deplasări, categoria C1:	$N_{Rk,s,C1}$ [kN], $N_{Rk,p,C1}$ [kN]
	Resistance to tension load, displacements, category C2: Rezistența la întindere, deplasări, categoria C2:	$N_{Rk,s,C2}$ [kN], $N_{Rk,p,C2}$ [kN], $\delta_{N,C2}$ [mm]
14	Resistance to shear load, displacements, category C1: Rezistența la forfecare, deplasări, categoria C1:	$V_{Rk,s,C1}$ [kN]
	Resistance to shear load, displacements, category C2: Rezistența la forfecare, deplasări, categoria C2:	$V_{Rk,s,C2}$ [kN], $\delta_{V,C2}$ [mm]
15	Factor for annular gap Factor gol circular:	α_{gap} [-]
Safety in case of fire (BWR 2)		
Siguranța în caz de incendiu (BWR 2)		
16	Reaction to fire: Reacție la foc:	Class
Resistance to fire:		
Rezistența la incendiu:		
17	Fire resistance to steel failure (tension load): Rezistența la foc în ipoteza cedării oțelului (rezistența la întindere)	$N_{Rk,s,fi}$ [kN]
18	Fire resistance to pull-out failure (tension load): Rezistența la foc în ipoteza cedării prin smulgere (rezistența la întindere)	$N_{Rk,p,fi}$ [kN]
19	Fire resistance to steel failure (shear load): Rezistența la foc în ipoteza cedării oțelului (rezistența la forfecare)	$V_{Rk,s,fi}$ [kN], $M^0_{Rk,s,fi}$ [Nm]
Aspects of durability		
Durabilitate:		
20	Durability: Durabilitate:	Class

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product

The FWA Plus is a torque-controlled expansion anchor made of galvanised steel. It is available in the sizes M8, M10, M12 and M16. The expansion is achieved by torque acting on the bolt. As the anchor is prestressed, the cone is pulled into the expansion sleeve and the load applied to the anchor is transferred to the concrete mainly by friction. The anchor body of sizes M8 to M16 is cold-formed. The FWA Plus is suitable for use in uncracked concrete of strength classes C20/25 to C50/60

The product description is given in Annex A and the intended use specifications of the product are detailed in Annex B.

2 Specification of the intended use(s) in accordance with the applicable European Assessment Document (hereinafter EAD)

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

Characteristic	Assessment of characteristic
-----------------------	-------------------------------------

3.1 Mechanical resistance and stability (BWR1)

Characteristic resistance to tension load (static and quasi-static loading) Method A

Resistance to steel failure	Annex C1
-----------------------------	-----------------

Resistance to pull-out failure	Annex C1
--------------------------------	-----------------

Resistance to concrete cone failure	Annex C1
-------------------------------------	-----------------

Robustness	Annex B
------------	----------------

Minimum edge distance and spacing	Annex C2
-----------------------------------	-----------------

Edge distance to prevent splitting under load	Annex C1
---	-----------------

Characteristic resistance to shear load (static and quasi-static loading)

Resistance to steel failure under shear load	Annex C2
--	-----------------

Resistance to pry-out failure	Annex C2
-------------------------------	-----------------

Characteristic resistance for simplified design

Method B	Not relevant
----------	---------------------

Method C	Not relevant
----------	---------------------

Displacements

Displacements under static and quasi-static loading	Annex C2
---	-----------------

Characteristic resistance and displacements for seismic performance categories C1 and C2

Resistance to tension load, displacements	No performance assessed
---	--------------------------------

Resistance to shear load, displacements	No performance assessed
---	--------------------------------

Factor for annual gap	No performance assessed
-----------------------	--------------------------------

Characteristic

Assessment of characteristic

3.2 Safety in case of fire (BWR2)

Reaction to fire

The anchors are made from steel classified as performance **class A1** of the characteristic reaction to fire, in accordance with the provisions of EC decision 96/603/EC, amended by EC Decision 2000/605/EC.

Resistance to fire

Fire resistance to steel failure (tension load)

No performance assessed

Fire resistance to pull-out failure (tension load)

No performance assessed

Fire resistance to steel failure (shear load)

No performance assessed

3.3 Aspects of durability

Durability

Annex B

See additional information in section 3.9

3.9 General aspects related to the performance of the product


The European Technical Assessment is issued for the product on the basis of agreed data/information, deposited with ETA-Danmark, which identifies the product that has been assessed and judged. Changes to the product or production process, which could result in this deposited data/information being incorrect, should be notified to ETA-Danmark before the changes are introduced. ETA-Danmark will decide whether or not such changes affect the ETA and consequently the validity of the CE marking on the basis of the ETA and if so whether further assessment or alterations to the ETA, shall be necessary.

4 Assessment and verification of constancy of performance (AVCP) (hereinafter AVCP) system applied, with reference to its legal base.


4.1 AVCP system

According to the decision 1996/582/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No. 305/2011) is 1.

Cone bolt manufactured by cold - forming:

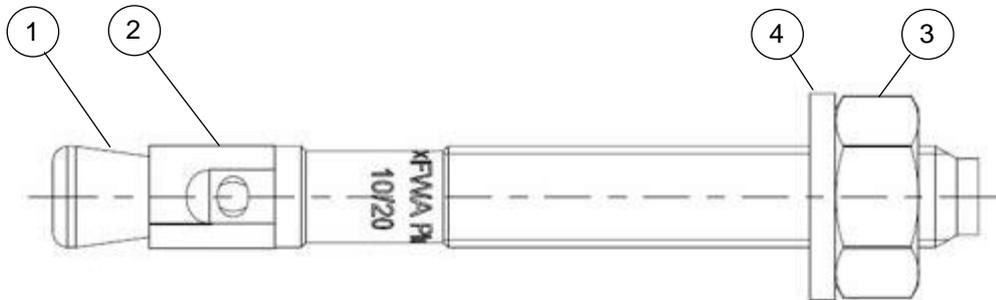

- ① Cone bolt (cold formed)
- ② Expansion sleeve
- ③ Hexagon nut
- ④ Washer

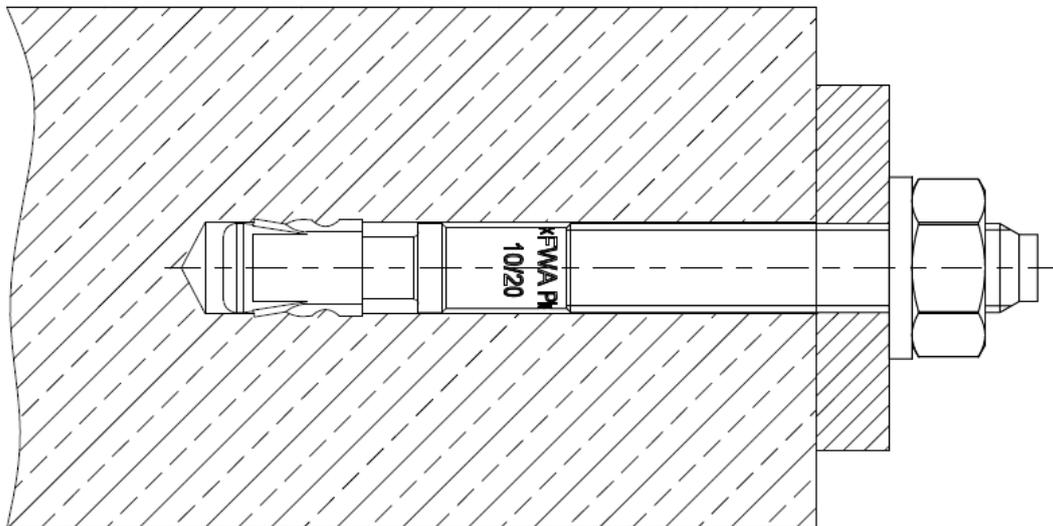


(Fig. not to scale)

fischer Bolt Anchor FWA Plus

Product description
Installed condition

Annex A1

Appendix 5 / 12

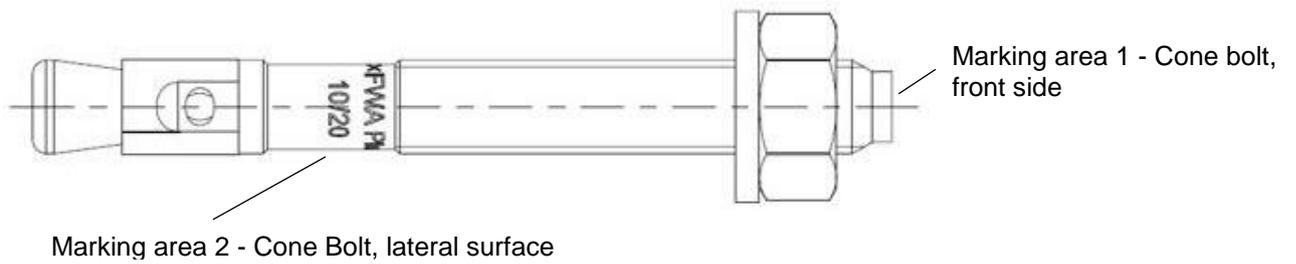

Product marking, example: **FWA Plus 10/20x94**

Brand | type of fastener placed at marking area 2 Thread size / max. thickness of fixture (t_{fix}) x fastener length (L) placed at marking area 2

Table A2.1: Letter-code on marking area 1 and maximum thickness of fixture t_{fix} :

Marking	A	B	C	D	E	F	G	H	I	K	L	M	N	O	P	R	S	T	U	V	W	X	Y	Z
Max. t_{fix}	5	10	15	20	25	30	35	40	45	50	60	70	80	90	100	120	140	160	180	200	250	300	350	400

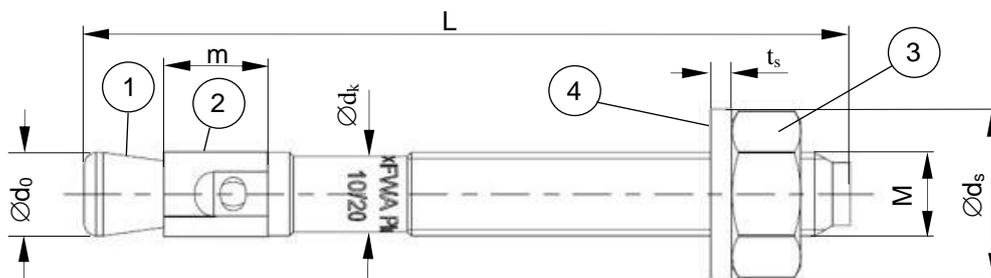


Table A2.2: Fastener dimensions [mm]

Part	Designation	FWA Plus				
		M8	M10	M12	M16	
1	Cone bolt	M	8	10	12	16
		$\text{Ø } d_0$	7,8	9,8	11,8	15
		$\text{Ø } d_k$	7,1	8,9	10,7	14,6
2	Expansion sleeve	m	10,0	12,0	14,0	20,0
3	Hexagon nut	SW	13	17	19	24
4	Washer	t_s	1,6	2,0	2,5	3,0
		$\text{Ø } d_s$	16	20	24	30
Thickness of fixture		t_{fix}	0			
Length of fastener	L_{min}		100	200	200	300
	L_{max}		166	274	202	421

(Fig. not to scale)

fischer Bolt Anchor FWA Plus

Product description
Product marking, letter code and fastener dimensions

Annex A2

Table A3.1: Materials FWA Plus (zinc plated $\geq 5\mu\text{m}$, ISO 4042:2022)

Part	Designation	Material
1	Cone bolt	Cold form steel
2	Expansion sleeve	Cold strip
3	Hexagon nut	Steel, property class min. 8
4	Washer	Cold strip

fischer Bolt Anchor FWA Plus

Product description
Materials


Annex A3

Appendix 7 / 12

Specifications of intended use				
fischer Bolt Anchor FWA Plus	M8	M10	M12	M16
Material: steel, zinc plated	✓			
Static and quasi-static loads				
Uncracked concrete				
<p>Base materials:</p> <ul style="list-style-type: none"> Reinforced or unreinforced normal concrete without fibres of strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021 <p>Use conditions (Environmental conditions):</p> <ul style="list-style-type: none"> Structures subject to dry internal conditions. <p>Design:</p> <ul style="list-style-type: none"> The structural design is conducted under responsibility of a designer experienced in the field of fastenings and concrete works. Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.) Design of fastenings according to EN 1992-4:2018 and TR 055:2018. 				
fischer Bolt Anchor FWA Plus			Annex B1 Appendix 8 / 12	
Intended Use Specifications				

Table B2.1: Installation parameters

Type of fastener / size		FWA Plus			
		M8	M10	M12	M16
Nominal drill hole diameter	$d_0 =$	8	10	12	16
Cutting diameter of drill bit	$d_{cut} \leq$	8,45	10,45	12,5	16,5
Effective embedment depth	$h_{ef} \geq$ [mm]	48	50	70	84
Depth of drill hole in concrete	$h_1 \geq$	65	75	100	120
Diameter of clearance hole in the fixture	$d_f \leq$	9	12	14	18
Required setting torque	$T_{inst} =$ [Nm]	10	15	35	110

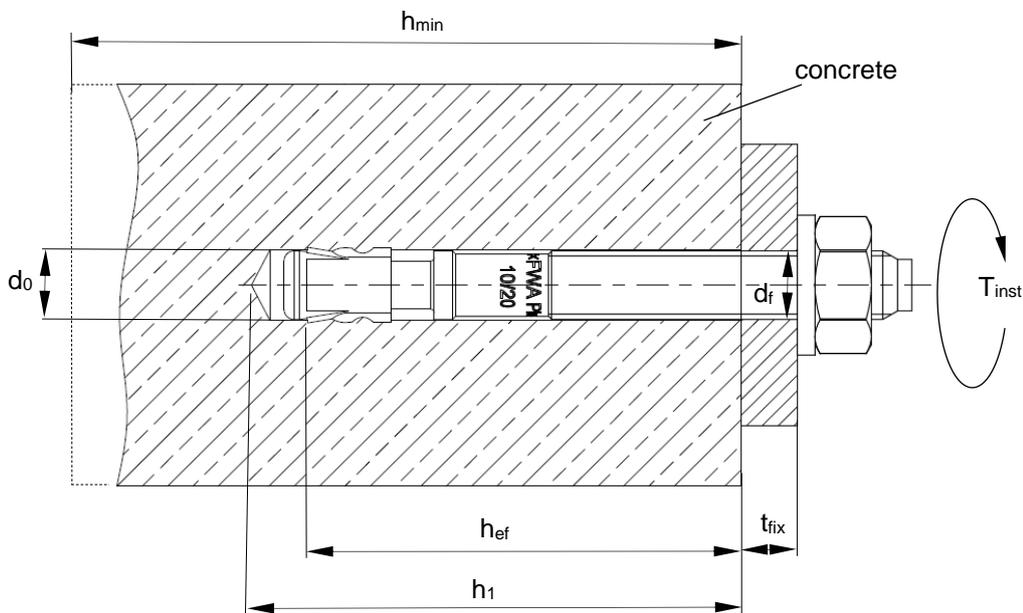

- h_{ef} = Effective embedment depth
- t_{fix} = Thickness of the fixture
- h_1 = Depth of drill hole to deepest point
- h_{min} = Minimum thickness of concrete member
- T_{inst} = Required setting torque

(Fig. not to scale)


fischer Bolt Anchor FWA Plus

Intended Use
Installation parameters

Annex B2

Installation instructions

- Fastener installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Use of the fastener only as supplied by the manufacturer without exchanging the components of the fastener
- Hammer drilling
- Drill hole created perpendicular +/- 5° to concrete surface, positioning without damaging the reinforcement
- In case of aborted hole: new drilling at a minimum distance twice the depth of the aborted drill hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or combined shear/tension load it is not in the direction of load application

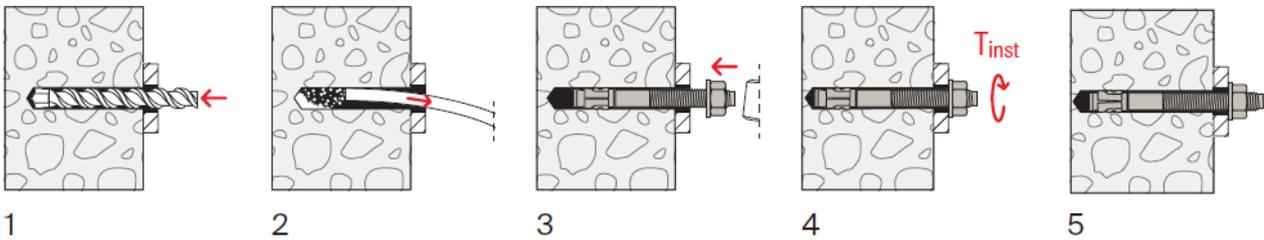

No.	Description
1	Drill the hole by hammer drilling.
2	Clean the hole.
3	Set the fastener.
4	Apply required setting torque T_{inst}
5	Installed fastener

(Fig. not to scale)

fischer Bolt Anchor FWA Plus

Annex B3

Intended Use
Installation instructions

Table C1.1: Characteristic values of **tension** resistance under static and quasi-static action

Type of fastener / size			FWA Plus			
			M8	M10	M12	M16
Steel failure						
Characteristic resistance	$N_{Rk,s}$	[kN]	15,5	22,0	35,0	46,0
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,50			
Pullout failure						
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p}$	[kN]	10,4	13,8	22,8	29,0
Increasing factors ψ_c for $N_{Rk,p}$ $N_{Rk,p} = \psi_c \cdot N_{Rk,p} (C20/25)$	ψ_c	C25/30	1,12			
		C30/37	1,22			
		C35/45	1,32			
		C40/50	1,41			
		C45/55	1,50			
		C50/60	1,58			
Partial installation factor	γ_{inst}	[-]	1,0			
Concrete cone and splitting failure						
Effective embedment depth	h_{ef}	[mm]	48	50	70	84
Factor for uncracked concrete	$k_{ucr,N}$	[-]	11,0 ²⁾			
Characteristic spacing	$s_{cr,N}$		3 h_{ef}			
Characteristic edge distance	$c_{cr,N}$		1,5 h_{ef}			
Characteristic spacing for splitting failure	$s_{cr,sp}$	[mm]	192	250	350	504
Characteristic distance for splitting failure	$c_{cr,sp}$		96	125	175	252
Characteristic resistance to splitting	$N^0_{Rk,sp}$	[kN]	min $\{N^0_{Rk,c}, N_{Rk,p}\}^{3)}$			
¹⁾ In absence of other national regulations ²⁾ Based on concrete strength as cylinder strength ³⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018						
fischer Bolt Anchor FWA Plus					Annex C1 Appendix 11 / 12	
Performance Characteristic values of tension resistance under static and quasi-static action						

Table C2.1: Characteristic values of **shear** resistance under static and quasi-static action

Type of fastener / size	FWA Plus			
	M8	M10	M12	M16
Installation factor γ_{inst} [-]	1,0			
Steel failure without lever arm				
Characteristic resistance $V_{Rk,s}^0$ [kN]	11,0	17,0	25,3	30,0
Partial factor for steel failure $\gamma_{Ms}^{1)}$ [-]	1,25			
Steel failure with lever arm and concrete pryout failure				
Characteristic bending moment $M_{Rk,s}^0$ [Nm]	22,5	44,8	78,6	199,0
Partial factor for steel failure $\gamma_{Ms}^{1)}$	1,25			
Factor for ductility k_7 [-]	0,8			
Factor for pryout k_8	1		2	
Concrete edge failure				
Effective length of fastener l_f [mm]	48	50	70	84
Effective diameter of fastener d_{nom}	8	10	12	16

¹⁾ In absence of other national regulations

Table C2.2: Minimum thickness of concrete members, minimum spacing and minimum edge distances

Type of fastener / size	FWA Plus			
	M8	M10	M12	M16
Minimum thickness of member h_{min}	100	120	140	170
Minimum spacing s_{min} [mm]	65	95	100	115
Minimum edge distance c_{min}	65	95	100	115

Table C2.3: Displacements under static and quasi static **tension** action

Type of fastener / size	FWA Plus			
	M8	M10	M12	M16
Tension load N [kN]	4,9	6,5	10,8	13,8
Displacements $\frac{\delta_{N0}}{\delta_{N\infty}}$ [mm]	0,8	1,0	1,2	1,3
	1,2	1,5	1,8	2,0

Table C2.4: Displacements under static and quasi static **shear** action

Type of fastener / size	FWA Plus			
	M8	M10	M12	M16
Shear load V [kN]	6,3	9,7	14,5	17,1
Displacements $\frac{\delta_{V0}}{\delta_{V\infty}}$ [mm]	1,9	2,7	3,5	3,5
	2,9	4,1	5,3	3,5

fischer Bolt Anchor FWA Plus

Performance

Characteristic values of shear resistance, minimum thickness of concrete members, minimum spacing and edge distances, displacements due to tension and shear action

Annex C2