

**DECLARAȚIA DE PERFORMANȚĂ****DoP 0225**

pentru Șurub de beton fischer ULTRACUT FBS II (Ancore din metal pentru utilizare în beton)

RO

1. <u>Cod unic de identificare al produsului-tip:</u>	DoP 0225		
2. <u>Utilizare (utilizări) preconizată (preconizate):</u>	Conectori pentru consolidarea structurilor existente din beton prin suprabetonare. Consultați suplimentul, în special anexele B1- B4 fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Germany		
3. <u>Fabricant:</u>			
4. <u>Reprezentant autorizat:</u>	-		
5. <u>Sistemul (sistemele) de evaluare și de verificare a constantei performantei:</u>	1		
6. <u>Documentul de evaluare europeană:</u> Evaluarea tehnică europeană: Organismul de evaluare tehnică: Organism (organisme) notificat(e):	EAD 332347-00-0601, (Edition 12/ 2019) ETA-20/0321; 2020-06-19 DIBt- Deutsches Institut für Bautechnik 1343 MPA Darmstadt / 2873 TU Darmstadt		
7. <u>Performanța (performante) declarată (declarate):</u> Rezistență mecanică și stabilitate (BWR 1) Conectori pentru consolidarea structurilor existente din beton prin suprabetonare.	Rezistență la cedarea oțelului:	Anexe C1	$E_S = 210\,000 \text{ MPa}$
	Rezistență la smulgere:	Anexe C1	
	Rezistență la cedarea conului de beton:	Anexe C1	
	Robustețe:	Anexe C1	
	Distanță minimă față de margine și între ancore:	Anexe B3	

Suprabetonare (fixări înglobate):

Rezistență la cedarea oțelului:	Anexe C2
Rezistență la smulgere:	Anexe C2
Rezistență la cedarea conului de beton:	Anexe C2
Distanță față de margine pentru a preveni fisuri sub încărcare:	Anexe C2
Rezistență cedare rupere beton:	Anexe C2
Distanță minimă față de margine și între ancore:	Anexe B3

Parametrii conectorilor de forfecare sub încărcări ciclice statice și cvasistatică și din oboseală:

Parametru materialului:	Anexe C2
Parametrii geometrici:	Anexe C2
Factor de oboseală încărcare ciclică:	NPD

Siguranță în caz de incendiu (BWR 2)

Reactie la foc:

Clasa (A1)

8. Documentatie tehnica adevarata si/sau documentatie tehnica specifica: -

Performanța produsului identificat mai sus este în conformitate cu setul de performanțe declarate. Această declarație de performanță este eliberată în conformitate cu Regulamentul (UE) nr. 305/2011, pe răspunderea exclusivă a fabricantului identificat mai sus.

Semnată pentru și în numele fabricantului de către:

ppu. Thilo Pregartner

Thilo Pregartner, Dr.-Ing.
Tumlingen, 2020-07-03

i.V. P. Schillinger

Peter Schillinger, Dipl.-Ing.

Această declarație de performanță a fost întocmită în mai multe limbi. În cazul unei divergențe de interpretare, versiunea în limba engleză prevalează întotdeauna.

Suplimentul include informații voluntare și complementare în limba engleză, în afara cerințelor legale (specificate neutru din punct de vedere al limbii).

Specific Part

1 Technical description of the product

The Shear connector fischer concrete screw UTRACUT FBS II is a concrete screw made of galvanised steel anchored into a predrilled cylindrical drill hole in existing concrete. The special thread of the concrete screw cuts an internal thread into the member while setting. The fischer concrete screw UTRACUT FBS II is connecting two layers of concrete cast at different times (existing concrete and concrete overlay). The side with head of concrete screw is finally embedded in the concrete overlay.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Existing concrete: - resistances - edge distance and spacing	See Annex C 1 See Annex B 3
Concrete overlay: - resistances - edge distance and spacing	See Annex A 2 and C 2 See Annex B 3
Shear interface parameter under static and quasi-static and fatigue cyclic loading - material and geometric parameters - factor for fatigue cyclic loading	See Annex C 2 No performance assessed

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

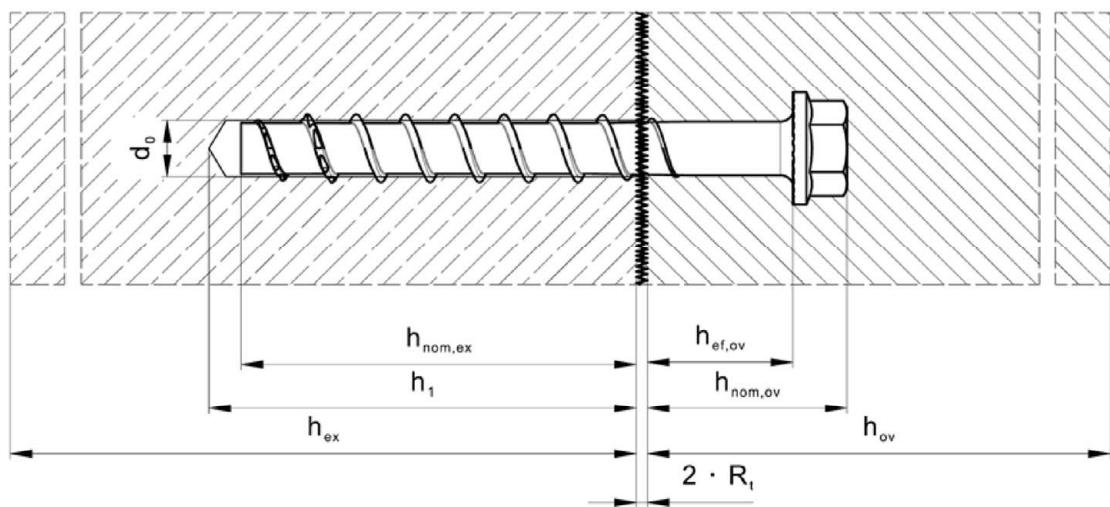
In accordance with European Assessment Document EAD No. 332347-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

Installed condition

Existing Concrete

Concrete overlay



$h_{\text{nom},\text{ex}}$ Overall embedment depth in existing concrete
 h_1 Drill hole depth
 h_{ex} Thickness of existing concrete
 R_t Roughness according to EOTA TR 066:2018-11

$h_{\text{ef},\text{ov}}$ Effective embedment depth in concrete overlay
 $h_{\text{nom},\text{ov}}$ Overall embedment depth in concrete overlay
 h_{ov} Thickness of concrete overlay
 d_0 Nominal drill hole diameter

Table A1.1: Screw types FBS II 8 - 14

FBS II 8 - 14

Hexagon head with formed washer (US)		
Hexagon head with formed washer and TX-drive (US TX)		

(Fig. not to scale)

fischer concrete screw ULTRACUT FBS II

Product description

Installed condition


Screw types

Annex A 1

Appendix 2 / 9


Table A2.1: Dimensions and material

Screw types / size		All head shapes			
		8	10	12	14
Thread outer diameter	d_t	[mm]	10,3	12,5	14,5
Core diameter	d_k		7,4	9,4	11,3
Shaft diameter	d_s		8,0	9,9	11,7
Stressed cross section	A_s	[mm ²]	43,0	69,4	100,3
Minimum length	L_{min}	[mm]	$h_{nom,ex} + 40$ mm		
Maximum length	L_{max}		415	435	450
Diameter of the head	d_h		18	20,5	23
Height of the head	t_h		8,4	9,9	10,3
Material		[-]	Hardened carbon steel; $A_{5\%} \geq 8\%$		
Coating			galvanised		
Nominal characteristic steel yield strength	f_{yk}		800	750	750
Nominal characteristic steel ultimate tensile strength	f_{uk}	[N/mm ²]	950	900	900

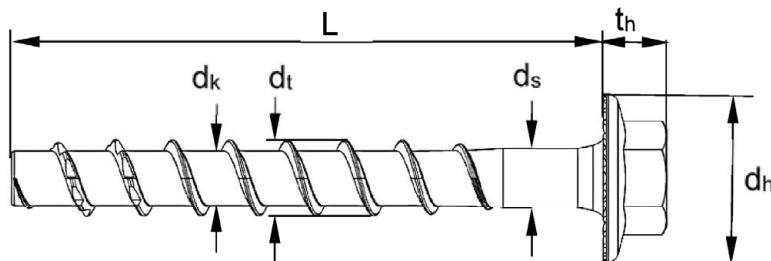

Product marking FBS II US (TX)

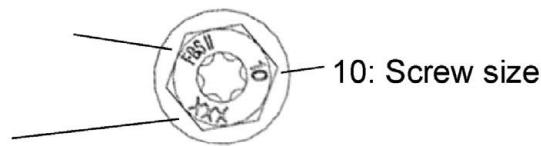FBS II: Product marking



XXX: Screw length L

(Fig. not to scale)

fischer concrete screw ULTRACUT FBS II

Product description

Dimensions, material and marking

Annex A 2

Appendix 3/9

Specifications of intended use

Anchorage subject to:

- Static or quasi static actions
- Surface roughness "very smooth" to "very rough" of the shear interface according to EOTA Technical Report TR 066:2018-11

Base materials:

- For use to strengthen existing concrete by concrete overlay. Both concrete members are compacted reinforced or unreinforced normal weight (cracked and uncracked) concrete without fibres in the range C20/25 to C50/60 according to EN 206:2013+A1:2016.

Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the screw is indicated on the design drawings (e.g. position of the screw relative to reinforcement or to supports, etc.).
- Post-installed shear connections are designed in accordance with EOTA Technical Report TR 066:2018-11
- For the concrete overlay the following requirements on the mixture according to TR 066:2018-11, chapter 3.2 apply:
 - Concrete compressive strength of the new concrete shall be higher than the concrete compressive strength of the existing concrete.
 - Use of concrete with low shrinkage is recommended.
 - Slump of fresh concrete $f \geq 380$ mm, a slump value $f \geq 450$ mm is recommended, if applicable.
 - Concrete consolidation with vibratory screed. With thickness of the overlay concrete > 10 cm specific vibratory screed must be checked for its maximum working depth.
 - Very good posttreatment.

Installation:

- The screw installation is executed by trained personal, ensuring that the installation instruction and the specifications by the engineer are observed.
- Hammer drilling, hollow drilling or diamond drilling:
All sizes and embedment depths
- Screw installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on site
- Cleaning of drill hole is not necessary when using a hollow drill with functional suction or:
 - If drilling vertically upwards
 - If drilling vertically downwards and the drill hole depth has been increased. It is recommended to increase the drill hole depth with additional 3 d₀.
- The requirements for construction works given in EOTA Technical Report TR 066:2018-11 have to be observed.

fischer concrete screw ULTRACUT FBS II

Intended use
Specifications

Annex B 1

Appendix 4/ 9

Table B2.1: Installation parameters FBS II 8 – 14 in existing concrete


Size		FBS II											
		8		10			12			14			
Nominal embedment depth	$h_{\text{nom},\text{ex}}$	[mm]	50	65	55	65	85	60	75	100	65	85	115
Nominal drill hole diameter	d_0		8		10			12			14		
Cutting diameter of drill bits	$d_{\text{cut}} \leq$		8,45		10,45			12,50			14,50		
Cutting diameter of diamond driller	$d_{\text{cut}} \leq$		8,10		10,30			12,30			14,30		
Wrench size (US, S)	SW		13		15			17			21		
TX size	TX	[-]	40		50			-					
Drill hole depth		[mm]	60	75	65	75	95	70	85	110	80	100	130
Drill hole depth (for vertical downwards installation without cleaning)	$h_1 \geq$		85	100	105	115	135	95	130	155	130	150	180
Length of screw	$L_{\text{min}} =$		90	105	95	105	125	100	115	140	105	125	155
	$L_{\text{max}} =$		400	415	405	415	435	410	425	450	415	435	465
Torque impact wrench	$T_{\text{imp,max}}$	[Nm]	600		650								

Table B2.2: Installation parameters FBS II 8 – 14 in concrete overlay

Size		FBS II			
		8	10	12	14
Minimum effective embedment depth	$h_{\text{ef,ov,min}}$	[mm]	40		
Maximum effective embedment depth	$h_{\text{ef,ov,max}}$		$L - h_{\text{nom},\text{ex}} - 2 R_t$		
Nominal embedment depth	$h_{\text{nom},\text{ov}}$		$h_{\text{ef,ov}} + L_h$		
Min. thickness of concrete overlay	$h_{\text{min,ov}}$		$h_{\text{nom},\text{ov}} + c_{\text{nom}}^1)$		

¹⁾ Nominal concrete cover according to EN 1992-1-1:2004 + AC:2010

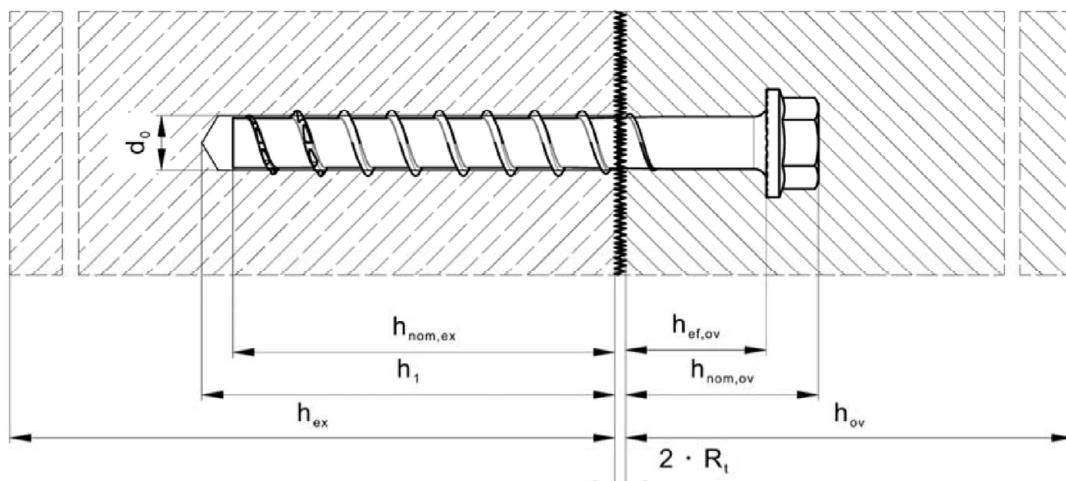Existing Concrete



Concrete overlay

(Fig. not to scale)

fischer concrete screw ULTRACUT FBS II

Intended use

Installation parameters FBS II 8 – 14

Annex B 2

Appendix 5 / 9

Table B3.1: Minimum member thickness, minimum spacing and edge distance

Size		FBS II																
		8	10	12			14											
Existing Concrete																		
Nominal embedment depth	$h_{\text{nom},\text{ex}}$	[mm]	50	65	55	65	85	60	75	100	65							
Minimum thickness of concrete member	$h_{\text{min},\text{ex}}$		100	120	100	120	140	110	130	150	120							
Minimum spacing	$s_{\text{min},\text{ex}}$		35		40		50			60								
Minimum edge distance	$c_{\text{min},\text{ex}}$		35		40		50			60								
Concrete Overlay																		
Minimum thickness of concrete member	$h_{\text{min},\text{ov}}$	[mm]	$h_{\text{nom},\text{ov}} + c_{\text{nom}}^{\text{1)}})$															
Minimum spacing	$s_{\text{min},\text{ov}}$		40		40		45			55								
Minimum edge distance	$c_{\text{min},\text{ov}}$		$10 + c_{\text{nom}}^{\text{1)}})$		$10 + c_{\text{nom}}^{\text{1)}})$		$15 + c_{\text{nom}}^{\text{1)}})$			$15 + c_{\text{nom}}^{\text{1)}})$								

¹⁾Nominal concrete cover according to EN 1992-1-1:2004 + AC:2010

fischer concrete screw ULTRACUT FBS II






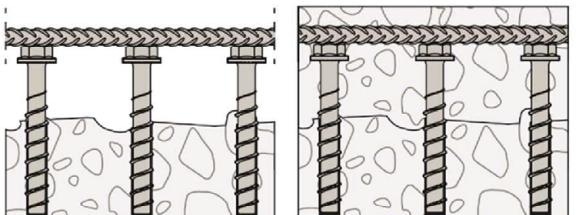
Intended use

Minimum member thickness, minimum spacing and edge distance

Annex B 3

Appendix 6/ 9

Installation instruction

	<p>Step 1: Creation of the drill hole: Drill a hole to the required setting depth using a hammer drill bit, hollow drill bit or a diamond drill bit.</p>
	<p>Step 2: Cleaning of the drill hole - horizontal: Clean the drill hole. This step can be omitted in the preparation of the hole by using a hollow drill bit. (recommendation: use the fischer FHD hollow drill bit)</p>
	<p>Step 2: Cleaning of the drill hole - vertical: Cleaning of the drill hole can be omitted, if drilling vertically upwards or if drilling vertically downwards and the hole depth has been increased. We recommend increasing the drill hole depth by an additional $3 \times$ drilling \varnothing when drilling vertically downwards.</p>
	<p>Step 3: Installation via Impact Wrench: Installation with any impact wrench at a max. mentioned torque moment ($T_{imp, max}$) and with simultaneous axial pressure on the impact wrench. (recommendation: use the fischer FSS 18V 400BL)</p>
	<p>Step 4: Installation on the right depth: First, install the concrete screw FBS II in the existing concrete to the defined setting depth $h_{nom,ex}$, while ensuring the desired setting depth $h_{ef,ov}$ is fulfilled in the top concrete layer (for an easy installation it is allowed to use the fischer setting tool SC-ST).</p>
	<p>Process after the installation of the screw: After installing the concrete screw, further work can be completed on the reinforcements and using the top concrete layer. ATTENTION: In accordance with TR 066: 2018-11, the requirements for properties of the composite surface and concrete mixture must be observed.</p>

fischer concrete screw ULTRACUT FBS II

Intended use
Installation instructions

Annex B 4

Appendix 7 / 9

Table C1.1: Characteristic tension resistance under static and quasi-static action in the existing concrete

Size	FBS II																	
	8		10			12			14									
Nominal embedment depth h _{nom,ex} [mm]	50	65	55	65	85	60	75	100	65	85	115							
Steel failure																		
Characteristic resistance N _{Rk,s,ex} [kN]	35			55			76			103								
Partial factor γ _{Ms,N,ex} [-]	1,4																	
Pullout failure																		
Characteristic resistance in concrete C20/25 uncracked N _{Rk,p,ex} [kN]	≥ N ⁰ _{Rk,c,ex}																	
cracked N _{Rk,p,ex}	6	12	9	12		≥ N ⁰ _{Rk,c,ex}												
C25/30	1,12																	
C30/37	1,22																	
Increasing factors concrete C35/45 ψ _{c,ex}	1,32																	
C40/50	1,41																	
C45/55	1,50																	
C50/60	1,58																	
Installation factor γ _{inst} [-]	1,0																	
Concrete cone failure and splitting failure																		
Effective embedment depth h _{ef,ex} [mm]	40	52	43	51	68	47	60	81	50	67	93							
Factor for uncracked concrete k _{ucr,N,ex} [-]	11,0																	
Factor for cracked concrete k _{cr,N,ex}	7,7																	
Characteristic edge distance c _{cr,N,ex}	1,5 h _{ef,ex}																	
Characteristic spacing s _{cr,N,ex}	3 h _{ef,ex}																	
Charact. edge distance for splitting c _{cr,sp,ex}	1,5 h _{ef,ex}																	
Charact. spacing for splitting s _{cr,sp,ex}	3 h _{ef,ex}																	

fischer concrete screw ULTRACUT FBS II

Performances

Characteristic tension resistance in the existing concrete

Annex C 1

Appendix 8/ 9

Table C2.1: Characteristic resistance under static and quasi-static action in the concrete overlay

Size	FBS II				
	8	10	12	14	
Steel failure					
Characteristic resistance $N_{Rk,s,ov}$	[kN]	35,0	55,0	76,0	103,0
Partial factor $\gamma_{Ms,N,ov}$	[-]		1,4		
Pullout failure					
Projected area of the head A_h	[mm ²]	205	255	308	472
Concrete cone failure and splitting failure					
Effective embedment depth min $h_{ef,ov}$	[mm ²]		40		
Effective embedment depth max $h_{ef,ov}$			$L - h_{nom,ex} - 2 R_t$		
Factor for uncracked concrete $k_{ucr,N,ov}$	[-]		12,7		
Factor for cracked concrete $k_{cr,N,ov}$			8,9		
Characteristic edge distance $c_{cr,N,oc}$	[mm]		1,5 $h_{ef,ov}$		
Characteristic spacing $s_{cr,N,ov}$			3 $h_{ef,ov}$		
Charact. edge distance for splitting $c_{cr,sp,ov}$			3 $h_{ef,ov}$		
Charakt. spacing for splitting $s_{cr,sp,ov}$			6 $h_{ef,ov}$		
Blowout failure					
Projected area of the head A_h	[mm ²]	205	255	308	472

Table C2.2: Characteristic shear resistance in the interface under static and quasi-static action

Size	FBS II				
	8	10	12	14	
Characteristic yield strength f_{yk}	[N/mm ²]	800	750	750	750
Product specific factor for ductility α_{k1}	[-]		0,8		
Stressed cross section A_s	[mm ²]	43,0	69,4	100,3	138,9
Product specific factor for geometry α_{k2}	[-]		1,0		

fischer concrete screw ULTRACUT FBS II

Performances

Characteristic tension resistance in the concrete overlay

Characteristic shear resistance in the interface

Annex C 2

Appendix 9/9