

VYHLÁSENIE O PARAMETROCH

DoP 0371

pre skrutku do betónu fischer ULTRACUT FBS II R (mechanická kotva do betónu)

SK

- | | |
|---|---|
| 1. <u>Jedinečný identifikačný kód typu výrobku:</u> | DoP 0371 |
| 2. <u>Zamýšľané použitie/použitia:</u> | Dodatočné, viacnásobné upevnenie v betóne pre nenosné konštrukcie, pozri prílohu, najmä prílohy B1-B4. |
| 3. <u>Výrobca:</u> | fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Nemecko |
| 4. <u>Splnomocnený zástupca:</u> | – |
| 5. <u>Systém(-y) posudzovania a overovania nemennosti parametrov:</u> | 2+ |
| 6. <u>Európsky hodnotiaci dokument:</u> | EAD 330747-00-0601 |
| Európske technické posúdenie: | ETA-24/0973; 2025-01-08 |
| Orgán technického posudzovania: | DIBt- Deutsches Institut für Bautechnik |
| Notifikovaný(-é) subjekt(-y): | 2873 TU Darmstadt |

7. Deklarované parametre:

Bezpečnosť pri používaní (BWR 4)

Charakteristická odolnosť v ťahu (statické a kvázistatické zaťaženie):

- Odolnosť voči porušeniu ocele: pozri prílohu, najmä prílohu C1
- Odolnosť voči porušeniu vytiahnutím: pozri prílohu, najmä prílohu C1
- Odolnosť voči porušeniu betónového kužľa: pozri prílohu, najmä prílohu C1
- Robustnosť: pozri prílohu, najmä prílohu C1
- Minimálna vzdialenosť od okraj a osová vzdialenosť: pozri prílohu, najmä prílohu C2
- Vzdialenosť od okraja voči rozštípeniu pri zaťažení: pozri prílohu, najmä prílohu C1

$E_s = 210\,000\text{ MPa}$

Charakteristická odolnosť v šmyku (statické a kvázistatické zaťaženie):

- Odolnosť voči porušeniu ocele: (Zaťaženie šmykom): pozri prílohu, najmä prílohu C1
- Odolnosť voči vylomeniu: pozri prílohu, najmä prílohu C1
- Odolnosť voči poškodeniu hrany betónu: pozri prílohu, najmä prílohu C1

Charakteristická únosnosť pre všetky smery zaťaženia a spôsoby porušenia pre zjednodušený návrh:

Charakteristická únosnosť: NPD

životnosť:

životnosť: pozri prílohu, najmä prílohy A2, B1

Bezpečnosť v prípade požiaru (BWR 2)

Reakcia na oheň: Trieda (A1)

Odolnosť proti ohňu:

- Požiarna odolnosť voči porušeniu ocele (Zaťaženie ťahom): pozri prílohu, najmä prílohu C2
- Požiarna odolnosť voči vytiahnutiu (Zaťaženie ťahom): pozri prílohu, najmä prílohu C2
- Požiarna odolnosť voči porušeniu ocele (Zaťaženie šmykom): pozri prílohu, najmä prílohu C2

8. Vhodná technická dokumentácia a/alebo špecifická technická dokumentácia:

–

Uvedené parametre výrobku sú v zhode so súborom deklarovanych parametrov. Toto vyhlásenie o parametroch sa v súlade s nariadením (EÚ) č. 305/2011 vydáva na výhradnú zodpovednosť uvedeného výrobcu.

Podpísal(-a) za a v mene výrobcu:



Dr. Ronald Mihala, Vedúci oddelenia vývoja a riadenia výroby
Tumlingen, 2025-01-22



Dieter Pfaff, Vedúci Medzinárodnej produkčnej federácie a riadenia kvality

Toto vyhlásenie o vlastnostiach bolo vyhotovené v rôznych jazykoch. V prípade, že dôjde k rozdielnemu výkladu má anglická verzia vždy prednosť.

Príloha obsahuje dobrovoľné a doplňujúce informácie v anglickom jazyku. Tieto vychádzajú zo zákonom stanovených požiadaviek (jazykovo neutrálnych).

Translation guidance Essential Characteristics and Performance Parameters for Annexes

Základné charakteristiky a parametre výkonu – pokyny na preklad pre prílohy

Safety in case of fire (BWR 2)		
Bezpečnosť v prípade požiaru (BWR 2)		
1	Reaction to fire: Reakcia na oheň:	Class Trieda (A1)
Resistance to fire: Odolnosť proti ohňu:		
2	Fire resistance to steel failure (tension load): Požiarna odolnosť voči porušeniu ocele (Zaťaženie ťahom):	$N_{Rk,s,fi}$ [kN]
3	Fire resistance to pull-out failure (tension load): Požiarna odolnosť voči vytiahnutiu (Zťaženie tahom):	$N_{Rk,p,fi}$ [kN]
4	Fire resistance to steel failure (shear load): Požiarna odolnosť voči porušeniu ocele (Zaťaženie šmykom):	$V_{Rk,s,fi}$ [kN], $M^0_{Rk,s,fi}$ [Nm]
Safety and accessibility in use (BWR 4)		
Bezpečnosť pri používaní (BWR 4)		
Characteristic resistance to tension load (static and quasi-static loading): Charakteristická odolnosť v ťahu (statické a kvázistatické zaťaženie):		
6	Resistance to steel failure: Odolnosť voči porušeniu ocele:	$N_{Rk,s}$ [kN], E_s [N/mm ²]
7	Resistance to pull- out failure: Odolnosť voči porušeniu vytiahnutím:	$N_{Rk,p}$ [kN], ψ_c , $T_{Rk,p}$ [N/mm ²]
8	Resistance to concrete cone failure: Odolnosť voči porušeniu betónového kužeľa:	$k_{cr,N}$, $k_{ucr,N}$ [-], h_{ef} , $c_{cr,N}$ [mm]
9	Robustness: Robustnosť:	γ_{inst} [-]
10	Minimum edge distance and spacing: Minimálna vzdialenosť od okraj a osová vzdialenosť:	c_{min} , s_{min} , h_{min} [mm]
11	Edge distance to prevent splitting under load: Vzdialenosť od okraja voči rozštiepniu pri zaťažení:	$N^0_{Rk,sp}$ [kN], $c_{cr,sp}$ [mm]
Characteristic resistance to shear load (static and quasi-static loading): Charakteristická odolnosť v šmyku (statické a kvázistatické zaťaženie):		
12	Resistance to steel failure (shear load): Odolnosť voči porušeniu ocele: (Zaťaženie šmykom):	$V_{Rk,s}$ [kN], $M^0_{Rk,s}$ [Nm], k_7 [-]
13	Resistance to pry-out failure: Odolnosť voči vylomeniu:	k_8 [-]
14	Resistance to concrete edge failure: Odolnosť voči poškodeniu hrany betónu:	d_{nom} , l_f [mm]
Characteristic resistance for all load directions and modes of failure for simplified design: Charakteristická únosnosť pre všetky smery zaťaženia a spôsoby porušenia pre zjednodušený návrh:		
15	Characteristic resistance: Charakteristická únosnosť:	F^0_{Rk} [kN], s_{cr} , c_{cr} [mm]
Durability: životnosť:		
16	Durability: životnosť:	Description

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product

fischer concrete screw UltraCut FBS II R is a concrete screw made of stainless steel. The anchor is installed in a drilled hole and anchored by mechanical interlock.

An illustration of the product is given in Annex A.

The characteristic material values, dimensions and tolerances of the anchors not indicated in Annexes shall correspond to the respective values laid down in the technical documentation of this European Technical Assessment.

The anchors are intended to be used with embedment depth given in Annex B, Table B2.1. The intended use specifications of the product are detailed in the Annex B1.

2 Specification of the intended use in accordance with the applicable European Assessment Document (hereinafter EAD)

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Characteristics of product

Safety in case of fire (BWR 2):

The essential characteristics are detailed in the Annex C2.

Hygiene, health and the environment (BWR3)

No performance assessed

Safety and accessibility in use (BWR4)

The essential characteristics are detailed in the Annex C1 and C2.

Durability:

See annex B1.

3.2 Methods of assessment

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirement 2, 3 and 4 has been made in accordance with EAD 330747-00-0601 - Fasteners for use in concrete in redundant for non-structural systems.

4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base.

4.1 AVCP system

According to the decision 97/161/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No. 305/2011) is 2+.

Product in the installed condition

Installed condition in normal weight concrete

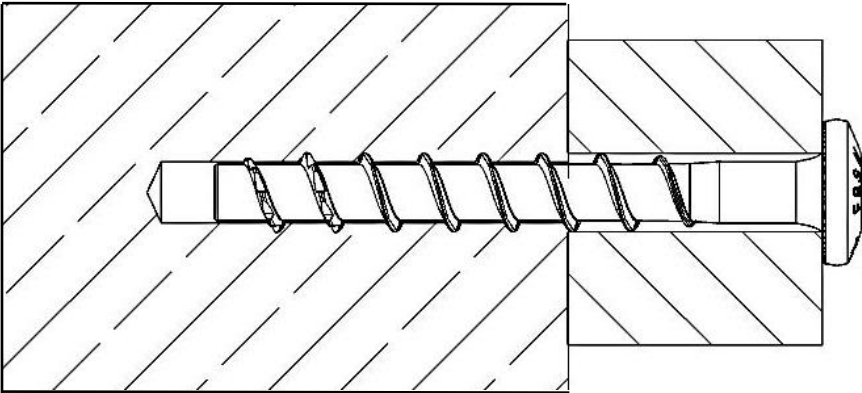
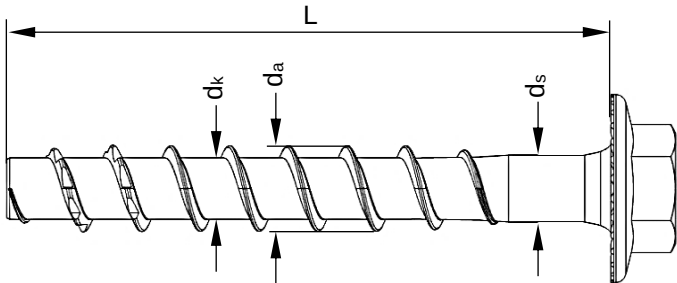



Table A1.1: Screw types FBS II 6 R

FBS II 6 R		
Hexagon head with formed washer (US)		
Countersunk head (SK)		
Pan head (P)		
(Figure not to scale)		
fischer concrete screw UltraCut FBS II 6 R		Annex A 1 Appendix 4 / 11
Product description Product in the installed condition and screw types FBS II 6 R		

Table A2.1: Geometry and material

FBS II 6 R		All head shapes	
Thread outer diameter	d_a	[mm]	7,8
Core diameter	d_k		5,6
Shaft diameter	d_s		6,0
Material	[-]	Tip: hardened steel; Shaft and head: stainless steel EN 10088-1:2023	
Coating		Tip: red colour	
 Head marking (example) at US, SK, P FBS II: Product short name XXX: Screw length L  R: Material type 6: Screw size			
(Figure not to scale)			
fischer concrete screw UltraCut FBS II 6 R		Annex A 2 Appendix 5 / 11	
Product description Geometry and material			

Specification of intended use:

Size	FBS II 6 R
Hammer drilling 	✓
Static and quasi-static loads	
Cracked and uncracked concrete	
Fire exposure	

Base materials:

- Compacted reinforced and unreinforced normal weight concrete without fibres (cracked or uncracked) according to EN 206:2013+A2:2021
- Strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021

Use conditions (Environmental conditions):

- Structures subjected to dry internal conditions (FBS II 6 R)
- For all other conditions according to EN 1993-1-4:2006 +A1:2015 corresponding to corrosion resistance class
 - CRC III: for FBS II 6 R

Design:

- The structural design according to EN 1992-4:2018 are conducted under responsibility of a designer experienced in the field of anchorages and concrete works.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.)
- Design of fastenings according to EN 1992-4: 2018 and EOTA Technical Report TR 055:2018

fischer concrete screw UltraCut FBS II 6 R

Intended use
Specification of intended use


Annex B 1

Appendix 6 / 11

Table B2.1: Installation parameters – drilling bore hole and setting tools				
FBS II 6 R			All head shapes	
Nominal embedment depth	h_{nom}	[mm]	45	60
Nominal drill hole diameter	$d_o =$		6	
Cutting diameter of drill bits	$d_{cut} \leq$		6,4	
Diameter of clearance hole in the fixture	$d_f \leq$		8	
Drill hole depth	$h_1 \geq$		55	70
Drill hole depth (with adjustable setting)		65	80	
Torque impact screw driver	$T_{imp,max}$	[Nm]	240	

Table B2.2: Installation parameters – drive and fixture


FBS II 6 R			US	SK	P
Wrench size	SW	[mm]	10 / 13	-	
TX size	TX	[-]	-	30	
Head diameter	d_h	[mm]	15 / 17	13,3	14,4
Thickness of fixture	$t_{fix} \leq$		$L - h_{nom}$		
Length of screw	$L_{min} =$		50		
	$L_{max} =$		400		

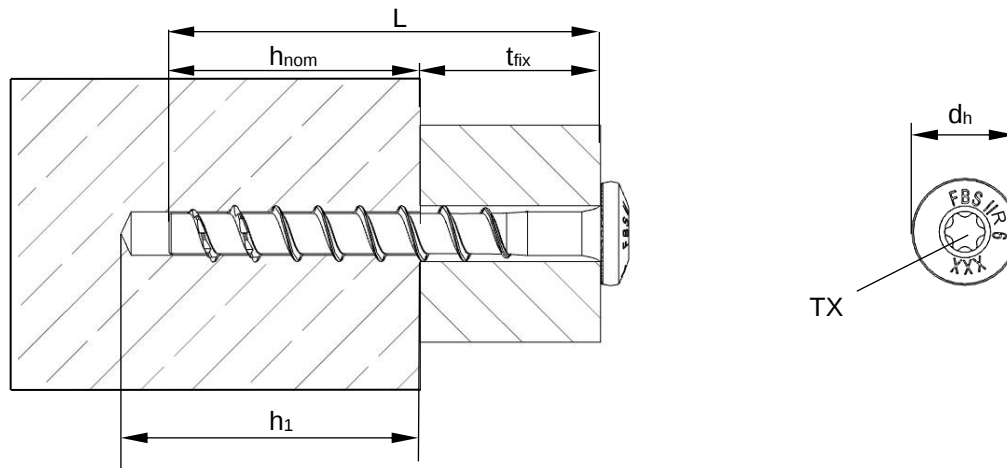

(Figure not to scale)

fischer concrete screw UltraCut FBS II 6 R	Annex B 2 Appendix 7 / 11
Intended use Installation parameters	


Installation instruction part 1



Step 1: Drilling of the drill hole:


Drill the hole using hammer drill

Drill hole diameter d_0 and
drill hole depth h_1 according to table B2.1



Step 2: Cleaning of the drill hole:


Clean the drill hole.



Step 3: Installation:

Turn in until the head is in contact with the fixture.

Installation with any torque impact screw driver up to
the maximum mentioned torque moment ($T_{imp,max}$
according to table B2.1).



Step 4: Checking of the correct installation:

After installation a further turning of the screw must not
be possible. The head of the screw must be in contact
with the fixture and is not damaged




fischer concrete screw UltraCut FBS II 6 R

Intended use
Installation instruction

Annex B 3

Appendix 8 / 11

Installation instruction part 2



Adjustment

Optional:
It is permissible to adjust the screw twice.
Therefore, the screw may be untightened to a maximum of $L_{adj} = 20\text{ mm}$ off the surface of the initial fixture. The total permissible thickness of shims added during the adjustment process is $t_{adj} = 10\text{ mm}$.
The required nominal anchoring depth h_{nom} must be kept after the adjustment process. (see also annex B 3)

fischer concrete screw UltraCut FBS II 6 R

Intended use
Installation instruction

Annex B 4

Appendix 9 / 11

Table C1.1: Characteristic values for static and quasi-static action					
FBS II 6 R					
Nominal embedment depth		h_{nom}	[mm]	45	60
Steel failure for tension load and shear load					
Characteristic resistance		$N_{Rk,S}$	[kN]	19,3	
Partial factor		$\gamma_{Ms,N}^{2)}$	[-]	1,5	
Characteristic resistance		$V^0_{Rk,S}$	[kN]	5,2	12,6
Partial factor		$\gamma_{Ms,V}^{2)}$	[-]	1,5	
Factor for ductility		k_7		0,75	
Characteristic bending resistance		$M^0_{Rk,S}$	[Nm]	16,1	
Pullout failure					
Characteristic resistance in concrete C20/25	uncracked	$N_{Rk,p}$	[kN]	5,0	10,0
	cracked			2,5	6,0
Increasing factors concrete	C25/30	ψ_c	[-]	1,07	
	C30/37			1,13	
	C35/45			1,18	
	C40/50			1,23	
	C45/55			1,28	
	C50/60			1,32	
Installation sensitivity factor		γ_{inst}		1,4	
Concrete cone failure and splitting failure; concrete pryout failure					
Effective embedment depth		h_{ef}	[mm]	24	37
Factor for uncracked concrete		$k_{ucr,N}$	[-]	11,0	
Factor for cracked concrete		$k_{cr,N}$		7,7	
Characteristic edge distance		$C_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$	
Characteristic spacing		$S_{cr,N}$		$3 \cdot h_{ef}$	
Characteristic resistance for splitting		$N^0_{Rk,sp}$	[kN]	$\min(N^0_{Rk,c}{}^1); N_{Rk,p}$	
Characteristic edge distance for splitting		$C_{cr,sp}$	[mm]	66	42
Characteristic spacing for splitting		$S_{cr,sp}$		$2 \cdot C_{cr,sp}$	$2 \cdot C_{cr,sp}$
Factor for pryout failure		k_8	[-]	2,1	2,6
Installation factor		γ_{inst}		$1,4^{3)}$	
Concrete edge failure					
Effective length in concrete		l_f	[mm]	31	46
Nominal diameter of screw		d_{nom}		6	
Adjustment					
Maximum thickness of shims		t_{adj}	[mm]	10	
Max. number of adjustments		n_a	[-]	2	
¹⁾ $N^0_{Rk,c}$ according EN 1992-4:2018					
²⁾ In absence of other national regulations					
³⁾ Only for concrete cone failure and splitting failure; concrete pryout failure according to EN 1992-4:2018,Table 4.1					
fischer concrete screw UltraCut FBS II 6 R					Annex C 1 Appendix 10 / 11
Performances Characteristic values for static and quasi-static action					

Table C2.1: Minimum thickness of concrete members, minimum spacing and edge distance						
FBS II 6 R						
Minimum thickness of concrete member	h_{min}	[mm]	100			
Minimum spacing	s_{min}		35			
Minimum edge distance	c_{min}					
1) Drill hole depth according to table B2.1						
Table C2.2: Characteristic values for resistance to fire						
FBS II 6 R						
Nominal embedment depth	h_{nom}	[mm]	45	60		
Steel failure for tension load and shear load						
Characteristic resistance for the head shapes	US $\geq$ SW13	$F_{Rk,s,fi}$	R30	[kN]	-1)	2,1
			R60		-1)	1,7
			R90		-1)	1,2
			R120		-1)	1,0
	SK/P US SW10	$F_{Rk,s,fi}$	R30	[kN]	-1)	1,8
			R60		-1)	1,4
			R90		-1)	1,1
			R120		-1)	0,9
Characteristic bending resistance for the head shapes	US $\geq$ SW13	$M^0_{Rk,s,fi}$	R30	[Nm]	-1)	1,7
			R60		-1)	1,4
			R90		-1)	1,0
			R120		-1)	0,8
	SK/P US SW10	$M^0_{Rk,s,fi}$	R30	[Nm]	-1)	1,5
			R60		-1)	1,2
			R90		-1)	0,9
			R120		-1)	0,7
Pullout failure						
Characteristic resistance	$N_{Rk,p,fi}$	R30	[kN]	-1)	1,0	
		R60				
		R90				
		R120		-1)	0,8	
Concrete cone failure failure						
Characteristic resistance	$N_{Rk,c,fi}$	R30	[kN]	-1)	1,4	
		R60				
		R90				
		R120		-1)	1,1	
Edge distance						
R30 to R120	$C_{cr,fi}$	[mm]	$2 \cdot h_{ef}$			
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm						
Spacing						
R30 to R120	$S_{cr,fi}$	[mm]	$2 \cdot C_{cr,fi}$			
1) No performance assessed						
fischer concrete screw UltraCut FBS II 6 R					Annex C 2	
Performances Minimum thickness of concrete members, minimum spacing and edge distance; Characteristic values for resistance to fire						
					Appendix 11 / 11	