

IZJAVA O LASTNOSTIH

DoP 0349

za fischer sistem za vbrzganje Superbond (pritrjen pritrdilni element za uporabo v betonu)

SL

1. Enotna identifikacijska oznaka tipa proizvoda: DoP 0349
2. Predvidena uporaba: Za vgradnjo v razpokan in nerazpokan beton, glej dodatek, zlasti priloge B1 - B17.
3. Proizvajalec: fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Nemčija
4. Pooblaščen zastopnik: –
5. Sistemi ocenjevanja in preverjanja nespremenljivosti lastnosti: 1
6. Evropski ocenjevalni dokument: EAD 330499-01-0601, Edition 04/2020
Evropska tehnična ocena: ETA-12/0258; 2023-10-24
Organ za tehnično ocenjevanje: DIBt- Deutsches Institut für Bautechnik
Priglašeni organi: 2873 TU Darmstadt
7. Navedene lastnosti:
Mehanska odpornost in stabilnost (BWR 1)
Karakteristična odpornost na napetostno obremenitev (statična in kvazistatična obremenitev):
Odpornost pri odpovedi jekla: Prilogah C1 - C3
Odpornost na kombinirani izvek in odpoved betonskega stožca: Prilogah C4-C10
Odpornost na odpoved v betonski coni: Priloge C4
Razdalja od roba betona za preprečevanje loma pod obremenitvijo: Priloge C4
Robusnost: Prilogah C4-C10
Največji zatezni navor: Prilogah B4-B6,B8
Najmanjša razdalja do roba betona in razmik: Prilogah B4 - B8
Karakteristična odpornost proti strižni obremenitvi (statična in kvazistatična obremenitev):
Odpornost na odpoved jekla: Prilogah C2, C3
Odpornost na neuspešno odstranitev: Priloge C4
Odpornost na odpoved od roba betona: Priloge C4
Zamenjave pri kratkoročnem in dolgoročnem nalaganju:
Zamenjave pri kratkoročnem in dolgoročnem nalaganju: Prilogah C11, C12
Karakteristična odpornost in premiki za kategoriji seizmičnih lastnosti C1 in C2:
Odpornost na napetost, premiki, kategorija C1: Prilogah C13 - C15
Odpornost na napetost, premiki, kategorija C2: Prilogah C13, C16
Odpornost na strižno obremenitev, premiki, kategorija C1: Prilogah C13, C14
Odpornost na strižno obremenitev, premiki, kategorija C2: Prilogah C13, C16
Faktor reže obroča: Priloge C13
Higiena, zdravje in okolje (BWR 3)
Vsečina, emisije in / ali sproščanje nevarnih snovi: NPd
8. Ustrezna tehnična dokumentacija in/ali specifična tehnična dokumentacija: –

Lastnosti proizvoda, navedenega zgoraj, so v skladu z navedenimi lastnostmi. Za izdajo te izjave o lastnostih je v skladu z Uredbo (EU) št. 305/2011 odgovoren izključno proizvajalec, naveden zgoraj.

Podpisal za in v imenu proizvajalca:



Dr.-Ing. Oliver Geibig, Generalni direktor poslovne enote in inženiringa
Tumlingen, 2023-11-17



Jürgen Grün, Generalni direktor za kemijo in kvaliteto

Ta izjava o lastnostih je bila pripravljena v različnih jezikih. V primeru nerazumevanja, se vedno upošteva angleška različica.

Priloga vsebuje informacije v angleškem jeziku, ki presegajo zakonske zahteve.

Translation guidance Essential Characteristics and Performance Parameters for Annexes

Navodila za prevajanje. Bistvene značilnosti in parametri za pravilno delovanje priloge

Mechanical resistance and stability (BWR 1)		
Mehanska odpornost in stabilnost (BWR 1)		
Characteristic resistance to tension load (static and quasi-static loading):		
Karakteristična odpornost na napetostno obremenitev (statična in kvazistatična obremenitev):		
1	Resistance to steel failure: Odpornost pri odpovedi jekla:	$N_{Rk,s}$ [kN]
2	Resistance to combined pull-out and concrete cone failure: Odpornost na kombinirani izvlek in odpoved betonskega stožca:	T_{Rk} and/or $T_{Rk,100}$ [N/mm ²], ψ_{sus}^0 [-] (BF) $N_{Rk,p}$ and/or $N_{Rk,p,100}$ [kN] (BEF)
3	Resistance to concrete cone failure: Odpornost na odpoved v betonski coni:	$c_{cr,N}$ [mm], $k_{cr,N}$, $k_{ucr,N}$ [-]
4	Edge distance to prevent splitting under load: Razdalja od roba betona za preprečevanje loma pod obremenitvijo:	$c_{cr,sp}$ [mm]
5	Robustness: Robustnost:	γ_{inst} [-]
6	Maximum installation torque: Največji zatezni navor:	$\max T_{inst}$ [Nm] (BF)
	Installation torque: Zatezni navor:	T_{inst} [Nm] (BEF)
7	Minimum edge distance and spacing: Najmanjša razdalja do roba betona in razmik:	c_{min} , s_{min} , h_{min} [mm]
Characteristic resistance to shear load (static and quasi-static loading):		
Karakteristična odpornost proti strižni obremenitvi (statična in kvazistatična obremenitev):		
8	Resistance to steel failure: Odpornost na odpoved jekla:	$V_{Rk,s}^0$ [kN], $M_{Rk,s}^0$ [Nm], k_7 [-]
9	Resistance to pry-out failure: Odpornost na neuspešno odstranitev:	k_8 [-]
10	Resistance to concrete edge failure: Odpornost na odpoved od roba betona:	d_{nom} , l_f [mm]
Displacements under short-term and long-term loading:		
Zamenjave pri kratkoročnem in dolgoročnem nalaganju:		
11	Displacements under short-term and long-term loading: Zamenjave pri kratkoročnem in dolgoročnem nalaganju:	δ_0 , δ_∞ [mm or mm/(N/mm ²)]
Characteristic resistance and displacements for seismic performance categories C1 and C2:		
Karakteristična odpornost in premiki za kategoriji seizmičnih lastnosti C1 in C2:		
12	Resistance to tension load, displacements:	
	Odpornost na napetost, premiki, kategorija C1:	C1 $N_{Rk,s,C1}$ [kN] (all) $T_{Rk,C1}$ [N/mm ²] (BF) $N_{Rk,p,C1}$ [kN] (BEF)
	Odpornost na napetost, premiki, kategorija C2:	C2 $N_{Rk,s,C2}$ [kN] (all) $T_{Rk,C2}$ [N/mm ²] (BF) $N_{Rk,p,C2}$ [kN] (BEF) $\delta_{N,C2}$ [mm] (all)
13	Resistance to shear load, displacements:	
	Odpornost na strižno obremenitev, premiki, kategorija C1:	C1 $V_{Rk,s,C1}$ [kN] (all)
	Odpornost na strižno obremenitev, premiki, kategorija C2:	C2 $V_{Rk,s,C2}$ [kN] (all) $\delta_{V,C2}$ [mm] (all)
14	Factor annular gap: Faktor reže obroča:	α_{gap} [-]
Hygiene, health and the environment (BWR 3)		
Higiena, zdravje in okolje (BWR 3)		
15	Content, emission and/or release of dangerous substances: Vsebina, emisije in / ali sproščanje nevarnih snovi:	-

Specific Part

1 Technical description of the product

The injection system fischer Superbond is a bonded anchor for use in concrete consisting of a cartridge with injection mortar fischer FIS SB or a resin capsule fischer RSB and a steel element according to Annex A 5.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The resin capsule is placed into a drilled hole and the steel element is driven by rotary hammer drill or tangential impact screw driver or cordless drill screw driver. The anchor rod is anchored via the bond between steel element, chemical mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B 4 to B 8, C 1 to C 10
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 1 to C 4
Displacements under short-term and long-term loading	See Annex C 11 and C 12
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C 13 to C 16

3.2 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

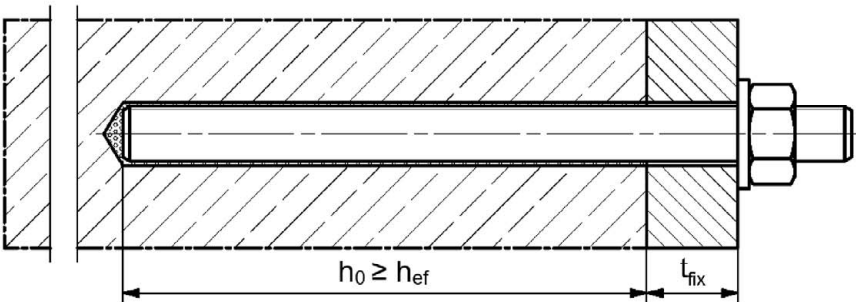
In accordance with the European Assessment Document EAD 330499-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1


Installation conditions part 1

anchor rod or fischer anchor rod RG M with fischer injection system FIS SB


Pre-positioned installation



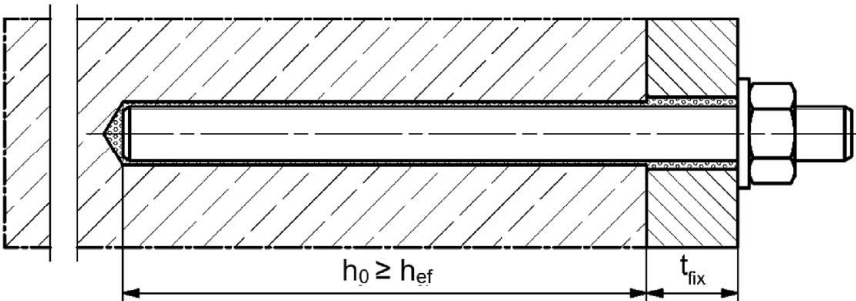Push through installation (annular gap filled with mortar)



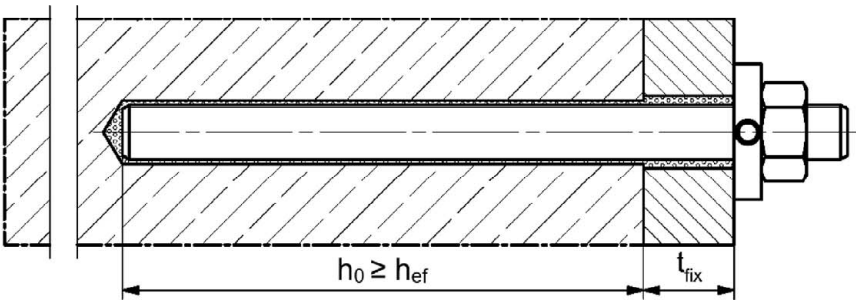Pre-positioned or push through installation with subsequently injected fischer filling disk (annular gap filled with mortar)



Figures not to scale

h_0 = drill hole depth
 t_{fix} = thickness of fixture

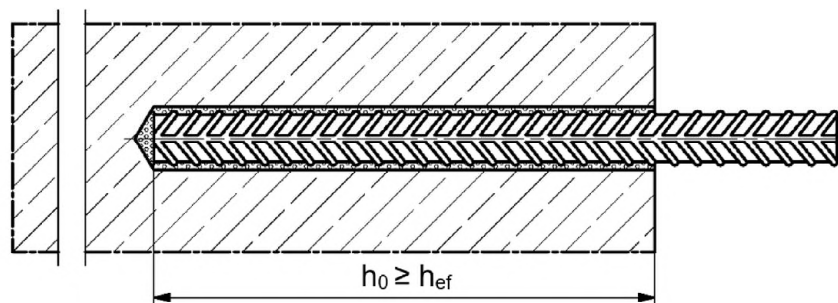
h_{ef} = effective embedment depth

fischer Superbond

Product description
Installation conditions part 1


Installation conditions part 2

Reinforcing bar with fischer injection system FIS SB




fischer rebar anchor FRA with fischer injection system FIS SB

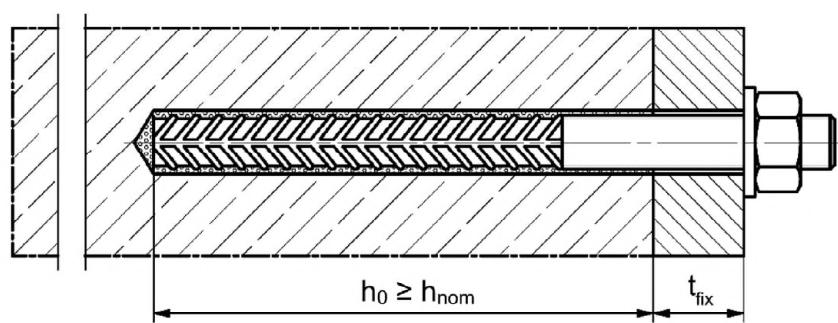Pre-positioned installation



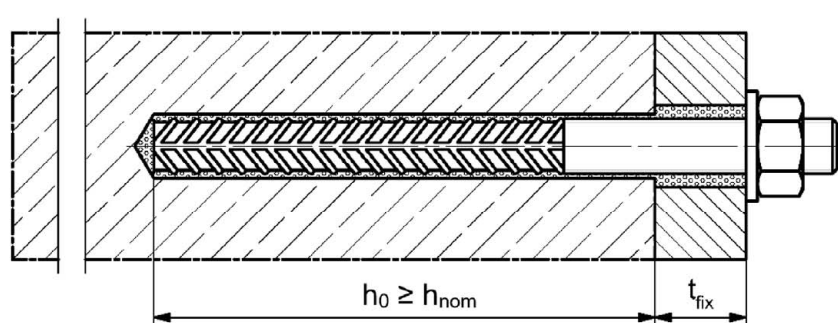Push through installation (annular gap filled with mortar)




Figures not to scale

h_0 = drill hole depth	h_{ef} = effective embedment depth
t_{fix} = thickness of fixture	h_{nom} = overall fastener embedment depth in the concrete


Installation conditions part 3

fischer internal threaded anchor RG M I with fischer resin capsule system RSB or fischer injection system FIS SB

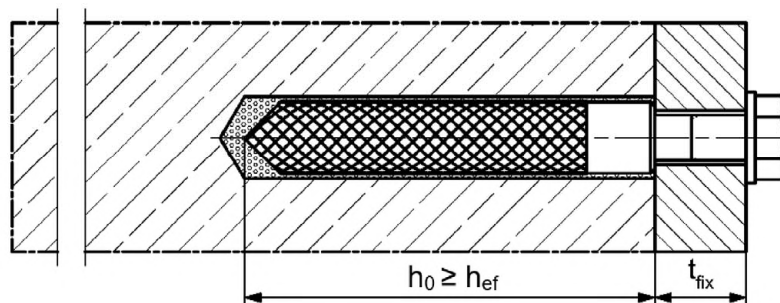Pre-positioned installation




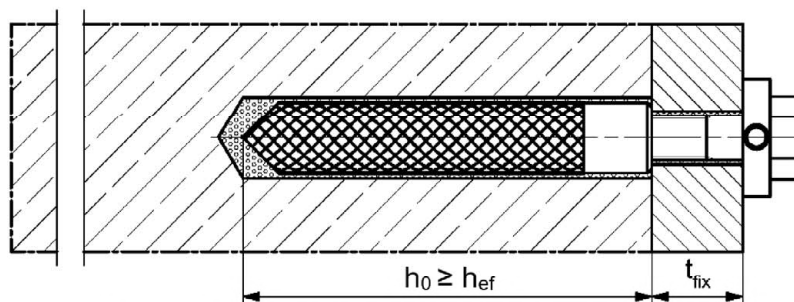Pre-positioned installation with subsequently injected fischer filling disk (annular gap filled with mortar)




fischer anchor rod RG M with fischer resin capsule system RSB

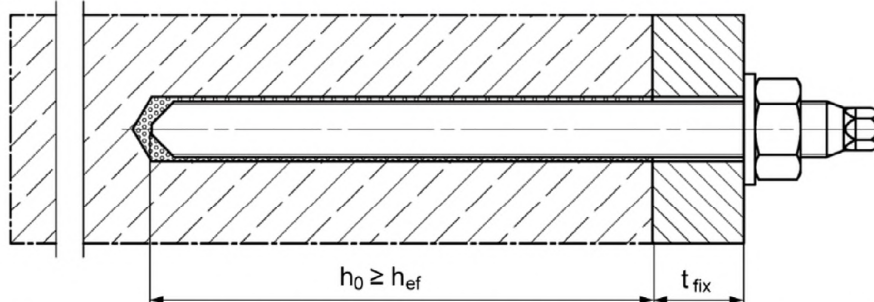Pre-positioned installation



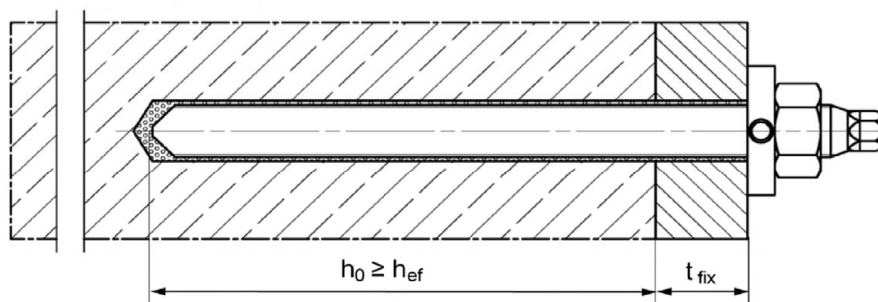Pre-positioned installation with subsequently injected fischer filling disk (annular gap filled with mortar)



Figures not to scale

h_0 = drill hole depth

h_{ef} = effective embedment depth

t_{fix} = thickness of fixture

fischer Superbond

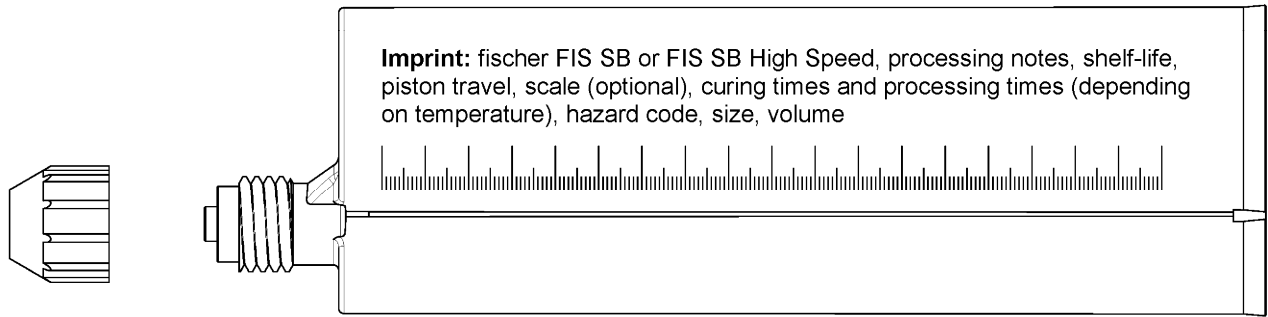
Product description
Installation conditions part 3

Annex A 3

Appendix 5 / 42

Overview system components Part 1

Injection cartridge (shuttle cartridge) with sealing cap; Size: 390 ml, 585 ml, 1500 ml




Resin capsule


Sizes: 8, 10 mini, 10, 12 mini, 12, 16 mini, 16, 16 E, 20, 20 E / 24, 30




Static mixer FIS MR Plus for Injection cartridge 390 ml



Static mixer FIS UMR Injection cartridges ≥ 585 ml



Injection adapter and extension tube $\varnothing 9$ for static mixer FIS MR Plus;
Injection adapter and extension tube $\varnothing 9$ or $\varnothing 15$ for static mixer FIS UMR



Figures not to scale

fischer Superbond

System description

Overview system components part 1;
cartridges / capsule / static mixer / accessories


Annex A 4

Appendix 6 / 42

Overview system components Part 2


anchor rod

Sizes: M8, M10, M12, M16, M20, M24, M27, M30



fischer anchor rod RG M

Sizes: M8, M10, M12, M16, M20, M24, M30




fischer internal threaded anchor RG M I


Size: M8, M10, M12, M16, M20



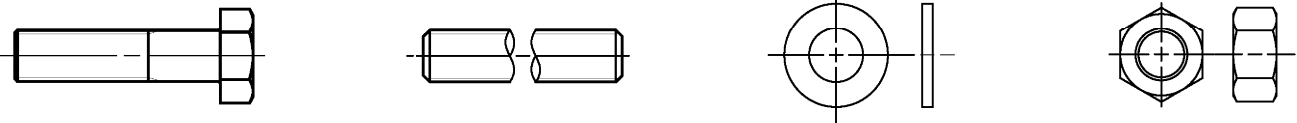Screw / threaded rod / washer / hexagon nut



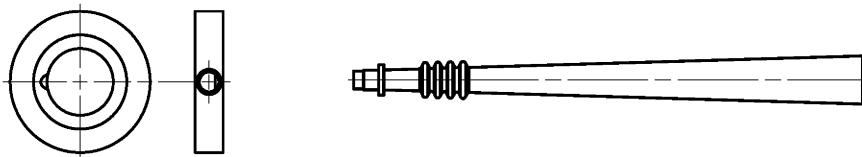fischer filling disc with injection adapter



Reinforcing bar

Nominal diameters: $\phi 8$, $\phi 10$, $\phi 12$, $\phi 14$, $\phi 16$, $\phi 20$, $\phi 25$, $\phi 28$, $\phi 32$



fischer rebar anchor FRA

Sizes: M12, M16, M20, M24



Figures not to scale

fischer Superbond

System description
Overview system components part 2;
steel components, injection adapter

Overview system components Part 3

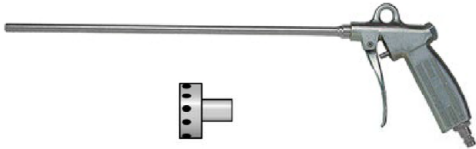
Cleaning brush BS



Blow-out pump AB G



Compressed-air cleaning tool ABP



Figures not to scale

fischer Superbond

System description
Overview system components part 3;
cleaning brush / blow-out pump

Table A7.1: Materials				
Part	Designation	Material		
1	Injection cartridge	Mortar, hardener, filler		
	Steel grade	Steel	Stainless steel R	High corrosion resistant steel HCR ²⁾
		zinc plated	acc. to EN 10088-1:2014 Corrosion resistance class CRC III acc. to EN 1993-1-4:2006+A1:2015	acc. to EN 10088-1:2014 Corrosion resistance class CRC V acc. to EN 1993-1-4:2006+A1:2015
2	Anchor rod	Property class 4.8, 5.8 or 8.8; EN ISO 898-1:2013 zinc plated ≥ 5 µm, EN ISO 4042:2022/Zn5/An(A2K) or hot dip galvanised ≥ 40 µm EN ISO 10684:2004 f _{uk} ≤ 1000 N/mm ² A ₅ > 12% fracture elongation	Property class 50, 70 or 80 EN ISO 3506-1:2020 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662, 1.4462; EN 10088-1:2014 f _{uk} ≤ 1000 N/mm ² A ₅ > 12% fracture elongation	Property class 50 or 80 EN ISO 3506-1:2020 or property class 70 with f _{yk} = 560 N/mm ² 1.4565; 1.4529; EN 10088-1:2014 f _{uk} ≤ 1000 N/mm ² A ₅ > 12% fracture elongation
		Fracture elongation A ₅ > 8 %, for applications without requirements for seismic performance category C2		
3	Washer ISO 7089:2000	zinc plated ≥ 5 µm, EN ISO 4042:2022/Zn5/An(A2K), or hot dip galvanised ≥ 40 µm EN ISO 10684:2004	1.4401; 1.4404; 1.4578;1.4571; 1.4439; 1.4362; EN 10088-1:2014	1.4565; 1.4529; EN 10088-1:2014
4	Hexagon nut	Property class 4, 5 or 8; EN ISO 898-2:2012 zinc plated ≥ 5 µm, EN ISO 4042:2022/Zn5/An(A2K), or hot dip galvanised ≥ 40 µm EN ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506-2:2020 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506-2:2020 1.4565; 1.4529 EN 10088-1:2014
5	fischer internal threaded anchor RG M I	Property class 5.8 ISO 898-1:2013 zinc plated ≥ 5 µm, EN ISO 4042:2022/Zn5/An(A2K)	Property class 70 EN ISO 3506-1:2020 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	Property class 70 EN ISO 3506-1:2020 1.4565; 1.4529; EN 10088-1:2014
6	Commercial standard screw or threaded rod for fischer internal threaded anchor RG M I	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated ≥ 5 µm, EN ISO 4042:2022/Zn5/An(A2K) A ₅ > 8 % fracture elongation	Property class 70 EN ISO 3506-1:2020 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014 A ₅ > 8 % fracture elongation	Property class 70 EN ISO 3506-1:2020 1.4565; 1.4529; EN 10088-1:2014 A ₅ > 8 % fracture elongation
7	fischer filling disk similar to DIN 6319-G	zinc plated ≥ 5 µm, EN ISO 4042:2022/Zn5/An(A2K) or hot dip galvanised ≥ 40 µm EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	1.4565;1.4529; EN 10088-1:2014
8	Reinforcing bar EN 1992-1-1:2004 and AC:2010, Annex C	Bars and de-coiled rods, class B or C with f _{yk} and k according to NDP or NCI according to EN 1992-1-1/NA f _{uk} = f _{tk} = k · f _{yk} (A ₅ > 8%)		
9	fischer rebar anchor FRA	Rebar part: Bars and de-coiled rods class B or C with f _{yk} and k according to NDP or NCI of EN 1992-1-1:2004+AC:2010 / f _{uk} = f _{tk} = k · f _{yk} (A ₅ > 8%) Threaded part: Property class 80 EN ISO 3506-1:2020	1.4401, 1.4404, 1.4571, 1.4578, 1.4439, 1.4362, 1.4062 acc. to EN 10088-1:2014 Corrosion resistance class CRC III acc. to EN 1993-1-4:2006+A1:2015 1.4565; 1.4529 acc. to EN 10088-1:2014 Corrosion resistance class CRC V acc. to EN 1993-1-4: 2006+A1:2015 f _{uk} ≤ 1000 N/mm ² ; (A ₅ > 8%)	
fischer Superbond				Annex A 7 Appendix 9 / 42
Product description Materials				

Specifications of intended use part 1

Table B1.1: Overview use and performance categories, injection mortar system FIS SB

Anchorages subject to		FIS SB with ...							
		Anchor rod		fischer internal threaded anchor RG M I		Reinforcing bar		fischer rebar anchor FRA	
									
Hammer drilling with standard drill bit		all sizes							
Hammer drilling with hollow drill bit (fischer "FHD", Heller "Duster Expert"; Bosch „Speed Clean“; Hilti "TE-CD, TE-YD", DreBo „D-Plus“, DreBo „D-Max“)		Nominal drill bit diameter (d ₀) 12 mm to 35 mm							
Diamond drilling		_1)							
Static and quasi static loading, in	uncracked concrete	all sizes	Tables: C1.1 C4.1 C5.1 C11.1	all sizes	Tables: C2.1 C4.1 C7.1 C11.2	all sizes	Tables: C3.1 C4.1 C9.1 C12.1	all sizes	Tables: C3.2 C4.1 C10.1 C12.2
	cracked concrete								
Seismic performance category (only hammer drilling with standard / hollow drill bits)	C1	all sizes	Tables: C13.1 C14.2 C15.1	_1)		all sizes	Tables: C14.1 C14.2 C15.2	_1)	
	C2	M12 M16 M20 M24	Tables: C13.1 C14.2 C16.1			_1)	_1)		
Use category	I1 dry or wet concrete	all sizes							
	I2 water filled hole	_1)							
Installation direction		D3 (downward and horizontal and upwards (e.g., overhead))							
Installation method		pre-positioned or push through installation							
Installation temperature		FIS SB: T _{i,min} = -15 °C to T _{i,max} = +40 °C FIS SB High Speed: T _{i,min} = -20 °C to T _{i,max} = +40 °C							
Service temperature	Temperature range I	-40 °C to +40 °C		T _{st} = +40 °C / T _{lt} = +24 °C					
	Temperature range II	-40 °C to +80 °C		T _{st} = +80 °C / T _{lt} = +50 °C					
	Temperature range III	-40 °C to +120 °C		T _{st} = +120 °C / T _{lt} = +72 °C					
	Temperature range IV	-40 °C to +150 °C		T _{st} = +150 °C / T _{lt} = +90 °C					

¹⁾ No performance assessed.

fischer Superbond

Intended use
Specifications part 1, fischer injection mortar system FIS SB

Annex B 1

Appendix 10 / 42

Specifications of intended use part 2

Table B2.1: Overview use and performance categories, resin capsule system RSB

Anchorages subject to		RSB with ...			
		fischer anchor rod RG M 		fischer internal threaded anchor RG MI 	
Hammer drilling with standard drill bit 		all sizes			
Hammer drilling with hollow drill bit (fischer "FHD", Heller "Duster Expert"; Bosch „Speed Clean“; Hilti "TE-CD, TE-YD", DreBo „D-Plus“, DreBo „D-Max“) 		Nominal drill bit diameter (d ₀) 12 mm to 35 mm		all sizes	
Diamond drilling 		all sizes ¹⁾			
Static and quasi static loading, in	uncracked concrete	all sizes	Tables: C1.1 C4.1 C6.1 C11.1	all sizes	Tables: C2.1 C4.1 C8.1 C11.2
	cracked concrete	all sizes ¹⁾		all sizes ¹⁾	
Seismic performance category (only hammer drilling with standard / hollow drill bits)	C1	all sizes	Tables: C13.1 C14.2 C15.1	_2)	
	C2	_2)			
Use category	I1 dry or wet concrete	all sizes			
	I2 water filled hole	all sizes			
Installation direction		D3 (downward and horizontal and upwards (e.g. overhead))			
Installation method		only pre-positioned installation			
Installation temperature		T _{i,min} = -30 °C to T _{i,max} = +40 °C			
Service temperature	Temperature range I	-40 °C to +40 °C	T _{st} = +40 °C / T _{lt} = +24 °C		
	Temperature range II	-40 °C to +80 °C	T _{st} = +80 °C / T _{lt} = +50 °C		
	Temperature range III	-40 °C to +120 °C	T _{st} = +120 °C / T _{lt} = +72 °C		
	Temperature range IV	-40 °C to +150 °C	T _{st} = +150 °C / T _{lt} = +90 °C		
¹⁾ For diamond drilling in cracked concrete only nominal drill bit diameters (d ₀) ≥ 18 mm are permitted. ²⁾ No performance assessed.					

fischer Superbond

Intended use
Specifications part 2, fischer resin capsule system RSB

Annex B 2

Appendix 11 / 42

Specifications of intended use part 3

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres of strength classes C20/25 to C50/60 according to EN 206:2013+A1:2016

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel).
- For all other conditions according to EN1993-1-4:2006+A1:2015 corresponding to corrosion resistance classes to Annex A 7 Table A7.1.

Design:

- Fastenings have to be designed by a responsible engineer with experience of concrete anchor design.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Fastenings are designed in accordance with:
EN 1992-4:2018 and EOTA Technical Report TR 055, Edition February 2018.

Installation:

- Fastener installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: The hole shall be filled with mortar.
- Fastening depth should be marked and adhered to on installation.
- Overhead installation is allowed (necessary equipment see installation instruction).

fischer Superbond

Intended use
Specifications part 3


Annex B 3

Appendix 12 / 42

Table B4.1: Installation parameters for anchor rods in combination with injection mortar system FIS SB

Anchor rods		Thread	M8	M10	M12	M16	M20	M24	M27	M30
Nominal drill hole diameter	d_0	[mm]	10	12	14	18	24	28	30	35
Drill hole depth	h_0		$h_0 \geq h_{ef}$							
Effective embedment depth	$h_{ef, min}$		60	60	70	80	90	96	108	120
	$h_{ef, max}$		160	200	240	320	400	480	540	600
Minimum spacing and minimum edge distance	s_{min}		40	45	55	65	85	105	120	140
	c_{min}		40	45	55	65	85	105	120	140
Diameter of the clearance hole of the fixture	pre-positioned installation d_f		9	12	14	18	22	26	30	33
	push through installation d_f		11	14	16	20	26	30	33	40
Min. thickness of concrete member	h_{min}		$h_{ef} + 30 (\geq 100)$			$h_{ef} + 2d_0$				
Maximum setting torque	$\max T_{inst}$	[Nm]	10	20	40	60	120	150	200	300

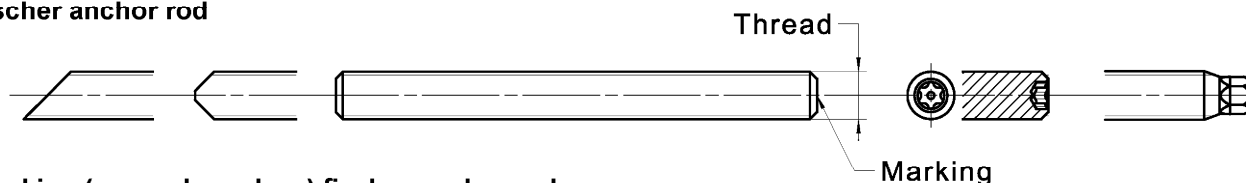fischer anchor rod




Marking (on random place) fischer anchor rod:

Steel zinc plated PC ¹⁾ 8.8	• or +	Steel hot-dip PC ¹⁾ 8.8	•
High corrosion resistant steel HCR PC ¹⁾ 50	•	High corrosion resistant steel HCR PC ¹⁾ 70	-
High corrosion resistant steel HCR PC ¹⁾ 80	(	Stainless steel R property class 50	~
Stainless steel R property class 80 ¹⁾	*		

Alternatively: Colour coding according to DIN 976-1: 2016

¹⁾ PC = property class

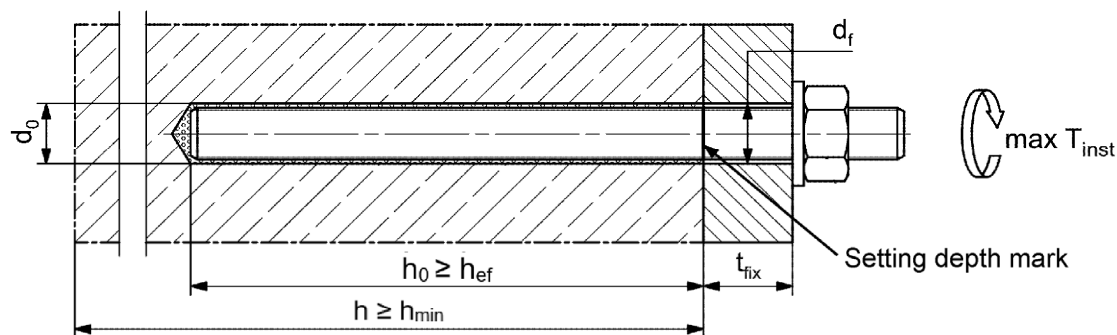Installation conditions:



Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

- Materials, dimensions and mechanical properties according to **Annex A 7, Table A7.1**.
- Inspection certificate 3.1 according to EN 10204:2004, the documents have to be stored.
- Setting depth is marked.

Figures not to scale

fischer Superbond

Intended use

Installation parameters for anchor rods in combination with injection mortar system FIS SB


Annex B 4

Appendix 13 / 42

Table B5.1: Installation parameters for fischer anchor rods RG M in combination with resin capsule system RSB

Anchor rod RG M		Thread	M8	M10	M12	M16	M20	M24	M30
Nominal drill hole diameter	d_0	[mm]	10	12	14	18	25	28	35
Drill hole depth	h_0		$h_0 \geq h_{ef}$						
Effective embedment depth	$h_{ef,1}$		---	75	75	95	---	---	---
	$h_{ef,2}$		80	90	110	125	170	210	280
	$h_{ef,3}$		---	150	150	190	210	---	---
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$		40	45	55	65	85	105	140
Diameter of the pre-positioned clearance hole of the fixture installation	d_f		9	12	14	18	22	26	33
Min. thickness of concrete member	h_{min}	$h_{ef} + 30 (\geq 100)$			$h_{ef} + 2d_0$				
Maximum setting torque	$\max T_{inst}$	[Nm]	10	20	40	60	120	150	300

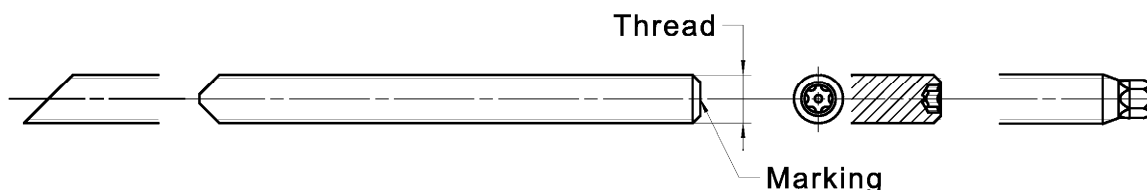fischer anchor rod RG M




Marking (on random place) fischer anchor rod RG M:

Steel zinc plated PC ¹⁾ 8.8	• or +	Steel hot-dip PC ¹⁾ 8.8	•
High corrosion resistant steel HCR PC ¹⁾ 50	•	High corrosion resistant steel HCR PC ¹⁾ 70	-
High corrosion resistant steel HCR PC ¹⁾ 80	(	Stainless steel R property class 50	~
Stainless steel R property class 80	*		

Alternatively: Colour coding according to DIN 976-1:2016

¹⁾ PC = property class

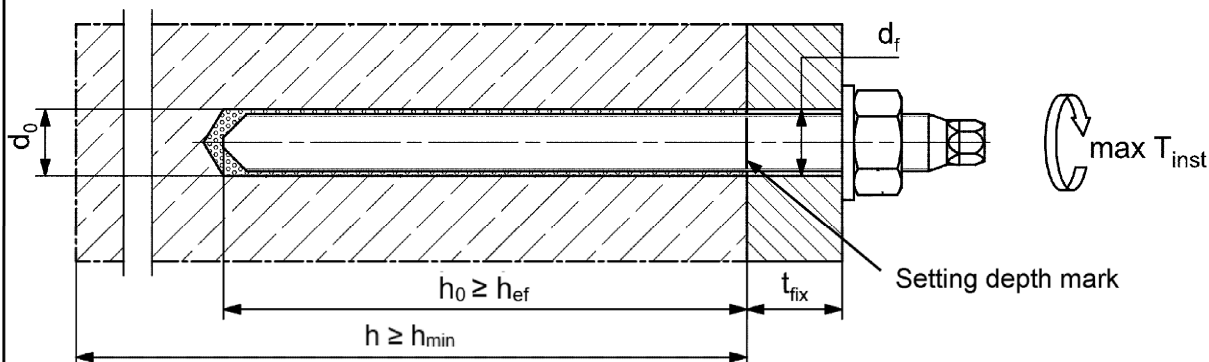Installation conditions:



Figures not to scale

fischer Superbond

Intended use



Installation parameters for fischer anchor rods RG M in combination with resin capsule system RSB

Annex B 5

Appendix 14 / 42


Table B6.1: Installation parameters for fischer internal threaded anchors RG M I

Internal threaded anchor RG M I		Thread	M8	M10	M12	M16	M20
Sleeve diameter	$d_{nom} = d_H$	[mm]	12	16	18	22	28
Nominal drill hole diameter	d_0		14	18	20	24	32
Drill hole depth	h_0		$h_0 \geq h_{ef} = L_H$				
Effective embedment depth ($h_{ef} = L_H$)	h_{ef}		90	90	125	160	200
Minimum spacing and minimum edge distance	s_{min} = c_{min}		55	65	75	95	125
Diameter of clearance hole in the fixture	d_f		9	12	14	18	22
Minimum thickness of concrete member	h_{min}		120	125	165	205	260
Maximum screw-in depth	$l_{E,max}$		18	23	26	35	45
Minimum screw-in depth	$l_{E,min}$		8	10	12	16	20
Maximum installation torque	$\max T_{inst}$	[Nm]	10	20	40	80	120

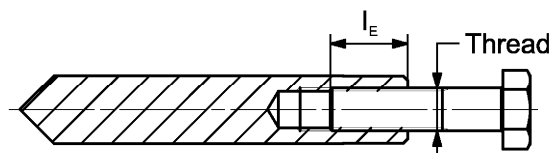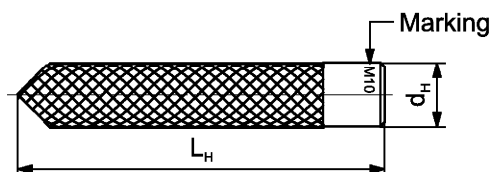fischer internal threaded anchor RG M I

Marking: Anchor size e. g.: **M10**
 Stainless steel → additional R; e.g.: **M10 R**
 High corrosion resistant steel R → additional C; e.g.: **M10 HCR**

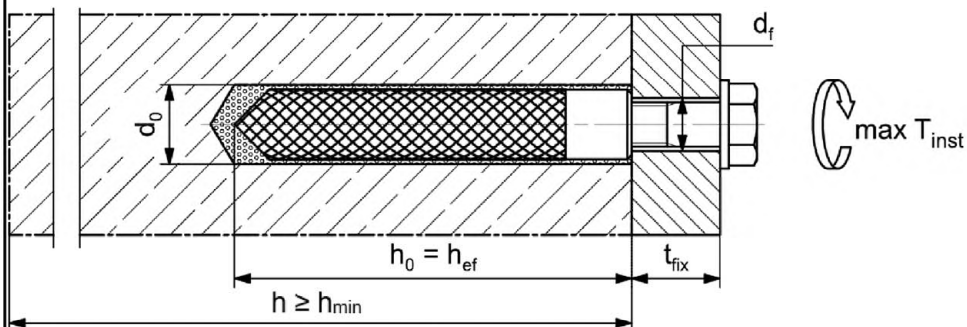Retaining bolt or threaded rods (including nut and washer) must comply with the appropriate material and strength class of **Annex A 7, Table A7.1**.

Installation conditions:

Figures not to scale

fischer Superbond

Intended use

Installation parameters for fischer internal threaded anchors RG M I

Annex B 6

Appendix 15 / 42

Table B7.1: Installation parameters for reinforcing bars

Nominal diameter of the bar		ϕ	8 ¹⁾		10 ¹⁾		12 ¹⁾		14	16	20	25	28	32
Nominal drill hole diameter	d_0	[mm]	10	12	12	14	14	16	18	20	25	30	35	40
Drill hole depth	h_0		$h_0 \geq h_{ef}$											
Effective embedment depth	$h_{ef,min}$		60	60	70	75	80	90	100	112	128			
	$h_{ef,max}$		160	200	240	280	320	400	500	560	640			
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$		40	45	55	60	65	85	110	130	160			
Minimum thickness of concrete member	h_{min}		$h_{ef} + 30$ (≥ 100)				$h_{ef} + 2d_0$							

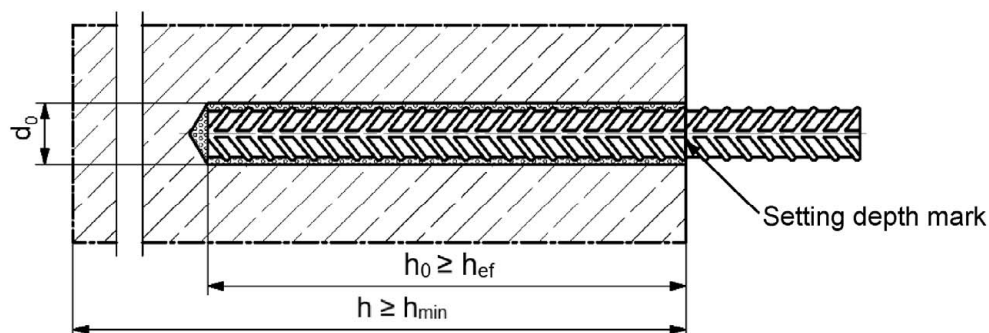
¹⁾ Both drill hole diameters can be used

Reinforcing bar



- The minimum value of related rib area $f_{R,min}$ must fulfil the requirements of EN 1992-1-1:2004+AC:2010
- The rib height must be within the range: $0,05 \cdot \phi \leq h_{rib} \leq 0,07 \cdot \phi$
(ϕ = Nominal diameter of the bar, h_{rib} = rib height)

Installation conditions:



Figures not to scale

fischer Superbond

Intended use
Installation parameters reinforcing bars

Annex B 7


Appendix 16 / 42

Table B8.1: Installation parameters for fischer rebar anchor FRA

Rebar anchor FRA		Thread	M12 ¹⁾		M16	M20	M24
Nominal diameter of the bar	ϕ	[mm]	12		16	20	25
Nominal drill hole diameter	d_0		14	16	20	25	30
Drill hole depth	h_0		$h_{ef} + l_e$				
Effective embedment depth	$h_{ef,min}$		70		80	90	96
	$h_{ef,max}$		140		220	300	380
Distance concrete surface to welded joint	l_e		100				
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$		55		65	85	105
Diameter of clearance hole in the fixture	pre-positioned anchorage $\leq d_f$		14		18	22	26
	push through anchorage $\leq d_f$		18		22	26	32
Minimum thickness of concrete member	h_{min}		$h_0 + 30$ (≥ 100)	$h_0 + 2d_0$			
Maximum installation torque	$\max T_{inst}$	[Nm]	40		60	120	150

¹⁾ Both drill hole diameters can be used

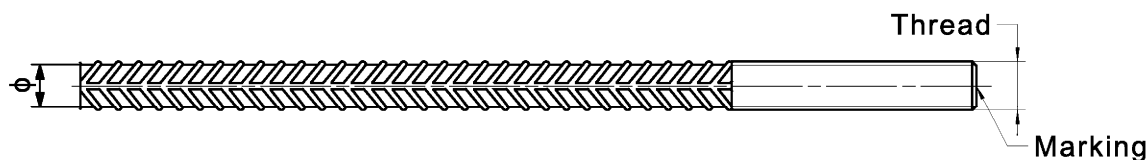
fischer rebar anchor FRA



Marking frontal e. g:

 FRA (for stainless steel);
 FRA HCR (for high corrosion resistant steel)

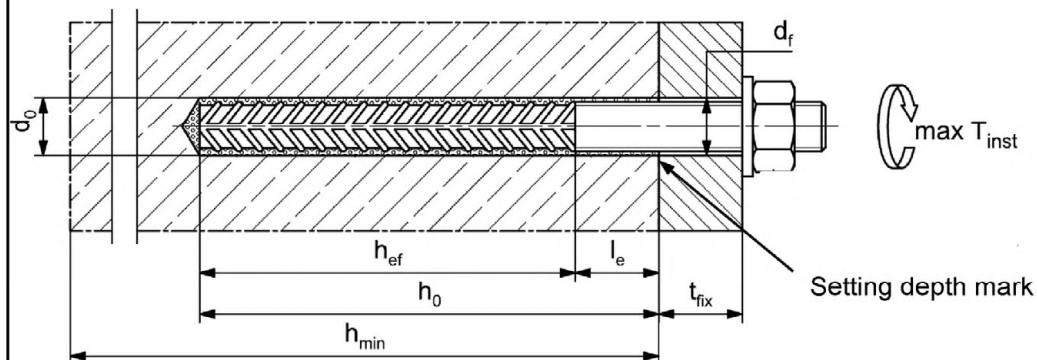Installation conditions:



Figures not to scale

fischer Superbond

Intended use

Installation parameters rebar anchor FRA

Annex B 8

Appendix 17 / 42

Table B9.1: Dimension of resin capsule RSB

Resin capsule RSB		RSB 8	RSB 10 mini	RSB 10	RSB 12 mini	RSB 12	RSB 16 mini	RSB 16	RSB 16 E	RSB 20	RSB 20 E / 24	RSB 30
Capsule diameter	d _P	9,0	10,5		12,5		16,5			23,0		27,5
Capsule length	L _P	85	72	90	72	97	72	95	123	160	190	260

**Table B9.2: Assignment of resin capsule RSB to fischer anchor rod RG M**

Anchor rod RG M		M8	M10	M12	M16	M20	M24	M30
Effective embedment depth	h _{ef, 1} [mm]	---	75	75	95	---	---	---
Related capsule RSB	[-]	---	10 mini	12 mini	16 mini	---	---	---
Effective embedment depth	h _{ef, 2} [mm]	80	90	110	125	170	210	280
Related capsule RSB	[-]	8	10	12	16	20	20 E / 24	30
Effective embedment depth	h _{ef, 3} [mm]	---	150	150	190	210	---	---
Related capsule RSB	[-]	---	2 x 10 mini	2 x 12 mini	2 x 16 mini	20 E / 24	---	---

Table B9.3: Assignment of resin capsule RSB to fischer internal threaded anchor RG M I

Internal threaded anchor RG M I		M8	M10	M12	M16	M20
Effective embedment depth	h _{ef} [mm]	90	90	125	160	200
Related capsule RSB	[-]	10	12	16	16 E	20 E / 24

fischer Superbond

Intended use

Dimensions of the capsules; Assignment of the capsule to the fischer anchor rod RG M and fischer internal threaded anchor RG M I

Annex B 9

Appendix 18 / 42

Table B10.1: Combined setting methods for resin capsule RSB with fischer anchor rod RG M

Anchor rod RG M	Minimum temperature at anchoring base [°C]	Minimum temperature of the resin capsule [°C]	M8	M10	M12	M16	M20	M24	M30
Rotary hammer	-30	-15	✓	✓	✓	✓	✓	✓	✓
Tangential impact screw driver	-10	-10	-	✓	✓	✓	-	-	-
Cordless drill screw driver	-10	5	✓	✓	✓	✓	-	-	-

Table B10.2: Combined setting methods for resin capsule RSB with fischer internal threaded anchor RG M I

fischer internal threaded anchor RG M I	Minimum temperature at anchoring base [°C]	Minimum temperature of the resin capsule [°C]	M8	M10	M12	M16	M20
Rotary hammer	-30	-15	✓	✓	✓	✓	✓
Tangential impact screw driver	-10	-10	✓	✓	✓	-	-
Cordless drill screw driver	-10	5	✓	✓	✓	-	-

--	--	--	--	--	--	--	--

fischer Superbond	Annex B 10 Appendix 19 / 42
Intended use Combined setting methods for resin capsule RSB with fischer anchor rod RG M or fischer internal threaded anchor RG M I	

Table B11.1: Parameters of the cleaning brush BS (steel brush with steel bristles)

The size of the cleaning brush refers to the drill hole diameter

Nominal drill hole diameter	d_0		10	12	14	16	18	20	24	25	28	30	32	35	40
Steel brush diameter BS	d_b	[mm]	11	14	16	20		25	26	27	30	40			-
Steel brush diameter BSB	d_b		-	-	-	-		-	-	-	-	-			42

**Table B11.2: Conditions for use static mixer without an extension tube**

Nominal drill hole diameter	d_0		10	12	14	16	18	20	24	25	28	30	35	40
Drill hole depth h_0 by using	FIS MR Plus	[mm]	≤ 90		≤ 120	≤ 140	≤ 150	≤ 160	≤ 190	≤ 210				
	FIS UMR		-	-	≤ 90	≤ 160	≤ 180	≤ 190	≤ 220		≤ 250			

Table B11.3: Maximum processing time of the mortar and minimum curing time
 (During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature. Minimal cartridge temperature +5 °C; minimal resin capsule temperature -15 °C)

Temperature at anchoring base [°C]	Maximum processing time t_{work}		Minimum curing time t_{cure}		
	FIS SB	FIS SB High Speed	FIS SB	FIS SB High Speed	RSB
-30 to -20	---	---	---	---	120 h
> -20 to -15	---	60 min	---	24 h	48 h
> -15 to -10	60 min	30 min	36 h	8 h	30 h
> -10 to -5	30 min	15 min	24 h	3 h	16 h
> -5 to 0	20 min	10 min	8 h	2 h	10 h
> 0 to 5	13 min	5 min	4 h	1 h	45 min
> 5 to 10	9 min	3 min	2 h	45 min	30 min
> 10 to 20	5 min	2 min	1 h	30 min	20 min
> 20 to 30	4 min	1 min	45 min	15 min	5 min
> 30 to 40	2 min	---	30 min	---	3 min

Figures not to scale

fischer Superbond

Intended use





Cleaning brush (steel brush)
 Processing time and curing time

Annex B 11

Appendix 20 / 42

Installation instructions part 1; Injection mortar system FIS SB



Drilling and cleaning the hole (hammer drilling with standard drill bit)

1		Drill the hole. Nominal drill hole diameter d_0 and drill hole depth h_0 see Tables B4.1, B6.1, B7.1, B8.1.
2		Clean the drill hole: Blow out the drill hole twice, with oil free compressed air ($p \geq 6$ bar) In uncracked concrete the use of the manual blow-out pump ABG is possible (Installation parameters: $d_0 < 18$ mm and $h_{ef} < 10d$)
3		Brush the drill hole twice. For drill hole diameter ≥ 30 mm use a power drill. For deep holes use an extension. Corresponding brushes see Table B11.1.
4		Clean the drill hole: Blow out the drill hole twice, with oil free compressed air ($p \geq 6$ bar) In uncracked concrete the use of the manual blow-out pump ABG is possible (Installation parameters: $d_0 < 18$ mm and $h_{ef} < 10d$)



Go to step 5 (Annex B 12)

Drilling and cleaning the hole (hammer drilling with hollow drill bit)

1		Check a suitable hollow drill (see Table B1.1) for correct operation of the dust extraction.
2		Use a suitable dust extraction system, e. g. fischer FVC 35 M or a comparable dust extraction system with equivalent performance data. Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Nominal drill hole diameter d_0 and drill hole depth h_0 see Tables B4.1, B6.1, B7.1, B8.1.

Go to step 5 (Annex B 12)

fischer Superbond

Intended use




Installation instructions part 1; injection mortar system FIS SB

Annex B 12




Appendix 21 / 42

Installation instructions part 2; injection mortar system FIS SB

Preparing the cartridge

5		Remove the sealing cap Screw on the static mixer (the spiral in the static mixer must be clearly visible).
6		 Place the cartridge into the dispenser.
7		 Extrude approximately 10 cm of material out until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey.

Injection of the mortar

8	 For $h_0 = h_{ef}$ fill approximately 2/3 of the drill hole with mortar. For $h_0 > h_{ef}$ more mortar is needed. Always begin from the bottom of the hole and avoid bubbles.	 The conditions for mortar injection without extension tube can be found in Table B11.2. For deeper drill holes, than those mentioned in Table B11.2, use a suitable extension tube.	 For overhead installation, deep holes ($h_0 > 250$ mm) or drill hole diameter ($d_0 \geq 30$ mm) use an injection-adaptor.
---	--	--	---

Go to step 9 (Annex B 13)

fischer Superbond

Intended use

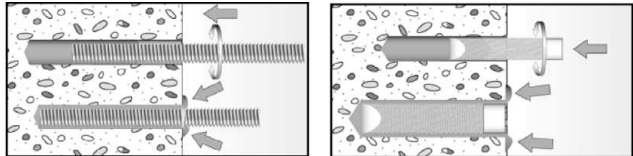




Installation instructions part 2; injection mortar system FIS SB

Annex B 13



Appendix 22 / 42

Installation instructions part 3; injection mortar system FIS SB

Installation of anchor rods or fischer internal threaded anchors RG M I

9		Only use clean and oil-free metal part. Mark the setting depth of the metal part. Push the anchor rod or fischer internal threaded RG M I anchor down to the bottom of the hole, turning it slightly while doing so. After inserting the metal part, excess mortar must be emerged around the anchor element. If not, pull out the metal part immediately and reinject mortar.
9a	 For overhead installations support the metal part with wedges. (e. g. fischer centering wedges).	 For push through installation fill the annular gap with mortar.
10	 Wait for the specified curing time t_{cure} see Table B11.3.	11  Mounting the fixture max T_{inst} see Tables B4.1 and B6.1.
Option		After the minimum curing time is reached, the gap between metal part and fixture (annular clearance) may be filled with mortar via the fischer filling disc. Compressive strength $\geq 50 \text{ N/mm}^2$ (e.g. fischer injection mortars FIS HB, FIS SB, FIS V, FIS EM Plus). ATTENTION: Using fischer filling disc reduces t_{fix} (usable length of the anchor).

Installation reinforcing bars and fischer rebar anchor FRA

9		Only use clean and oil-free reinforcing bars or fischer FRA. Mark the setting depth. Turn while using force to push the reinforcement bar or the fischer FRA into the filled hole up to the setting depth mark. When the setting depth mark is reached, excess mortar must be emerged from the mouth of the drill hole. If not, pull out the anchor element immediately and reinject mortar.
10	 Wait for the specified curing time t_{cure} see Table B11.3.	11  Mounting the fixture max T_{inst} see Table B8.1.

fischer Superbond

Intended use



Installation instructions part 3; injection mortar system FIS SB

Annex B 14

Appendix 23 / 42







Installation instructions part 4; resin capsule RSB

Drilling and cleaning the hole (hammer drilling with standard drill bit)

1		Drill the hole. Nominal drill hole diameter d_0 and drill hole depth h_0 see Tables B5.1 and B6.1
2		Clean the drill hole: Blow out the drill hole four times, with oil free compressed air ($p \geq 6$ bar) In uncracked concrete the use of the manual blow-out pump ABG is possible (Installation parameters: $d_0 < 18$ mm and $h_{ef} < 10d$) 

Go to step 6 (Annex B 16)

Drilling and cleaning the hole (wet drilling with diamond drill bit)

1		Drill the hole. Drill hole diameter d_0 and drill hole depth h_0 see Tables B5.1 and B6.1.	 Break the drill core and remove it.
2		Flush the drill hole with clean water until it flows clear.	
3		Blow out the drill hole twice, using oil-free compressed air ($p > 6$ bar).	
4		Brush the drill hole twice using a power drill. Corresponding brushes see Table B11.1.	
5		Blow out the drill hole twice, using oil-free compressed air ($p > 6$ bar).	

Go to step 6 (Annex B 16)

fischer Superbond

Intended use



Installation instructions part 4; resin capsule RSB

Annex B 15

Appendix 24 / 42


Installation instructions part 5; resin capsule RSB

Drilling and cleaning the hole (hammer drilling with hollow drill bit)







1		Check a suitable hollow drill (see Table B2.1) for correct operation of the dust extraction.
2		Use a suitable dust extraction system, e. g. fischer FVC 35 M or a comparable dust extraction system with equivalent performance data. Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Nominal drill hole diameter d_0 and drill hole depth h_0 see Tables B5.1 and B6.1 .


Go to step 6 (Annex B 16)

Installation fischer anchor rod RG M or fischer internal threaded anchor RG M I

6		Insert the resin capsule into the drill hole by hand. Suitable resin capsule RSB or RSB mini see Table B9.2 .
---	---	---

Installation with rotary hammer

7a		   SK SW 8 1/2" VK (M8-M22)	   1/2" + SDS plus 1/2" VK (M8-M16) SDS max 1/2" VK (M16-M20)  3/4" + SDS max 3/4" VK (M20-M30)
----	---	---	--

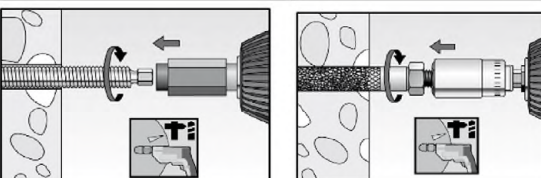		Only use clean and grease-free metal parts. Using a suitable adapter, drive the fischer anchor rod RG M or the fischer internal threaded anchor RG M I into the capsule using a rotary hammer on rotary hammer mode. Stop when the metal parts reaches the bottom of the hole and is set to the correct embedment depth.
--	---	--

fischer Superbond

Intended use

Installation instructions part 5; resin capsule RSB

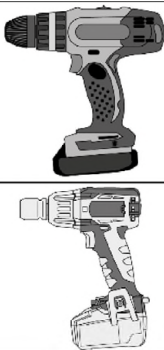
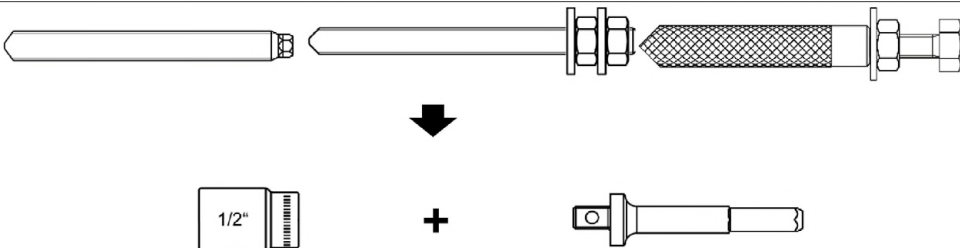
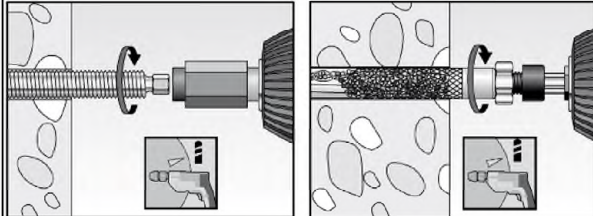


Annex B 16

Appendix 25 / 42

Installation instructions part 6; resin capsule RSB

Installation fischer anchor rod RG M or fischer internal threaded anchor RG M I (continue)

Installation with cordless drill or tangential impact screwdriver (Specification according to step 7c)

7b		 Anchor rod RG M: SK SW 8 1/2" VK (M8-M16) Internal threaded anchor RG M I: SK SW 8 1/2" VK (M8-M12)
7c		Only use clean and grease-free metal parts. Using a suitable adapter, drive the fischer anchor rod RG M or the fischer internal threaded anchor RG M I into the capsule using a cordless drill screwdriver (only drilling operation, torque = 0 - 32 Nm and idle speed = 0 - 450 revolutions per minute, e.g., FEIN ASB 18, 1st gear or equivalent power tool) or tangential impact screw driver (torque = 0 - 400 Nm and idle speed = 0-2.150 revolutions per minute; e.g. fischer FSS 18V 400BL, torque setting 12 or equivalent power tool). Stop when the metal parts reaches the bottom of the hole and is set to the correct embedment depth.
8		When reaching the correct embedment depth, excess mortar must emerge from the mouth of the drill hole. If not, the metal parts must be pulled out directly and a second resin capsule must be pushed into the drill hole. Setting process must be repeated (Step 7).
9	 Wait for the specified curing time, t_{cure} see Table B11.3.	10  Mounting the fixture max T_{inst} see Tables B5.1 and B6.1.

fischer Superbond

Intended use

Installation instructions part 6; resin capsule RSB

Annex B 17

Appendix 26 / 42

Table C1.1: Characteristic resistance to steel failure under tension / shear loading of fischer anchor rods and standard threaded rods

Anchor rod / standard threaded rod				M8	M10	M12	M16	M20	M24	M27	M30	
Characteristic resistance to steel failure under tension loading ³⁾												
Characteristic resistance $N_{Rk,s}$	Steel zinc plated	Property class	4.8	[kN]	15(13)	23(21)	33	63	98	141	184	224
			5.8		19(17)	29(27)	43	79	123	177	230	281
			8.8		29(27)	47(43)	68	126	196	282	368	449
	Stainless steel R and high corrosion resistant steel HCR		50		19	29	43	79	123	177	230	281
			70		26	41	59	110	172	247	322	393
			80		30	47	68	126	196	282	368	449
Partial factors ¹⁾												
Partial factor $\gamma_{Ms,N}$	Steel zinc plated	Property class	4.8	[-]	1,50							
			5.8		1,50							
			8.8		1,50							
	Stainless steel R and high corrosion resistant steel HCR		50		2,86							
			70		1,87 / fischer HCR: 1,50							
			80		1,60							
Characteristic resistance to steel failure under shear loading ³⁾												
without lever arm												
Characteristic resistance $V_{Rk,s}^0$	Steel zinc plated	Property class	4.8	[kN]	9(8)	14(13)	20	38	59	85	110	135
			5.8		11(10)	17(16)	25	47	74	106	138	168
			8.8		15(13)	23(21)	34	63	98	141	184	225
	Stainless steel R and high corrosion resistant steel HCR		50		9	15	21	39	61	89	115	141
			70		13	20	30	55	86	124	161	197
			80		15	23	34	63	98	141	184	225
Ductility factor		k_7	[-]	1,0								
with lever arm												
Characteristic resistance $M_{Rk,s}^0$	Steel zinc plated	Property class	4.8	[Nm]	15(13)	30(27)	52	133	259	448	665	899
			5.8		19(16)	37(33)	65	166	324	560	833	1123
			8.8		30(26)	60(53)	105	266	519	896	1333	1797
	Stainless steel R and high corrosion resistant steel HCR		50		19	37	65	166	324	560	833	1123
			70		26	52	92	232	454	784	1167	1573
			80		30	60	105	266	519	896	1333	1797
Partial factors ¹⁾												
Partial factor $\gamma_{Ms,V}$	Steel zinc plated	Property class	4.8	[-]	1.25							
			5.8		1.25							
			8.8		1.25							
	Stainless steel R and high corrosion resistant steel HCR		50		2.38							
			70		1.56 / fischer HCR: 1.25 ²⁾							
			80		1.33							
¹⁾ In absence of other national regulations												
²⁾ Only admissible for high corrosion resistant steel C, with $f_{yk} / f_{uk} \geq 0,8$ and $A_5 > 12 \%$ (e.g. fischer anchor rods)												
³⁾ Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hotdip galvanized standard threaded rods according to EN ISO 10684:2004+AC:2009												

¹⁾ In absence of other national regulations

²⁾ Only admissible for high corrosion resistant steel C, with $f_{yk} / f_{uk} \geq 0,8$ and $A_s > 12 \%$ (e.g. fischer anchor rods)

³⁾ Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hotdip galvanized standard threaded rods according to EN ISO 10684:2004+AC:2009

fischer Superbond

Performances

Characteristic resistance to steel failure under tension and shear loading of fischer anchor rods and standard threaded rods

Annex C 1

Appendix 27 / 42

Table C2.1: Characteristic resistance to steel failure under tension / shear loading of fischer internal threaded anchors RG M I

fischer internal threaded anchors RG M I				M8	M10	M12	M16	M20	
Characteristic resistance to steel failure under tension loading									
Charact. resistance with screw	N _{Rk,s}	Property class	5.8 8.8	[kN]	19	29	43	79	123
					29	47	68	108	179
		Property class 70	R HCR		26	41	59	110	172
					26	41	59	110	172
Partial factors ¹⁾									
Partial factors	γ _{Ms,N}	Property class	5.8 8.8	[-]	1,50				
					1,50				
		Property class 70	R HCR		1,87				
					1,87				
Characteristic resistance to steel failure under shear loading									
Without lever arm									
Charact. resistance with screw	V ⁰ _{Rk,s}	Property class	5.8 8.8	[kN]	9,2	14,5	21,1	39,2	62,0
					14,6	23,2	33,7	54,0	90,0
		Property class 70	R HCR		12,8	20,3	29,5	54,8	86,0
					12,8	20,3	29,5	54,8	86,0
Ductility factor			k ₇	[-]	1,0				
With lever arm									
Charact. resistance with screw	M ⁰ _{Rk,s}	Property class	5.8 8.8	[Nm]	20	39	68	173	337
					30	60	105	266	519
		Property class 70	R HCR		26	52	92	232	454
					26	52	92	232	454
Partial factors ¹⁾									
Partial factors	γ _{Ms,V}	Property class	5.8 8.8	[-]	1,25				
					1,25				
		Property class 70	R HCR		1,56				
					1,56				

¹⁾ In absence of other national regulations

fischer Superbond

Performances

Characteristic resistance to steel failure under tension / shear loading of fischer internal threaded anchor RG M I

Annex C 2

Appendix 28 / 42

Table C3.1: Characteristic resistance to steel failure under tension and shear loading of reinforcing bars

Nominal diameter of the bar	ϕ	8	10	12	14	16	20	25	28	32
Characteristic resistance to steel failure under tension loading										
Characteristic resistance	$N_{Rk,s}$	[kN]	$A_s \cdot f_{uk}^{2)}$							
Characteristic resistance to steel failure under shear loading										
Without lever arm										
Characteristic resistance	$V_{Rk,s}^0$	[kN]	$k_6^{1)} \cdot A_s \cdot f_{uk}^{2)}$							
Ductility factor	k_7	[-]	1,0							
With lever arm										
Characteristic resistance	$M_{Rk,s}^0$	[Nm]	$1,2 \cdot W_{el} \cdot f_{uk}^{2)}$							

- 1) In accordance with EN 1992-4:2018 section 7.2.2.3.1
 $k_6 = 0,6$ for fasteners made of carbon steel with $f_{uk} \leq 500 \text{ N/mm}^2$
 $= 0,5$ for fasteners made of carbon steel with $500 < f_{uk} \leq 1000 \text{ N/mm}^2$
 $= 0,5$ for fasteners made of stainless steel
- 2) f_{uk} respectively shall be taken from the specifications of the rebar.

Table C3.2: Characteristic resistance to steel failure under tension and shear loading of fischer rebar anchors FRA

fischer rebar anchor FRA			M12	M16	M20	M24
Characteristic resistance to steel failure under tension loading						
Characteristic resistance	N _{Rk,s}	[kN]	62,1	110,5	172,7	263,0
Partial factor ¹⁾						
Partial factor	γ _{Ms,N}	[-]	1,4			
Characteristic resistance to steel failure under shear loading						
Without lever arm						
Characteristic resistance	V ⁰ _{Rk,s}	[kN]	33,7	62,8	98,0	141,2
Ductility factor	k ₇	[-]	1,0			
With lever arm						
Characteristic resistance	M ⁰ _{Rk,s}	[Nm]	104,8	266,3	519,2	898,0
Partial factor ¹⁾						
Partial factor	γ _{Ms,V}	[-]	1,25			

- 1) In absence of other national regulations

fischer Superbond	Annex C 3 Appendix 29 / 42
Performances Characteristic resistance to steel failure under tension and shear loading of reinforcing bars and fischer rebar anchors FRA	

Table C4.1: Characteristic resistance to **concrete failure** under tension / shear loading

Size			All sizes									
Tension loading												
Installation factor		γ_{inst}	[-]	See annex C 5 to C 10 and C 15 to C 16								
Factors for the compressive strength of concrete > C20/25												
Increasing factor ψ_c for cracked or uncracked concrete $\tau_{Rk}(X,Y) = \psi_c \cdot \tau_{Rk}(C20/25)$	C25/30	ψ_c	[-]	1,02								
	C30/37			1,04								
	C35/45			1,07								
	C40/50			1,08								
	C45/55			1,09								
	C50/60			1,10								
Splitting failure												
Edge distance	$h / h_{ef} \geq 2,0$	$C_{cr,sp}$	[mm]	1,0 h_{ef}								
	$2,0 > h / h_{ef} > 1,3$			4,6 h_{ef} - 1,8 h								
	$h / h_{ef} \leq 1,3$			2,26 h_{ef}								
Spacing		$S_{cr,sp}$		2 $C_{cr,sp}$								
Concrete cone failure												
Uncracked concrete	$k_{ucr,N}$	[-]	[mm]	11,0								
Cracked concrete	$k_{cr,N}$			7,7								
Edge distance	$C_{cr,N}$	1,5 h_{ef}										
Spacing	$S_{cr,N}$	2 $C_{cr,N}$										
Factors for sustained tension loading												
Temperature range		[-]	24 °C / 40 °C	50 °C / 80 °C	72 °C / 120 °C	90 °C / 150 °C						
Factor		Ψ_{sus}^0	[-]	0,84	0,86	0,84	0,91					
Shear loading												
Installation factor		γ_{inst}	[-]	1,0								
Concrete pry-out failure												
Factor for pry-out failure		k_8	[-]	2,0								
Concrete edge failure												
Effective length of fastener in shear loading		l_f	[mm]	for $d_{nom} \leq 24$ mm: min (h_{ef} ; 12 d_{nom}) for $d_{nom} > 24$ mm: min (h_{ef} ; 8 d_{nom} ; 300 mm)								
Calculation diameters												
Size			M8	M10	M12	M16	M20	M24	M27	M30		
fischer anchor rods and standard threaded rods	d_{nom}	[mm]	8	10	12	16	20	24	27	30		
fischer internal threaded anchors RG M I	d_{nom}		12	16	18	22	28	- ¹⁾	- ¹⁾	- ¹⁾		
fischer rebar anchor FRA	d_{nom}		- ¹⁾	- ¹⁾	12	16	20	25	- ¹⁾	- ¹⁾		
Size (nominal diameter of the bar)		ϕ	8	10	12	14	16	20	25	28	32	
Reinforcing bar		d_{nom}	[mm]	8	10	12	14	16	20	25	28	32
¹⁾ Anchor type not part of the ETA												
fischer Superbond									Annex C 4 Appendix 30 / 42			
Performances Characteristic values for concrete failure under tension / shear loading												

Table C5.1: Characteristic resistance to combined pull-out and concrete failure for fischer anchor rods and standard threaded rods in hammer drilled holes in combination with injection mortar FIS SB; uncracked or cracked concrete												
Anchor rod / standard threaded rod			M8	M10	M12	M16	M20	M24	M27	M30		
Combined pullout and concrete cone failure												
Thread diameter		d	[mm]	8	10	12	16	20	24	27	30	
Uncracked concrete												
Characteristic bond resistance in uncracked concrete C20/25												
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)												
Temperature range	I: 24 °C / 40 °C		$\tau_{RK,ucr}$	[N/mm²]	12	13	13	13	13	12	10	10
	II: 50 °C / 80 °C				12	12	12	13	13	12	10	10
	III: 72 °C / 120 °C				10	11	11	11	11	11	9,0	9,0
	IV: 90 °C / 150 °C				10	10	10	11	10	10	8,0	8,0
Installation factors												
Dry or wet concrete		γ_{inst}	[-]	1,0								
Cracked concrete												
Characteristic bond resistance in cracked concrete C20/25												
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)												
Temperature range	I: 24 °C / 40 °C		$\tau_{RK,cr}$	[N/mm²]	6,5	7,0	7,5	7,5	7,5	7,5	7,5	7,5
	II: 50 °C / 80 °C				6,0	6,5	7,5	7,5	7,5	7,5	7,0	7,0
	III: 72 °C / 120 °C				5,5	6,0	6,5	6,5	6,5	6,5	6,0	6,0
	IV: 90 °C / 150 °C				5,0	5,5	6,0	6,0	6,0	6,0	5,5	5,5
Installation factors												
Dry or wet concrete		γ_{inst}	[-]	1,0								

Table C6.1:	Characteristic resistance to combined pull-out and concrete failure for fischer anchor rods RG M in hammer or diamond drilled holes in combination with resin capsule RSB: uncracked or cracked concrete
--------------------	---

Anchor rod RG M			M8	M10	M12	M16	M20	M24	M30		
Combined pullout and concrete cone failure											
Thread diameter		d	[mm]	8	10	12	16	20	24	30	
Uncracked concrete											
Characteristic bond resistance in uncracked concrete C20/25											
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete as well as water filled hole)											
Temperature range	I: 24 °C / 40 °C		$\tau_{Rk,ucr}$	[N/mm²]	12	13	13	13	13	12	10
	II: 50 °C / 80 °C				12	12	12	13	13	12	10
	III: 72 °C / 120 °C				10	11	11	11	11	11	9,0
	IV: 90 °C / 150 °C				10	10	10	11	10	10	8,0
Diamond-drilling (dry or wet concrete as well as water filled hole)											
Temperature range	I: 24 °C / 40 °C		$\tau_{Rk,ucr}$	[N/mm²]	13	13	14	14	14	13	11
	II: 50 °C / 80 °C				12	13	13	14	13	13	10
	III: 72 °C / 120 °C				11	12	12	12	12	11	9,5
	IV: 90 °C / 150 °C				10	11	11	11	11	10	8,5
Installation factors											
Dry or wet concrete		γ_{inst}	[-]	1,0							
Water filled hole				1,2	1,0						
Cracked concrete											
Characteristic bond resistance in cracked concrete C20/25											
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete as well as water filled hole)											
Temperature range	I: 24 °C / 40 °C		$\tau_{Rk,cr}$	[N/mm²]	6,5	7,0	7,5	7,5	7,5	7,5	7,5
	II: 50 °C / 80 °C				6,0	6,5	7,5	7,5	7,5	7,5	7,0
	III: 72 °C / 120 °C				5,5	6,0	6,5	6,5	6,5	6,5	6,0
	IV: 90 °C / 150 °C				5,0	5,5	6,0	6,0	6,0	6,0	5,5
Diamond-drilling (dry or wet concrete as well as water filled hole)											
Temperature range	I: 24 °C / 40 °C		$\tau_{Rk,cr}$	[N/mm²]	– ¹⁾	– ¹⁾	– ¹⁾	7,5	7,5	7,5	7,5
	II: 50 °C / 80 °C				– ¹⁾	– ¹⁾	– ¹⁾	7,5	7,5	7,5	7,0
	III: 72 °C / 120 °C				– ¹⁾	– ¹⁾	– ¹⁾	6,5	6,5	6,5	6,5
	IV: 90 °C / 150 °C				– ¹⁾	– ¹⁾	– ¹⁾	6,0	6,0	6,0	6,0
Installation factors											
Dry or wet concrete		γ_{inst}	[-]	1,0							
Water filled hole				1,2	1,0						
¹) No performance assessed											

fischer Superbond

Performances

Characteristic resistance to combined pull-out and concrete failure for fischer anchor rod RG M with resin capsule RSB

Annex C 6

Appendix 32 / 42

Table C7.1: Characteristic resistance to **combined pull-out** and concrete failure for **fischer internal threaded anchors RG M I** in hammer drilled holes in combination with **injection mortar FIS SB**; **uncracked or cracked concrete**

Internal threaded anchor RG M I			M8	M10	M12	M16	M20	
Combined pullout and concrete cone failure								
Sleeve diameter		d	[mm]	12	16	18	22	28
Uncracked concrete								
Characteristic bond resistance in uncracked concrete C20/25								
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)								
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$	[N/mm ²]	12	12	11	11	9,5
	II: 50 °C / 80 °C			12	11	11	10	9,0
	III: 72 °C / 120 °C			11	10	10	9,0	8,0
	IV: 90 °C / 150 °C			10	9,5	9,0	8,5	7,5
Installation factors								
Dry or wet concrete		γ_{inst}	[-]	1,0				
Cracked concrete								
Characteristic bond resistance in cracked concrete C20/25								
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)								
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$	[N/mm ²]	5,0				
	II: 50 °C / 80 °C			5,0				
	III: 72 °C / 120 °C			4,5				
	IV: 90 °C / 150 °C			4,0				
Installation factors								
Dry or wet concrete		γ_{inst}	[-]	1,0				

fischer Superbond

Performances

Characteristic resistance to combined pull-out and concrete failure for fischer internal threaded anchor RG M I with injection mortar FIS SB

Annex C 7

Appendix 33 / 42

Table C8.1:	Characteristic resistance to combined pull-out and concrete failure for fischer internal threaded anchors RG M I in hammer or diamond drilled holes in combination with resin capsule RSB; uncracked or cracked concrete
--------------------	---

Internal threaded anchor RG M I			M8	M10	M12	M16	M20	
Combined pullout and concrete cone failure								
Sleeve diameter		d	[mm]	12	16	18	22	28
Uncracked concrete								
Characteristic bond resistance in uncracked concrete C20/25								
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete as well as water filled hole)								
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$	[N/mm²]	12	12	11	11	9,5
	II: 50 °C / 80 °C			12	11	11	10	9,0
	III: 72 °C / 120 °C			11	10	10	9,0	8,0
	IV: 90 °C / 150 °C			10	9,5	9,0	8,5	7,5
Diamond-drilling (dry or wet concrete as well as water filled hole)								
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$	[N/mm²]	13	12	12	11	10
	II: 50 °C / 80 °C			13	12	12	11	9,5
	III: 72 °C / 120 °C			11	11	10	9,5	8,5
	IV: 90 °C / 150 °C			10	10	9,5	9,0	8,0
Installation factors								
Dry or wet concrete		γ_{inst}	[-]	1,0				
Water filled hole				1,2	1,0			
Cracked concrete								
Characteristic bond resistance in cracked concrete C20/25								
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete as well as water filled hole)								
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$	[N/mm²]	5,0				
	II: 50 °C / 80 °C			5,0				
	III: 72 °C / 120 °C			4,5				
	IV: 90 °C / 150 °C			4,0				
Diamond-drilling (dry or wet concrete as well as water filled hole)								
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$	[N/mm²]	- ¹⁾	5,0			
	II: 50 °C / 80 °C			- ¹⁾	5,0			
	III: 72 °C / 120 °C			- ¹⁾	4,5			
	IV: 90 °C / 150 °C			- ¹⁾	4,0			
Installation factors								
Dry or wet concrete		γ_{inst}	[-]	1,0				
Water filled hole				1,2	1,0			
¹⁾ No performance assessed								

fischer Superbond

Performances

Characteristic resistance to combined pull-out and concrete failure for fischer internal threaded anchor RG M I with resin capsule RSB

Annex C 8

Appendix 34 / 42

Table C9.1: Characteristic resistance to **combined pull-out** and concrete failure for **reinforcing bars** in hammer drilled holes in combination with **injection mortar** FIS SB: **uncracked or cracked concrete**

Nominal diameter of the bar		ϕ	8	10	12	14	16	20	25	28	32	
Combined pullout and concrete cone failure												
Bar diameter		d	[mm]	8	10	12	14	16	20	25	28	32
Uncracked concrete												
Characteristic bond resistance in uncracked concrete C20/25												
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)												
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$	[N/mm ²]	8,0	8,5	9,0	9,5	9,5	10	9,5	9,0	7,5
	II: 50 °C / 80 °C			8,0	8,5	9,0	9,0	9,5	9,5	9,0	8,5	7,5
	III: 72 °C / 120 °C			7,0	7,5	8,0	8,0	8,5	8,5	8,0	7,5	6,5
	IV: 90 °C / 150 °C			6,5	7,0	7,0	7,5	7,5	8,0	7,5	7,0	6,0
Installation factors												
Dry or wet concrete		γ_{inst}	[-]	1,0								
Cracked concrete												
Characteristic bond resistance in cracked concrete C20/25												
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)												
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$	[N/mm ²]	4,5	6,0	6,0	6,0	7,0	6,0	6,0	6,0	6,0
	II: 50 °C / 80 °C			4,5	5,5	5,5	5,5	6,5	6,0	6,0	6,0	6,0
	III: 72 °C / 120 °C			4,0	5,0	5,0	5,0	6,0	5,5	5,5	5,5	5,5
	IV: 90 °C / 150 °C			3,5	4,5	4,5	4,5	5,5	5,0	5,0	5,0	5,0
Installation factors												
Dry or wet concrete		γ_{inst}	[-]	1,0								

fischer Superbond

Performances

Characteristic resistance to combined pull-out and concrete failure for reinforcing bars with injection mortar FIS SB

Annex C 9

Appendix 35 / 42

Table C10.1: Characteristic resistance to **combined pull-out** and concrete failure for **fischer rebar anchors FRA** in hammer drilled holes in combination with **injection mortar FIS SB; uncracked or cracked concrete**

fischer rebar anchor FRA			M12	M16	M20	M24	
Combined pullout and concrete cone failure							
Bar diameter		d	[mm]	12	16	20	25
Uncracked concrete							
Characteristic bond resistance in uncracked concrete C20/25							
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)							
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$	[N/mm ²]	9,0	9,5	10	9,5
	II: 50 °C / 80 °C			9,0	9,5	9,5	9,0
	III: 72 °C / 120 °C			8,0	8,5	8,5	8,0
	IV: 90 °C / 150 °C			7,0	7,5	8,0	7,5
Installation factors							
Dry or wet concrete		γ_{inst}	[-]	1,0			
Cracked concrete							
Characteristic bond resistance in cracked concrete C20/25							
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)							
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$	[N/mm ²]	6,0	7,0	6,0	6,0
	II: 50 °C / 80 °C			5,5	6,5	6,0	6,0
	III: 72 °C / 120 °C			5,0	6,0	5,5	5,5
	IV: 90 °C / 150 °C			4,5	5,5	5,0	5,0
Installation factors							
Dry or wet concrete		γ_{inst}	[-]	1,0			

fischer Superbond

Performances

Characteristic resistance to combined pull-out and concrete failure for fischer rebar anchors FRA with injection mortar FIS SB

Annex C 10

Appendix 36 / 42

Table C11.1: Displacements for anchor rods

Anchor rod		M8	M10	M12	M16	M20	M24	M27	M30
Displacement-Factors for tension loading ¹⁾									
Uncracked or cracked concrete; Temperature range I, II, III, IV									
δ_{N0} -Factor	[mm/(N/mm ²)]	0,07	0,08	0,09	0,10	0,11	0,12	0,12	0,13
$\delta_{N\infty}$ -Factor		0,13	0,14	0,15	0,17	0,17	0,18	0,19	0,19
Displacement-Factors for shear loading ²⁾									
Uncracked or cracked concrete; Temperature range I, II, III, IV									
δ_{V0} -Factor	[mm/kN]	0,18	0,15	0,12	0,09	0,07	0,06	0,05	0,05
$\delta_{V\infty}$ -Factor		0,27	0,22	0,18	0,14	0,11	0,09	0,08	0,07
1) Calculation of effective displacement:					2) Calculation of effective displacement:				
$\delta_{N0} = \delta_{N0\text{-Factor}} \cdot \tau$					$\delta_{V0} = \delta_{V0\text{-Factor}} \cdot V$				
$\delta_{N\infty} = \delta_{N\infty\text{-Factor}} \cdot \tau$					$\delta_{V\infty} = \delta_{V\infty\text{-Factor}} \cdot V$				
τ : acting bond strength under tension loading					V : acting shear loading				

Table C11.2: Displacements for fischer internal threaded anchors RG M I

Internal threaded anchor RG M I		M8	M10	M12	M16	M20
Displacement-Factors for tension loading¹⁾						
Uncracked or cracked concrete; Temperature range I, II, III, IV						
δ_{N0} -Factor	[mm/(N/mm ²)]	0,09	0,10	0,10	0,11	0,19
$\delta_{N\infty}$ -Factor		0,13	0,15	0,15	0,17	0,19
Displacement-Factors for shear loading²⁾						
Uncracked or cracked concrete; Temperature range I, II, III, IV						
δ_{V0} -Factor	[mm/kN]	0,12	0,09	0,08	0,07	0,05
$\delta_{V\infty}$ -Factor		0,18	0,14	0,12	0,10	0,08
1) Calculation of effective displacement: $\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau$ $\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau$ τ: acting bond strength under tension loading 2) Calculation of effective displacement: $\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V$ $\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V$ V: acting shear loading						

fischer Superbond

Performances

Displacements for anchor rods and fischer internal threaded anchors RG M I

Annex C 11

Appendix 37 / 42

Table C12.1: Displacements for reinforcing bars										
Nominal diameter of the bar	ϕ	8	10	12	14	16	20	25	28	32
Displacement-Factors for tension loading ¹⁾										
Uncracked or cracked concrete; Temperature range I, II, III, IV										
δ_{N0} -Factor	[mm/(N/mm ²)]	0,07	0,08	0,09	0,09	0,10	0,11	0,12	0,13	0,13
$\delta_{N\infty}$ -Factor		0,11	0,13	0,13	0,15	0,16	0,16	0,18	0,20	0,20
Displacement-Factors for shear loading ²⁾										
Uncracked or cracked concrete; Temperature range I, II, III, IV										
δ_{V0} -Factor	[mm/kN]	0,18	0,15	0,12	0,10	0,09	0,07	0,06	0,05	0,05
$\delta_{V\infty}$ -Factor		0,27	0,22	0,18	0,16	0,14	0,11	0,09	0,08	0,06
1) Calculation of effective displacement: $\delta_{N0} = \delta_{N0\text{-Factor}} \cdot \tau$ $\delta_{N\infty} = \delta_{N\infty\text{-Factor}} \cdot \tau$ τ: acting bond strength under tension loading 2) Calculation of effective displacement: $\delta_{V0} = \delta_{V0\text{-Factor}} \cdot V$ $\delta_{V\infty} = \delta_{V\infty\text{-Factor}} \cdot V$ V: acting shear loading										
Table C12.2: Displacements for fischer rebar anchors FRA										

Table C12.2: Displacements for fischer rebar anchors FRA

fischer rebar anchor FRA		M12	M16	M20	M24
Displacement-Factors for tension load ¹⁾					
Uncracked or cracked concrete; Temperature range I, II, III, IV					
δ_{N0} -Factor	[mm/(N/mm ²)]	0,09	0,10	0,11	0,12
$\delta_{N\infty}$ -Factor		0,13	0,15	0,16	0,18
Displacement-Factors for shear load ²⁾					
Uncracked or cracked concrete; Temperature range I, II, III, IV					
δ_{V0} -Factor	[mm/kN]	0,12	0,09	0,07	0,06
$\delta_{V\infty}$ -Factor		0,18	0,14	0,11	0,09
1) Calculation of effective displacement: $\delta_{N0} = \delta_{N0\text{-Factor}} \cdot \tau$ $\delta_{N\infty} = \delta_{N\infty\text{-Factor}} \cdot \tau$ τ: acting bond strength under tension loading 2) Calculation of effective displacement: $\delta_{V0} = \delta_{V0\text{-Factor}} \cdot V$ $\delta_{V\infty} = \delta_{V\infty\text{-Factor}} \cdot V$ V: acting shear loading					
fischer Superbond					Annex C 12 Appendix 38 / 42
Performances Displacements for reinforcing bars and fischer rebar anchors FRA					

Table C13.1: Characteristic resistance to **steel failure** under tension / shear loading of **fischer anchor rods** and **standard threaded rods** under seismic action performance category **C1** or **C2**

Anchor rod / standard threaded rod				M8	M10	M12	M16	M20	M24	M27	M30	
Characteristic resistance to steel failure under tension loading ¹⁾												
fischer anchor rods and standard threaded rods, performance category C1 ²⁾												
Characteristic resistance $N_{Rk,s,C1}$	Steel zinc plated	Property class	5.8	[kN]	19(17)	29(27)	43	79	123	177	230	281
			8.8		29(27)	47(43)	68	126	196	282	368	449
	Stainless steel R and high corrosion resistant steel HCR		50		19	29	43	79	123	177	230	281
			70		26	41	59	110	172	247	322	393
			80		30	47	68	126	196	282	368	449
fischer anchor rods and standard threaded rods, performance category C2 ²⁾												
Characteristic resistance $N_{Rk,s,C2}$	Steel zinc plated	Property class	5.8	[-]	- ⁴⁾	- ⁴⁾	39	72	108	177	- ⁴⁾	- ⁴⁾
			8.8		- ⁴⁾	- ⁴⁾	61	116	173	282	- ⁴⁾	- ⁴⁾
	Stainless steel R and high corrosion resistant steel HCR		50		- ⁴⁾	- ⁴⁾	39	72	108	177	- ⁴⁾	- ⁴⁾
			70		- ⁴⁾	- ⁴⁾	53	101	152	247	- ⁴⁾	- ⁴⁾
			80		- ⁴⁾	- ⁴⁾	61	116	173	282	- ⁴⁾	- ⁴⁾
Characteristic resistance to steel failure under shear loading without lever arm ¹⁾												
fischer anchor rods, performance category C1 ²⁾												
Characteristic resistance $V_{Rk,s,C1}$	Steel zinc plated	Property class	5.8	[kN]	11(10)	17(16)	25	47	74	106	138	168
			8.8		15(13)	23(21)	34	63	98	141	184	225
	Stainless steel R and high corrosion resistant steel HCR		50		9	15	21	39	61	89	115	141
			70		13	20	30	55	86	124	161	197
			80		15	23	34	63	98	141	184	225
Standard threaded rods, performance category C1 ²⁾												
Characteristic resistance $V_{Rk,s,C1}$	Steel zinc plated	Property class	5.8	[kN]	8(7)	12(11)	17	33	52	74	97	118
			8.8		11	16(14)	24	44	69	99	129	158
	Stainless steel R and high corrosion resistant steel HCR		50		6	11	15	27	43	62	81	99
			70		9	14	21	39	60	87	113	138
			80		11	16	24	44	69	99	129	158
fischer anchor rods and standard threaded rods, performance category C2												
Characteristic resistance $V_{Rk,s,C2}$	Steel zinc plated	Property class	5.8	[-]	- ⁴⁾	- ⁴⁾	14	27	43	62	- ⁴⁾	- ⁴⁾
			8.8		- ⁴⁾	- ⁴⁾	22	44	69	99	- ⁴⁾	- ⁴⁾
	Stainless steel R and high corrosion resistant steel HCR		50		- ⁴⁾	- ⁴⁾	14	27	43	62	- ⁴⁾	- ⁴⁾
			70		- ⁴⁾	- ⁴⁾	20	39	60	87	- ⁴⁾	- ⁴⁾
			80		- ⁴⁾	- ⁴⁾	22	44	69	99	- ⁴⁾	- ⁴⁾
Factor for the annular gap		α_{gap}	[-]	0,5 (1,0) ³⁾								

¹⁾ Partial factors for performance category C1 or C2 see Table C14.2;
for fischer anchor rods FIS A / RG M the factor for steel ductility is 1,0

²⁾ Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot dip galvanized standard threaded rods according to EN ISO 10684:2004+AC:2009.

³⁾ Values in brackets are valid for filled annular gaps between the anchor rod and the through-hole in the attachment. It is necessary to use the fischer filling disc according to Annex A 1 and A 3.

4) No performance assessed.

fischer Superbond

Performances

Characteristic resistance to steel failure under tension / shear loading for fischer anchor rods and standard threaded rods under seismic action (performance category C1 / C2)

Annex C 13

Appendix 39 / 42

Table C14.1: Characteristic resistance to steel failure under tension / shear loading for of reinforcing bars (B500B) under seismic action performance category C1

Nominal diameter of the bar	ϕ	8	10	12	14	16	20	25	28	32
Bearing capacity under tension load, steel failure¹⁾										
Reinforcing bar B500B acc. to DIN 488-2:2009-08, performance category C1										
Characteristic resistance	$N_{Rk,s,C1}$	[kN]	27,1	42,3	61,0	83,5	108,5	169,5	265,1	434,1
Bearing capacity under shear load, steel failure without lever arm¹⁾										
Reinforcing bar B500B acc. to DIN 488-2:2009-08, performance category C1										
Characteristic resistance	$V_{Rk,s,C1}$	[kN]	9,5	14,8	21,3	29,1	37,9	59,3	92,7	151,9

¹⁾ Partial factors for performance category C1 see Table C14.2

Table C14.2: Partial factors for fischer anchor rods, standard threaded rods and reinforcing bars (B500B) under seismic action performance category C1 or C2

Anchor rod / standard threaded rod			M8	M10	M12	M16	M20	M24	M27	M30		
Nominal diameter of the bar			ϕ	8	10	12	14	16	20	25	28	32
Tension load, steel failure ¹⁾												
Partial factor $\gamma_{Ms,N}$	Steel zinc plated	5.8	[-]	1,50								
		8.8		1,50								
	Stainless steel R and high corrosion resistant steel HCR	50		2,86								
		70		1,87 / fischer HCR: 1,50 ²								
		80		1,60								
	Reinforcing bar	B500B		1,40								
	Shear load, steel failure ¹⁾											
Partial factor $\gamma_{Ms,V}$	Steel zinc plated	5.8	[-]	1,25								
		8.8		1,25								
	Stainless steel R and high corrosion resistant steel HCR	50		2,38								
		70		1,56 / fischer HCR: 1,25 ²								
		80		1,33								
	Reinforcing bar	B500B	1,50									

¹⁾ In absence of other national regulations

²⁾ Only admissible for high corrosion resistant steel HCR, with $f_{yk} / f_{uk} \geq 0,8$ and $A_5 > 12 \%$ (e.g. fischer anchor rods)

fischer Superbond

Performances

Characteristic resist. to steel failure under tension / shear loading for reinforcing bars under seismic action (performance category C1); partial factors (perfor. category C1 / C2)

Annex C 14

Appendix 40 / 42

Table C15.1: Characteristic resistance to **combined pull-out** and concrete failure for **fischer anchor rods** and **standard threaded rods** in hammer drilled holes with **injection mortar FIS SB** or **resin capsule RSB** under seismic action performance category **C1**

Anchor rod / standard threaded rod			M8	M10	M12	M16	M20	M24	M27 ¹⁾	M30	
Characteristic bond resistance, combined pullout and concrete cone failure											
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete; resin capsule RSB additional in water filled holes)											
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,C1}$	[N/mm ²]	4,6	5,0	5,6	5,6	5,6	5,6	6,4	
	II: 50 °C / 80 °C			4,3	4,6	5,6	5,6	5,6	5,6	5,3	6,0
	III: 72 °C / 120 °C			3,9	4,3	4,9	4,9	4,9	4,9	4,5	5,1
	IV: 90 °C / 150 °C			3,6	3,9	4,5	4,5	4,5	4,5	4,1	4,7
Installation factors											
Dry or wet concrete	γ_{inst}	[-]	1,0								
Water filled hole			1,2 ²⁾		1,0 ²⁾						

¹⁾ Only use with injection mortar FIS SB.

²⁾ Only use with resin capsule RSB in water filled hole

Table C15.2: Characteristic resistance to **combined pull-out** and concrete failure for **reinforcing bars** in hammer drilled holes with **injection mortar FIS SB** under seismic action performance category **C1**

Nominal diameter of the bar		ϕ	8	10	12	14	16	20	25	28	32	
Characteristic bond resistance, combined pullout and concrete cone failure												
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)												
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,C1}$	[N/mm ²]	3,2	4,3	4,5	4,5	5,3	4,5	4,5	4,5	5,1
	II: 50 °C / 80 °C			3,2	3,9	4,1	4,1	4,9	4,5	4,5	4,5	5,1
	III: 72 °C / 120 °C			2,8	3,6	3,8	3,8	4,5	4,1	4,1	4,1	4,7
	IV: 90 °C / 150 °C			2,5	3,2	3,4	3,4	4,1	3,8	3,8	3,8	4,3
Installation factors												
Dry or wet concrete		γ_{inst}	[-]	1,0								

fischer Superbond

Performances

Characteristic resist. to combined pull-out and concrete failure under seismic action (performance category C1) for fischer anchor rods, standard threaded rods and reinf. bars

Annex C 15

Appendix 41 / 42

Table C16.1: Characteristic resistance to combined pull-out and concrete failure for fischer anchor rods and standard threaded rods in hammer drilled holes with injection mortar FIS SB under seismic action performance category C2									
Anchor rod / standard threaded rod		M12		M16		M20		M24	
Characteristic bond resistance, combined pullout and concrete cone failure									
Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)									
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,C2}$	[N/mm ²]	4,5	3,2	2,6	3,0		
	II: 50 °C / 80 °C			4,5	3,2	2,6	3,0		
	III: 72 °C / 120 °C			3,9	2,7	2,3	2,6		
	IV: 90 °C / 150 °C			3,6	2,5	2,1	2,4		
Installation factors									
Dry or wet concrete		γ_{inst}	[-]	1,0					
Displacement-Factors for tension loading ¹⁾									
$\delta_{N,C2}$ (DLS)-Factor		[mm/(N/mm ²)]		0,09	0,10	0,11	0,12		
$\delta_{N,C2}$ (ULS)-Factor				0,15	0,17	0,17	0,18		
Displacement-Factors for shear loading ²⁾									
$\delta_{V,C2}$ (DLS)-Factor		[mm/kN]		0,18	0,10	0,07	0,06		
$\delta_{V,C2}$ (ULS)-Factor				0,25	0,14	0,11	0,09		
1) Calculation of effective displacement: $\delta_{N,C2} \text{ (DLS)} = \delta_{N,C2} \text{ (DLS)-Factor} \cdot \tau$ $\delta_{N,C2} \text{ (ULS)} = \delta_{N,C2} \text{ (ULS)-Factor} \cdot \tau$ τ: acting bond strength under tension loading 2) Calculation of effective displacement: $\delta_{V,C2} \text{ (DLS)} = \delta_{V,C2} \text{ (DLS)-Factor} \cdot V$ $\delta_{V,C2} \text{ (ULS)} = \delta_{V,C2} \text{ (ULS)-Factor} \cdot V$ V: acting shear loading									
fischer Superbond								Annex C 16 Appendix 42 / 42	
Performances Characteristic resistance to combined pull-out and concrete failure under seismic action (performance category C2) for fischer anchor rods and standard threaded rods									