

IZJAVA O LASTNOSTIH

DoP 0371

Vijačno sidro fischer ULTRACUT FBS II R (Mehansko sidro za uporabo v betonu)

SL

- | | |
|---|--|
| 1. <u>Enotna identifikacijska oznaka tipa proizvoda:</u> | DoP 0371 |
| 2. <u>Predvidena uporaba:</u> | Naknadno nameščen pritrdilni element za uporabo v betonu za nestrukturne sisteme, glej dodatek, zlasti priloge B1-B4. |
| 3. <u>Proizvajalec:</u> | fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Nemčija |
| 4. <u>Pooblaščen zastopnik:</u> | – |
| 5. <u>Sistemi ocenjevanja in preverjanja nespremenljivosti lastnosti:</u> | 2+ |
| 6. <u>Evropski ocenjevalni dokument:</u> | EAD 330747-00-0601 |
| Evropska tehnična ocena: | ETA-24/0973; 2025-01-08 |
| Organ za tehnično ocenjevanje: | DIBt- Deutsches Institut für Bautechnik |
| Priglašeni organi: | 2873 TU Darmstadt |

7. Navedene lastnosti:

Varnost pri uporabi (BWR 4)

Karakteristična odpornost na napetostno obremenitev (statična in kvazistatična obremenitev):

Odpornost pri odpovedi jekla: glej dodatek, zlasti priloge C1

$E_s = 210\,000\text{ MPa}$

Odpornost na izvlek: glej dodatek, zlasti priloge C1

Odpornost na odpoved v betonski coni: glej dodatek, zlasti priloge C1

Robusnost: glej dodatek, zlasti priloge C1

Najmanjša razdalja do roba betona in razmik: glej dodatek, zlasti priloge C2

Razdalja od roba betona za preprečevanje loma pod obremenitvijo: glej dodatek, zlasti priloge C1

Karakteristična odpornost proti strižni obremenitvi (statična in kvazistatična obremenitev):

Odpornost na odpoved jekla (strižna obremenitev): glej dodatek, zlasti priloge C1

Odpornost na neuspešno odstranitev: glej dodatek, zlasti priloge C1

Odpornost na odpoved od roba betona: glej dodatek, zlasti priloge C1

Karakteristična odpornost za vse smeri obremenitve in načine odpovedi na poenostavljeno zasnovi:

Karakteristična odpornost: NPĐ

Trajnost:

Trajnost: glej dodatek, zlasti prilogah A2, B1

Varnost v primeru požara (BWR 2)

Odzivnost na ogenj: Razred (A1)

Odpornost proti ognju:

Požarna odpornost pri odpovedi jekla (napetostna obremenitev): glej dodatek, zlasti priloge C2

Požarna odpornost pri izvleku (napetostna obremenitev): glej dodatek, zlasti priloge C2


Požarna odpornost pri odpovedi jekla (strižna obremenitev): glej dodatek, zlasti priloge C2

8. Ustrezna tehnična dokumentacija in/ali specifična tehnična dokumentacija:


–

Lastnosti proizvoda, navedenega zgoraj, so v skladu z navedenimi lastnostmi. Za izdajo te izjave o lastnostih je v skladu z Uredbo (EU) št. 305/2011 odgovoren izključno proizvajalec, naveden zgoraj.

Podpisal za in v imenu proizvajalca:

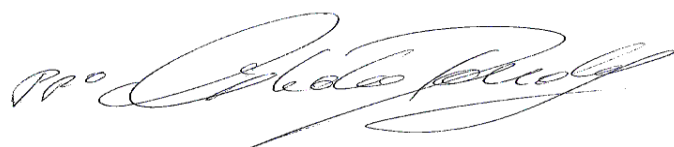

Dr. Ronald Mihala, Vodja razvoja in vodenja proizvodnje
Tumlingen, 2025-01-22



Dieter Pfaff, Vodja Mednarodne proizvodne federacije in upravljanja kakovosti

Ta izjava o lastnostih je bila pripravljena v različnih jezikih. V primeru nerazumevanja, se vedno upošteva angleška različica.

Priloga vsebuje informacije v angleškem jeziku, ki presegajo zakonske zahteve.

Translation guidance Essential Characteristics and Performance Parameters for Annexes

Navodila za prevajanje. Bistvene značilnosti in parametri za pravilno delovanje priloge

Safety in case of fire (BWR 2)		
Varnost v primeru požara (BWR 2)		
1	Reaction to fire: Odzivnost na ogenj:	Class Razred (A1)
Resistance to fire: Odpornost proti ognju:		
2	Fire resistance to steel failure (tension load): Požarna odpornost pri odpovedi jekla (napetostna obremenitev):	$N_{RK,s,fi}$ [kN]
3	Fire resistance to pull-out failure (tension load): Požarna odpornost pri izvleku (napetostna obremenitev):	$N_{RK,p,fi}$ [kN]
4	Fire resistance to steel failure (shear load): Požarna odpornost pri odpovedi jekla (strižna obremenitev):	$V_{RK,s,fi}$ [kN], $M^0_{RK,s,fi}$ [Nm]
Safety and accessibility in use (BWR 4)		
Varnost pri uporabi (BWR 4)		
Characteristic resistance to tension load (static and quasi-static loading): Karakteristična odpornost na napetostno obremenitev (statična in kvazistatična obremenitev):		
6	Resistance to steel failure: Odpornost pri odpovedi jekla:	$N_{RK,s}$ [kN], E_s [N/mm ²]
7	Resistance to pull- out failure: Odpornost na izvlek:	$N_{RK,p}$ [kN], ψ_c , $T_{RK,p}$ [N/mm ²]
8	Resistance to concrete cone failure: Odpornost na odpoved v betonski coni:	$k_{cr,N}$, $k_{ucr,N}$ [-], h_{ef} , $c_{cr,N}$ [mm]
9	Robustness: Robusnost:	γ_{inst} [-]
10	Minimum edge distance and spacing: Najmanjša razdalja do roba betona in razmik:	c_{min} , s_{min} , h_{min} [mm]
11	Edge distance to prevent splitting under load: Razdalja od roba betona za preprečevanje loma pod obremenitvijo:	$N^0_{RK,sp}$ [kN], $c_{cr,sp}$ [mm]
Characteristic resistance to shear load (static and quasi-static loading): Karakteristična odpornost proti strižni obremenitvi (statična in kvazistatična obremenitev):		
12	Resistance to steel failure (shear load): Odpornost na odpoved jekla (strižna obremenitev):	$V_{RK,s}$ [kN], $M^0_{RK,s}$ [Nm], k_7 [-]
13	Resistance to pry-out failure: Odpornost na neuspešno odstranitev:	k_8 [-]
14	Resistance to concrete edge failure: Odpornost na odpoved od roba betona:	d_{nom} , l_f [mm]
Characteristic resistance for all load directions and modes of failure for simplified design: Karakteristična odpornost za vse smeri obremenitve in načine odpovedi na poenostavljeno zasnovi:		
15	Characteristic resistance: Karakteristična odpornost:	F^0_{RK} [kN], s_{cr} , c_{cr} [mm]
Durability: Trajnost:		
16	Durability: Trajnost:	Description

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product

fischer concrete screw UltraCut FBS II R is a concrete screw made of stainless steel. The anchor is installed in a drilled hole and anchored by mechanical interlock.

An illustration of the product is given in Annex A.

The characteristic material values, dimensions and tolerances of the anchors not indicated in Annexes shall correspond to the respective values laid down in the technical documentation of this European Technical Assessment.

The anchors are intended to be used with embedment depth given in Annex B, Table B2.1. The intended use specifications of the product are detailed in the Annex B1.

2 Specification of the intended use in accordance with the applicable European Assessment Document (hereinafter EAD)

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Characteristics of product

Safety in case of fire (BWR 2):

The essential characteristics are detailed in the Annex C2.

Hygiene, health and the environment (BWR3)

No performance assessed

Safety and accessibility in use (BWR4)

The essential characteristics are detailed in the Annex C1 and C2.

Durability:

See annex B1.

3.2 Methods of assessment

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirement 2, 3 and 4 has been made in accordance with EAD 330747-00-0601 - Fasteners for use in concrete in redundant for non-structural systems.

4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base.

4.1 AVCP system

According to the decision 97/161/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No. 305/2011) is 2+.

Product in the installed condition

Installed condition in normal weight concrete

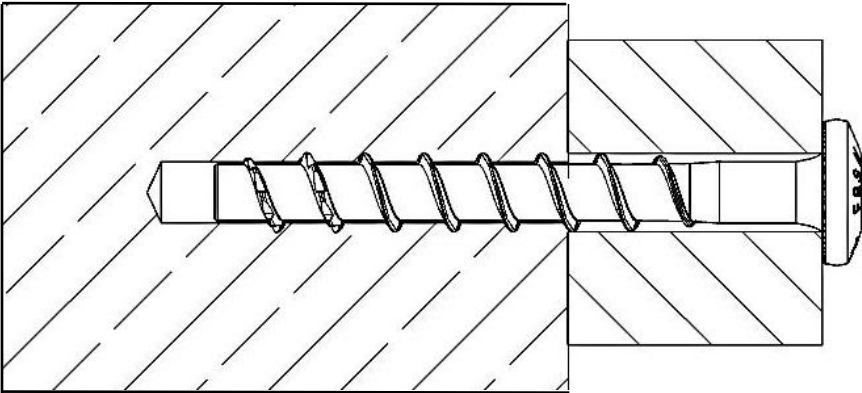


Table A1.1: Screw types FBS II 6 R


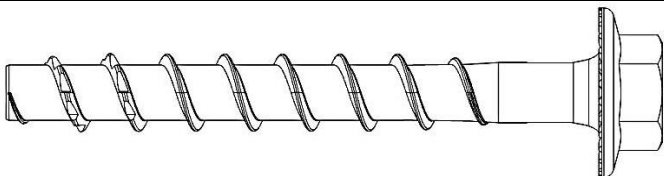
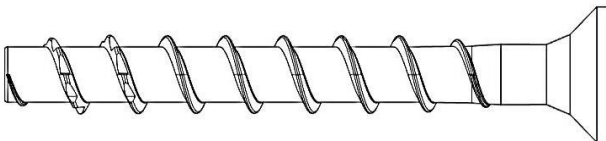

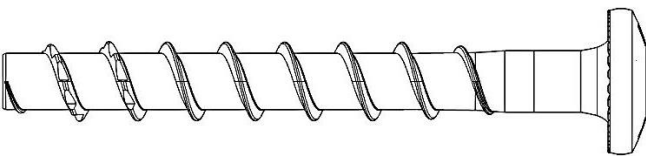
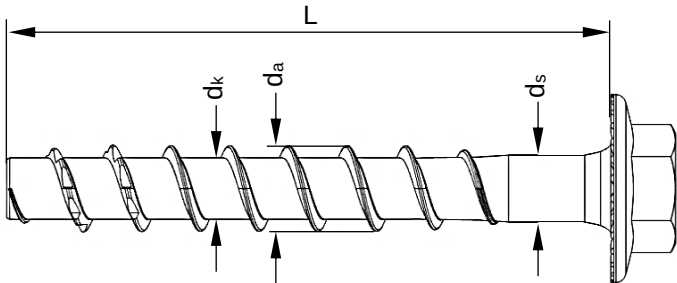

FBS II 6 R		
Hexagon head with formed washer (US)		
Countersunk head (SK)		
Pan head (P)		
(Figure not to scale)		
fischer concrete screw UltraCut FBS II 6 R		Annex A 1 Appendix 4 / 11
Product description Product in the installed condition and screw types FBS II 6 R		

Table A2.1: Geometry and material

FBS II 6 R		All head shapes	
Thread outer diameter	d_a	[mm]	7,8
Core diameter	d_k		5,6
Shaft diameter	d_s		6,0
Material	[-]	Tip: hardened steel; Shaft and head: stainless steel EN 10088-1:2023	
Coating		Tip: red colour	
 Head marking (example) at US, SK, P FBS II: Product short name XXX: Screw length L  R: Material type 6: Screw size			
(Figure not to scale)			
fischer concrete screw UltraCut FBS II 6 R		Annex A 2 Appendix 5 / 11	
Product description Geometry and material			

Specification of intended use:

Size	FBS II 6 R
Hammer drilling 	✓
Static and quasi-static loads	
Cracked and uncracked concrete	
Fire exposure	

Base materials:

- Compacted reinforced and unreinforced normal weight concrete without fibres (cracked or uncracked) according to EN 206:2013+A2:2021
- Strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021

Use conditions (Environmental conditions):

- Structures subjected to dry internal conditions (FBS II 6 R)
- For all other conditions according to EN 1993-1-4:2006 +A1:2015 corresponding to corrosion resistance class
 - CRC III: for FBS II 6 R

Design:

- The structural design according to EN 1992-4:2018 are conducted under responsibility of a designer experienced in the field of anchorages and concrete works.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.)
- Design of fastenings according to EN 1992-4: 2018 and EOTA Technical Report TR 055:2018

fischer concrete screw UltraCut FBS II 6 R

Intended use
Specification of intended use

Annex B 1


Appendix 6 / 11

Table B2.1: Installation parameters – drilling bore hole and setting tools

FBS II 6 R			All head shapes	
Nominal embedment depth	h_{nom}	[mm]	45	60
Nominal drill hole diameter	$d_0 =$		6	
Cutting diameter of drill bits	$d_{cut} \leq$		6,4	
Diameter of clearance hole in the fixture	$d_f \leq$		8	
Drill hole depth	$h_1 \geq$		55	70
Drill hole depth (with adjustable setting)			65	80
Torque impact screw driver	$T_{imp,max}$	[Nm]	240	

Table B2.2: Installation parameters – drive and fixture

FBS II 6 R			US	SK	P
Wrench size	SW	[mm]	10 / 13	-	
TX size	TX	[-]	-	30	
Head diameter	d_h	[mm]	15 / 17	13,3	14,4
Thickness of fixture	$t_{fix} \leq$		$L - h_{nom}$		
Length of screw	$L_{min} =$		50		
	$L_{max} =$		400		

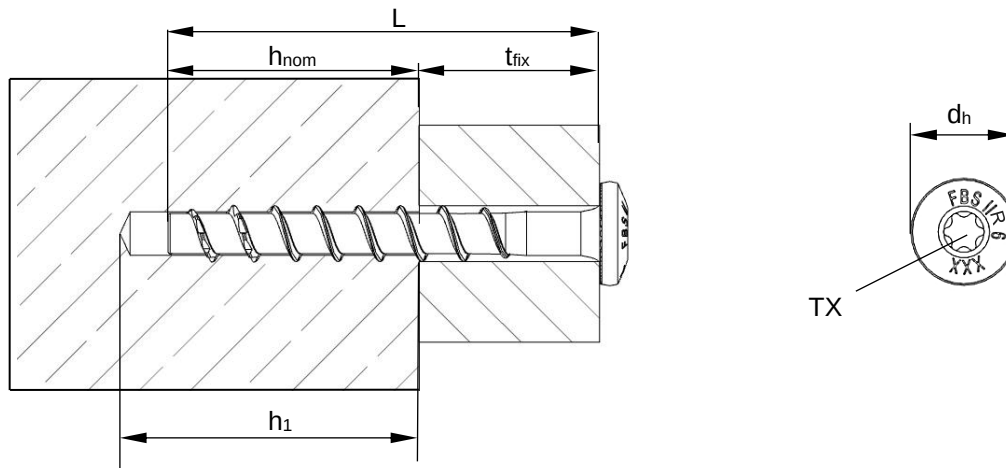

(Figure not to scale)


fischer concrete screw UltraCut FBS II 6 R

Intended use
Installation parameters

Annex B 2

Appendix 7 / 11


Installation instruction part 1



Step 1: Drilling of the drill hole:


Drill the hole using hammer drill

Drill hole diameter d_0 and
drill hole depth h_1 according to table B2.1



Step 2: Cleaning of the drill hole:


Clean the drill hole.



Step 3: Installation:

Turn in until the head is in contact with the fixture.

Installation with any torque impact screw driver up to
the maximum mentioned torque moment ($T_{imp,max}$
according to table B2.1).



Step 4: Checking of the correct installation:

After installation a further turning of the screw must not
be possible. The head of the screw must be in contact
with the fixture and is not damaged




fischer concrete screw UltraCut FBS II 6 R

Intended use
Installation instruction

Annex B 3

Appendix 8 / 11

Installation instruction part 2



Adjustment

Optional:

It is permissible to adjust the screw twice. Therefore, the screw may be untightened to a maximum of $L_{adj} = 20 \text{ mm}$ off the surface of the initial fixture. The total permissible thickness of shims added during the adjustment process

is $t_{adj} = 10 \text{ mm}$.

The required nominal anchoring depth h_{nom} must be kept after the adjustment process. (see also annex B 3)

fischer concrete screw UltraCut FBS II 6 R

Intended use
Installation instruction

Annex B 4

Appendix 9 / 11

Table C1.1: Characteristic values for static and quasi-static action					
FBS II 6 R					
Nominal embedment depth		h_{nom}	[mm]	45	60
Steel failure for tension load and shear load					
Characteristic resistance		$N_{Rk,s}$	[kN]	19,3	
Partial factor		$\gamma_{Ms,N}^{2)}$	[-]	1,5	
Characteristic resistance		$V^0_{Rk,s}$	[kN]	5,2	12,6
Partial factor		$\gamma_{Ms,V}^{2)}$	[-]	1,5	
Factor for ductility		k_7		0,75	
Characteristic bending resistance		$M^0_{Rk,s}$	[Nm]	16,1	
Pullout failure					
Characteristic resistance in concrete C20/25	uncracked	$N_{Rk,p}$	[kN]	5,0	10,0
	cracked			2,5	6,0
Increasing factors concrete	C25/30	ψ_c	[-]	1,07	
	C30/37			1,13	
	C35/45			1,18	
	C40/50			1,23	
	C45/55			1,28	
	C50/60			1,32	
Installation sensitivity factor		γ_{inst}		1,4	
Concrete cone failure and splitting failure; concrete pryout failure					
Effective embedment depth		h_{ef}	[mm]	24	37
Factor for uncracked concrete		$k_{ucr,N}$	[-]	11,0	
Factor for cracked concrete		$k_{cr,N}$		7,7	
Characteristic edge distance		$C_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$	
Characteristic spacing		$S_{cr,N}$		$3 \cdot h_{ef}$	
Characteristic resistance for splitting		$N^0_{Rk,sp}$	[kN]	$\min(N^0_{Rk,c}{}^1); N_{Rk,p}$	
Characteristic edge distance for splitting		$C_{cr,sp}$	[mm]	66	42
Characteristic spacing for splitting		$S_{cr,sp}$		$2 \cdot C_{cr,sp}$	$2 \cdot C_{cr,sp}$
Factor for pryout failure		k_8	[-]	2,1	2,6
Installation factor		γ_{inst}		1,4 ³⁾	
Concrete edge failure					
Effective length in concrete		l_f	[mm]	31	46
Nominal diameter of screw		d_{nom}		6	
Adjustment					
Maximum thickness of shims		t_{adj}	[mm]	10	
Max. number of adjustments		n_a	[-]	2	
¹⁾ $N^0_{Rk,c}$ according EN 1992-4:2018					
²⁾ In absence of other national regulations					
³⁾ Only for concrete cone failure and splitting failure; concrete pryout failure according to EN 1992-4:2018,Table 4.1					
fischer concrete screw UltraCut FBS II 6 R					Annex C 1 Appendix 10 / 11
Performances Characteristic values for static and quasi-static action					

Table C2.1: Minimum thickness of concrete members, minimum spacing and edge distance						
FBS II 6 R						
Minimum thickness of concrete member	h_{min}	[mm]	100			
Minimum spacing	s_{min}		35			
Minimum edge distance	c_{min}					
1) Drill hole depth according to table B2.1						
Table C2.2: Characteristic values for resistance to fire						
FBS II 6 R						
Nominal embedment depth	h_{nom}	[mm]	45	60		
Steel failure for tension load and shear load						
Characteristic resistance for the head shapes	US $\geq$ SW13	$F_{Rk,s,fi}$	R30	[kN]	-1)	2,1
			R60		-1)	1,7
			R90		-1)	1,2
			R120		-1)	1,0
	SK/P US SW10	$F_{Rk,s,fi}$	R30	[kN]	-1)	1,8
			R60		-1)	1,4
			R90		-1)	1,1
			R120		-1)	0,9
Characteristic bending resistance for the head shapes	US $\geq$ SW13	$M^0_{Rk,s,fi}$	R30	[Nm]	-1)	1,7
			R60		-1)	1,4
			R90		-1)	1,0
			R120		-1)	0,8
	SK/P US SW10	$M^0_{Rk,s,fi}$	R30	[Nm]	-1)	1,5
			R60		-1)	1,2
			R90		-1)	0,9
			R120		-1)	0,7
Pullout failure						
Characteristic resistance	$N_{Rk,p,fi}$	R30	[kN]	-1)	1,0	
		R60				
		R90				
		R120		-1)	0,8	
Concrete cone failure failure						
Characteristic resistance	$N_{Rk,c,fi}$	R30	[kN]	-1)	1,4	
		R60				
		R90				
		R120		-1)	1,1	
Edge distance						
R30 to R120	$C_{cr,fi}$	[mm]	$2 \cdot h_{ef}$			
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm						
Spacing						
R30 to R120	$S_{cr,fi}$	[mm]	$2 \cdot C_{cr,fi}$			
1) No performance assessed						
fischer concrete screw UltraCut FBS II 6 R					Annex C 2	
Performances Minimum thickness of concrete members, minimum spacing and edge distance; Characteristic values for resistance to fire						
					Appendix 11 / 11	