



European Technical Assessment

ETA-05/0164
of 16 December 2025

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Trade name of the construction product

Product family
to which the construction product belongs

Manufacturer

Manufacturing plant

This European Technical Assessment
contains

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

This version replaces

Deutsches Institut für Bautechnik

fischer Highbond-Anchor FHB II

Bonded fasteners and bonded expansion fastners for use
in concrete

fischerwerke GmbH & Co. KG
Otto-Hahn-Straße 15
79211 Denzlingen
GERMANY

fischerwerke

37 pages including 3 annexes which form an integral part
of this assessment

EAD 330499-02-0601

ETA-05/0164 issued on 14 December 2017

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The fischer Highbond-Anchor FHB II is a torque controlled bonded fastener consisting of a mortar cartridge with mortar fischer FIS HB or fischer mortar capsule FHB II-P(F) and an anchor rod FHB II (Inject) – A L or FHB II (Inject) – A S with hexagon nut and washer.

The glass capsule is set into a drilled hole in the concrete. The special formed anchor rod is driven into the glass capsule by machine with simultaneous hammering and turning. For the injection system the anchor rod is placed into a drilled hole filled with injection mortar. The load transfer is realised by mechanical interlock of several cones in the bonding mortar and then via a combination of bonding and friction forces in the anchorage ground (concrete).

The product description is given in Annex A

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 and / or 100 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C1 to C8
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C1 to C4
Displacements under short-term and long-term loading	See Annex C9 to C11
Characteristic resistance and displacements for seismic performance categories C1 and C2	No performance assessed

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	No performance assessed

3.3 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330499-02-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

The following standards and documents are referred to in this European Technical Assessment:

EN 10088-1:2023	Stainless steels - Part 1: List of stainless steels
EN 1993-1-4:2006 + A1:2015	Eurocode 3: Design of steel structures - Part 1-4: General rules - Supplementary rules for stainless steels
EN ISO 898-1:2013	Mechanical properties of fasteners made of carbon steel and alloy steel- Part 1: Bolts, screws and studs with specified property classes- Coarse thread and fine pitch thread
EN ISO 898-2:2022	Fasteners – Mechanical properties of fasteners made of carbon steel alloy steel – Part 2: Nuts with specified property classes (ISO 898-2:2022)
EN ISO 4042:2022	Fastener- Electroplated coating systems
EN ISO 10684-:2004 + AC:2009	Fasteners - Hot dip galvanized coatings (ISO 10684:2004+Cor.1:2008)
EN ISO 3506-1:2020	Fasteners – Mechanical properties of corrosion-resistant stainless steel fasteners – Part 1: Bolts, screws and studs with specifies grades and property classes (ISO 3506-1:2020)
EN ISO 3506-2:2020	Fasteners – Mechanical properties of corrosion-resistant stainless steel fasteners – Part 2: Nuts with specified grades and property classes (ISO 3506-2:2020)
EN 1992-1-1:2023	Eurocode 2: Design of concrete structures - Part 1-1: General rules and rules for buildings
EN 206:2013 + A2:2021	Concrete - Specification, performance, production and conformity
EN 1992-4:2018	Eurocode 2: Design of concrete structures - Part 4: Design of fastenings for use in concrete
DIN 976-1:2016	Mechanische Verbindungselemente - Gewindegelenke - Teil 1: Metrisches Gewinde
EN 10204:2004	Metallic products – Types of inspection documents
EOTA TR 055:2018-02	Design of fastenings based on EAD 330232-00-0601, EAD 330499-00-0601 and EAD 330747-00-0601
EOTA TR 082:2024-04	Design of bonded fasteners in concrete under fire conditions,

Issued in Berlin on 16 December 2025 by Deutsches Institut für Bautechnik


Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Stiller


Installation conditions part 1

fischer Highbond - Anchor FHB II - A L


Pre-positioned installation

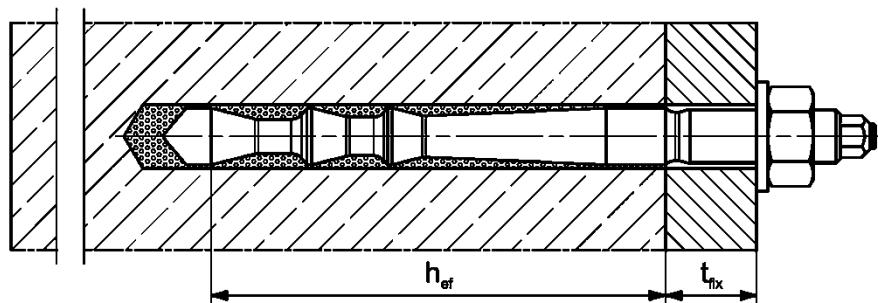

Push through installation not with mortar capsule (annular gap filled with mortar)

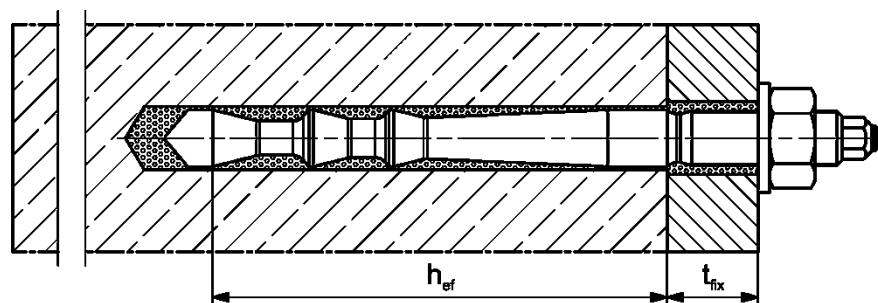

Pre-positioned or push through installation with subsequently pressed filling disk (annular gap filled with mortar)

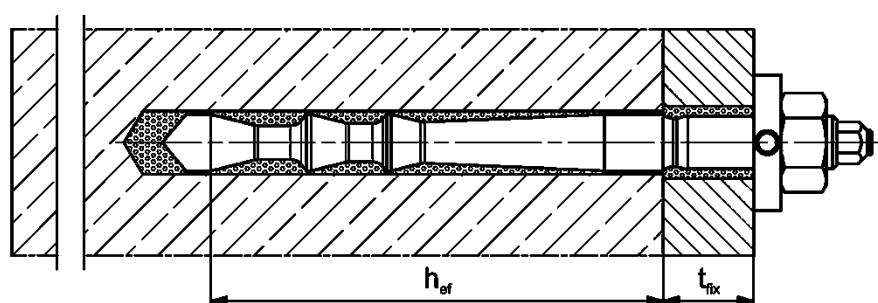

Figures not to scale

h_{ef} = effective anchorage depth

t_{fix} = thickness of fixture

fischer Highbond-Anchor FHB II

Product description


Installation conditions part 1; FHB II – A L

Annex A1


Installation conditions part 2

fischer Highbond - Anchor FHB II - A S


Pre-positioned installation

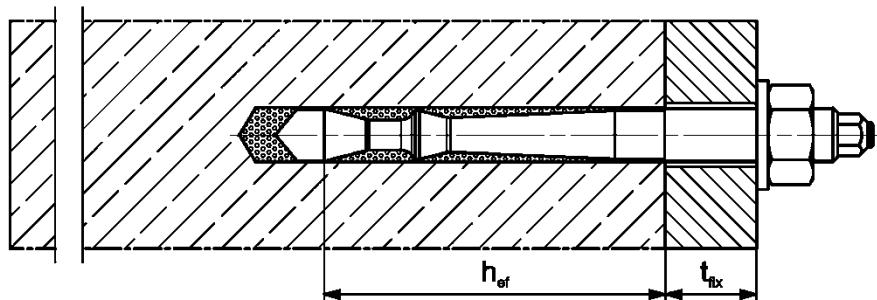

Push through installation

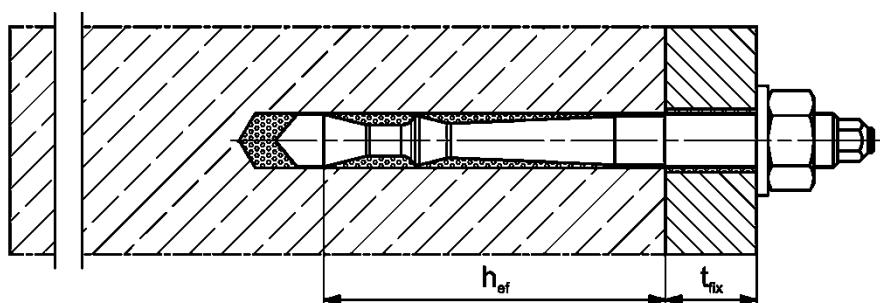

Pre-positioned or push through installation with subsequently pressed filling disk (annular gap filled with mortar)

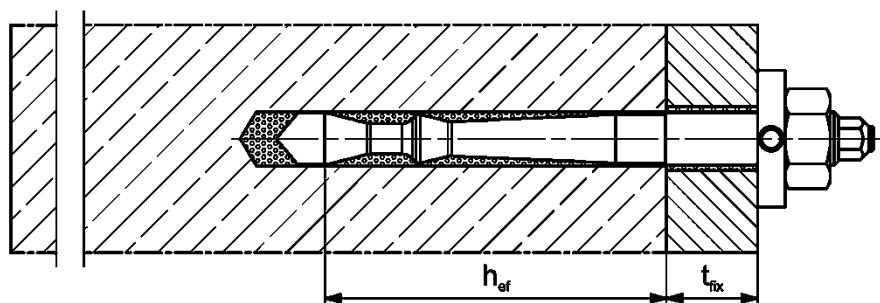

Figures not to scale

h_{ef} = effective anchorage depth

t_{fix} = thickness of fixture

fischer Highbond-Anchor FHB II


Product description
Installation conditions part 2; FHB II – A S

Annex A2


Installation conditions part 3

fischer Highbond - Anchor FHB II Inject - A L


Pre-positioned installation

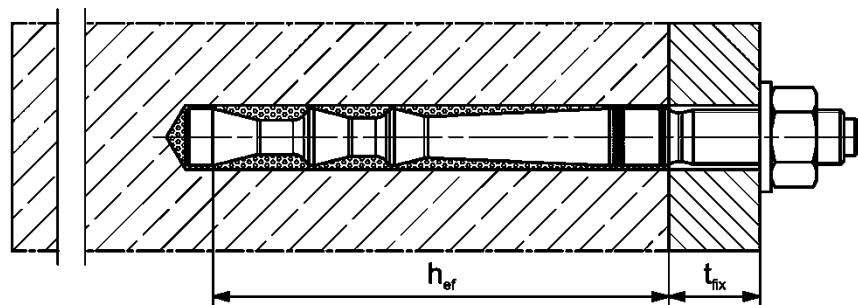

Push through installation not with mortar capsule (annular gap filled with mortar)

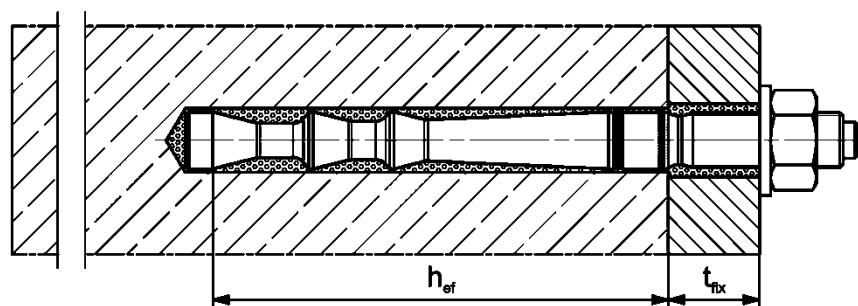

Pre-positioned or push through installation with subsequently pressed filling disk (annular gap filled with mortar)

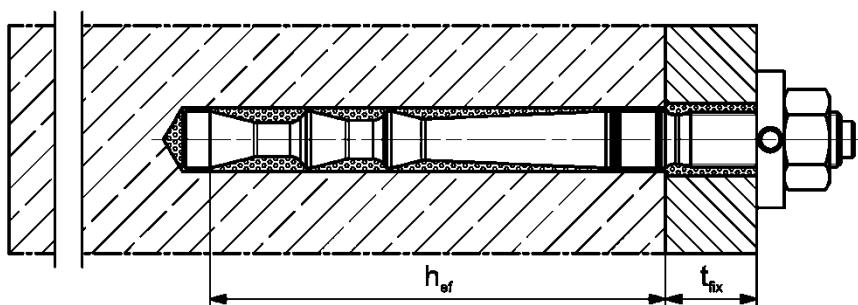

Figures not to scale

h_{ef} = effective anchorage depth

t_{fix} = thickness of fixture

fischer Highbond-Anchor FHB II

Product description


Installation conditions part 1; FHB II Inject – A L

Annex A3


Installation conditions part 4

fischer Highbond - Anchor FHB II Inject - A S


Pre-positioned installation

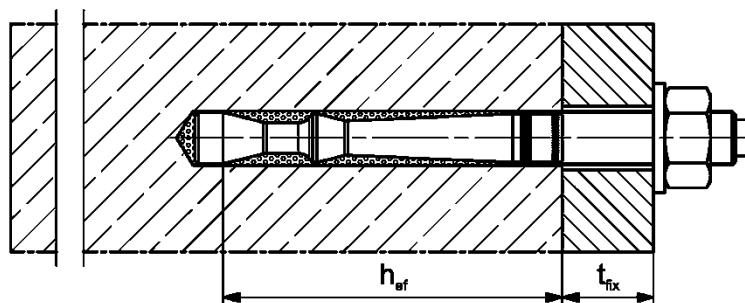

Push through installation

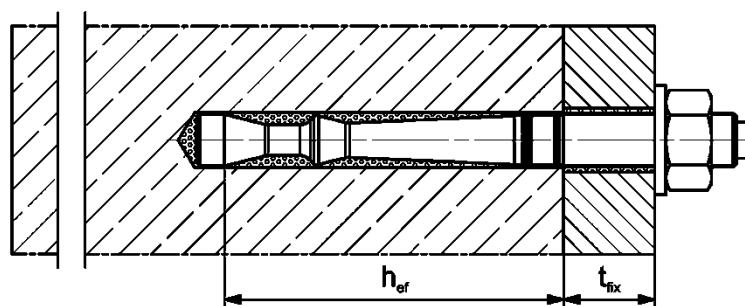

Pre-positioned or push through installation with subsequently pressed filling disk (annular gap filled with mortar)

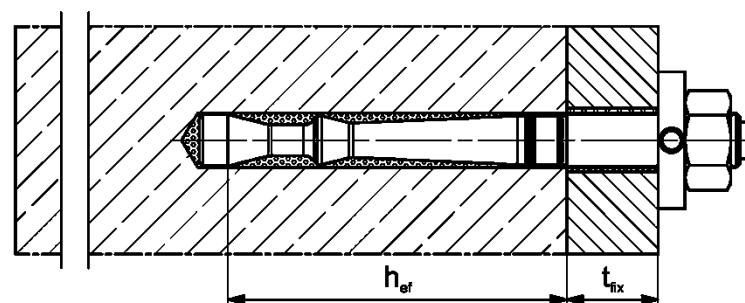

Figures not to scale

h_{ef} = effective anchorage depth

t_{fix} = thickness of fixture

fischer Highbond-Anchor FHB II


Product description

Installation conditions part 2; FHB II Inject – A S


Annex A4

Overview system components part 1

Mortar cartridge (shuttle cartridge) with sealing cap; Size: 360 ml, 825 ml

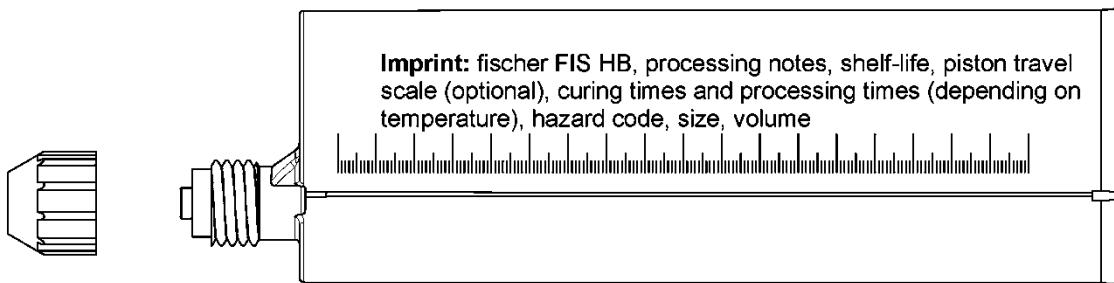


Mortar cartridge (coaxial cartridge) with sealing cap; Size: 150 ml, 300 ml, 380 ml, 400 ml, 410 ml

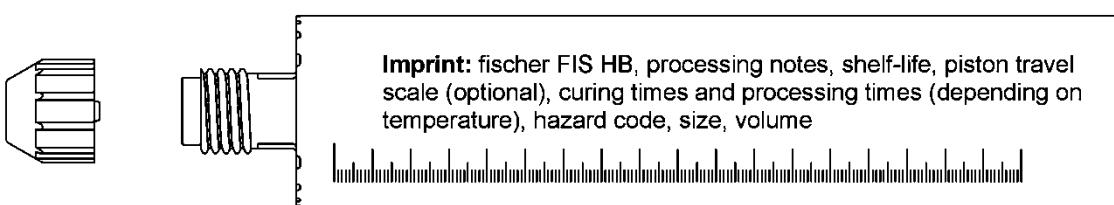


Mortar capsule




Static mixer FIS MR Plus for injection cartridges up to 410 ml



Static mixer FIS JMR for injection cartridges with 825 ml



Injection adapter and extension tube Ø 9 for static mixer FIS MR Plus; Injection adapter and extension tube Ø 9 or Ø 15 for static mixer FIS JMR




Cleaning brush BS



Blow-out pump ABG or



ABP with cleaning nozzle



Figures not to scale

fischer Highbond-Anchor FHB II

Product description

Overview system components part 1;
cartridges / static mixer / accessories



Annex A5

Overview system components part 2

fischer Highbond - Anchor rod; pre-assembled condition



fischer Highbond - Anchor rod FHB II - A L

fischer Highbond - Anchor rod FHB II - A S




Anchor rod FHB II - A L

Size: M8




Anchor rod FHB II - A L

Size: M10, M12, M16




Anchor rod FHB II - A L

Size: M20, M24




Anchor rod FHB II - A S


Size: M10, M12, M16, M20, M24



Washer




Hexagon nut




fischer filling disk FFD


radial



angular



axial



Figures not to scale

fischer Highbond-Anchor FHB II

Product description

Overview system components part 2; steel components


Annex A6

Overview system components part 3

fischer Highbond - Anchor rod; pre-assembled condition


fischer Highbond - Anchor rod FHB II Inject - A L

fischer Highbond - Anchor rod FHB II Inject - A S




Anchor rod FHB II Inject - A L

Size: M8




Anchor rod FHB II Inject - A L

Size: M10, M12, M16




Anchor rod FHB II Inject - A L

Size: M20, M24




Anchor rod FHB II Inject - A S


Size: M10, M12, M16, M20, M24



Washer




Hexagon nut




fischer filling disk FFD


radial



angular



axial



Figures not to scale

fischer Highbond-Anchor FHB II

Product description

Overview system components part 3; steel components

Annex A7

Table A8.1: Materials

Part	Designation	Material		
1	Mortar cartridge	Mortar, hardener, filler		
2	Mortar capsule	Mortar, hardener, filler		
Steel grade		Steel	Stainless steel R	High corrosion resistant steel HCR
		zinc plated	acc. to EN 10088-1 Corrosion resistance class CRC III acc. to EN 1993-1-4	acc. to EN 10088-1 Corrosion resistance class CRC V acc. to EN 1993-1-4
3	fischer Highbond-Anchor rod FHB II - A L or FHB II - A S FHB II - A L Inject or FHB II - A S Inject	Property class 8.8; EN ISO 898-1 zinc plated $\geq 5 \mu\text{m}$, EN ISO 4042 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_s > 12 \%$ fracture elongation	Property class 80 EN ISO 3506-1 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662, 1.4462 EN 10088-1 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_s > 12 \%$ fracture elongation	Property class 80 EN ISO 3506-1 1.4565; 1.4529 EN 10088-1 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_s > 12 \%$ fracture elongation
4	Washer ISO 7089:2000	zinc plated $\geq 5 \mu\text{m}$ EN ISO 4042	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014	1.4565; 1.4529 EN 10088-1
5	Hexagon nut	Property class 8; EN ISO 898-2 zinc plated $\geq 5 \mu\text{m}$, ISO 4042	Property class 70 or 80 EN ISO 3506-2 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1	Property class 70 or 80 EN ISO 3506-2 1.4565; 1.4529 EN 10088-1
6	fischer filling disk FFD	zinc plated $\geq 5 \mu\text{m}$, EN ISO 4042	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1	1.4565; 1.4529 EN 10088-1
fischer Highbond-Anchor FHB II				
Product description Materials			Annex A8	

Specifications of intended use part 1

Table B1.1: Overview use and performance categories

Anchorage subject to		fischer injection mortar FIS HB or capsule FHB II-P or FHB II-PF with ...		fischer injection mortar FIS HB with ...						
		FHB II- A L	FHB II - A S	FHB II Inject - A L	FHB II Inject - A S					
Hammer drilling with standard drill bit				all sizes						
Hammer drilling with hollow drill bit				all sizes (fischer "FHD", Heller "Duster Expert", Bosch "Speed-Clean" or Hilti "TE-CD, TE-YD")						
Diamond drilling		- ¹⁾	M16x95, M20x170, M24x170 (only with resin capsule allowed)	- ¹⁾	- ¹⁾					
Static or quasi static load, in	uncracked concrete	all sizes	Tables: C1.1, C3.1, C5.1 C9.1	Tables: C2.1, C3.1, C6.1, C7.1, C7.2, C8.1, C9.2, C10.1, C11.1,	Tables: C1.1, C3.1, C5.1 C9.1					
	cracked concrete		all sizes	all sizes						
Installation and use condition	I1 dry or wet concrete	all sizes								
	I2 flooded hole	all sizes (only with resin capsule allowed)		- ¹⁾						
Seismic performance C1 and C2		- ¹⁾		- ¹⁾						
Installation direction	D3 (downwards, horizontal, and upwards (overhead) installation)									
Kind of installation	Pre-positioned anchor	all sizes		all sizes						
	Push through anchor	all sizes (only with injection mortar FIS HB allowed)		all sizes						
Installation temperature	-5 °C to +40 °C									
Service temperature	Temperature range I	-40 °C to +40 °C		(max. short term temperature +40 °C and max. long term temperature +24 °C)						
	Temperature range II	-40 °C to +80 °C		(max. short term temperature +80 °C and max. long term temperature +50 °C)						
1) no performance assessed										
fischer Highbond-Anchor FHB II										
Intended use Specifications part 1										
Annex B1										

Specifications of intended use part 2

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibre of strength classes C20/25 to C50/60 according to EN 206.

Use conditions (Environmental conditions):

- Fastener intended for use in structures subject to dry, internal conditions (all materials).
- For all other conditions according to EN 1993-1-4 corresponding to corrosion resistance classes to **Annex A8 Table A8.1**.

Design:

- Fastenings are designed in accordance with:
EN 1992-4 and TR 082 from April 2024.
- The structural design is conducted under responsibility of a designer experienced in the field of anchorages and concrete works.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e. g. position of the fastener relative to reinforcement or to supports, etc.).

Installation:

- Fastener installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Overhead installation is allowed (necessary equipment see installation instruction).

fischer Highbond-Anchor FHB II

Intended use
Specifications part 2

Annex B2

Table B3.1: Installation parameters for Highbond - Anchor rods FHB II – A L


Anchor rod FHB II – A L	Thread	M8x	M10x	M12x		M16x			M20x	M24x
		60	95	100	120	125	145	160	210	210
Corresponding mortar capsules FHB II-P or FHB II-PF	[-]	8x 60	10x 95	12x 100	12x 120	16x 125	16x 145	16x 160	20x 210	24x 210
Cone diameter d_k		9,4	10,7	12,5		16,8			23,0	
Nominal drill hole diameter d_0		10	12	14		18			25	
Drill hole depth h_0		75	110	115	135	140	160	175	235	
Effective anchorage depth h_{ef}		60	95	100	120	125	145	160	210	
Minimum spacing and minimum edge distance $s_{min} = c_{min}$	[mm]	40		50		55	60	70	90	
Diameter of clearance hole in the fixture ¹⁾	pre-positioned anchorage $d_f \leq$	9	12	14		18			22	26
Min. thickness of concrete member	push through anchorage ²⁾ $d_f \leq$	11	14	16		20			26	
Min. thickness of concrete member	h_{min}	100		140		170	190	220	280	
Installation torque moment	T_{inst} [Nm]	15	20	40		60			100	
Thickness of fixture	$t_{fix} \leq$	1500								
fischer filling disk FFD ³⁾	$\geq d_a$	[mm]	-	26	30	38			46	54
	t_s		-	6	6	7			8	10

¹⁾ For larger clearance holes in the fixture see EN1992-4; 6.2.2.2

²⁾ Only with mortar cartridge system FIS HB

³⁾ Using fischer filling disk FFD reduces t_{fix} (usable length of the anchor)

fischer Highbond – Anchor rod FHB II – A L

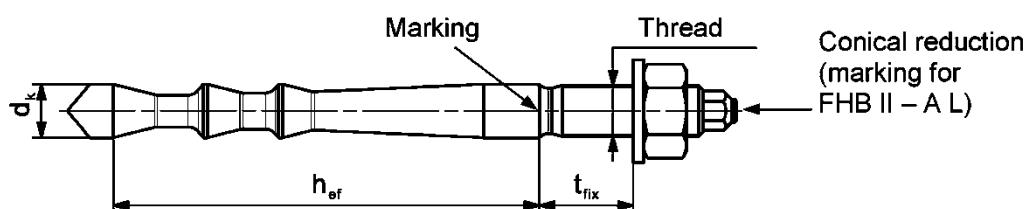


Marking: work symbol, size of anchor, setting depth. e.g.:  M10x95

For stainless steel additional **A4** or **R**. For high corrosion resistant steel additional **C** or **HCR**.

For high corrosion resistant steel additional marking **C** or **HCR** also on the face side

Installation conditions:

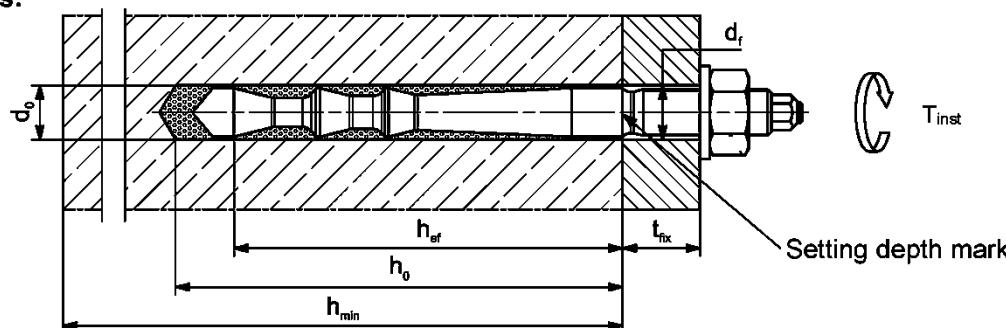

Figures not to scale

fischer Highbond-Anchor FHB II

Intended use

Installation parameters for Highbond-Anchor rods FHB II-A L

Annex B3


Table B4.1: Installation parameters for Highbond – Anchor rods FHB II – A S

Anchor rod FHB II – A S	Thread	M10x		M12x	M16x	M20x	M24x
		60	75	75	95	170	170
Corresponding mortar capsules FHB II-P or FHB II-PF	[-]	10x 60	10x 75	12x 75	16x 95	20x 170	24x 170
Cone diameter d_k			9,4	11,3	14,5		23,0
Nominal drill hole diameter d_0			10	12	16		25
Drill hole depth h_0		75	90	90	110		190
Effective anchorage depth h_{ef}		60	75	75	95		170
Minimum spacing and minimum edge distance $s_{min} = c_{min}$			40		50		80
Diameter of clearance hole in the fixture ¹⁾	pre-positioned anchorage $d_f \leq$		12	14	18	22	26
	push through anchorage $d_f \leq$		12	14	18		26
Min. thickness of concrete member	h_{min}	100	120		150		240
Installation torque moment	T_{inst} [Nm]		15	30	50		100
Thickness of fixture	$t_{fix} \leq$			1500			
fischer filling disk FFD ²⁾	$\geq d_a$	[mm]	26	30	38	46	54
	t_s		6	6	7	8	10

¹⁾ For larger clearance holes in the fixture see EN1992-4; 6.2.2.2

²⁾ Using fischer filling disk FFD reduces t_{fix} (usable length of the anchor)

fischer Highbond – Anchor rod FHB II – A S

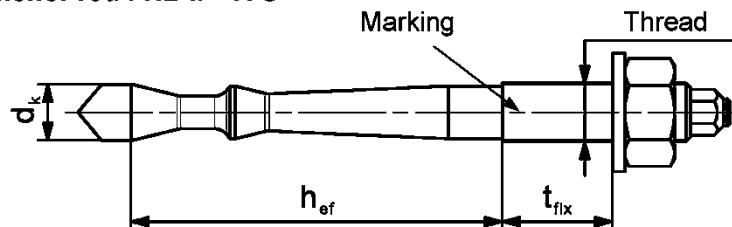


Marking: work symbol, size of anchor, setting depth. e.g.: M10x75

For stainless steel additional **A4** or **R**. For high corrosion resistant steel additional **C** or **HCR**.

For high corrosion resistant steel additional marking **C** or **HCR** also on the face side

Installation conditions:

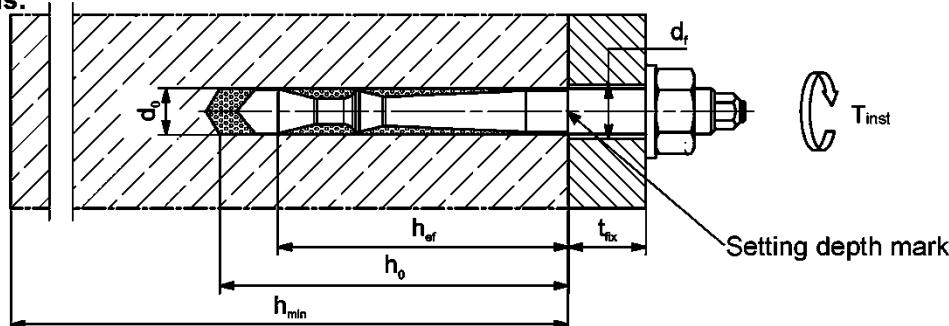

Figures not to scale

fischer Highbond-Anchor FHB II

Intended use
Installation parameters for Highbond-Anchor rods FHB II-A S

Annex B4


Table B5.1: Installation parameters for Highbond – Anchor rods FHB II Inject – A L

Anchor rod FHB II Inject– A L	Thread	M8x	M10x	M12x		M16x			M20x	M24x
		60	95	100	120	125	145	160	210	210
Cone diameter	[mm]	9,4	10,7	12,5		16,8			23,0	
Nominal drill hole diameter		10	12	14		18			25	
Drill hole depth		66	101	106	126	131	151	166	216	
Effective anchorage depth		60	95	100	120	125	145	160	210	
Minimum spacing and minimum edge distance		$s_{min} = c_{min}$		40		55	60	70	90	
Diameter of clearance hole in the fixture ¹⁾		pre-positioned anchorage	$d_f \leq$	14		18			22	26
push through anchorage		$d_f \leq$		16		20			26	
Min. thickness of concrete member	h_{min}	100	140		170	190	220	280		
Installation torque moment	T_{inst}	[Nm]	15	20	40	60			100	
Thickness of fixture	$t_{fix} \leq$	1500								
fischer filling disk FFD ²⁾	$\geq d_a$	[mm]	-	26	30	38			46	54
	t_s		-	6	6	7			8	10

¹⁾ For larger clearance holes in the fixture see EN1992-4; 6.2.2.2

²⁾ Using fischer filling disk FFD reduces t_{fix} (usable length of the anchor)

fischer Highbond – Anchor rod FHB II Inject – A L

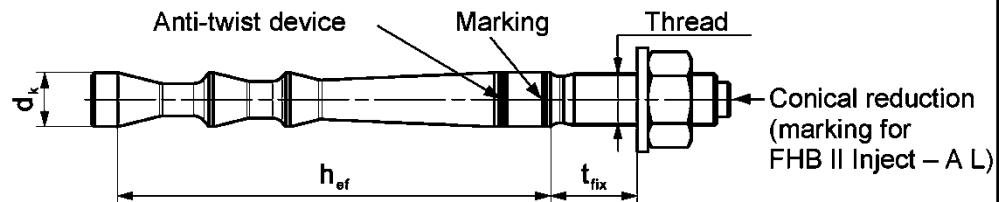


Marking: work symbol, size of anchor, setting depth. e.g.:  M10x95

For stainless steel additional **A4** or **R**. For high corrosion resistant steel additional **C** or **HCR**.

For high corrosion resistant steel additional marking **C** or **HCR** also on the face side.

Installation conditions:

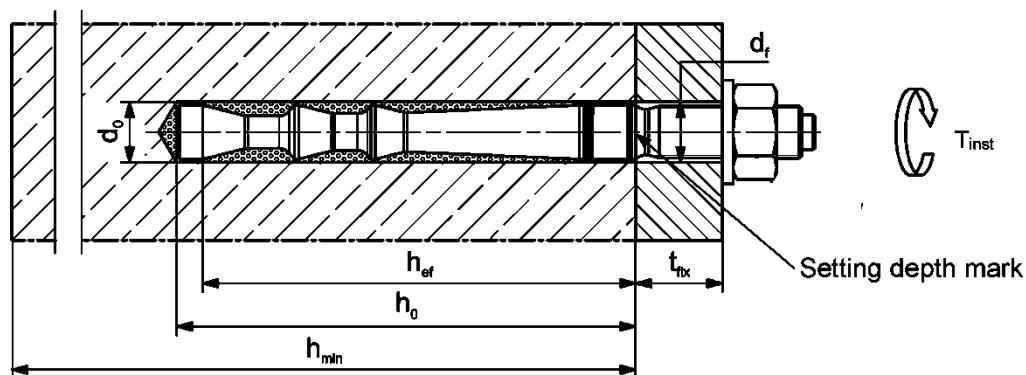

Figures not to scale

fischer Highbond-Anchor FHB II

Intended use

Installation parameters for Highbond-Anchor rods FHB II-A L

Annex B5


Tabelle B6.1: Installation parameters for Highbond – Anchor rods FHB II Inject – A S

Anchor rod FHB II Inject – A S	Thread	M10x		M12x	M16x	M20x	M24x
		60	75	75	95	170	170
Cone diameter d_k		9,4		11,3	14,5		23,0
Nominal drill hole diameter d_0		10		12	16		25
Drill hole depth h_0		66	81	81	101		176
Effective anchorage depth h_{ef}		60	75	75	95		170
Minimum spacing and minimum edge distance $s_{min} = c_{min}$	[mm]	40		50	80		
Diameter of pre-positioned anchorage $d_f \leq$		12		14	18	22	26
clearance hole in the fixture ¹⁾		12		14	18	26	
push through anchorage $d_f \leq$		100	120		150	240	
Min. thickness of concrete member h_{min}							
Installation torque moment T_{inst}	[Nm]	15		30	50	100	
Thickness of fixture $t_{fix} \leq$	1500						
fischer filling disk FFD ²⁾ $\geq d_a$	26		30	38	46	54	
t_s	6		6	7	8	10	

¹⁾ For larger clearance holes in the fixture see EN1992-4; 6.2.2.2

²⁾ Using fischer filling disk FFD reduces t_{fix} (usable length of the anchor)

fischer Highbond – Anchor rod FHB II Inject – A S

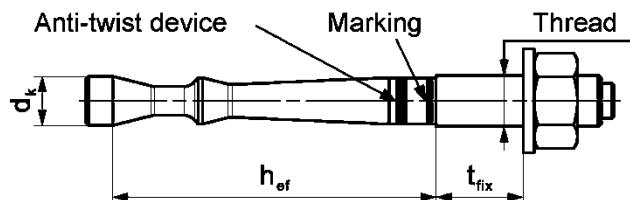


Marking: work symbol, size of anchor, setting depth. e.g.:  M10x75

For stainless steel additional A4 or R. For high corrosion resistant steel additional C or HCR.

For high corrosion resistant steel additional marking C or HCR also on the face side

Installation conditions:

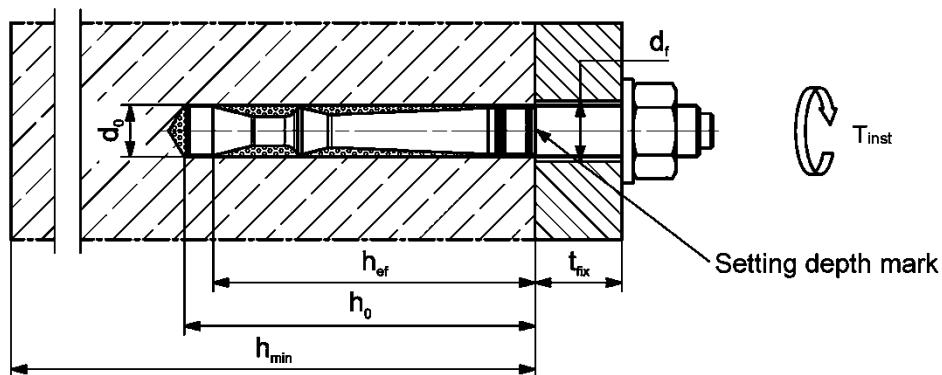

Figures not to scale

fischer Highbond-Anchor FHB II

Intended use


Installation parameters for Highbond-Anchor rods FHB II-A S

Annex B6


Table B7.1: Dimensions of mortar capsules FHB II-P and FHB II-PF

Mortar capsule		8x 60	10x 60	75	95	75	100	120	95	125	145	160	170	210	170	210
Length of capsule	L_p	85	90	115	95		120		150		155		185	210	185	210
Diameter of capsule	$\emptyset d_p$		9		11		12,5	14,5		17				21,5		

FHB II-P (standard)

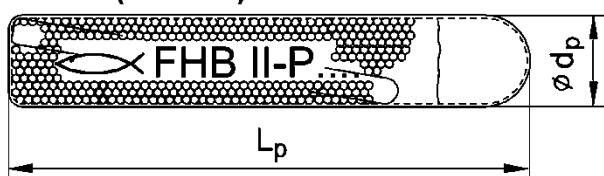

FHB II-PF (fast curing)

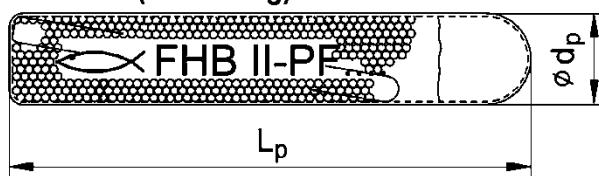


Imprint: work symbol, marking, anchor size and effective anchorage depth.

e.g.: FHB II-P 12x100 or
 FHB II-PF 12x100

Table B7.2: Parameters of the cleaning brush BS (steel brush; when using injection mortar or when using mortar capsules in diamond drilled holes)

The size of the steel brush refers to the nominal drill hole diameter

Drill hole diameter	d_0	[mm]	10	12	14	16	18	25
Brush diameter	d_b		11	14	16	20	22	27

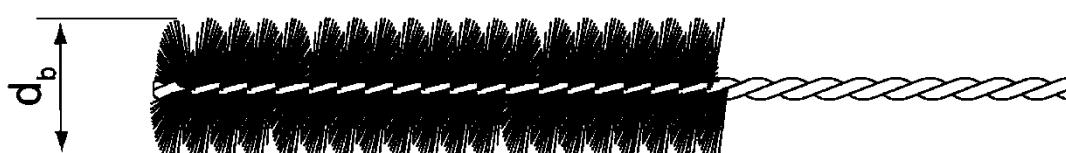

Figures not to scale

fischer Highbond-Anchor FHB II

Intended use
Dimensions of mortar capsules; parameters of the cleaning brush

Annex B7

Table B8.1: Maximum processing time of the mortar FIS HB and minimum curing time

Temperature at anchoring base ¹⁾ [°C]	Maximum processing time t_{work}	Minimum curing time ²⁾ t_{cure}
-5 to 0 ³⁾	-	6 h
> 0 to 5 ³⁾	-	3 h
> 5 to 10	15 min	90 min
> 10 to 20	6 min	35 min
> 20 to 30	4 min	20 min
> 30 to 40	2 min	12 min

¹⁾ During the curing time of the mortar the temperature of the anchoring base may not fall below the listed minimum temperature

²⁾ In wet concrete the curing time must be doubled

³⁾ Minimal cartridge temperature +5 °C

Table B8.2: Minimum curing time for mortar capsules FHB II-P and FHB II-PF

Resin capsule FHB II-P (standard)		Resin capsule FHB II-PF (fast curing)	
Temperature at anchoring base ¹⁾ [°C]	Minimum curing time ²⁾ t_{cure}	Temperature at anchoring base ¹⁾ [°C]	Minimum curing time ²⁾ t_{cure}
-5 to 0	4 h	-5 to 0	8 min
> 0 to 10	45 min	> 0 to 10	6 min
> 10 to 20	20 min	> 10 to 20	4 min
> 20	10 min	> 20	2 min

¹⁾ During the curing time of the mortar the temperature of the anchoring base may not fall below the listed minimum temperature.

²⁾ In wet concrete or water-filled holes the curing times must be doubled

fischer Highbond-Anchor FHB II


Intended use
Processing times and curing times

Annex B8

Installation instructions part 1; Installation with mortar capsule FHB II-P or FHB II-PF

Drilling the hole (hammer drilling with standard drill bit)

1




Drill the hole with hammer drill.
Drill hole diameter d_0 and drill hole depth h_0 see
Tables B3.1, B4.1.
Cleaning of the bore hole is not necessary.

Go to step 6


Drilling and cleaning the hole (hammer drilling with hollow drill bit)

1



Check a suitable hollow drill (see **Table B1.1**)
for correct operation of the dust extraction.

2



Use a suitable dust extraction system, e. g. fischer FVC 35 M or a comparable dust extraction system with equivalent performance data.
Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Diameter of drill hole d_0 and drill hole depth h_0 see **Tables B3.1, B4.1.**

Go to step 6

Drilling and cleaning the drill hole (wet drilling with diamond drill bit)

1




Drill the hole.
Drill hole diameter d_0 and nominal
drill hole depth h_0
see **Table B3.1, B4.1.**




Break the drill core and remove it

2




Flush the drill hole, until clear water emerges from the drill hole.

3



Blow out the drill hole twice, using oil-free compressed air ($p \geq 6$ bar).


4



Brush the drill hole twice.
Corresponding cleaning brush BS see **Table B7.2.**



5



Blow out the drill hole twice, using oil-free compressed air ($p \geq 6$ bar).

Go to step 6








fischer Highbond-Anchor FHB II

Intended use
Installation instructions part 1; Installation with mortar capsule

Annex B9






Installation instruction part 2; Installation with mortar capsule FHB II-P or FHB II-PF

Installation Highbond-Anchor rod FHB II – A L and FHB II – A S

6		Put the mortar capsule FHB II-P or FHB II-PF into the bore hole.
7		Pre-positioned anchor: Only use Highbond-Anchor rods FHB II - A L or FHB II - A S with roof-shaped point . Drive in the Anchor rod using a hammer drill or impact drill. When reaching the setting depth mark stop the drill immediately.
7		Push through anchor: Only use Highbond-Anchor rods FHB II – A S with roof-shaped point . Drive in the anchor rod using a hammer drill or impact drill. When reaching the setting depth mark stop the drill immediately.
8		After inserting the anchor, excess mortar must be emerged around the anchor (pre-positioned installation) or in the attached part (push-through installation).
8a		For overhead installations support the anchor rod with wedges. (e.g. fischer centering wedges)
9		Wait for the specified curing time t_{cure} see Table B8.2 . Mounting the fixture with T_{inst} see Tables B3.1, B4.1 .
Option		After the minimum curing time is reached, the gap between anchor and fixture (annular clearance) may be filled with mortar via the fischer filling disc FFD. compressive strength $\geq 50 \text{ N/mm}^2$ (e.g. FIS HB). ATTENTION: Using fischer filling disk FFD reduces t_{fix} (usable length of the anchor).
fischer Highbond-Anchor FHB II		Annex B10
Intended use Installation instructions part 2; Installation with mortar capsule FHB II-P or FHB II-PF		



Installation instructions part 3; Installation with injection mortar FIS HB

Drilling and cleaning the hole (hammer drilling with standard drill bit)

1		Drill the hole with hammer drill. Drill hole diameter d_0 and drill hole depth h_0 see Tables B3.1, B4.1, B5.1, B6.1.
2		Blow out the drill hole twice. For drill hole diameter $d_0 = 25$ mm with oil-free compressed air ($p \geq 6$ bar) Use a cleaning nozzle.
 For drill hole diameter $d_0 < 25$ mm with hand- blowout or oil-free compressed air. ($p \geq 6$ bar)		
	If necessary, remove standing water out of the bore hole.	
3		Brush the bore hole twice. Corresponding brushes see Table B7.2.
4		Blow out the drill hole twice. For drill hole diameter $d_0 = 25$ mm with oil-free compressed air ($p \geq 6$ bar) Use a cleaning nozzle.
	 For drill hole diameter $d_0 < 25$ mm with hand- blowout or oil-free compressed air. ($p \geq 6$ bar)	

Go to step 5

Drilling and cleaning the hole (hammer drilling with hollow drill bit)

1		Check a suitable hollow drill (see Table B1.1) for correct operation of the dust extraction.
2		Use a suitable dust extraction system, e. g. fischer FVC 35 M or a comparable dust extraction system with equivalent performance data. Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Diameter of drill hole d_0 and drill hole depth h_0 see Tables B3.1, B4.1, B5.1, B6.1.

Go to step 5


fischer Highbond-Anchor FHB II

Intended use
Installation instructions part 3; Installation with injection mortar

Annex B11

Installation instruction part 4; Installation with injection mortar FIS HB


Preparing the cartridge

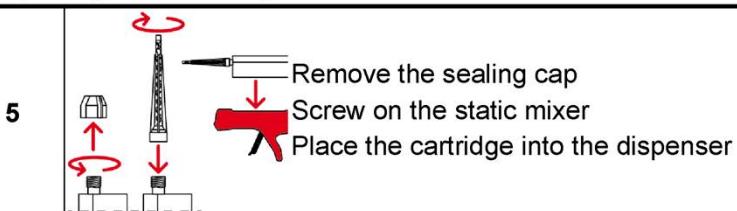


6 Ensuring that the spiral inside the mixer is clearly visible.

7 Extrude approximately 10 cm of material until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey.

Injection of the mortar




Fill approximately 2/3 of the drill hole with mortar. Exact quantity of mortar (travel scale on the cartridge) see instruction sheet. Fill the drill hole with mortar, always begin from the bottom of the hole to avoid bubbles.



Push-through installation:

By using Highbond-Anchor rods **FHB II - AL** or **FHB II Inject - AL** the drill hole in the fixture must be also filled with mortar.

By using Highbond-Anchor rods **FHB II - AS** or **FHB II Inject - AS** is this not necessary.



For drill hole depth ≥ 170 mm use an extension tube.

Go to step 9

fischer Highbond-Anchor FHB II

Intended use
Installation instructions part 4; Installation with injection mortar

Annex B12

Installation instruction part 5; Installation with injection mortar FIS HB

Installation Highbond-Anchor rod FHB II (Inject)– A L and FHB II (Inject)– A S

9		Only use clean and oil-free anchor rods. Push the anchor rod down to the bottom of the hole, turning it slightly while doing so.
10		Pre-positioned anchor: After inserting the anchor rod, surplus mortar must be escaped from the fixture. Push through anchor: After inserting the anchor rod, surplus mortar must be escaped from the bore hole or must be visible in the fixture.
		For overhead installations support the anchor rod with wedges. (e.g. fischer centering wedges)
11		Wait for the specified curing time t_{cure} see Table B8.1 . Mounting the fixture with T_{inst} see Tables B3.1, B4.1, B5.1, B6.1 .
Option		After the minimum curing time is reached, the gap between anchor and fixture (annular clearance) may be filled with mortar by using the fischer filling disc FFD. compressive strength $\geq 50 \text{ N/mm}^2$ (e.g. FIS HB). ATTENTION: Using fischer filling disk FFD reduces t_{fix} (usable length of the anchor).

fischer Highbond-Anchor FHB II

Intended use
Installation instructions part 5; Installation with injection mortar

Annex B13

Table C1.1: Characteristic resistance to steel failure under tension / shear loading of Highbond-Anchor FHB II – A L and FHB II Inject – A L

Anchor rod FHB II – A L and FHB II Inject – A L		M8x	M10x	M12x		M16x		M20x	M24x					
Characteristic resistance to steel failure under tension loading		60	95	100	120	125	145	160	210					
Characteristic resistance $N_{RK,s}$	Steel, zinc plated	24,2	34,4	49,8		96,6		137,6						
	Stainless steel R	[kN]	24,2	34,4	49,8		96,6		137,6					
	High corrosion resistant steel HCR				137,6									
Partial factors¹⁾		[-]	Steel, zinc plated	1,5 ¹⁾										
$\gamma_{Ms,N}$	Stainless steel R			1,5 ¹⁾										
	High corrosion resistant steel HCR			1,5 ¹⁾										
Anchor rod FHB II – A L and FHB II Inject – A L		M8x	M10x	M12x		M16x		M20x	M24x					
		60	95	100	120	125	145	160	210					
Characteristic resistance to steel failure under shear loading														
without lever arm														
Characteristic Resistance $V^0_{RK,s}$	Steel, zinc plated	[kN]	13,7	20,8	30,3		56,3		87,90					
	Stainless steel R		15,2	23,2	33,7		62,7		126,9					
	High corrosion resistant steel HCR				97,9		141,0							
with lever arm														
Characteristic resistance $M^0_{RK,s}$	Steel, zinc plated	[Nm]	31,0	62,0	105,0		266,0		519,0					
	Stainless steel R		31,0	62,0	266,0		896,0							
	High corrosion resistant steel HCR				519,0		896,0							
Partial factors														
Partial factor ¹⁾	$\gamma_{Ms,V}$	[-]	1,25 ¹⁾											
¹⁾ In absence of other national regulations														
fischer Highbond-Anchor FHB II								Annex C1						
Performances Characteristic resistance to steel failure under tension / shear loading of Highbond-Anchor FHB II – A L and FHB II Inject – A L														

Table C2.1: Characteristic resistance to steel failure under tension / shear loading of Highbond-Anchor FHB II – A S and FHB II Inject – A S

Anchor rod FHB II – A S / FHB II Inject – A S		M10x	M12x	M16x	M20x	M24x
		60	75	75	95	170
Characteristic resistance to steel failure under tension loading						
Characteristic resistance $N_{Rk,s}$	Steel, zinc plated	[kN]	24,2	34,4	61,6	128,5
	Stainless steel R		24,2	34,4	61,6	128,5
	High corrosion resistant steel HCR					
Partial factors¹⁾						
Partial factor $\gamma_{Ms,N}$	Steel, zinc plated	[-]		1,5 ¹⁾		
	Stainless steel R			1,5 ¹⁾		
	High corrosion resistant steel HCR			1,5 ¹⁾		
Splitting failure						
Anchor rod FHB II – A S / FHB II Inject – A S		M10x	M12x	M16x	M20x	M24x
		60	75	75	95	170
Characteristic resistance to steel failure under shear loading						
Characteristic Resistance $V^0_{Rk,s}$	Steel, zinc plated	[kN]	19,7	27,3	50,8	80,3
	Stainless steel R		24,1	33,7	62,7	97,9
	High corrosion resistant steel HCR		24,1	33,7	62,7	97,9
With lever arm						
Characteristic resistance $M^0_{Rk,s}$	Steel, zinc plated	[Nm]	62,0	105,0	266,0	519,0
	Stainless steel R		62,0	105,0	266,0	519,0
	High corrosion resistant steel HCR					
Partial factors¹⁾						
Partial factor	$\gamma_{Ms,V}$	[-]		1,25 ¹⁾		
¹⁾ In absence of other national regulations						
fischer Highbond-Anchor FHB II						
Performances						
Characteristic resistance to steel failure under tension / shear loading of Highbond-Anchor FHB II – A S and FHB II Inject – A S						
Annex C2						

Table C3.1: Characteristic resistance to concrete failure under tension / shear loading for Highbond-Anchor FHB II – A L and FHB II Inject – A L

Size		All sizes															
Tension loading																	
Installation factor γ_{inst} [-] See Annex C5 to C8																	
Factors for the compressive strength of concrete > C20/25																	
Increasing factor ψ_c for cracked or uncracked concrete		Ψ_c [-]		C25/30 C30/37 C35/45 C40/50 $N_{Rk,p} = \psi_c \cdot N_{Rk,p} (C20/25)$ C45/55 C50/60													
Anchor rod FHB II - A L and FHB II Inject - A L			M8x	M10x	M12x	M16x	M20x	M24x									
			60	95	100	120	125	145	160	210	210						
Splitting failure																	
Spacing $s_{cr,sp}$		$[mm]$		300	476	380	600	375	500	580	630						
Edge distance $c_{cr,sp}$				150	238	190	300	188	250	290	315						
Pullout and splitting failure in uncracked concrete C20/25																	
Characteristic resistance $N_{Rk,p}$ [kN]				15	35	40	50	75	75	95	148						
Spacing $s_{cr,sp}$		$[mm]$		3,0 h_{ef}													
Edge distance $c_{cr,sp}$				1,5 h_{ef}													
Concrete cone failure																	
Uncracked concrete $k_{ucr,N}$		$[-]$		11,0													
Cracked concrete $k_{cr,N}$				7,7													
Edge distance $c_{cr,N}$		$[mm]$		1,5 h_{ef}													
Spacing $s_{cr,N}$				3,0 h_{ef}													
Shear loading																	
Installation factor γ_{inst} [-]				1,0													
Concrete pry-out failure																	
Factor for pry-out failure k_8 [-]				2,0													
Concrete edge failure																	
Anchor rod FHB II - A L and FHB II Inject - A L			M8x	M10x	M12x	M16x	M20x	M24x									
			60	95	100	120	125	145	160	210	210						
Effective length of fastener in shear loading l_f		$[mm]$		60	95	100	120	125	144	200							
Calculation diameter d_{nom}				10	12	14	18			25							
fischer Highbond-Anchor FHB II																	
Performances																	
Characteristic resistance to concrete failure under tension / shear loading Highbond-Anchor FHB II – A L and FHB II Inject – A L																	
Annex C3																	

Table C4.1: Characteristic resistance to concrete failure under tension / shear loading for fischer Highbond-Anchor FHB II – A S and FHB II Inject – A S

Size		All sizes											
Tension loading													
Installation factor γ_{inst} [-] See Annex C5 to C8													
Factors for the compressive strength of concrete > C20/25													
Increasing factor ψ_c for cracked or uncracked concrete	C25/30	ψ_c [-]			1,12								
	C30/37				1,22								
	C35/45				1,32								
	C40/50				1,41								
$N_{RK,p} = \psi_c \cdot N_{RK,p} (C20/25)$	C45/55				1,50								
	C50/60				1,58								
Splitting failure													
Anchor rod FHB II - A S and FHB II Inject - A S			M10x		M12x	M16x	M20x	M24x					
			60	75	75	95	170	170					
Splitting failure													
Spacing	$s_{cr,sp}$	[mm]	300		340	510							
Edge distance	$c_{cr,sp}$			150		170	255						
Pullout and splitting failure in uncracked concrete C20/25													
Characteristic resistance	$N_{RK,p}$	[kN]	15	21	25	40	109						
Spacing	$s_{cr,sp}$	[mm]	3,0 h_{ef}										
Edge distance	$c_{cr,sp}$			1,5 h_{ef}									
Concrete cone failure													
Uncracked concrete	$k_{ucr,N}$	$[-]$	11,0										
Cracked concrete	$k_{cr,N}$			7,7									
Edge distance	$c_{cr,N}$			1,5 h_{ef}									
Spacing	$s_{cr,N}$			3 h_{ef}									
Shear loading													
Installation factor	γ_{inst}	[-]	1,0										
Concrete pry-out failure													
Factor for pry-out failure	k_8	[-]	2,0										
Concrete edge failure													
Anchor rod FHB II - A S and FHB II Inject - A S			M10x		M12x	M16x	M20x	M24x					
			60	75	75	95	170	170					
Effective length of fastener in shear loading	l_f	$[mm]$	60	75	75	95	170						
Calculation diameter	d_{nom}			10		12	16	25					
fischer Highbond-Anchor FHB II													
Performances													
Characteristic resistance to concrete failure under tension / shear loading Highbond-Anchor FHB II – A S and FHB II Inject – A S													
Annex C4													

Table C5.1: Characteristic resistance to pullout failure under tension / shear loading in uncracked or cracked concrete C20/25 for Highbond-Anchor FHB II – A L and FHB II Inject – A L; working life 50 years

Anchor rod FHB II - A L ¹⁾ FHB II Inject - A L ²⁾	M8 60	M10 95	M12 100	M12 120	M16 125	M16 145	M20 160	M20 210	M24 210
--	----------	-----------	------------	------------	------------	------------	------------	------------	------------

Characteristic resistance for pullout failure

Calculation diameter	d	[mm]	8	10	12	16	20	24
----------------------	---	------	---	----	----	----	----	----

Uncracked concrete

Characteristic resistance in uncracked concrete C20/25

Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete / water-filled hole)

Temperature range	I: 24 °C / 40 °C II: 50 °C / 80 °C	$N_{Rk,p,ucr,50}$ [N/mm ²]	15,9	34,9	44,9	51,1	97,4	97,4	100,9	148,2	148,2
-------------------	---------------------------------------	--	------	------	------	------	------	------	-------	-------	-------

Installation factors

Dry or wet concrete			1,0 ³⁾	1,0
Water filled hole (only for resin capsule)	γ_{inst}	[-]	1,2	1,0

Cracked concrete

Characteristic resistance in cracked concrete C20/25

Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete / water-filled hole)

Temperature range	I: 24 °C / 40 °C II: 50 °C / 80 °C	$N_{Rk,p,cr,50}$ [N/mm ²]	15,9	34,9	44,9	51,1	82,5	97,4	100,9	148,2	148,2
-------------------	---------------------------------------	---------------------------------------	------	------	------	------	------	------	-------	-------	-------

Installation factors

Dry or wet concrete			1,0 ³⁾	1,0
Water filled hole (only for resin capsule)	γ_{inst}	[-]	1,2	1,0

¹⁾ Highbond-Anchor rod FHB II - A L with resin capsule FHB II-P / FHB II-PF or injection mortar FIS HB

²⁾ Highbond-Anchor rod FHB II Inject - A L with injection mortar FIS HB

³⁾ With mortar capsule $\gamma_{inst} = 1,2$

fischer Highbond-Anchor FHB II

Performances

Characteristic resistance to pullout failure under tension / shear
Highbond-Anchor FHB II – A L and FHB II Inject – A L, working life 50 years

Annex C5

Table C6.1: Characteristic resistance to pullout failure under tension / shear loading in uncracked or cracked concrete C20/25 for fischer Highbond-Anchor FHB II – A S and FHB II Inject – A S; working life 50 years

Anchor rod FHB II - A S ¹⁾ FHB II Inject - A S ²⁾	M10x	M12x	M16x	M20x	M24x	
Calculation diameter d [mm]	60	75	75	95	170	170

Characteristic resistance for pullout failure

Calculation diameter	d	[mm]	10	12	16	20	24
----------------------	---	------	----	----	----	----	----

Uncracked concrete

Characteristic resistance in uncracked concrete C20/25

Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete / water-filled hole)

Temperature range	I: 24 °C / 40 °C II: 50 °C / 80 °C	$N_{Rk,p,ucr,50}$ [N/mm ²]	15,9	21,4	27,1	57,9	135,7	135,7
-------------------	---------------------------------------	--	------	------	------	------	-------	-------

Installation factors

Dry or wet concrete		γ_{inst}	1,0 ³⁾	1,0
Water filled hole (only for resin capsule)			1,2	1,0

Cracked concrete

Characteristic resistance in cracked concrete C20/25

Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete)

Temperature range	I: 24 °C / 40 °C II: 50 °C / 80 °C	$N_{Rk,p,cr,50}$ [N/mm ²]	15,9	21,4	26,2	42,6	123,3	123,3
-------------------	---------------------------------------	---------------------------------------	------	------	------	------	-------	-------

Installation factors

Dry or wet concrete		γ_{inst}	1,0 ³⁾	1,0
Water filled hole (only for resin capsule)			1,2	1,0

¹⁾ Highbond-Anchor rod FHB II - A S with resin capsule FHB II-P / FHB II-PF or injection mortar FIS HB

²⁾ Highbond-Anchor rod FHB II Inject - A S with injection mortar FIS HB

³⁾ With mortar capsule $\gamma_{inst} = 1,2$

fischer Highbond-Anchor FHB II

Performances

Characteristic resistance to pullout failure under tension / shear loading
Highbond-Anchor FHB II – A L and FHB II Inject – A L; working life 50 years

Annex C6

Table C7.1: Characteristic resistance to pullout failure under tension / shear loading in uncracked or cracked concrete C20/25 for Highbond-Anchor rods FHB II - A S with resin capsule FHB II-P or FHB II-PF in diamond drilled holes; working life 50 years

Highbond-Anchor rod FHB II - A S ¹⁾	M16x95	M20x170	M24x170	
Characteristic resistance to pull-out failure				
Calculation diameter d [mm]	16	25		
Uncracked concrete				
Characteristic resistance in uncracked concrete C20/25				
<u>Diamond-drilling (dry or wet concrete / water-filled hole)</u>				
Temperature range	I 24 °C / 40 °C II 50 °C / 80 °C	N _{Rk,p,ucr,50} [kN]	51,5	118,5
Cracked concrete				
Characteristic resistance in cracked concrete C20/25				
<u>Diamond-drilling (dry or wet concrete / water-filled hole)</u>				
Temperature range	I 24 °C / 40 °C II 50 °C / 80 °C	N _{Rk,p,cr,50} [kN]	42,8	101,4
Installation factors				
Dry or wet concrete			1,2	
Water-filled hole	γ _{inst} [-]		1,2	

¹⁾ Highbond-Anchor rod FHB II - A S with resin capsule FHB II-P / FHB II-PF

Table C7.2: Characteristic resistance to pullout failure under tension / shear loading in uncracked or cracked concrete C20/25 for Highbond-Anchor rods FHB II - A S with resin capsule FHB II-P or FHB II-PF in diamond drilled holes; working life 100 years

Highbond-Anchor rod FHB II - A S ¹⁾	M16x95	M20x170	M24x170	
Characteristic resistance to pull-out failure				
Calculation diameter d [mm]	16	25		
Uncracked concrete				
Characteristic resistance in uncracked concrete C20/25				
<u>Diamond-drilling (dry or wet concrete / water-filled hole)</u>				
Temperature range	I 24 °C / 40 °C II 50 °C / 80 °C	N _{Rk,p,ucr,100} [kN]	51,5	118,5
Cracked concrete				
Characteristic resistance in cracked concrete C20/25				
<u>Diamond-drilling (dry or wet concrete / water-filled hole)</u>				
Temperature range	I 24 °C / 40 °C II 50 °C / 80 °C	N _{Rk,p,cr,100} [kN]	36,0	86,0
Installation factors				
Dry or wet concrete			1,2	
Water-filled hole	γ _{inst} [-]		1,2	

¹⁾ Highbond-Anchor rod FHB II - A S with resin capsule FHB II-P / FHB II-PF

fischer Highbond-Anchor FHB II

Performances
Characteristic resistance to pull-out failure for Highbond-Anchor rods FHB II - A S in diamond drilled holes; working life 50 or 100 years

Annex C7

Table C8.1: Characteristic resistance to pull-out failure for Highbond-Anchor rods FHB II - A S with resin capsule FHB II-P / FHB II-PF or injection mortar FIS HB and FHB II Inject - A S with injection mortar FIS HB in hammer drilled holes; working life 100 years

Anchor rod FHB II - A S ¹⁾ FHB II Inject - A S ²⁾	M16x95	M20x170	M24x170
Characteristic resistance to pull-out failure			
Calculation diameter d [mm]	16	25	
Uncracked concrete			
Characteristic resistance in uncracked concrete C20/25			
Hammer-drilling with standard or hollow drill bit (dry or wet concrete / water-filled hole)			
Temperature range	I 24 °C / 40 °C II 50 °C / 80 °C	N _{Rk,p,ucr,100} [kN]	52,4 118,5
Cracked concrete			
Characteristic resistance in cracked concrete C20/25			
Hammer-drilling with standard or hollow drill bit (dry or wet concrete / water-filled hole)			
Temperature range	I 24 °C / 40 °C II 50 °C / 80 °C	N _{Rk,p,cr,100} [kN]	36,0 86,0
Installation factors			
Dry or wet concrete			1,0
Water-filled hole (only with resin capsule)	γ _{inst}	[-]	1,0
¹⁾ Highbond-Anchor rod FHB II - A S with resin capsule FHB II-P / FHB II-PF or injection mortar FIS HB			
²⁾ Highbond-Anchor rod FHB II Inject - A S with injection mortar FIS HB			
fischer Highbond-Anchor FHB II			
Performances Characteristic resistance to pull-out failure for Highbond-Anchor rods FHB II - A S or FHB II - A S Inject in hammer drilled holes; working life 100 years			Annex C8

Table C9.1: Displacements for Highbond-Anchor rod FHB II - A L and FHB II Inject- A L; working life 50 years

Anchor rod FHB II - A L and FHB II Inject -A L		M8	M10	M12		M16		M20	M24								
Displacement-Factors for tension loading ¹⁾																	
Uncracked concrete; Temperature range I and II																	
δ_{N0} -Factor	[mm/kN]	0,026	0,024	0,019	0,016	0,012	0,010	0,008	0,008								
		0,224	0,102	0,079	0,070	0,052	0,042	0,036	0,024								
Cracked concrete; Temperature range I and II																	
$\delta_{N\infty}$ -Factor	[mm/kN]	0,105	0,053	0,049	0,037	0,026	0,021	0,018	0,012								
		0,224	0,112	0,104	0,079	0,074	0,059	0,051	0,034								
Displacement-Factors for shear loading ²⁾																	
Uncracked or cracked concrete; Temperature range I and II																	
Steel, zinc plated																	
δ_{V0} -Factor	[mm/kN]	0,185	0,101	0,075		0,040		0,070	0,048								
		0,277	0,151	0,116		0,062		0,106	0,073								
Stainless steel R																	
$\delta_{V\infty}$ -Factor	[mm/kN]	0,137	0,075	0,057		0,061		0,063	0,043								
		0,205	0,113	0,088		0,092		0,095	0,066								
High corrosion resistant steel HCR																	
δ_{V0} -Factor	[mm/kN]	0,164	0,090	0,067		0,067		0,066	0,062								
		0,247	0,135	0,104		0,101		0,100	0,093								
1) Calculation of effective displacement:					2) Calculation of effective displacement:												
$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot N$					$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V$												
$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot N$					$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V$												
N = acting tension loading					V = acting shear loading												
fischer Highbond-Anchor FHB II																	
Performances Displacements for Highbond-Anchor rod Highbond-Anchor rod FHB II - A L, FHB II Inject- A L and working life 50 years																	
Annex C9																	

Table C10.1: Displacements for Highbond-Anchor rod FHB II - A S and FHB II Inject- A S; working life 50 years

Anchor rod FHB II – A S and FHB II Inject -A S	M10	M12	M16	M20	M24				
	60	95	75	95	210				
Displacement-Factors for tension loading ¹⁾									
Uncracked concrete; Temperature range I and II									
δ_{N0} -Factor	[mm/kN]	0,026	0,020	0,016	0,009				
		0,224	0,167	0,132	0,078				
Cracked concrete; Temperature range T2									
δ_{N0} -Factor	[mm/kN]	0,105	0,029	0,028	0,026				
		0,224	0,167	0,159	0,112				
Displacement-Factors for shear loading ²⁾									
Uncracked or cracked concrete; Temperature range I and II									
Steel, zinc plated	[mm/kN]	0,128	0,118	0,052	0,061				
		0,191	0,181	0,079	0,092				
Stainless steel R									
δ_{V0} -Factor	[mm/kN]	0,087	0,057	0,061	0,063				
		0,130	0,088	0,092	0,095				
High corrosion resistant steel HCR									
δ_{V0} -Factor	[mm/kN]	0,104	0,067	0,067	0,066				
		0,157	0,104	0,101	0,100				
1) Calculation of effective displacement:			2) Calculation of effective displacement:						
$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot N$			$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V$						
$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot N$			$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V$						
N = acting tension loading			V = acting shear loading						
fischer Highbond-Anchor FHB II									
Performances Displacements for Highbond-Anchor rod Highbond-Anchor rod FHB II - A S, FHB II Inject- A S and working life 50 years									
Annex C10									

Table C11.1: Displacements for Highbond-Anchor rod FHB II - A S in diamond drilled holes; working life 50 years

Anchor rod FHB II – A S / FHB II Inject - A S		M16x95	M20x170	M24x170	
Displacement-Factors for tension loading ¹⁾					
Uncracked concrete; Temperature range I and II					
δ_{N0} -Factor	[mm/kN]	0,030	0,020	0,016	
		0,120	0,045	0,045	
Cracked concrete; Temperature range T2					
δ_{N0} -Factor	[mm/kN]	0,030	0,020	0,016	
		0,120	0,045	0,045	
Displacement-Factors for shear loading ²⁾					
Uncracked or cracked concrete; Temperature range I and II					
δ_{V0} -Factor	[mm/kN]	0,02	0,02	0,02	
		0,03	0,03	0,03	

¹⁾ Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot N$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot N$$

N = acting tension loading

²⁾ Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V$$

V = acting shear loading

Table C11.2: Displacements for Highbond-Anchor rod FHB II - A S and FHB II Inject - A S; working life 100 years

Anchor rod FHB II – A S / FHB II Inject - A S		M16x95	M20x170	M24x170	
Displacement-Factors for tension loading ¹⁾					
Uncracked concrete; Temperature range I and II					
δ_{N0} -Factor	[mm/kN]	0,030	0,020	0,016	
		0,120	0,045	0,045	
Cracked concrete; Temperature range I and II					
δ_{N0} -Factor	[mm/kN]	0,030	0,020	0,016	
		0,120	0,045	0,045	
Displacement-Factors for shear loading ²⁾					
Uncracked or cracked concrete; Temperature range I and II					
δ_{V0} -Factor	[mm/kN]	0,02	0,02	0,02	
		0,03	0,03	0,03	

¹⁾ Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot N$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot N$$

N = acting tension loading

²⁾ Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V$$

V = acting shear loading

fischer Highbond-Anchor FHB II

Performances

Displacements for Highbond-Anchor rod Highbond-Anchor rod FHB II - A S, FHB II Inject- A S and working life 50 years or 100 years

Annex C11