



ETA-Danmark A/S
Göteborg Plads 1
DK-2150 Nordhavn
Tel. +45 72 24 59 00
Fax +45 72 24 59 04
Internet www.etadanmark.dk

Authorised and notified according
to Article 29 of the Regulation (EU)
No 305/2011 of the European
Parliament and of the Council of
9 March 2011

MEMBER OF EOTA



European Technical Assessment ETA-24/0973 of 2025/01/08

I General Part

Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No. 305/2011: ETA-Danmark A/S

Trade name of the construction product:

fischer concrete screw UltraCut FBS II R

Product family to which the above construction product belongs:

Mechanical fasteners for use in cracked and un-cracked concrete

Manufacturer:

fischerwerke GmbH & Co. KG
Klaus-Fischer-Straße 1
D-72178 Waldachtal

Manufacturing plant:

fischerwerke

This European Technical Assessment contains:

13 pages including 8 annexes which form an integral part of the document

This European Technical Assessment is issued in accordance with Regulation (EU) No. 305/2011, on the basis of:

EAD 330747-00-0601 - Fasteners for use in concrete in redundant for non-structural systems

This version replaces:

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product

fischer concrete screw UltraCut FBS II R is a concrete screw made of stainless steel. The anchor is installed in a drilled hole and anchored by mechanical interlock.

An illustration of the product is given in Annex A.

The characteristic material values, dimensions and tolerances of the anchors not indicated in Annexes shall correspond to the respective values laid down in the technical documentation of this European Technical Assessment.

The anchors are intended to be used with embedment depth given in Annex B, Table B2.1. The intended use specifications of the product are detailed in the Annex B1.

2 Specification of the intended use in accordance with the applicable European Assessment Document (hereinafter EAD)

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Characteristics of product

Safety in case of fire (BWR 2):

The essential characteristics are detailed in the Annex C2.

Hygiene, health and the environment (BWR3)

No performance assessed

Safety and accessibility in use (BWR4)

The essential characteristics are detailed in the Annex C1 and C2.

Durability:

See annex B1.

3.2 Methods of assessment

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirement 2, 3 and 4 has been made in accordance with EAD 330747-00-0601 - Fasteners for use in concrete in redundant for non-structural systems.

4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base.

4.1 AVCP system

According to the decision 97/161/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No. 305/2011) is 2+.

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark prior to CE marking.

Issued in Copenhagen on 2025-01-08 by



Thomas Bruun
Managing Director, ETA-Danmark

Product in the installed condition

Installed condition in normal weight concrete

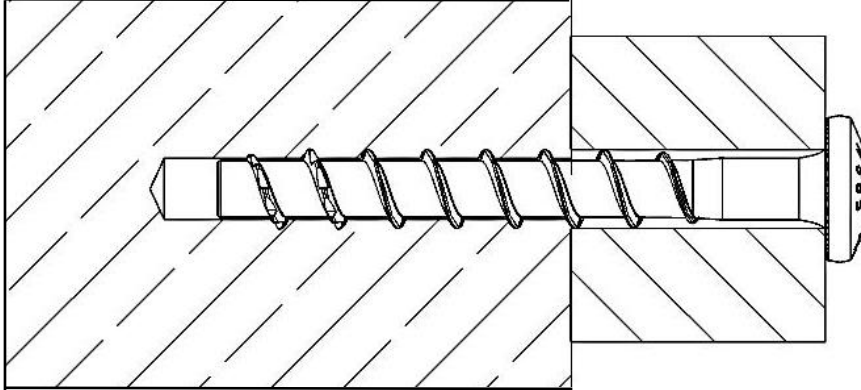


Table A1.1: Screw types FBS II 6 R

FBS II 6 R		
Hexagon head with formed washer (US)		
Countersunk head (SK)		
Pan head (P)		

(Figure not to scale)

fischer concrete screw UltraCut FBS II 6 R


Product description

Product in the installed condition and screw types FBS II 6 R


Annex A 1

Table A2.1: Geometry and material

FBS II 6 R		All head shapes	
Thread outer diameter	d_a	[mm]	7,8
Core diameter	d_k		5,6
Shaft diameter	d_s		6,0
Material	[-]	Tip: hardened steel; Shaft and head: stainless steel EN 10088-1:2023	
Coating		Tip: red colour	

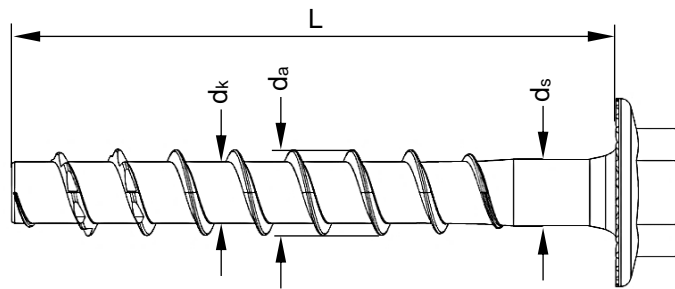


Head marking (example) at US, SK, P

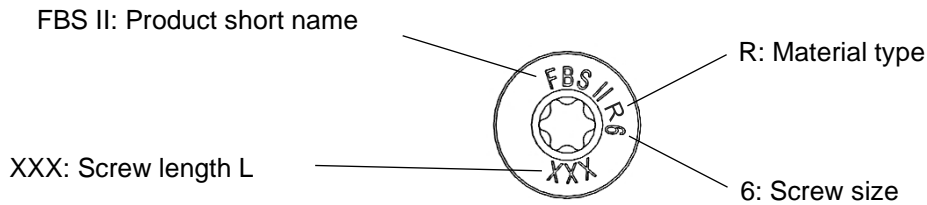


(Figure not to scale)

fischer concrete screw UltraCut FBS II 6 R	Annex A 2
Product description Geometry and material	

Specification of intended use:	
Size	FBS II 6 R
Hammer drilling 	✓
Static and quasi-static loads	
Cracked and uncracked concrete	
Fire exposure	
<p>Base materials:</p> <ul style="list-style-type: none"> • Compacted reinforced and unreinforced normal weight concrete without fibres (cracked or uncracked) according to EN 206:2013+A2:2021 • Strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021 <p>Use conditions (Environmental conditions):</p> <ul style="list-style-type: none"> • Structures subjected to dry internal conditions (FBS II 6 R) • For all other conditions according to EN 1993-1-4:2006 +A1:2015 corresponding to corrosion resistance class <ul style="list-style-type: none"> ○ CRC III: for FBS II 6 R <p>Design:</p> <ul style="list-style-type: none"> • The structural design according to EN 1992-4:2018 are conducted under responsibility of a designer experienced in the field of anchorages and concrete works. • Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.) • Design of fastenings according to EN 1992-4: 2018 and EOTA Technical Report TR 055:2018 	
fischer concrete screw UltraCut FBS II 6 R	
Intended use Specification of intended use	Annex B 1

FBS II 6 R			All head shapes	
Nominal embedment depth	h_{nom}	[mm]	45	60
Nominal drill hole diameter	$d_0 =$		6	
Cutting diameter of drill bits	$d_{cut} \leq$		6,4	
Diameter of clearance hole in the fixture	$d_f \leq$		8	
Drill hole depth	$h_1 \geq$		55	70
Drill hole depth (with adjustable setting)			65	80
Torque impact screw driver	$T_{imp,max}$	[Nm]	240	





FBS II 6 R			US	SK	P
Wrench size	SW	[mm]	10 / 13	-	
TX size	TX	[-]	-	30	
Head diameter	d_h	[mm]	15 / 17	13,3	14,4
Thickness of fixture	$t_{fix} \leq$		$L - h_{nom}$		
Length of screw	$L_{min} =$		50		
	$L_{max} =$		400		

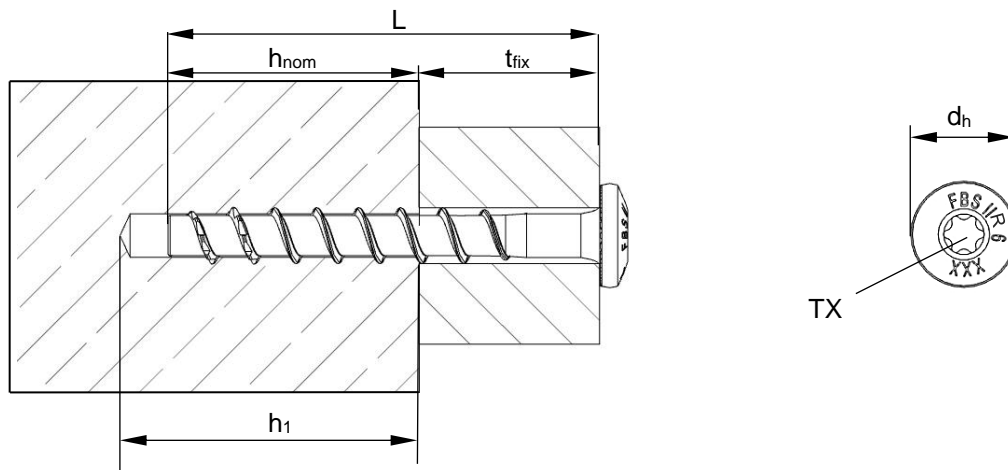

(Figure not to scale)

fischer concrete screw UltraCut FBS II 6 R	Annex B 2
Intended use Installation parameters	

Installation instruction part 1




	<p>Step 1: Drilling of the drill hole:</p> <p>Drill the hole using hammer drill</p> <p>Drill hole diameter d_0 and drill hole depth h_1 according to table B2.1</p>
	<p>Step 2: Cleaning of the drill hole:</p> <p>Clean the drill hole.</p>
	<p>Step 3: Installation:</p> <p>Turn in until the head is in contact with the fixture.</p> <p>Installation with any torque impact screw driver up to the maximum mentioned torque moment ($T_{imp,max}$ according to table B2.1).</p>
	<p>Step 4: Checking of the correct installation:</p> <p>After installation a further turning of the screw must not be possible. The head of the screw must be in contact with the fixture and is not damaged</p>

fischer concrete screw UltraCut FBS II 6 R

Intended use
Installation instruction

Annex B 3

Installation instruction part 2



Adjustment

Optional:

It is permissible to adjust the screw twice. Therefore, the screw may be untightened to a maximum of $L_{adj} = 20$ mm off the surface of the initial fixture. The total permissible thickness of shims added during the adjustment process is $t_{adj} = 10$ mm.

The required nominal anchoring depth h_{nom} must be kept after the adjustment process. (see also annex B 3)

fischer concrete screw UltraCut FBS II 6 R

Intended use
Installation instruction

Annex B 4

Table C1.1: Characteristic values for static and quasi-static action				
FBS II 6 R				
Nominal embedment depth	h_{nom}	[mm]	45	60
Steel failure for tension load and shear load				
Characteristic resistance	$N_{Rk,s}$	[kN]	19,3	
Partial factor	$\gamma_{Ms,N}^{2)}$	[-]	1,5	
Characteristic resistance	$V_{Rk,s}^0$	[kN]	5,2	12,6
Partial factor	$\gamma_{Ms,V}^{2)}$	[-]	1,5	
Factor for ductility	k_7		0,75	
Characteristic bending resistance	$M_{Rk,s}^0$	[Nm]	16,1	
Pullout failure				
Characteristic resistance in concrete C20/25	uncracked	$N_{Rk,p}$	[kN]	5,0
	cracked			10,0
Increasing factors concrete	C25/30	ψ_c	[-]	2,5
	C30/37			1,07
	C35/45			1,13
	C40/50			1,18
	C45/55			1,23
	C50/60			1,28
Installation sensitivity factor	γ_{inst}			1,32
				1,4
Concrete cone failure and splitting failure; concrete pryout failure				
Effective embedment depth	h_{ef}	[mm]	24	37
Factor for uncracked concrete	$k_{ucr,N}$	[-]	11,0	
Factor for cracked concrete	$k_{cr,N}$		7,7	
Characteristic edge distance	$c_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$	
Characteristic spacing	$s_{cr,N}$		$3 \cdot h_{ef}$	
Characteristic resistance for splitting	$N_{Rk,sp}^0$	[kN]	$\min(N_{Rk,c}^0{}^1); N_{Rk,p}$	
Characteristic edge distance for splitting	$c_{cr,sp}$	[mm]	66	42
Characteristic spacing for splitting	$s_{cr,sp}$		$2 \cdot c_{cr,sp}$	$2 \cdot c_{cr,sp}$
Factor for pryout failure	k_8	[-]	2,1	2,6
Installation factor	γ_{inst}		1,4 ³⁾	
Concrete edge failure				
Effective length in concrete	l_f	[mm]	31	46
Nominal diameter of screw	d_{nom}		6	
Adjustment				
Maximum thickness of shims	t_{adj}	[mm]	10	
Max. number of adjustments	n_a	[-]	2	
1) $N_{Rk,c}^0$ according EN 1992-4:2018				Annex C 1
2) In absence of other national regulations				
3) Only for concrete cone failure and splitting failure; concrete pryout failure according to EN 1992-4:2018, Table 4.1				
fischer concrete screw UltraCut FBS II 6 R				Annex C 1
Performances Characteristic values for static and quasi-static action				

Table C2.1: Minimum thickness of concrete members, minimum spacing and edge distance					
FBS II 6 R					
Minimum thickness of concrete member	h_{min}	[mm]	100		
Minimum spacing	s_{min}		35		
Minimum edge distance	c_{min}				
1) Drill hole depth according to table B2.1					
Table C2.2: Characteristic values for resistance to fire					
FBS II 6 R					
Nominal embedment depth	h_{nom}	[mm]	45	60	
Steel failure for tension load and shear load					
Characteristic resistance for the head shapes	US ≥SW13	$F_{Rk,s,fi}$	R30	-1)	2,1
			R60	-1)	1,7
			R90	-1)	1,2
			R120	-1)	1,0
	SK/P US SW10	$F_{Rk,s,fi}$	R30	-1)	1,8
			R60	-1)	1,4
			R90	-1)	1,1
			R120	-1)	0,9
Characteristic bending resistance for the head shapes	US ≥SW13	$M^0_{Rk,s,fi}$	R30	-1)	1,7
			R60	-1)	1,4
			R90	-1)	1,0
			R120	-1)	0,8
	SK/P US SW10	$M^0_{Rk,s,fi}$	R30	-1)	1,5
			R60	-1)	1,2
			R90	-1)	0,9
			R120	-1)	0,7
Pullout failure					
Characteristic resistance	$N_{Rk,p,fi}$	R30	[kN]	-1)	1,0
		R60			
		R90			
		R120			
Concrete cone failure failure					
Characteristic resistance	$N_{Rk,c,fi}$	R30	[kN]	-1)	1,4
		R60			
		R90			
		R120			
Edge distance					
R30 to R120	$c_{cr,fi}$	[mm]	$2 \cdot h_{ef}$		
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm					
Spacing					
R30 to R120	$s_{cr,fi}$	[mm]	$2 \cdot c_{cr,fi}$		
1) No performance assessed					
fischer concrete screw UltraCut FBS II 6 R				Annex C 2	
Performances Minimum thickness of concrete members, minimum spacing and edge distance; Characteristic values for resistance to fire					