

Technical Datasheet



FES-H-40/22 anchor channel

Advantages



- Hot-rolled Cast-in Channels combining excellent load capacity with high safety and flexibility.
- Fundamental load capacity in longitudinal direction in combination with channel bolts FBC-N or two directional load capacity with FBC.
- Suitable for applications in cracked and non-cracked concrete.
- Ideal prepositioned fixing solution, capable of covering on-site tolerances.
- Permanently adjustable fixing solution.

Technical Data

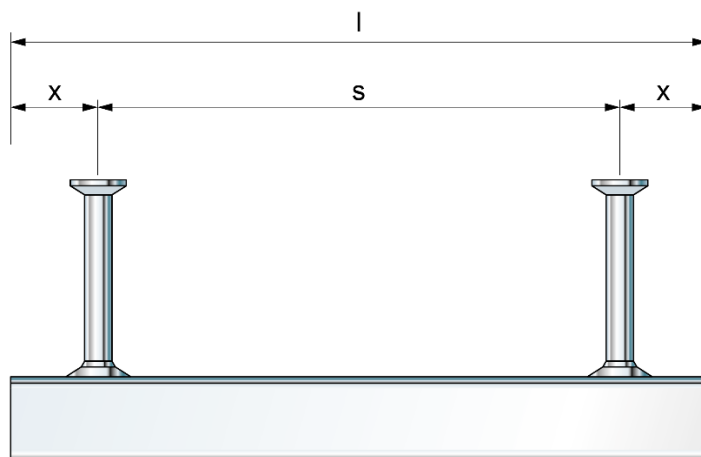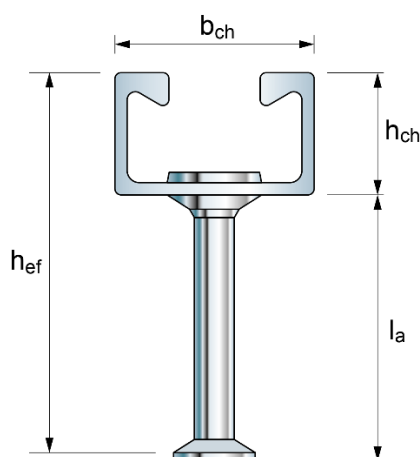

Effective embedment depth	Total embedment depth	Minimum thickness of concrete	Anchor length	Height	Width	Overhang	Anchor spacing
h_{ef}	$h_{nom} (l_a + h_{ch})$	h_{min}	l_a	h_{ch}	b_{ch}	x	s
90 mm	92 mm	100 mm	68,5 mm	23,5 mm	40 mm	25-35 mm	100-250 mm

Product Information

Item	Item no.	Length l [mm]	Number of anchors	Anchor spacing s [mm]	Match	Thread M	Sales units [pcs]
FES-H-40/22-150-HDG	569549	150	2	100	FBC-40/22; FBC-N-40/22	M10 – M16 for FBC-40/22 or M16 for FBC-N-40/22	45
FES-H-40/22-200-HDG	569550	200	2	150	FBC-40/22; FBC-N-40/22		30
FES-H-40/22-250-HDG	569551	250	2	200	FBC-40/22; FBC-N-40/22		25
FES-H-40/22-300-HDG	569552	300	2	250	FBC-40/22; FBC-N-40/22		25
FES-H-40/22-350-HDG	569553	350	3	150	FBC-40/22; FBC-N-40/22		20
FES-H-40/22-400-HDG	569554	400	3	175	FBC-40/22; FBC-N-40/22		15
FES-H-40/22-550-HDG	569555	550	3	250	FBC-40/22; FBC-N-40/22		10
FES-H-40/22-800-HDG	552475	800	4	250	FBC-40/22; FBC-N-40/22		10
FES-H-40/22-1050-HDG	552476	1050	5	250	FBC-40/22; FBC-N-40/22		1
FES-H-40/22-1300-HDG	552477	1300	6	250	FBC-40/22; FBC-N-40/22		1
FES-H-40/22-1550-HDG	552478	1550	7	250	FBC-40/22; FBC-N-40/22		1
FES-H-40/22-1800-HDG	552479	1800	8	250	FBC-40/22; FBC-N-40/22		1
FES-H-40/22-2050-HDG	552480	2050	9	250	FBC-40/22; FBC-N-40/22		1
FES-H-40/22-2300-HDG	552481	2300	10	250	FBC-40/22; FBC-N-40/22		1
FES-H-40/22-3050-HDG	552482	3050	13	250	FBC-40/22; FBC-N-40/22		1
FES-H-40/22-6070-HDG	552483	6070	25	250	FBC-40/22; FBC-N-40/22		1

- all Cast-In Channel FES-H-40/22 with hot-dip galvanized coating, Anchor Diameter $d_s=8$ mm
- different lengths and curved Cast-In channels available on request



European Technical Assessment
ETA-18/0862
EAD-330008-03-0601

