


# Technical Datasheet

## InnoLock PowerEdge System




### Advantages



- No intervention in the reinforcement plane.
- No lever arm between load introduction and load transfer.
- Load introduction to the PowerEdge System without cracking the concrete.
- Combination with supplementary reinforcement is possible.
- Highest loads close to the edge.

### Technical Data

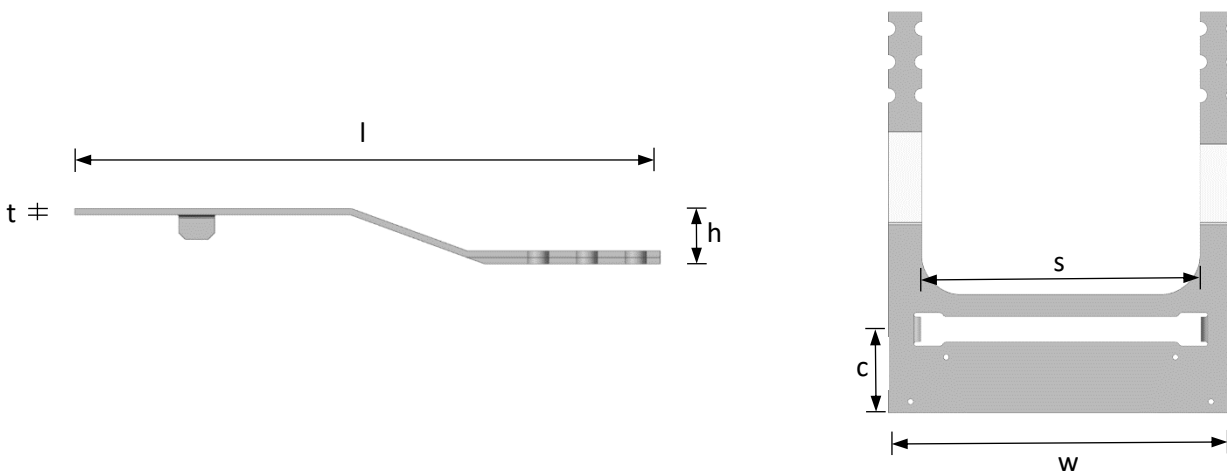

Length	Width	Height	Thickness	Distance to channel middle
l	w	h	t	c
360 mm	According channel length	38 mm	4 mm	75 mm

### Product Information

Item	Item no.	Width w [mm]	Usable spacing s [mm]	Match	Thread M	Sales units [pcs]
InnoLock PowerEdge 150 HDG	573545	160	105	InnoLock FES-RS-S-700-150-HDG InnoLock FES-RS-S-600-150-HDG	M12 – M20 for FBC-S-225	10
InnoLock PowerEdge 200 HDG	573546	210	155	InnoLock FES-RS-S-700-200-HDG InnoLock FES-RS-S-600-200-HDG		10
InnoLock PowerEdge 250 HDG	573547	260	205	InnoLock FES-RS-S-700-250-HDG InnoLock FES-RS-S-600-250-HDG		10
InnoLock PowerEdge 300 HDG	573548	310	255	InnoLock FES-RS-S-700-300-HDG InnoLock FES-RS-S-600-300-HDG		10

- The effective embedment depth of the channel will increase by 4 mm when used in combination with the PowerEdge System.
- All PowerEdge Articles with hot dip galvanized coating.



Website