


Flat fitting FMFF 90°

Stable right-angled connection of FMP massive profiles to each other

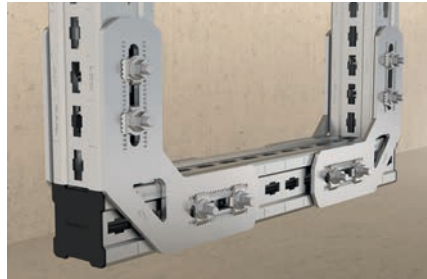

U-rack construction with flat fittings

11

Applications

- Element for stable right-angled connection of massive profiles with 2 flat connectors on each.
- For indoor and outdoor application.






Advantages


- The flat angle FMFF 90° is used in pairs and offers a high load capacity when connecting the FMP mounting profiles for the construction of massive applications.
- The design of the 90° flat angle FMFF with slotted holes and grating to accommodate the toothed plate of the FMHB hammer head connector allows optimum adjustment of the construction and simplifies the assembly process.

Properties

- Material: steel S235JR (material no. 1.0038) acc. to DIN EN 10025-2
- Zinc plating: hot-dip galvanised acc. to DIN EN ISO 1461

Installation FMFF



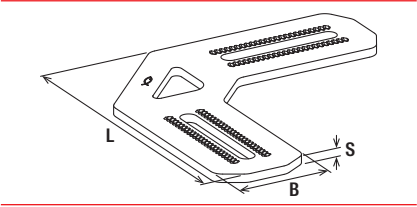

FMFF

Technical data

	Item no.	Length l [mm]	Width B [mm]	Thickness S [mm]	Sales unit [pcs]
Item					
FMFF 90°	547841	282	90	8.0	1