


Rubber inlay EMS

Fastening components - Rubber inlay EMS

8

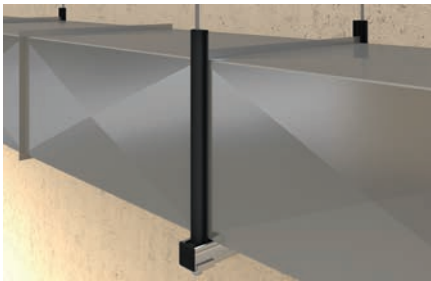

Airduct with sound insulation on installation channel

Applications


- Profile rubber to insert in channels.
- Sound insulation of large ducting.
- EMS 31 suitable for FLS channels, EMS 41 suitable for FUS channels.

Advantages

- The channel rubber EMS provides sound insulation between components.
- The design of the rubber EMS allows it to be used in channels and threaded rods.

Properties

- Material sound insulation: SBR/EPDM chlorine-free and silicone-free
- Sound insulation: special noise-absorbing lining
- Temperature range: -50 °C to +110 °C
- Hardness: 45 ± 5° Shore A
- Fire behaviour: DIN 4102: Class B2

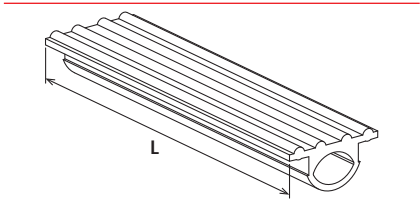

EMS

Technical data

		For profile	Length	Sales unit
Item	Item no.		[m]	[pcs]
EMS 31	538752	all FLS channels	25	1
EMS 41	550806	all FUS channels	6	1