


Stud screw STST with TX star recess

Stud screw STST for the direct mounting of pipe clamps to the substrate

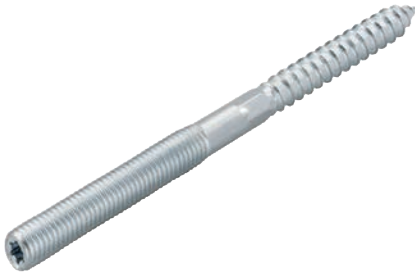

9

Applications

- Stud screw for easy attachment of pipe clamps directly to the substrate using plugs with TX drive.
- Direct connection to wooden surfaces without plugs using a wooden thread.
- For use in dry indoor areas.


Advantages


- Fixing with a nylon plug to brick or direct into timber construction is simple with the torx drive or the integrated hexagon.
- Different thread lengths and diameters allow a wide range of applications.

Properties

- Material: steel 4.6 acc. to DIN EN ISO 898-1
- Zinc plating: electro zinc-plated

Installation STST

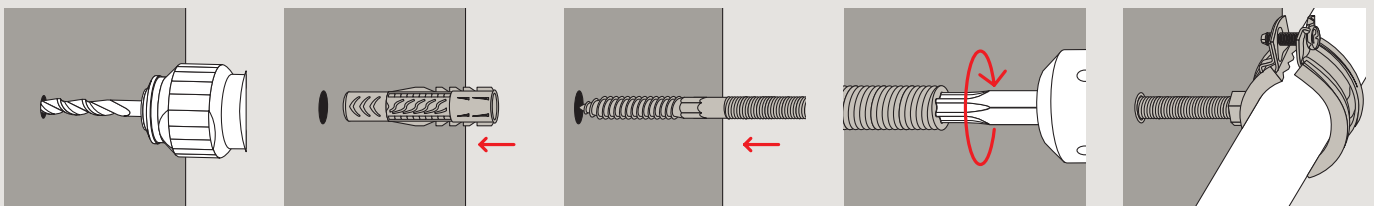

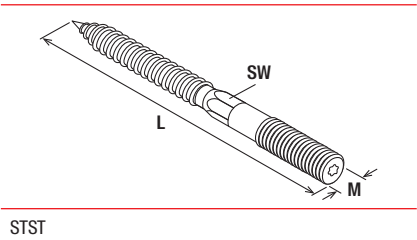

Technical data

	Item no.	Length L [mm]	Thread M	Drive	Width across nut SW [mm]	Sales unit [pcs]
Item						
STST 6 x 60	504400 ¹⁾	60	M6	TX15	–	100
STST 6 x 80	077714 ¹⁾	80	M6	TX15	–	100
STST 8 x 50	079780 ¹⁾	50	M8	TX25	–	100
STST 8 x 60	079781	60	M8	TX25	6	100
STST 8 x 80	079782	80	M8	TX25	6	100
STST 8 x 100	079783	100	M8	TX25	6	100
STST 8 x 120	079784	120	M8	TX25	6	100
STST 8 x 140	079785	140	M8	TX25	6	50
STST 8 x 180	079786	180	M8	TX25	6	50
STST 10 x 60	077689	60	M10	TX25	8	100
STST 10 x 80	077707	80	M10	TX25	8	100
STST 10 x 100	077708	100	M10	TX25	8	100
STST 10 x 120	077709	120	M10	TX25	8	100
STST 10 x 140	077711	140	M10	TX25	8	50
STST 10 x 180	077712	180	M10	TX25	8	50
STST 12 x 100	535541	100	M12	TX30	10	100
STST 12 x 160	535542	160	M12	TX30	10	50

¹⁾ without hex drive