


T-head bolt FCN Clix S

Hammer-head bolt for quick and easy fixing of pipe clamps in FUS profiles

4

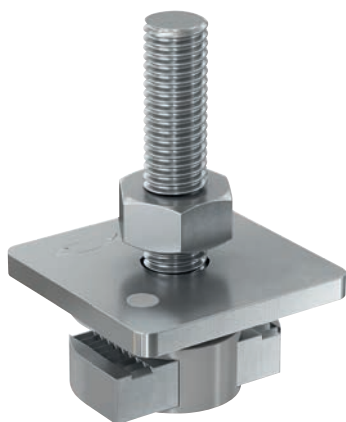

Lightweight installation on cantilever



Connection on channel

Applications

- For the quick connection of pipe clamps with FUS channels.
- For use in dry interior areas.


Advantages


- The design of the FCN Clix S fits to the FUS channel profile and allows for a quick and easy installation.
- The spring effect of the FCN Clix S guarantees simple and precise positioning in the channel.
- Installation by rotating 90° enables post-installation to installed channel.
- The serration on the T-head bolt provides a secure hold in FUS channels.
- The pre-mounted threaded stud allows for direct mounting of the pipe clamps to the channel without additional material.

Properties

- Washer: S235JR (material no. 1.0038)
- Threaded stud: DIN 976 steel 4.8
- Hexagonal nut: resistance class 8
- Plastic cage: Polyamide PA 6
- Zinc plating: electro zinc-plated

Installation FCN Clix S

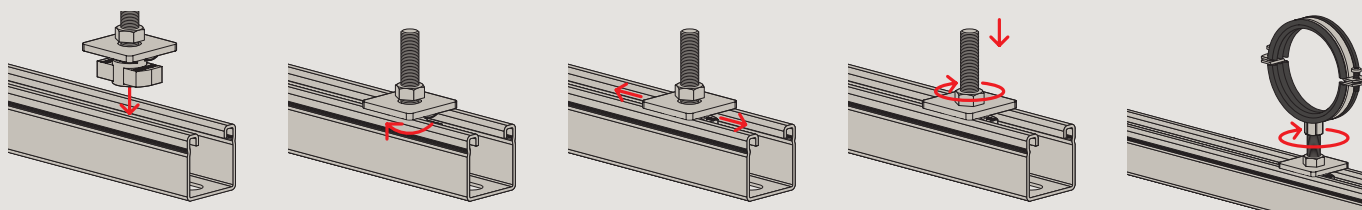




FCN Clix S

4

Technical data

Item	Item no.	Thread A	Length L [mm]	Width across nut SW [mm]	Sales unit [pcs]
FCN Clix S 8x30	567462	M8	30	13	50
FCN Clix S 8x40	567463	M8	40	13	50
FCN Clix S 8x60	567464	M8	60	13	50
FCN Clix S 8x80	567465	M8	80	13	50
FCN Clix S 8x100	567466	M8	100	13	50
FCN Clix S 10x30	567467	M10	30	17	50
FCN Clix S 10x40	567468	M10	40	17	50
FCN Clix S 10x60	567469	M10	60	17	50
FCN Clix S 10x100	567470	M10	100	17	50
FCN Clix S 12x40	567471	M12	40	19	50
FCN Clix S 12x60	567472	M12	60	19	50



FCN Clix S

Loads

Item	Item no.	Max. recommended tension load for FUS 1,5 mm N_{rec} [kN]	Max. recommended tension load for FUS 2,0 mm N_{rec} [kN]	Max. recommended tension load for FUS 2,5 mm N_{rec} [kN]	Installation torque T_{inst} [Nm]	Sales unit [pcs]
FCN Clix S 8x30	567462	3.0	4.0	4.0	10	50
FCN Clix S 8x40	567463	3.0	4.0	4.0	10	50
FCN Clix S 8x60	567464	3.0	4.0	4.0	10	50
FCN Clix S 8x80	567465	3.0	4.0	4.0	10	50
FCN Clix S 8x100	567466	3.0	4.0	4.0	10	50
FCN Clix S 10x30	567467	4.0	5.0	8.0	15	50
FCN Clix S 10x40	567468	4.0	5.0	8.0	15	50
FCN Clix S 10x60	567469	4.0	5.0	8.0	15	50
FCN Clix S 10x100	567470	4.0	5.0	8.0	15	50
FCN Clix S 12x40	567471	4.0	5.0	8.0	20	50
FCN Clix S 12x60	567472	4.0	5.0	8.0	20	50