


Threaded stud GS

Universal threaded stud for mounting pipes




9

Applications

- For use in dry interior areas.

Properties


- Material: DIN 976 Steel 4.6 acc. to DIN EN ISO 898-1
- Zinc plating: electro zinc-plated



GS

Technical data

Item	Item no.	Length L [mm]	Thread A	Sales unit [pcs]
GS M6 x 25	544589	25	M6	100
GS M6 x 40	544590	40	M6	100
GS M6 x 50	544591	50	M6	100
GS M6 x 70	544592	70	M6	100
GS M6 x 80	544593	80	M6	100
GS M6 x 100	544594	100	M6	100
GS M8 x 25	079750	25	M8	100
GS M8 x 40	079751	40	M8	100
GS M8 x 50	079752	50	M8	100
GS M8 x 60	079753	60	M8	100
GS M8 x 70	079754	70	M8	100
GS M8 x 80	079755	80	M8	100
GS M8 x 100	079757	100	M8	100
GS M8 x 120	535535	120	M8	50
GS M8 x 150	079758	150	M8	50
GS M8 x 180	535536	180	M8	50
GS M8 x 200	079759	200	M8	50




GS

Technical data


	Item no.	Length l [mm]	Thread A	Sales unit [pcs]
Item				
GS M10 x 25	079765	25	M10	100
GS M10 x 40	079766	40	M10	100
GS M10 x 60	079767	60	M10	100
GS M10 x 80	079768	80	M10	100
GS M10 x 100	079769	100	M10	100
GS M10 x 120	079770	120	M10	50
GS M10 x 150	079771	150	M10	50
GS M10 x 200	079772	200	M10	50
GS M12 x 40	091442	40	M12	100
GS M12 x 60	091443	60	M12	100
GS M12 x 80	091444	80	M12	100
GS M12 x 100	091461	100	M12	100
GS M12 x 120	091462	120	M12	50
GS M12 x 150	091463	150	M12	50
GS M12 x 200	091464	200	M12	50
GS M16 x 40	570691	40	M16	50

9


Loads

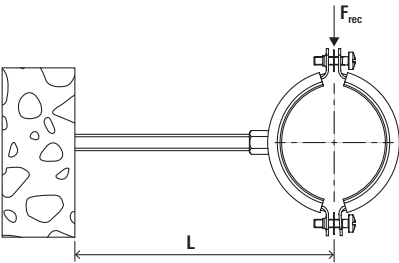

Threaded rods (4.8)

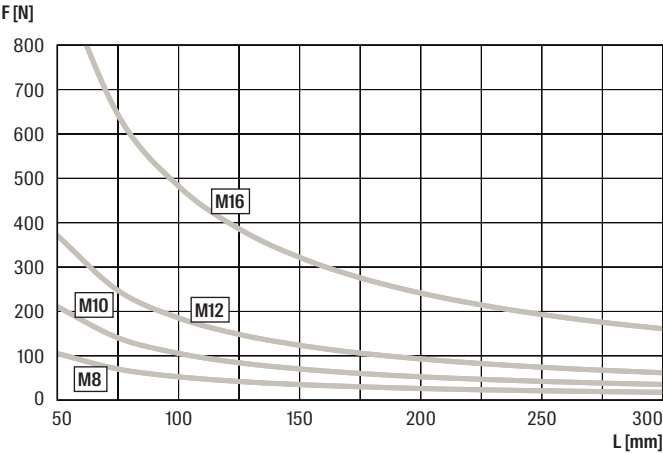

Threaded pipes

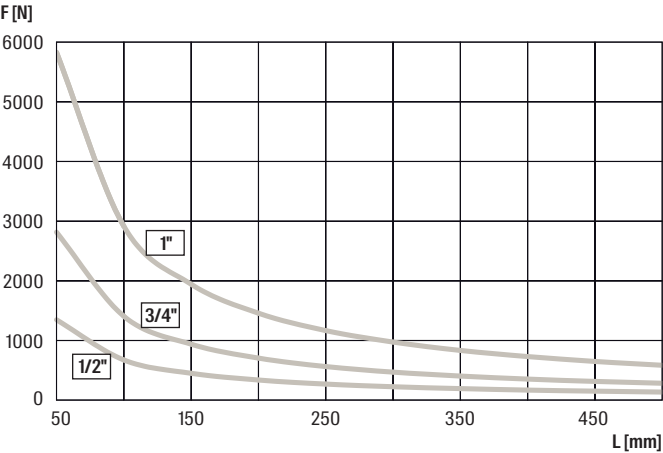

Threaded stud GS A4

Universal threaded pin for mounting pipes




Applications

- For indoor and outdoor applications and in environments with high stress to components due to corrosion.

Properties

- Material: stainless steel A4 (material no. 1.4401) acc. to DIN EN 10088-1



GS

Technical data

Item	Item no.	Length l [mm]	Thread A	Sales unit [pcs]
GS M8 x 40 A4	559698	40	M8	50
GS M8 x 60 A4	559699	60	M8	50
GS M10 x 40 A4	559700	40	M10	50
GS M10 x 60 A4	559701	60	M10	50