

U-Bolt ETR

The U-Bolt with metric thread

2



Applications


- Installation of standing or hanging pipes.
- Pipe routing on profiles and consoles.
- For use in dry interior areas.

Advantages

- The U-Bolt's two screws allow an ideal adaptation to suit the outer pipe diameter.


Properties

- Material: steel with min. tensile strength of 360 N/mm²
- Zinc plating: electro zinc-plated

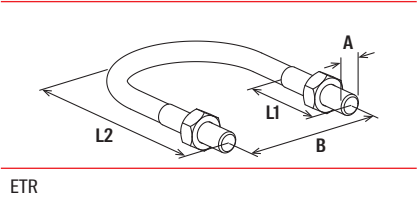

Technical data

	Item no.	Thread A	Length L1 [mm]	Length L2 [mm]	Size [in]	Width B [mm]	Sales unit [pcs]
Item							
ETR 8 - 13	024415	M6	20	30	1/4	20	10
ETR 12 - 17	024416	M6	20	35	3/8	24	10
ETR 15 - 21	024417	M6	25	40	1/2	28	10
ETR 20 - 27	024418	M8	32	50	3/4	36	10
ETR 26 - 34	024419	M8	32	55	1	43	10
ETR 33 - 42	024420	M8	38	68	1 1/4	51	10
ETR 40 - 49	024421	M8	38	70	1 1/2	58	10
ETR 50 - 60	024422	M8	40	80	2	69	10
ETR 60 - 70	024423	M10	43	100	–	82	10
ETR 66 - 76	024424	M10	50	110	2 1/2	88	10
ETR 70 - 82	024425	M10	50	115	–	94	10
ETR 80 - 90	024426	M10	50	115	3	102	10
ETR 90 - 102	024427	M12	55	145	3 1/2	116	5
ETR 100 - 108	024428	M12	50	150	–	122	5
ETR 102 - 114	024429	M12	60	156	4	128	5
ETR 121 - 127	024430	M12	60	170	–	141	5



ETR

Technical data

	Item no.	Thread A	Length L1 [mm]	Length L2 [mm]	Size [in]	Width B [mm]	Sales unit [pcs]
Item							
ETR 126 - 133	024431	M12	70	180	–	147	5
ETR 131 - 140	024432	M14	70	185	5	156	5
ETR 143 - 153	024433	M14	70	193	–	169	5
ETR 150 - 159	024434	M14	70	200	–	175	5
ETR 168	024435	M14	70	210	6	184	5
ETR 193,7	024436	M14	70	232	–	209	5
ETR 219	024437	M14	70	270	8	236	5