

ДЕКЛАРАЦИЯ ЗА ЕКСПЛОАТАЦИОННИ ПОКАЗАТЕЛИ

DoP 0348

за назъбената анкершина fischer InnoLock FES-RS-S с назъбени канални болтове fischer FBC-S (Анкерни канали за използване в бетон)

BG

1. Уникален идентификационен код на типа продукт: **DoP 0348**
2. Предвидена употреба/употреби: **Анкерни канали за използване в напукан и ненапукан бетон, вж Приложението, по-специално Приложения B1- B6.**
3. Производител: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Германия**
4. Упълномощен представител: **–**
5. Система/системи за оценяване и проверка на постоянството на експлоатационните показатели: **1**
6. Европейски документ за оценяване: **EAD 330008-04-0601, Edition 02/2023**
Европейска техническа оценка: **ETA-22/0035; 2023-12-01**
Орган за техническа оценка: **DIBt- Deutsches Institut für Bautechnik**
Нотифициран орган/органи: **2873 TU Darmstadt**

7. Декларирани експлоатационни показатели:
Механична устойчивост и здравина (BWR 1)

Характерна носимоспособност на опън (за статично и квази статично действие):

- 1) Устойчивост на разрушаване на стоманата, на анкерите: Приложения C1
- 2) Устойчивост на разрушаване на стоманата, на връзката между анкерите и канала: Приложения C1
- 3) Устойчивост на разрушаване на стоманата, на устните на канала и последващо издърпване на каналният болт: Приложения C1
- 4) Устойчивост на разрушаване на стоманата, на каналният болт: Приложения C6
- 5) Устойчивост на разрушаване на стоманата, чрез превишаване на якостта на огъване на канала: Приложения A5, C1
- 6) Максимален въртящ момент на монтаж, за да се избегнат повреди по време на монтажа: Приложения B4
- 7) Устойчивост на разрушаване при измъкване на анкера: Приложения C2
- 8) Товароустойчивост при при отказ от излизане на бетонния конус: Приложения B3, C2
- 9) Минимално разстояние до ръба, разстояние, дебелина на елемента, за да се предотврати спукването на бетона по време на монтажа: Приложения A5, B3
- 10) Характерно разстояние до ръба и междусови разстояние, за да се избегне спукването на бетона под товар: Приложения C2
- 11) Устойчивост на повреда на носещата зона на главата: Приложения A4

Характерна носимоспособност на сряз (за статично и квази статично действие):

- 12) Устойчивост на разрушаване на стоманата на анкерния болт при срязващо натоварване без лостово рамо: Приложения C6
- 13) Устойчивост на разрушаване на стомана чрез огъване на болта на канала при срязващо натоварване с лостово рамо: Приложения
- 14) Устойчивост на разрушаване на стоманата, на устните на канала, разрушаване на стоманта при повреда на връзката между анкера и канала или разрушаване на стоманата при повреда на анкерния канал (срязващо натоварване в напречна посока)
- 15) Устойчивост на разрушаване на стоманата, на връзката между устните на канала и болта на канала (срязващо натоварване в надлъжната ос на канала): Приложение C5
- 16) Фактор за чувствителност на инсталацията: Приложение C5
- 17) Устойчивост на разрушаване стоманата на анкера: Приложение C4
- 18) Устойчивост на разрушаване на стоманата на връзката между анкера и канала (срязващо натоварване в надлъжната ос на
- 19) Устойчивост на отказ при отклонение: Приложение C5
- 20) Устойчивост на разрушаване на бетонния ръб: Приложения C5

Характеристична устойчивост при комбинирано статично и квази-статично натоварване на опън и срязване

- 21) Устойчивост на разрушаване на стоманата, на анкерния канал: Приложения C6

Характерна устойчивост при натоварване от напрежение от умора:

- 22) Устойчивост на умора, на разрушаване на стомана, на цялата система (непрекъсната или трилинейна функция, Метод за
- 23) Устойчивост на границата, на умора, на разрушаване на стоманата на цялата система (Метод за оценяване B): NPD
- 24) Устойчивост на умора, на разрушаване на стомана, на цялата система (Линеаризирана функция, Метод за оценяване C): NPD
- 25) Устойчивост на умора, свързана при разрушаване на бетона (експоненциална функция, Метод за оценяване A1, A2): NPD
- 26) Fatigue resistance to concrete related failure (linearized function, assessment method C): NPD
- 27) Устойчивост на умора, свързана при разрушаване на бетона (Линеаризирана функция, Метод за оценяване C): NPD

Характеристично съпротивление при сеизмично натоварване (категория на сеизмично поведение C1)

- 28) Устойчивост срещу повреда на стоманата при сеизмично опънно натоварване (категория на сеизмично поведение C1): NPD
- 29) Устойчивост срещу повреда на стоманата при сеизмично срязващо натоварване за срязващо натоварване в напречна посока (категория на сеизмично поведение C1): NPD
- 30) Устойчивост срещу повреда на стоманата при сеизмично срязващо натоварване за срязващо натоварване по надлъжната ос на канала (категория на сеизмично поведение C1): NPD

Характеристично съпротивление при статично и квазистатично опънно и/или срязващо натоварване

31) измествания: Приложения C3, C6

Пожарна безопасност (BWR 2)

32) Реакция на огън: Клас (A1)

33) Пожароустойчивост: Приложение C8, C9

трайност:

34) трайност: Приложения A7, B1


8. Подходяща техническа документация и/или --
специфична техническа документация:

Експлоатационните показатели на продукта, посочени по-горе, са в съответствие с декларираните експлоатационни показатели. Настоящата декларация за експлоатационни показатели се издава в съответствие с Регламент (ЕС) № 305/2011, като отговорността за нея се носи изцяло от посочения по-горе производител.

Подписано за и от името на производителя от:



Dr. Ronald Mihala, Изпълнителен директор Изследвания и развитие
Tumlingen, 2025-05-30

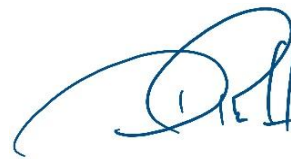

Dieter Pfaff, Ръководител на Международната федерация по производство и управление на к

Тази Декларация за съответствие е изготвена на различни езици. В случай, че възникне спор, относно интерпретирането, трябва да се вземе предвид английската версия.

Приложението съдържа доброволна и допълнителна информация на английски език в обем и съдържание, надхвърлящи (независимо от езика) законовите изисквания.

Translation guidance Essential Characteristics and Performance Parameters for Annexes

Насоки за превод Основни характеристики и експлоатационни параметри на приложенията

Mechanical resistance and stability (BWR 1)		
Механична устойчивост и здравина (BWR 1)		
Characteristic resistance to tension load (static and quasi-static loading):		
Характерна носимоспособност на опън (за статично и квази статично действие):		
1	Resistance to steel failure of anchors: Устойчивост на разрушаване на стомната, на анкерите:	$N_{Rk,s,a}$
2	Resistance to steel failure of the connection between anchors and channel: Устойчивост на разрушаване на стоманата, на връзката между анкерите и канала:	$N_{Rk,s,c}$
3	Resistance to steel failure of channel lips and sunsequently pullout of channel bolt: Устойчивост на разрушаване на стоманата, на устните на канала и последващо издърпване на каналният болт:	$N_{Rk,s,l}^0$; $S_{l,N}$
4	Resistance to steel failure of channel bolt: Устойчивост на разрушаване на стоманата, на каналният болт:	$N_{Rk,s}$
5	Resistance to steel failure by exceeding the bending strength of the channel: Устойчивост на разрушаване на стоманата, чрез превишаване на якостта на огъване на канала:	$M_{Rk,s,flex}$; S_{max}
6	Maximum installation torque moment to avoid damage during installation: Максимален въртящ момент на монтаж, за да се избегнат повреди по време на монтажа:	$T_{inst,g}$; ($T_{inst,s}$)
7	Resistance to pull-out failure of the anchor: Устойчивост на разрушаване при измъкване на анкера:	$N_{Rk,p}$
8	Resistance to concrete cone failure: Товароустойчивост при при отказ от излизане на бетонния конус:	$k_{cr,N}$; $k_{ucr,N}$; h_{ef}
9	Minimum edge distance, spacing, member thickness to prevent concrete splitting during installation: Минимално разстояние до ръба, разстояние, дебелина на елемента, за да се предотврати спукването на бетона по време на монтажа:	s_{min} ; c_{min} ; h_{min}
10	Characteristic edge distance and spacing to avoid splitting of concrete under load: Характерно разстояние до ръба и междуосови разстояние, за да се избегне спукването на бетона под товар:	$s_{cr,sp}$; $c_{cr,sp}$
11	Resistance to blowout failure- bearing area of head: Устойчивост на повреда на носещата зона на главата:	A_h
Characteristic resistance to shear load (static and quasi-static loading):		
Характерна носимоспособност на сряз (за статично и квази статично действие):		
12	Resistance to steel failure of channel bolt under shear loading without lever arm: Устойчивост на разрушаване на стоманата на анкерния болт при срязващо натоварване без лостово рамо:	$V_{Rk,s}$
13	Resistance to steel failure by bending of the channel bolt under shear load with lever arm: Устойчивост на разрушаване на стомана чрез огъване на болта на канала при срязващо натоварване с лостово рамо:	$M_{Rk,s}^0$
14	Resistance to steel failure of channel lips, steel failure of connection between anchor and channel or steel failure of anchor (shear load in transverse direction): Устойчивост на разрушаване на стоманата, на устните на канала, разрушаване на стоманта при повреда на връзката между анкера и канала или разрушаване на стоманата при повреда на анкерния канал (срязващо натоварване в	$V_{Rk,s,l,y}^0$; $S_{l,V}$; $V_{Rk,s,c,y}$; $V_{Rk,s,a,y}$
15	Resistance to steel failure of connection between channel lips and channel bolt (shear load in longitudinal channel axis): Устойчивост на разрушаване на стоманата, на връзката между устните на канала и болта на канала (срязващо натоварване в надлъжната ос на канала):	$V_{Rk,s,l,x}$
16	Factor for sensistivity to installation: Фактор за чувствителност на инсталацията:	γ_{inst}
17	Resistance to steel failure of the anchor: Устойчивост на разрушаване стоманата на анкера:	$V_{Rk,s,a,x}$
18	Resistance to steel failure of connection between anchor and channel: Устойчивост на разрушаване на стоманата на връзката между анкера и канала (срязващо натоварване в надлъжната ос на канала):	$V_{Rk,s,c,x}$
19	Resistance to concrete pry-out failure: Устойчивост на отказ при отклонение:	k_g
20	Resistance to concrete edge failure: Устойчивост на разрушаване на бетонния ръб:	$k_{cr,V}$; $k_{ucr,V}$
Characteristic resistance under combined static and quasi-static tension and shear loading		
Характеристична устойчивост при комбинирано статично и квази-статично натоварване на опън и срязване		
21	Resistance to steel failure of the anchor channel: Устойчивост на разрушаване на стоманата, на анкерния канал:	k_{13} , k_{14}
Characteristic resistance under fatigue tension loading:		
Характерна устойчивост при натоварване от напрежение от умора:		
22	Fatigue resistance to steel failure of the whole system (continuous or tri-linear function): Устойчивост на умора, на разрушаване на стомана, на цялата система (непрекъсната или трилинейна функция,Метод за оценяване A1, A2):	$\Delta N_{Rk,s,0,n}$ ($n=1$ to $n=\infty$)
23	Fatigue limit resistance to steel failure of the whole system: Устойчивост на границата, на умора, на разрушаване на стоманата на цялата система (Метод за оценяване B):	$\Delta N_{Rk,s,0,\infty}$
24	Fatigue resistance to steel failure of the whole system (linearized function,assessment method C): NPD Устойчивост на умора, на разрушаване на стомана, на цялата система (Линеаризирана функция,Метод за оценяване C):	$\Delta N_{Rk,s,l0,n}$; $N_{lok,s,n}$ ($n=10^4$ to $n=\infty$)
25	Fatigue resistance to concrete related failure (exponential function): Устойчивост на умора, свързана при разрушаване на бетона (експоненциална функция, Метод за оценяване A1, A2):	$\Delta N_{Rk,c,0,n}$; $\Delta N_{Rk,p,0,n}$ ($n=1$ to $n=\infty$)
26	Fatigue limit resistance to concrete related failure: Fatigue resistance to concrete related failure (linearized function, assessment method C):	$\Delta N_{Rk,c,0,\infty}$; $\Delta N_{Rk,p,0,\infty}$
27	Fatigue resistance to concrete related failure (linearized function, assessment method C): Устойчивост на умора, свързана при разрушаване на бетона (Линеаризирана функция, Метод за оценяване C):	$\Delta N_{Rk,c,E,n}$; $N_{Rk,p,E,n}$ ($n=10^4$ to $n=\infty$)

Characteristic resistance under seismic loading (seismic performance category C1)		
Характеристично съпротивление при сеизмично натоварване (категория на сеизмично поведение C1)		
28	Resistance to steel failure under seismic tension loading (seismic performance category C1): Устойчивост срещу повреда на стоманата при сеизмично опънно натоварване (категория на сеизмично поведение C1):	$N_{Rk,s,a,eq}$; $N_{Rk,s,c,eq}$; $N^0_{Rk,s,l,eq}$; $N_{Rk,s,eq}$; $M_{Rk,s,flex,eq}$
29	Resistance to steel failure under seismic shear loading for shear load in transverse direction (seismic performance category C1): Устойчивост срещу повреда на стоманата при сеизмично срязващо натоварване за срязващо натоварване в напречна посока (категория на сеизмично поведение C1):	$V_{Rk,s,eq}$; $V^0_{Rk,s,l,y,eq}$; $V_{Rk,s,c,y,eq}$; $V_{Rk,s,a,y,eq}$
30	Resistance to steel failure under seismic shear loading for shear load in longitudinal channel axis (seismic performance category C1): Устойчивост срещу повреда на стоманата при сеизмично срязващо натоварване за срязващо натоварване по надлъжната ос на канала (категория на сеизмично поведение C1):	$V_{Rk,s,l,x,eq}$; $V_{Rk,s,a,x,eq}$; $V_{Rk,s,c,x,eq}$
Characteristic resistance under seismic loading (seismic performance category C1)		
Характеристично съпротивление при статично и квазистатично опънно и/или срязващо натоварване		
31	Displacements: измествания:	δ_{N0} ; $\delta_{N\infty}$; $\delta_{V,y,0}$; $\delta_{V,y,\infty}$; $\delta_{V,x,0}$; $\delta_{V,x,\infty}$
Safety in case of fire (BWR 2)		
Пожарна безопасност (BWR 2)		
32	Reaction to fire: Реакция на огън:	Class
33	Resistance to fire: Пожароустойчивост:	$N_{Rk,s,fi}$; $V_{Rk,s,fi}$; $C_{min,fi}$; $S_{min,fi}$
Durability:		
трайност:		
34	Durability: трайност:	Description

Specific Part

1 Technical description of the product

The fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S is a system consisting of a C-shaped channel profile of steel and at least two metal anchors non-detachably fixed on the channel back and fischer Serrated Channel Bolts.

The anchor channel is embedded surface-flush in the concrete. fischer Serrated Channel Bolts with appropriate hexagonal nuts and washers are fixed to the channel.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor channel is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor channel of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under static and quasi-static tension loading	
- Resistance to steel failure of anchors	$N_{Rk,s,a}$ see Annex C1
- Resistance to steel failure of the connection between anchors and channel	$N_{Rk,s,c}$ see Annex C1
- Resistance to steel failure of channel lips and subsequently pull-out of channel bolt	$N_{Rk,s,l}^0 ; s_{l,N}$ see Annex C1
- Resistance to steel failure of channel bolt	$N_{Rk,s}$ see Annex C6
- Resistance to steel failure by exceeding the bending strength of the channel	s_{max} see Annex A5 $M_{Rk,s,flex}$ see Annex C1
- Maximum installation torque to avoid damage during installation	$T_{inst,g} ; T_{inst,s}$ see Annex B4
- Resistance to pull-out failure of the anchor	$N_{Rk,p}$ see Annex C2
- Resistance to concrete cone failure	h_{ef} see Annex B3 $k_{cr,N} ; k_{ucr,N}$ see Annex C2
- Minimum edge distances, spacing and member thickness to avoid concrete splitting during installation	s_{min} see Annex A5 $c_{min} ; h_{min}$ see Annex B3
- Characteristic edge distance and spacing to avoid splitting of concrete under load	$s_{cr,sp} ; c_{cr,sp}$ see Annex C2
- Resistance to blowout failure - bearing area of anchor head	A_h see Annex A4

Essential characteristic	Performance
Characteristic resistance under static and quasi-static shear loading - Resistance to steel failure of channel bolt under shear loading without lever arm - Resistance to steel failure by bending of the channel bolt under shear load with lever arm - Resistance to steel failure of channel lips, steel failure of connection between anchor and channel and steel failure of anchor (shear load in transverse direction) - Resistance to steel failure of connection between channel lips and channel bolt (shear load in longitudinal channel axis) - Factor for sensitivity to installation (longitudinal shear) - Resistance to steel failure of the anchor (longitudinal shear) - Resistance to steel failure of connection between anchor and channel (longitudinal shear) - Resistance to concrete pry-out failure - Resistance to concrete edge failure	$V_{Rk,s}$ see Annex C6 $M_{Rk,s}^0$ see Annex C7 $V_{Rk,s,l,y}^0 ; S_{l,v} ; V_{Rk,s,c,y} ; V_{Rk,s,a,y}$ see Annex C4 $V_{Rk,s,l,x}$ see Annex C5 γ_{inst} see Annex C5 $V_{Rk,s,a,x}$ see Annex C4 $V_{Rk,s,c,x}$ see Annex C4 k_8 see Annex C5 $k_{cr,v} ; k_{ucr,v}$ see Annex C5
Characteristic resistance under combined static and quasi-static tension and shear loading - Resistance to steel failure of the anchor channel	$k_{13} ; k_{14}$ see Annex C6
Characteristic resistance under fatigue tension loading - Fatigue resistance to steel failure of the whole system (continuous or tri-linear function, test method A1, A2) - Fatigue limit resistance to steel failure of the whole system (test method B) - Fatigue resistance to steel failure of the whole system (linearized function, test method C) - Fatigue resistance to concrete related failure (exponential function, test method A1, A2) - Fatigue limit resistance to concrete related failure (test method B) - Fatigue resistance to concrete related failure (linearized function, test method C)	No Performance assessed No Performance assessed No Performance assessed No Performance assessed No Performance assessed No Performance assessed

Characteristic resistance under seismic loading (seismic performance category C1) - Resistance to steel failure under seismic tension loading (seismic performance category C1) - Resistance to steel failure under seismic shear loading for shear load in transverse direction (seismic performance category C1) - Resistance to steel failure under seismic shear loading for shear load in longitudinal channel axis (seismic performance category C1)	No Performance assessed No Performance assessed No Performance assessed
Characteristic resistance under static and quasi-static tension and/or shear loading - Displacements	δ_{N0} ; $\delta_{N\infty}$ see Annex C3 $\delta_{V,y,0}$; $\delta_{V,y,\infty}$; $\delta_{V,x,0}$; $\delta_{V,x,\infty}$ see Annex C6

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Characteristic resistance to fire	See Annex C8 and C9


3.3 Aspects of durability linked with the Basic Works Requirements

Essential characteristic	Performance
Durability	See Annex B1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330008-04-0601, the applicable European legal act is: [2000/273/EC].

The system to be applied is: 1

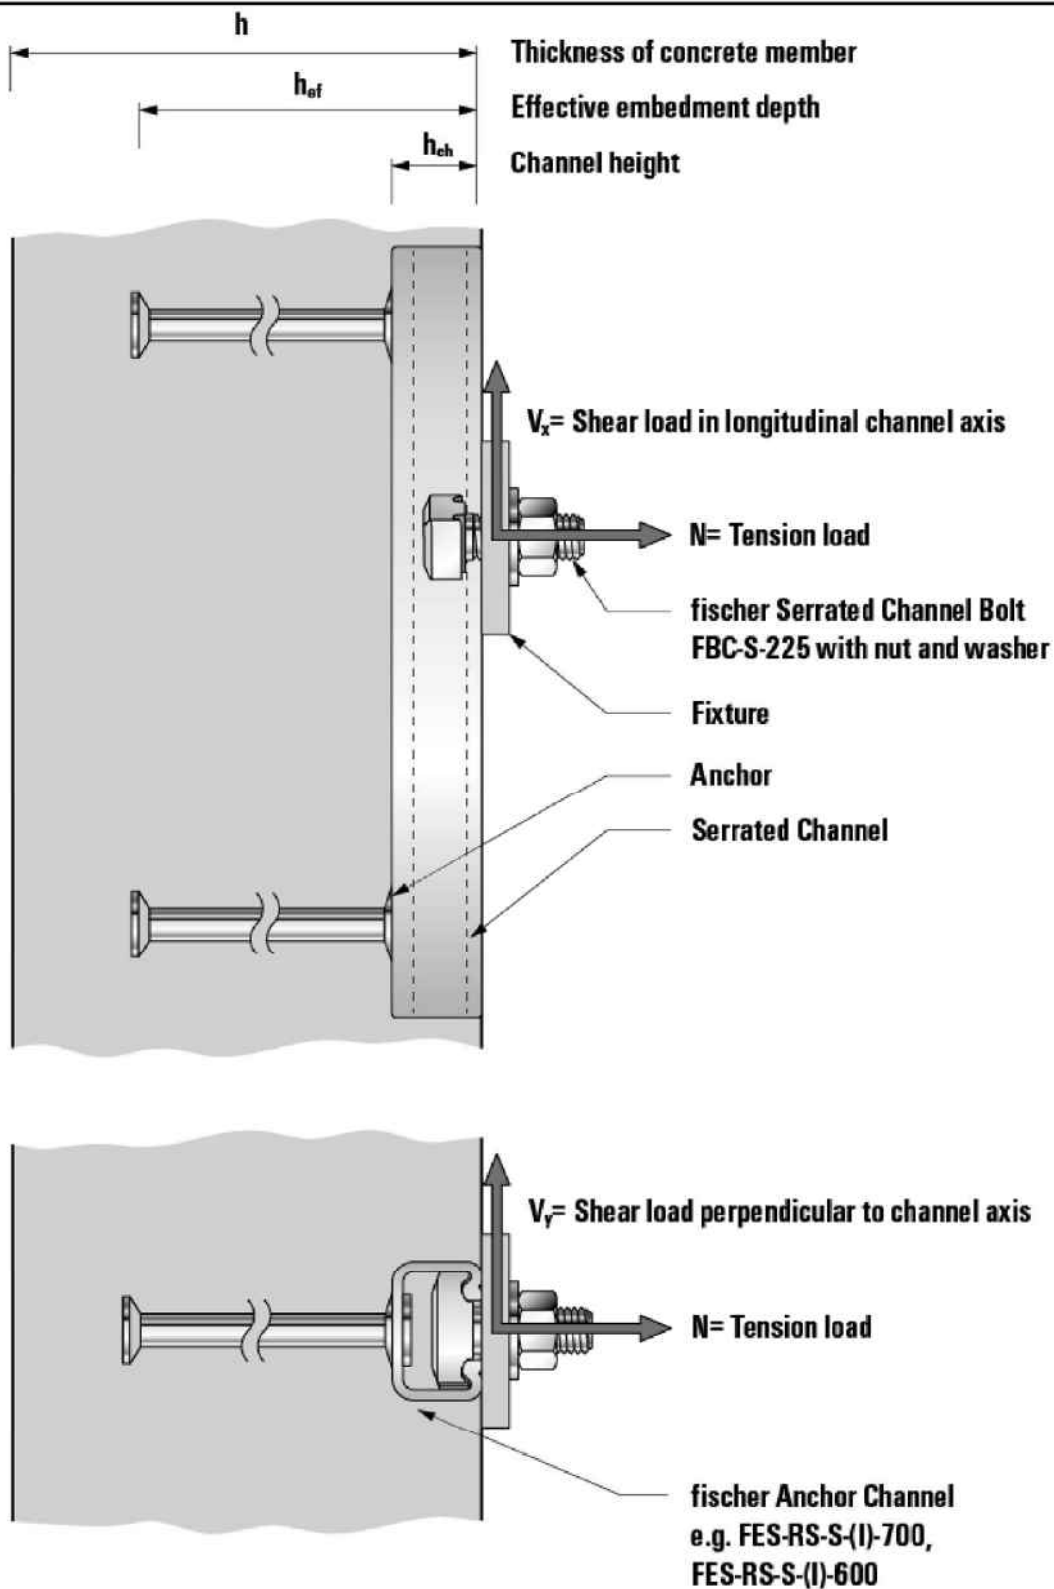


fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S


Product description
Installed conditions

Annex A 1

Appendix 4 / 25

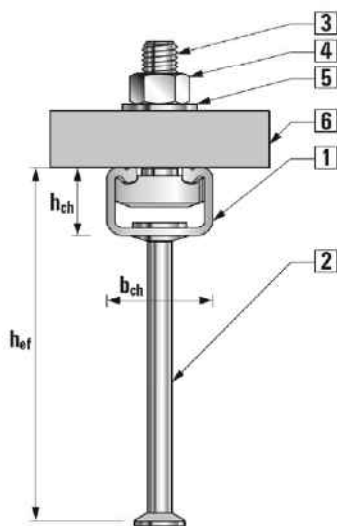

Round anchor

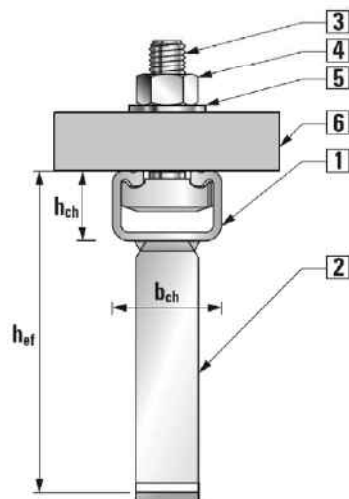

I-anchor

- fischer Anchor Channel
FES-RS-S
- 1 Serrated channel profile
 - 2 Anchor
 - 3 Serrated channel bolt
 - 4 Hexagonal nut
 - 5 Washer
 - 6 Fixture

Marking of the fischer anchor channel FES-RS-S:

e. g.:  700

 = Identifying mark of the manufacturer

I = Additional marking for I-anchors
No marking for round anchors

700 = Size of the anchor channel (700, 600)



Stamped into back of channel

Optional: printed on channel web or channel lips

RS = Roll-shaped, S = Serrated

No marking for material acc. Table A7.1 (Channel profile)

Marking of the fischer channel bolt FBC-S:


e. g.:  8.8 225

 = Identifying mark of the manufacturer

8.8 = Strength grade

225 = Width of anchor channel opening d_{ch}

• = Coating electro-plated
No marking for hot dip galvanized

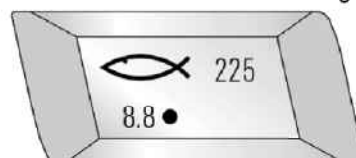


fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Product description
Product and marking

Annex A 2

Appendix 5 / 25

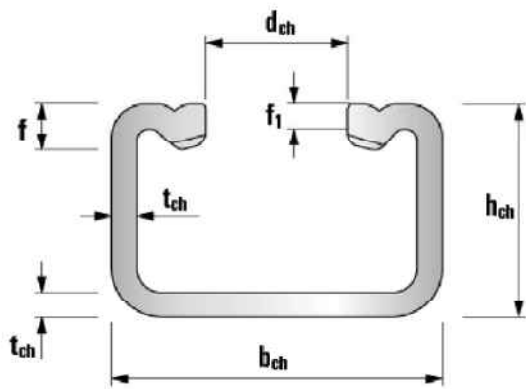

Serrated anchor channel FES-RS-S-(I)-

Table A3.1: Dimensions of channel profile

Anchor channel FES-RS-S-(I)-	b _{ch} [mm]	h _{ch} [mm]	t _{ch} [mm]	d _{ch} [mm]	f [mm]	f ₁ [mm]	I _y [mm ⁴]
600	50,5	29,0	3,0	22,5	6,0	3,0	41.862
700	52,5	34,0	4,0	22,5	7,0	4,0	79.168

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Product description
Dimensions of channels

Annex A 3

Appendix 6 / 25

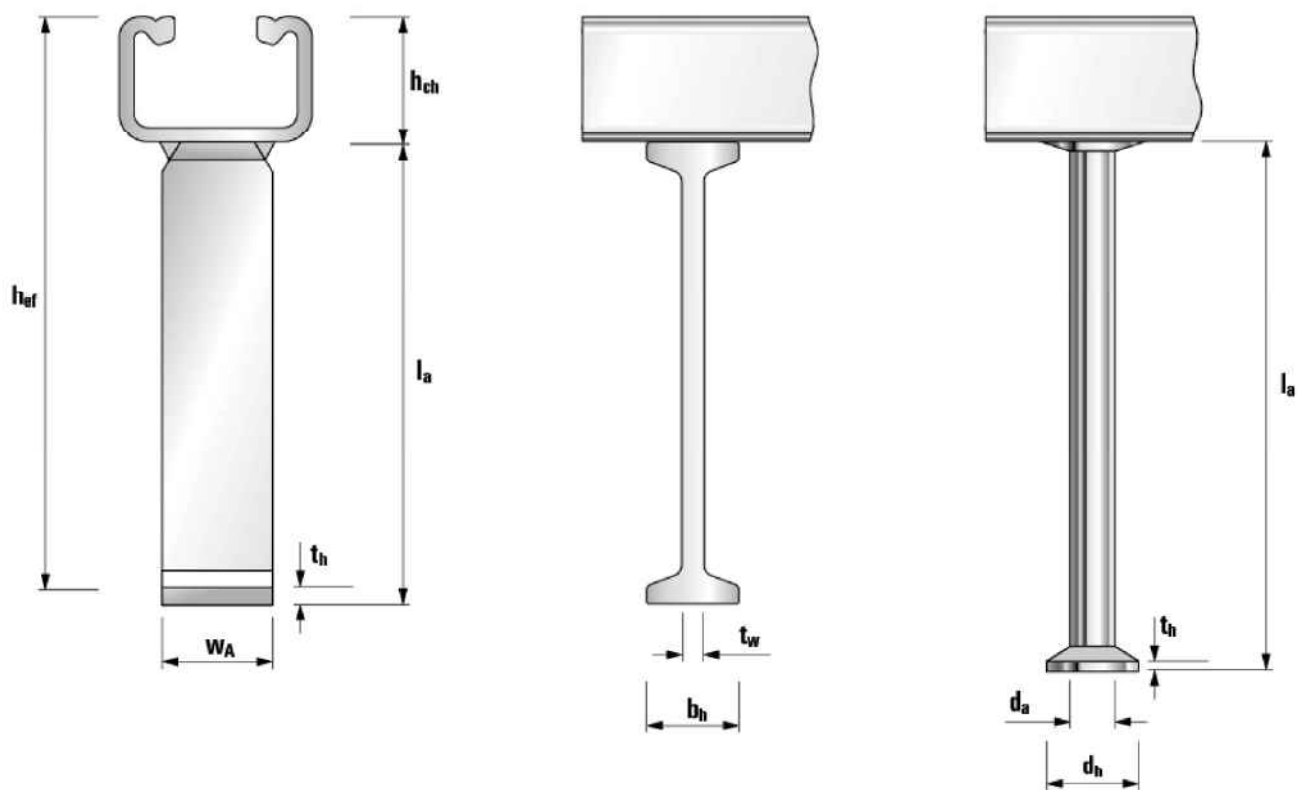


Table A4.1: Dimensions of anchor (welded I-anchor or forged round anchor)

Anchor channel FES-RS-S-(I)-	I-anchor						Round anchor				
	$l_{a,min}$ [mm]	$t_{w,min}$ [mm]	$b_{h,min}$ [mm]	t_h [mm]	$w_{A,min}$ [mm]	$A_{h,min}$ [mm ²]	$l_{a,min}$ [mm]	d_a [mm]	d_h [mm]	t_h [mm]	A_h [mm ²]
600	125	6	25	5	30	570	123,5	11,0	24,3	2,5	368
700	125	6	25	5	30	570	144,0	12,8	26,0	3,0	402

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S


Product description
Dimensions of anchors

Annex A 4

Appendix 7 / 25

Table A5.1: Anchor position

Anchor channel FES-RS-S-(I)-	Anchor type	S _{min} [mm]	S _{max} [mm]	X _{min} [mm]	X _{max} [mm]	l _{min} [mm]	l _{max} [mm]
600	Round or I	80	250	30	35	140	6.070
700							

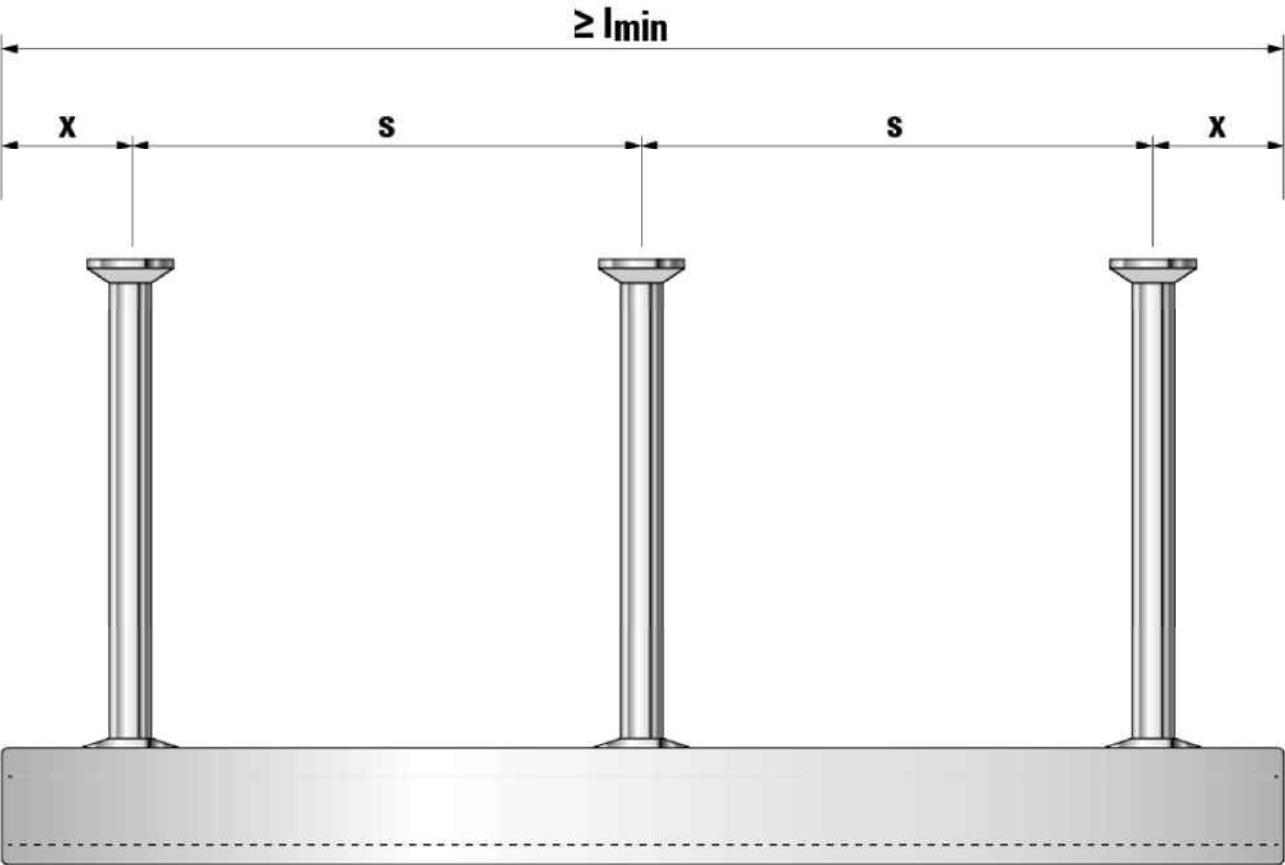

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Product description
Anchor position and channel length

Annex A 5

Appendix 8 / 25


Table A6.1: Strength grade and corrosion class

Channel bolt	Carbon steel ¹⁾
Strength grade	8.8
f _{uk} [N/mm ²]	800 / 830
f _{yk} [N/mm ²]	640 / 660 ²⁾
Corrosion protection	F ³⁾ or Electroplated

¹⁾ Material properties according to Annex A7.

²⁾ Material properties according to EN ISO 898-1:2013.

³⁾ Hot-dip galvanized.

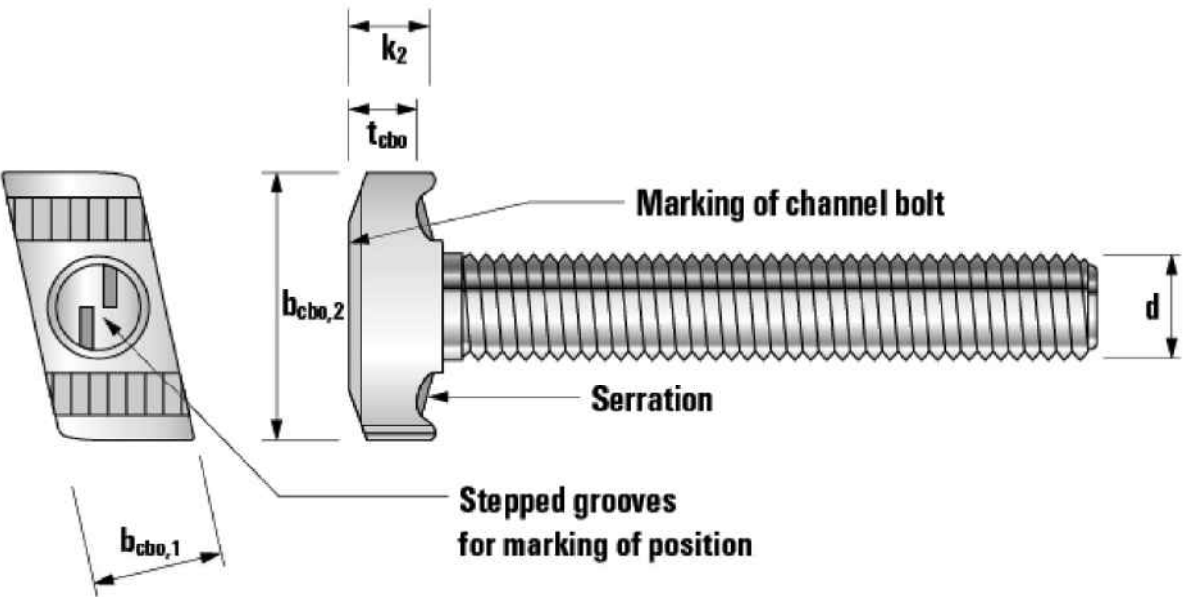

Serrated channel bolt FBC-S-225

Table A6.2: Dimensions of fischer channel bolt FBC and matching fischer anchor channels FES

Anchor channel FES-RS-S-(I)-	Channel bolt FBC-S	d [mm]	b _{cbo,1} [mm]	b _{cbo,2} [mm]	t _{cbo} [mm]	k ₂ [mm]
600	225	12	21,0	43,0	10,7	15,0
700		16 20				

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S	Annex A 6 Appendix 9 / 25
Product description Serrated channel bolts	

Table A7.1: Materials and properties

Component	Carbon steel		
	Mechanical properties	Coating	Coating
1	2	2a	2b
Channel profile	1.0976 acc. to EN 10149:2013	Hot dip galvanized ≥ 55 µm acc. to EN ISO 1461:2022	Hot dip galvanized ≥ 55 µm acc. to EN ISO 1461:2022
Round anchor	1.5525 acc. to EN 10263:2017	Hot dip galvanized ≥ 55 µm acc. to EN ISO 1461:2022	Hot dip galvanized ≥ 55 µm acc. to EN ISO 1461:2022
I-anchor	1.0045, 1.0976 acc. to EN 10149:2013	Hot dip galvanized ≥ 55 µm acc. to EN ISO 1461:2022	Hot dip galvanized ≥ 55 µm acc. to EN ISO 1461:2022
Serrated channel bolt	Strength grade 8.8 acc. to EN ISO 898- 1:2013	Electroplated acc. to EN ISO 4042:2022	Hot dip galvanized ≥ 50 µm acc. to EN ISO 10684:2004 + AC:2009
Plain washer ¹⁾ acc. to EN ISO 7089:2000 and EN ISO 7093-1:2000	Hardness class A ≥ 200 HV	Electroplated acc. to EN ISO 4042:2022	Hot dip galvanized ≥ 50 µm acc. to EN ISO 10684:2004 + AC:2009
Hexagonal nut acc. to EN ISO 4032:2012	Property class 8 acc. to EN ISO 898- 2:2022	Electroplated acc. to EN ISO 4042:2022	Hot dip galvanized ≥ 50 µm acc. to EN ISO 10684:2004 + AC:2009

¹⁾ Not in the scope of delivery.

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Product description
Materials

Annex A 7

Appendix 10 / 25

Specifications of intended use

Anchor channels and serrated channel bolts subject to:

- Static and quasi-static tension, shear perpendicular to the longitudinal axis of the channel and shear in the direction of the longitudinal axis of the channel.
- Fire exposure: Only for concrete class C20/25 to C50/60.

Base materials:

- Reinforced or unreinforced compacted normal weight concrete without fibres according to EN 206:2013+A2:2021.
- Strength classes C12/15 to C90/105 according to EN 206:2013+A2:2021.
- Cracked or uncracked concrete.

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (anchor channels and channel bolts according to Annex A7, Table A7.1, column 2a and 2b).
- Structures subject to internal conditions with usual humidity (e.g. kitchens, bathrooms and laundries in residential buildings, exceptional permanent damp conditions and application under water) (anchor channels and channel bolts according to Annex A7, Table A7.1, column 2b).

Design:

- Anchor channels are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor channel and channel bolts are indicated on the design drawings (e.g. position of the anchor channel relative to the reinforcement or to supports).
- For static and quasi-static loading as well as fire exposure the anchor channels are designed in accordance with EN 1992-4:2018 and EOTA TR 047 "Design of Anchor Channels", May 2021.
- The characteristic resistances are calculated with the minimum effective embedment depth.

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Intended Use
Specifications

Annex B 1

Appendix 11 / 25

Installation:

- The installation of anchor channels is carried out by appropriately qualified personnel under the supervision of the person responsible for the technical matters on site.
- Use of the anchor channels only as supplied by the manufacturer - without any manipulations, repositioning or exchanging of channel components.
- Cutting of anchor channels is allowed only if pieces according to Annex 5, Table A5.1 are generated including end spacing x and minimum channel length l_{min} and only to be used in dry internal conditions.
- Installation in accordance with the installation instruction given in Annexes B5 and B6.
- The anchor channels are fixed on the formwork, reinforcement or auxiliary construction such that no movement of the channels will occur during the time of laying the reinforcement and of placing and compacting the concrete.
- The concrete around the head of the anchors is properly compacted. The channels are protected from penetration of concrete into the internal space of the channels.
- Washer may be chosen according to Annex A7 and provided separately by the user.
- Orientating the **serrated** channel bolt (groove according to Annex B6) rectangular to the channel axis.
- The required installation torque given in Annex B4 must be applied and must not be exceeded.

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Intended Use
Specifications

Annex B 2

Appendix 12 / 25

Installation parameters

Table B3.1: Installation parameters

Anchor channel FES-RS-S-			600	I-600	700	I-700
Minimum effective embedment depth	$h_{ef,min}$	[mm]	150	154	175	154
Minimum edge distance	c_{min}		75	75	75	75
Minimum thickness of concrete member	h_{min}		153	159	178	178

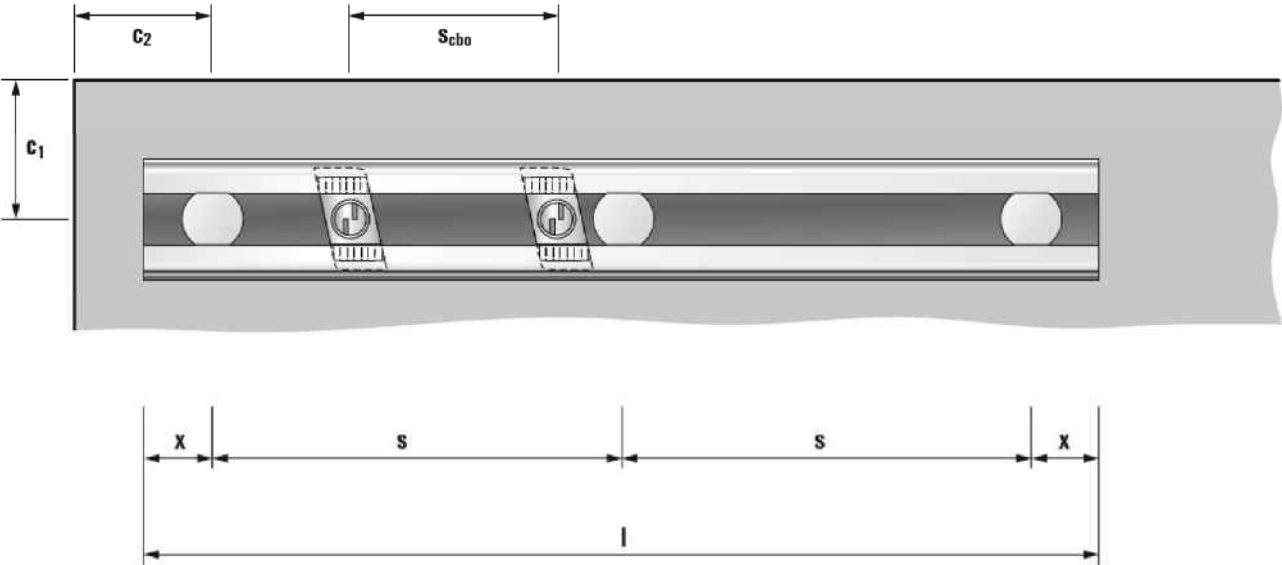


Table B3.2: Minimum spacing for serrated channel bolts

Serrated channel bolt			M12	M16	M20
Minimum spacing between channel bolts	$S_{cbo,min}$	[mm]	60	80	100

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S


Intended Use
Installation parameters for fischer anchor channels FES-RS-S

Annex B 3

Table B4.1: Installation torque T_{inst}

fischer anchor channel FES-RS-S-(I)-	fischer serrated channel bolt FBC-S	Thread diameter	T _{inst} ¹⁾ [Nm]	
			General T _{inst,g}	Steel – steel contact T _{inst,s}
			8.8	8.8
600	225	M12	80	100
700		M16	100	200
		M20	120	360

¹⁾ T_{inst} must not be exceeded.

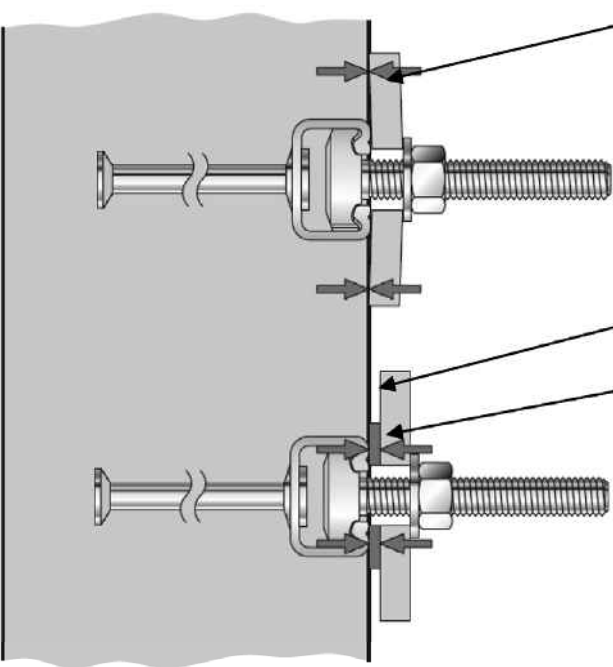

General:
The fixture is in contact with the channel profile and the concrete surface by tightening with $T_{\text{inst,g}}$.

Gap

Steel-to-steel contact:
The fixture is not in contact with the concrete surface. The fixture is fastened to the anchor channel by a suitable steel part (e.g. washer) by tightening with $T_{\text{inst,s}}$.
($T_{\text{inst,s}} \geq T_{\text{inst,g}}$)









fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Intended Use
Installation parameters for fischer serrated channel bolts FBC-S

Annex B 4

Appendix 14 / 25

Anchor channel FES-RS-S

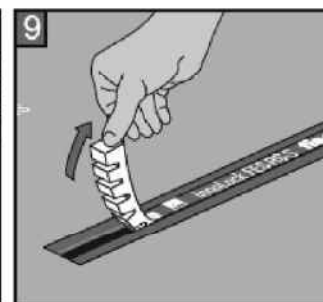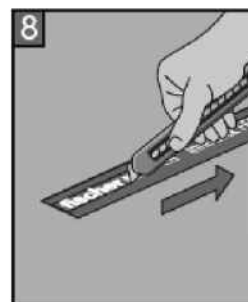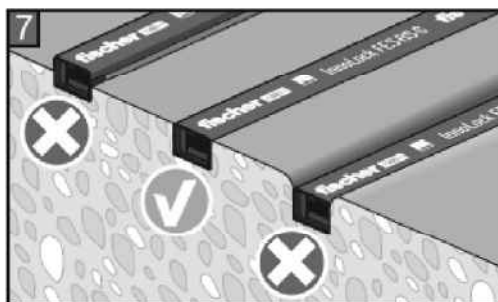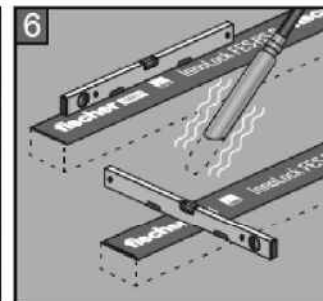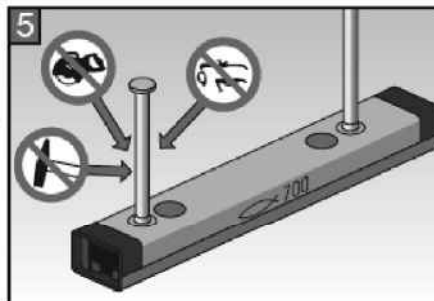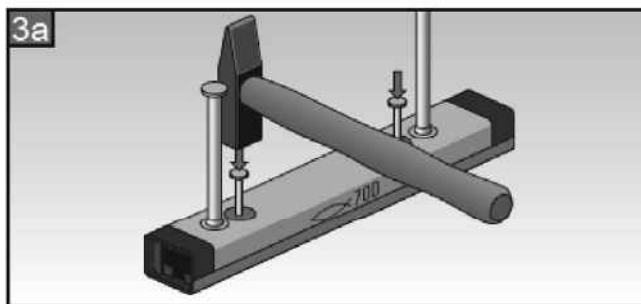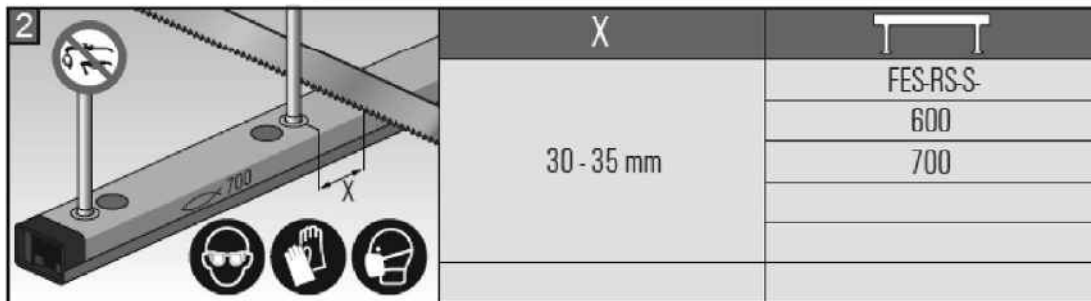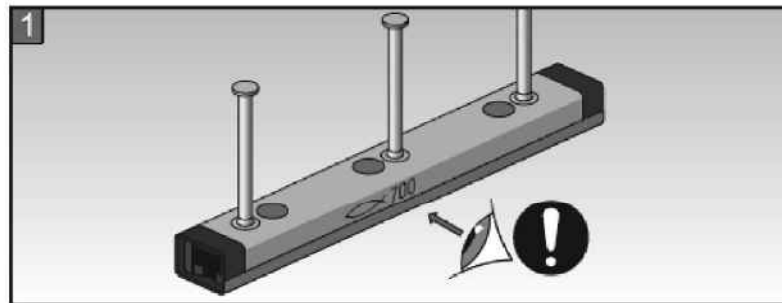


fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Intended Use












Installation instruction for fischer anchor channel FES-RS-S

Annex B 5

Serrated Channel bolt FBC-S

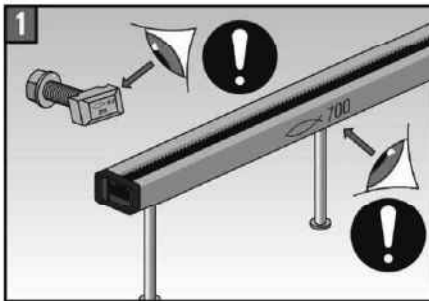

	FBC-S	FES-RS-S
225	600	
225	700	

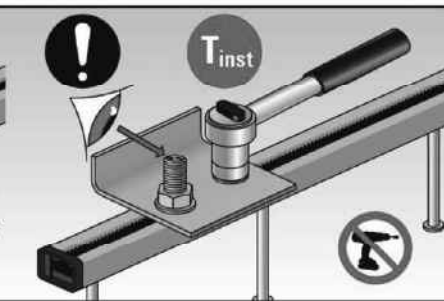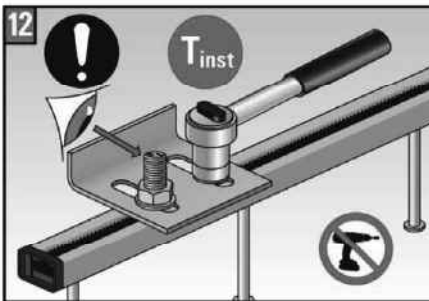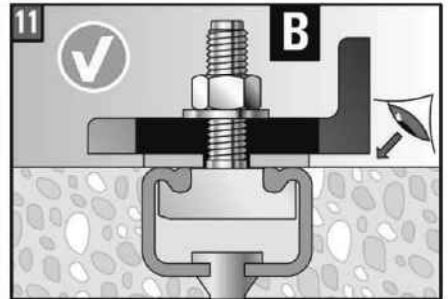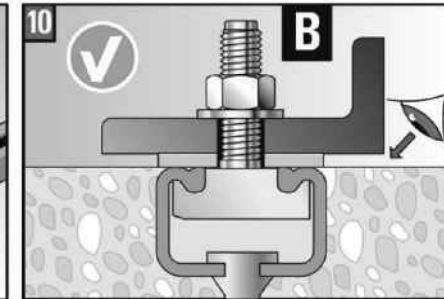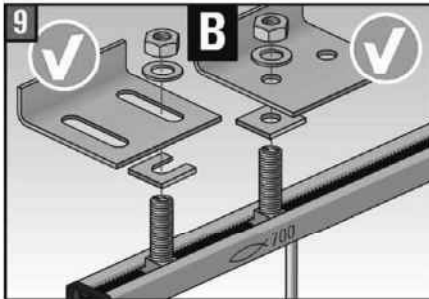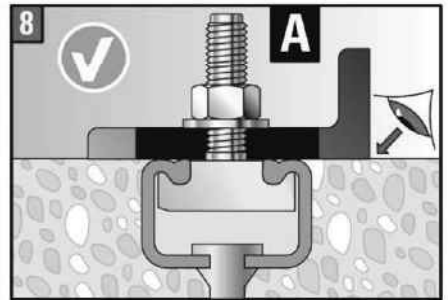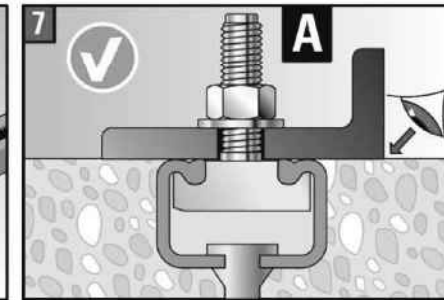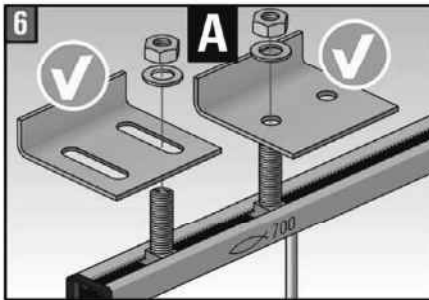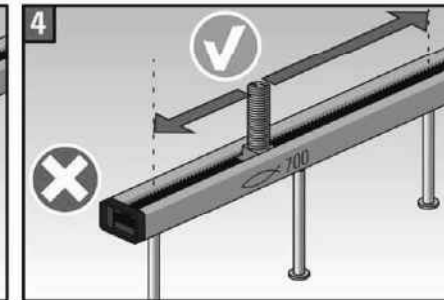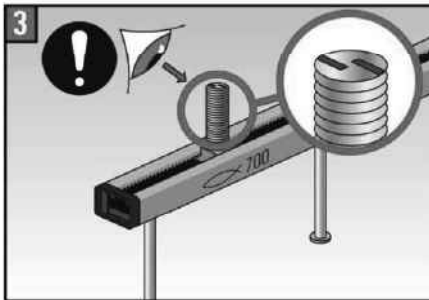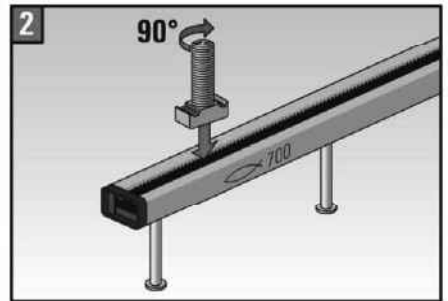

FBC-S	FES-RS-S	T _{inst} Nm	M12	M16	M20
225	600	A	80	100	120
		B	100	200	360
225	700	A	80	100	120
		B	100	200	360

T_{inst} must not be exceeded.

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Intended Use

Installation instruction for fischer serrated channel bolt FBC-S

Annex B 6

Table C1.1: Characteristic resistances under tension load – steel failure of anchor channels

Anchor channel FES-RS-S-			600	I-600	700	I-700
Steel failure: Anchor						
Characteristic resistance	N _{Rk,s,a}	[kN]	55,2	57,0	73,3	81,0
Partial factor	γ _{Ms} ¹⁾	[-]	1,8			
Steel failure: Connection between anchor and channel						
Characteristic resistance	N _{Rk,s,c}	[kN]	55,2	57,0	73,0	80,0
Partial factor	γ _{Ms} ¹⁾	[-]	1,8			
Steel failure: Local flexure of the channel lips						
Characteristic spacing of channel bolts for N _{Rk,s,l}	S _{l,N}	[mm]	101		105	
Characteristic resistance	N ⁰ _{Rk,s,l}	[kN]	64,0		80,0	
Partial factor	γ _{Ms} ¹⁾	[-]	1,8			

¹⁾ In absence of other national regulations.

Table C1.2: Characteristic flexural resistance of the channel

Anchor channel FES-RS-S-			600	700
Steel failure: Flexure of channel				
Characteristic flexural resistance of channel	$M_{Rk,s,flex}$	[Nm]	2581	3749
Partial factor	$\gamma_{Ms,flex}^{1)}$	[-]	1,15	

¹⁾ In absence of other national regulations.

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Performances

Characteristic resistances of anchor channels under tension load – steel failure of anchor channel

Annex C 1

Appendix 17 / 25

Table C2.1: Characteristic resistances under tension load – concrete failure

Anchor channel FES-RS-S-			600	I-600	700	I-700
Concrete failure: Pull-out failure						
Characteristic resistance in cracked concrete C12/15	N _{Rk,p}	[kN]	33,1	51,3	36,2	51,3
Characteristic resistance in uncracked concrete C12/15	N _{Rk,p}	[kN]	46,4	71,8	50,7	71,8
Increasing factor of N _{Rk,p} = N _{Rk,p} (C12/15)*ψ _c	C16/20	ψ _c [-]	1,33			
	C20/25		1,67			
	C25/30		2,08			
	C30/37		2,50			
	C35/45		2,92			
	C40/50		3,33			
	C45/55		3,75			
	C50/60		4,17			
	C55/67		4,58			
≥C60/75		5,00				
Partial factor	γ _{Mp} = γ _{Mc} ¹⁾	[-]	1,5			
Concrete failure: Concrete cone failure						
Product factor k ₁	k _{cr,N}	[-]	8,6	8,6	8,9	8,7
	k _{ucr,N}	[-]	12,3	12,4	12,6	12,5
Partial factor	γ _{Mc} ¹⁾	[-]	1,5			
Concrete failure: Concrete splitting failure						
Characteristic edge distance	C _{cr,sp}	[mm]	450	462	525	462
Characteristic spacing	S _{cr,sp}	[mm]	900	942	1050	942
Partial factor	γ _{MSp} = γ _{Mc} ¹⁾	[-]	1,5			

¹⁾ In absence of other national regulations.

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Performances

Characteristic resistances under tension load – concrete failure

Annex C 2

Table C3.1: Displacements under tension load

Anchor channel FES-RS-S-(I)-			600	700
Tension load	N	[kN]	21,4	31,4
Short-term displacement ¹⁾	δ_{N0}	[mm]	2,1	2,1
Long-term displacement ¹⁾	$\delta_{N\infty}$	[mm]	4,2	4,2

¹⁾ Displacements in midspan of the anchor channel, including slip of channel bolt, deformation of channel lips, bending of the channel and slip of the anchor channel in concrete.

Table C4.1: Characteristic resistances under shear load – steel failure of anchor channels

Anchor channel FES-RS-S-			600	I-600	700	I-700
Steel failure: Anchor						
Characteristic resistance	V _{Rk,s,a,y}	[kN]	98,5	98,5	120,0	120,0
	V _{Rk,s,a,x}		34,2	50,7	44,0	48,6
Partial factor	γ _{Ms} ¹⁾	[-]	1,8			
Steel failure: Connection between anchor and channel						
Characteristic resistance	V _{Rk,s,c,y}	[kN]	98,5	98,5	120,0	120,0
	V _{Rk,s,c,x}		33,1	34,9	43,8	48,0
Partial factor	γ _{Ms} ¹⁾	[-]	1,8			
Steel failure: Local flexure of the channel lips						
Characteristic spacing of channel bolts for V _{Rk,s,l}	S _{i,v}	[mm]	101		105	
Characteristic resistance	V ⁰ _{Rk,s,l,y}	[kN]	77,7		92,0	
Partial factor	γ _{Ms} ¹⁾	[-]	1,8			

¹⁾ In absence of other national regulations.

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Performances

Characteristic resistance of anchor channel under shear load – steel failure of anchor channel

Annex C 4

Appendix 20 / 25

Table C5.1: Characteristic resistance for shear load in direction of the longitudinal axis of the channel – steel failure

Anchor channel FES-RS-S-(I)-			600	700
Steel failure: Connection between channel lips and serrated channel bolt				
Characteristic resistance	$V_{Rk,s,l,x}$	[kN]	FBC-S-225-M12-8.8	17,6
			FBC-S-225-M16-8.8	17,6
			FBC-S-225-M20-8.8	17,6
Installation factor	$\gamma_{Inst}^{1)}$	[-]	M12: 1,4 M16, M20: 1,0	1,2

¹⁾ In absence of other national regulations.

²⁾ No performance assessed.

Table C5.2: Characteristic resistance of the anchor channel under shear load – concrete failure

Anchor channel FES-RS-S-(I)-			600	700
Concrete failure: Pry-out failure				
Product factor	k ₈	[-]	2,0	2,0
Partial factor	γ _{Mc} ¹⁾	[-]	1,5	
Concrete failure: Concrete edge failure				
Product factor k ₁₂	Cracked concrete	k _{cr,V}	7,5	7,5
	Uncracked concrete	k _{ucr,V}	10,5	10,5
Partial factor	γ _{Mc} ¹⁾	[-]	1,5	

¹⁾ In absence of other national regulations.

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Performances

Characteristic resistance under shear load

Annex C 5

Appendix 21 / 25

Table C6.1: Displacements under shear load

Anchor channel FES-RS-S-(I)-			600	700
Shear load perpendicular to the longitudinal axis of the channel	V_y	[kN]	30,5	36,5
Short-term displacement ¹⁾	$\delta_{V,y,0}$	[mm]	2,5	2,9
Long-term displacement ¹⁾	$\delta_{V,y,\infty}$	[mm]	3,7	4,4
Shear load in direction of the longitudinal axis of the channel	V_x	[kN]	7,0	6,6
Short-term displacement ²⁾	$\delta_{V,x,0}$	[mm]	0,9	1,2
Long-term displacement ²⁾	$\delta_{V,x,\infty}$	[mm]	1,3	1,8

¹⁾ Displacements in midspan of the anchor channel, including slip of channel bolt, deformation of channel lips, bending of the channel and slip of the anchor channel in concrete.

²⁾ Displacements of the anchor channel, including slip of channel bolt, deformation of channel lips and slip of the anchor channel in concrete.

Table C6.2: Characteristic resistances under tension and shear load – steel failure of serrated channel bolts

Serrated channel bolt FBC-S-225			M12	M16	M20
Steel failure:			Steel grade 8.8		
Characteristic resistance	$N_{Rk,s}$	[kN]	67,4	125,6	170,0
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,5		
Characteristic resistance	$V_{Rk,s}$	[kN]	33,7	62,8	98,0
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,25		

¹⁾ In absence of other national regulations.

Table C6.3: Characteristic resistances under combined tension and shear load

Anchor channel FES-RS-S-(I)-			600	700
Steel failure: Local flexure of channel lips and flexure of channel				
Product factor	k ₁₃	[-]	according to EN 1992-4:2018, 7.4.3.1	
Steel failure: Anchor and connection between anchor and channel				
Product factor	k ₁₄	[-]	according to EN 1992-4:2018, 7.4.3.1	

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Performances

Characteristic resistance of channel bolts under tension and shear load, displacements under shear load, combined tension and shear load


Annex C 6

Table C7.1: Characteristic resistances under shear load with lever arm – steel failure of serrated channel bolts

Thread diameter of serrated channel bolt ²⁾				M12	M16	M20
Steel failure:						
Characteristic flexural resistance	M ⁰ _{RK,s}	[Nm]	FBC-S-225	104,8	266,4	519,3
Partial factor	γ _{Ms} ¹⁾	[-]	FBC-S-225	1,25		
Internal lever arm	a	[kN]	FBC-S-225	29,8	31,8	34,2

1) In absence of other national regulations.
2) Materials according to Annex A7, Table A7.1.

The characteristic flexure resistance according to Table C7.1 is limited as follows:

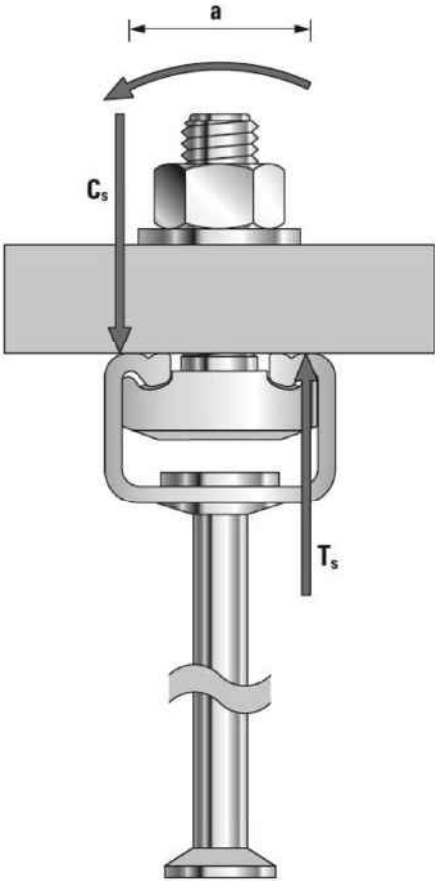

$M_{RK,s}^0 \leq 0,5 \cdot N_{RK,s,l}^0 \cdot a$ ($N_{RK,s,l}^0$ according to Table C1.1)

$M_{RK,s}^0 \leq 0,5 \cdot N_{RK,s} \cdot a$ ($N_{RK,s}$ according to Table C6.2)

a = Internal lever arm according to Table C7.1

T_s = Tension force acting on the channel lips

C_s = Compression force acting on the channel lips

fischer Serrated Anchor Channel InnoLock FES-RS-S with fischer Serrated Channel Bolts FBC-S

Performances
Characteristic flexural resistances under shear load of serrated channel bolts

Table C8.1: Characteristic resistances under fire exposure – steel failure


Channel bolt					M12	M16	M20
Steel failure: Anchor, connection between anchor and channel, local bending of channel lip							
Characteristic resistance	$N_{Rk,s,fi}$ $=V_{Rk,s,y,fi}$	[kN]	FES-RS-S-(I)-600	R30	2,5	4,8	12,0
				R60	2,0	4,2	8,7
				R90	1,4	3,5	5,2
				R120	1,2	3,1	3,4
			FES-RS-S-(I)-700	R30	2,5	4,8	12,0
				R60	2,0	4,2	8,7
				R90	1,4	3,5	5,2
				R120	1,2	3,1	3,4
Partial factor	$\gamma_{Ms,fi}^{1)}$	[-]	1,0				

¹⁾ In absence of other national regulations.

Table C9.1: Minimum axis distance of reinforcement

Anchor channel FES-RS-S-(I)-			600	700
Min. axis distance	R30	a [mm]	35	50
	R60		35	50
	R90		45	50
	R120		60	65

Fire exposure from one side only

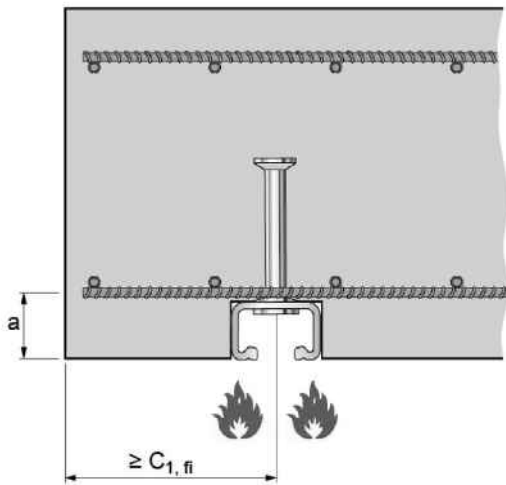

Fire exposure from more than one side

