

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-18/0862
of 31 March 2023

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

fischer Anchor Channel FES with fischer Channel Bolts
FBC

Product family
to which the construction product belongs

Anchor Channels

Manufacturer

fischerwerke GmbH & Co. KG
Klaus-Fischer-Straße 1
72178 Waldachtal
DEUTSCHLAND

Manufacturing plant

fischerwerke

This European Technical Assessment
contains

33 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330008-03-0601, Edition 06/2021

This version replaces

ETA-18/0862 issued on 16 June 2020

European Technical Assessment

ETA-18/0862

English translation prepared by DIBt

Page 2 of 33 | 31 March 2023

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The fischer Anchor Channel FES with fischer Channel Bolts FBC is a system consisting of a C-shaped channel profile of steel and at least two metal anchors non-detachably fixed on the channel back and fischer Channel Bolts.

The anchor channel is embedded surface-flush in the concrete. fischer Channel Bolts with appropriate hexagonal nuts and washers are fixed to the channel.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor channel is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor channel of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under tension load (static and quasi-static loading)	
- Resistance to steel failure of anchors	$N_{Rk,s,a}$ see Annex C1
- Resistance to steel failure of the connection between anchors and channel	$N_{Rk,s,c}$ see Annex C1
- Resistance to steel failure of channel lips and subsequently pull-out of channel bolt	$N_{Rk,s,l}^0$; $s_{l,N}$ see Annex C1
- Resistance to steel failure of channel bolt	$N_{Rk,s}$ see Annex C10
- Resistance to steel failure by exceeding the bending strength of the channel	s_{max} see Annex A5 $M_{Rk,s,flex}$ see Annex C2
- Maximum installation torque to avoid damage during installation	$T_{inst,g}$; $T_{inst,s}$ see Annex B4
- Resistance to pull-out failure of the anchor	$N_{Rk,p}$ see Annex C3
- Resistance to concrete cone failure	h_{ef} see Annex B3 $k_{cr,N}$; $k_{ucr,N}$ see Annex C4
- Minimum edge distances, spacing and member thickness to avoid concrete splitting during installation	s_{min} see Annex A5 c_{min} ; h_{min} see Annex B3
- Characteristic edge distance and spacing to avoid splitting of concrete under load	$s_{cr,sp}$; $c_{cr,sp}$ see Annex C4
- Resistance to blowout failure - bearing area of anchor head	A_h see Annex A4

Essential characteristic	Performance
<p>Characteristic resistance under shear load (static and quasi-static loading)</p> <ul style="list-style-type: none"> - Resistance to steel failure of channel bolt under shear loading without lever arm - Resistance to steel failure by bending of the channel bolt under shear load with lever arm - Resistance to steel failure of channel lips, steel failure of connection between anchor and channel and steel failure of anchor (shear load in transverse direction) - Resistance to steel failure of connection between channel lips and channel bolt (shear load in longitudinal channel axis) - Factor for sensitivity to installation (longitudinal shear) - Resistance to steel failure of the anchor (longitudinal shear) - Resistance to steel failure of connection between anchor and channel (longitudinal shear) - Resistance to concrete pry-out failure - Resistance to concrete edge failure 	<p>$V_{Rk,s}$ see Annex C10</p> <p>$M_{Rk,s}^0$ see Annex C11</p> <p>$V_{Rk,s,l,y}^0$; $S_{l,v}$; $V_{Rk,s,c,y}$; $V_{Rk,s,a,y}$ see Annex C6</p> <p>$V_{Rk,s,l,x}$ see Annex C8</p> <p>γ_{inst} see Annex C8</p> <p>$V_{Rk,s,a,x}$ see Annex C6</p> <p>$V_{Rk,s,c,x}$ see Annex C6</p> <p>k_8 see Annex C8</p> <p>$k_{cr,v}$; $k_{ucr,v}$ see Annex C8</p>
<p>Characteristic resistance under combined tension and shear load (static and quasi-static load)</p> <ul style="list-style-type: none"> - Resistance to steel failure of the anchor channel 	<p>k_{13} ; k_{14} see Annex C9</p>
<p>Characteristic resistance under fatigue tension loading</p> <ul style="list-style-type: none"> - Fatigue resistance to steel failure of the whole system (continuous or tri-linear function, test method A1, A2) - Fatigue limit resistance to steel failure of the whole system (test method B) - Fatigue resistance to concrete related failure (exponential function, test method A1, A2) - Fatigue limit resistance to concrete related failure (test method B) 	<p>No Performance assessed</p> <p>No Performance assessed</p> <p>No Performance assessed</p> <p>No Performance assessed</p>
<p>Displacements (static and quasi-static load)</p>	<p>δ_{N0} ; $\delta_{N\infty}$ see Annex C5</p> <p>$\delta_{v,y,0}$; $\delta_{v,y,\infty}$; $\delta_{v,x,0}$; $\delta_{v,x,\infty}$ see Annex C9</p>

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Characteristic resistance to fire	$N_{Rk,s,fi}$; $V_{Rk,s,fi}$ see Annex C12

3.3 Aspects of durability linked with the Basic Works Requirements

Essential characteristic	Performance
Durability	No performance assessed

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with EAD No. 330008-03-0601, the applicable European legal act is: [2000/273/EC].

The system to be applied is: 1


5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 31 March 2023 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock
Head of Section


beglaubigt:
Müller

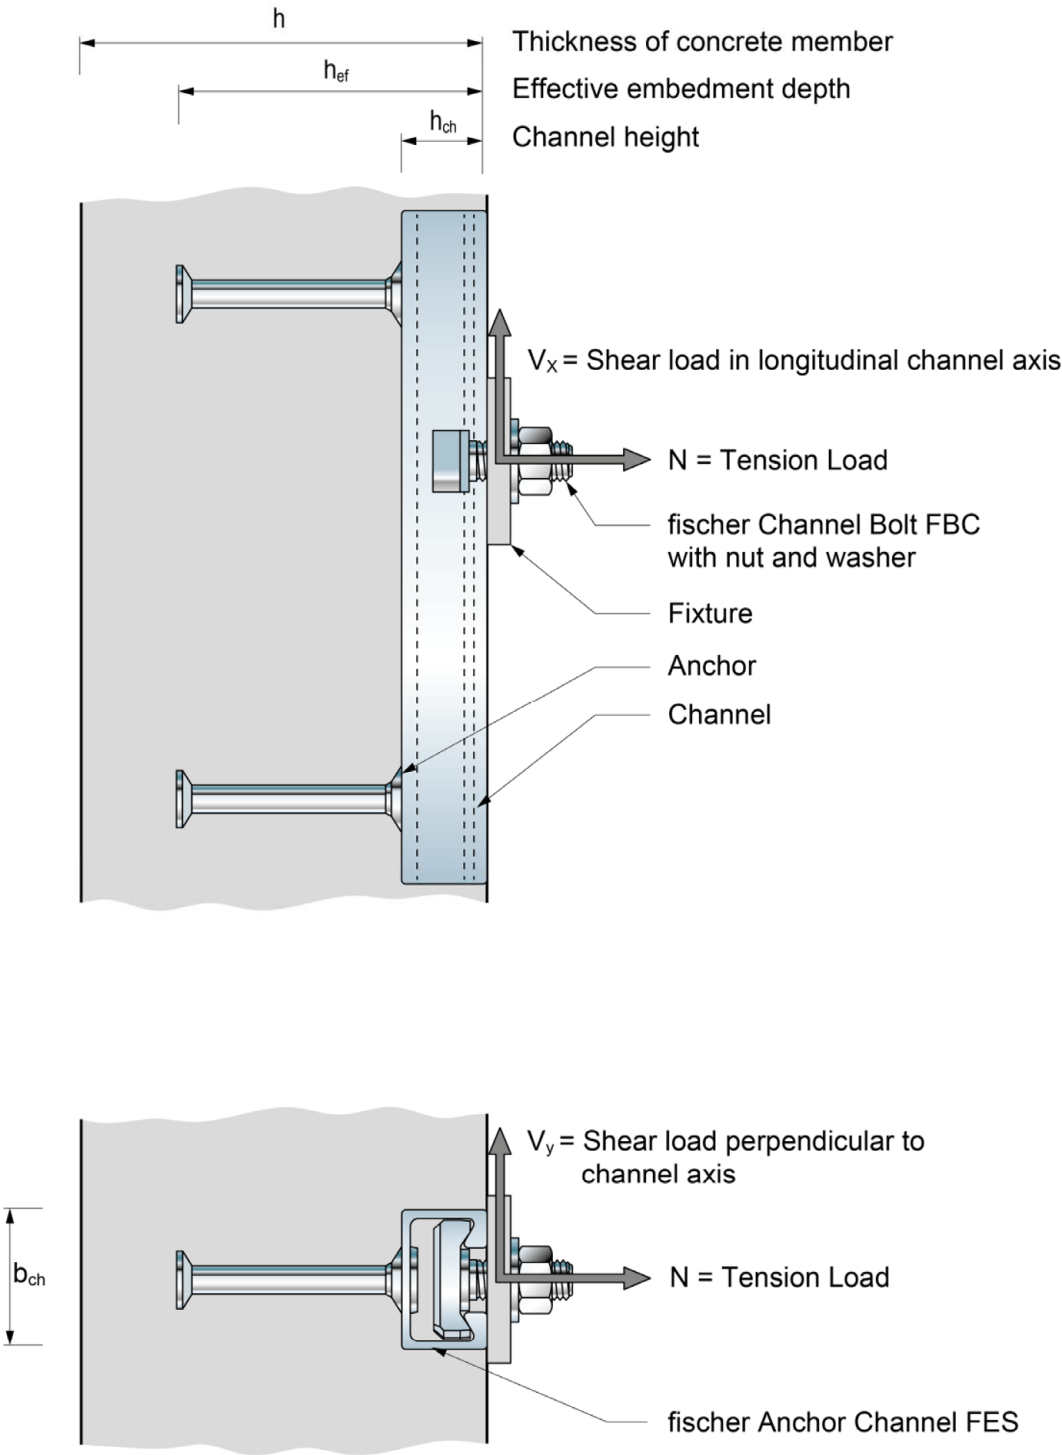


fischer Anchor Channel FES with fischer Channel Bolts FBC

Product Description
Installed condition

Annex A1

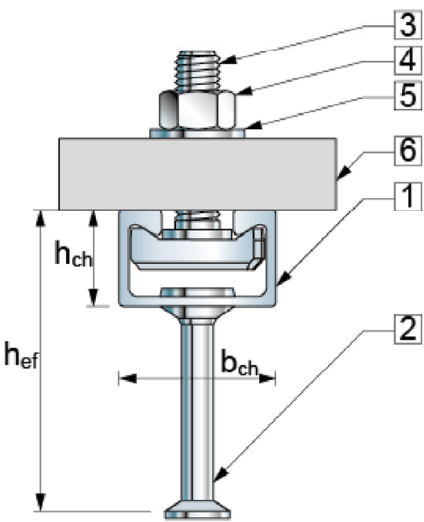

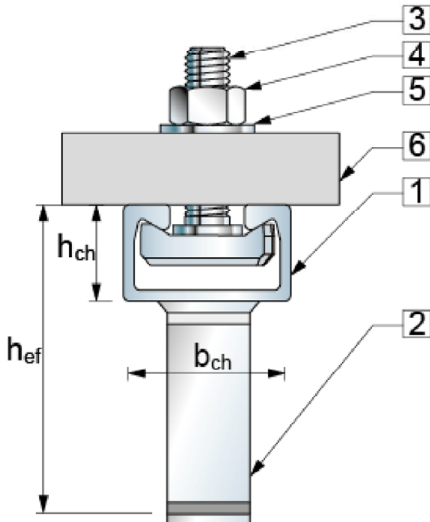

Round Anchor




I-Anchor

- fischer Anchor Channel FES
- 1 Channel profile
 - 2 Anchor
 - 3 Channel bolt
 - 4 Hexagonal nut
 - 5 Washer
 - 6 Fixture



Marking of the fischer anchor channel FES:

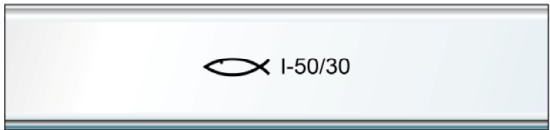
- e.g.:  I-50/30
-  = Identifying mark of the manufacturer
- I = Additional marking for I-anchors
No marking for round anchors
- 50/30(-P) = Anchor channel size
(29/20; 38/23; 40/22; 50/30; 52/34,
28/15; 38/17; 40/25; 49/30; 54/33)
- P = Additional marking for P-version



Stamped into back of channel
Optional: printed on channel web or channel lips
H = Hot rolled channel, C = Cold formed channel
No marking for material acc. Annex A7 Table 6
(Channel profile)

Marking of the fischer channel bolt FBC:

- e.g.:  5030 8.8 N
-  = Identifying mark of the manufacturer
- 5030 = Size of channel bolt
- 8.8 = Steel grade
- A4-70 = Stainless steel
- N = Notching channel bolt (if applicable)
- = Electroplated
No marking for hot dip galvanized




Additional marking of channel bolt (smooth, serrated,
notching channel bolt head) according to Annex A6 at
the top of thread.


fischer Anchor Channel FES with fischer Channel Bolts FBC

Product Description
Marking and materials


Annex A2

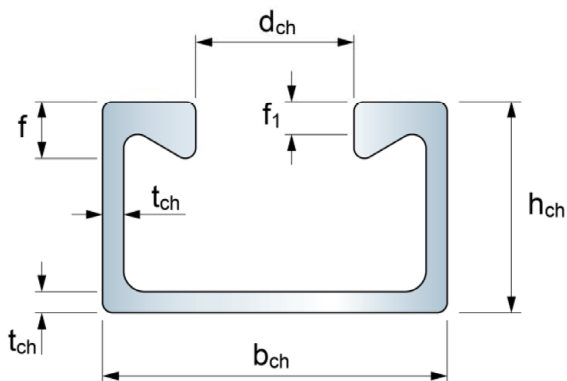


FES-H-(I)-40/22(-P), -50/30(-P), -52/34

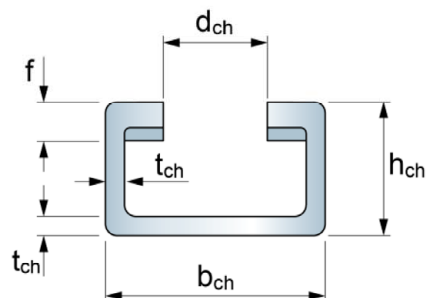

FES-H-S-29/20, -38/23 (serrated)

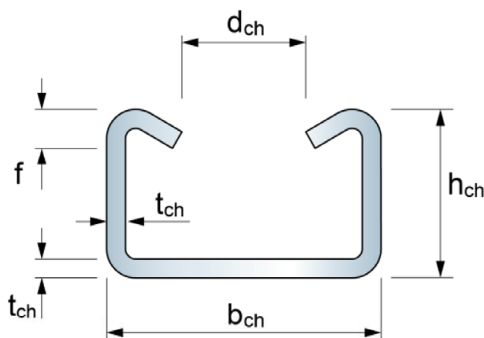

FES-C-40/25, -49/30, -54/33

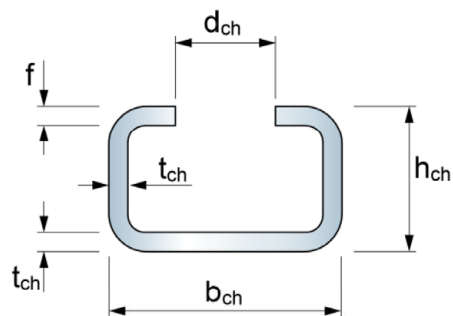

FES-C-28/15, -38/17

Table 1: Dimensions of hot-rolled and cold-formed channel profile

Anchor Channel FES-	b_{ch} [mm]	h_{ch} [mm]	t_{ch} [mm]	d_{ch} [mm]	f [mm]	f_1 [mm]	I_y [mm ⁴]
C-28/15	28,0	15,5	2,3	12,0	2,3	- ¹⁾	4.280
C-38/17	38,0	17,3	3,0	18,0	3,0	- ¹⁾	8.240
C-40/25	40,0	25,0	2,8	18,0	6,0	- ¹⁾	20.340
C-49/30	50,0	30,0	3,3	22,0	7,0	- ¹⁾	43.080
C-54/33	54,0	33,0	5,0	22,0	8,5	- ¹⁾	74.090
H-S-29/20	30,0	20,0	3,0	14,0	5,2	- ¹⁾	11.150
H-S-38/23	38,0	23,0	3,3	18,0	6,0	- ¹⁾	21.070
H-(I)-40/22(-P)	40,0	23,5	2,6	18,0	6,2	3,6	21.660
H-(I)-50/30(-P)	50,0	30,0	3,0	22,5	8,1	5,5	54.960
H-(I)-52/34	52,5	34,0	4,0	22,5	11,5	8,3	96.330

¹⁾ This dimension is not available for this product.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Product Description
Dimensions of channels

Annex A3

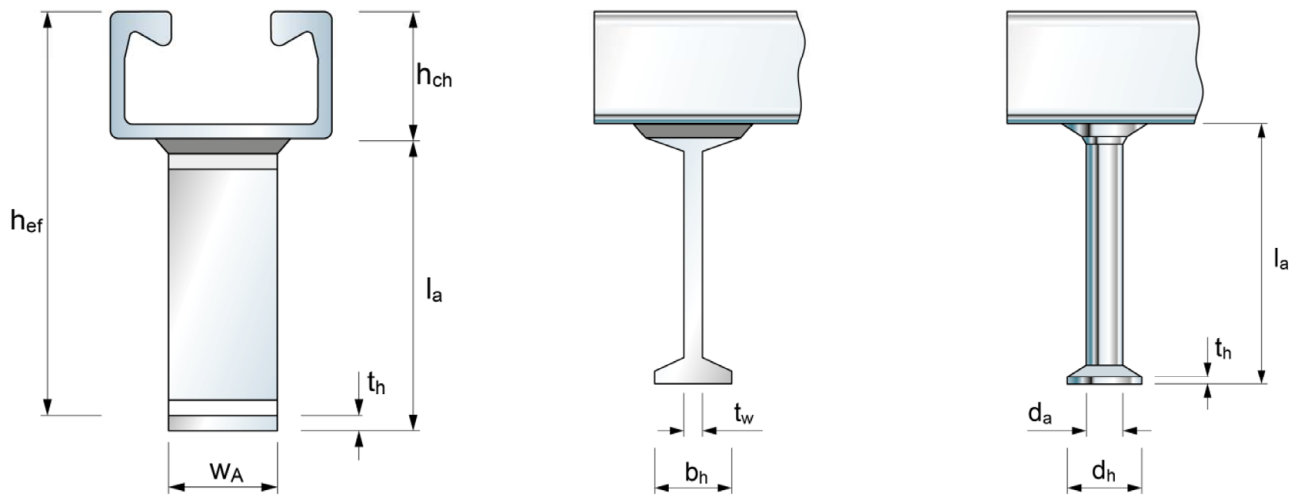


Table 2: Dimensions of anchor (welded I-anchor or forged round anchor)

Anchor Channel FES -	I-anchor						Round anchor				
	$l_{a,min}$ [mm]	$t_{w,min}$ [mm]	$b_{h,min}$ [mm]	t_h [mm]	W_A [mm]	$A_{h,min}$ [mm ²]	$l_{a,min}$ [mm]	d_a [mm]	d_h [mm]	t_h [mm]	A_h [mm ²]
C-28/15	- 2)						31,0	6	12,0	1,3	85
C-38/17	- 2)						60,8	8	16,0	2,0	151
C-40/25	- 2)						56,0	8	16,0	2,0	151
C-49/30	- 2)						66,0	10	20,0	2,2	236
C-54/33	- 2)						124,5	11	24,3	2,5	369
H-S-29/20	- 2)						59,5	10	20,0	2,5	236
H-S-38/23	- 2)						76,2	10	20,0	2,2	236
H-(I)-40/22	62	5	20	5	20	300	68,5	8	16,0	2,0	151
H-40/22-P	- 2)						69,7	10	20,0	2,2	236
H-(I)-50/30	69	5	20	5	25	375	66,2	10	20,0	2,2	236
H-50/30-P	- 2)						78,5	11	24,3	2,5	369
H-(I)-52/34	126	5 ¹⁾	20 ¹⁾	5	40	600	123,5	11	24,3	2,5	369

¹⁾ Alternative I-anchor: $t_w = 6$ mm, $b_h = 25$ mm.

²⁾ Product not available.


fischer Anchor Channel FES with fischer Channel Bolts FBC

Product Description
Dimensions of anchors

Annex A4

Table 3: Dimensions of Anchor Channels FES

Anchor channel FES-	Anchor type	S _{min} [mm]	S _{max} [mm]	X _{min} [mm]	X _{max} [mm]	l _{min} [mm]	l _{max} [mm]
C-28/15	round	100	200	25	35	150	6.070
C-38/17							
C-40/25			250				
C-49/30							
C-54/33			200				
H-S-29/20							
H-S-38/23	round or I		250				
H-(I-)40/22(-P)							
H-(I-)50/30	round or I						
H-I-52/34	I						
H-50/30-P	round			35		170	
H-52/34							

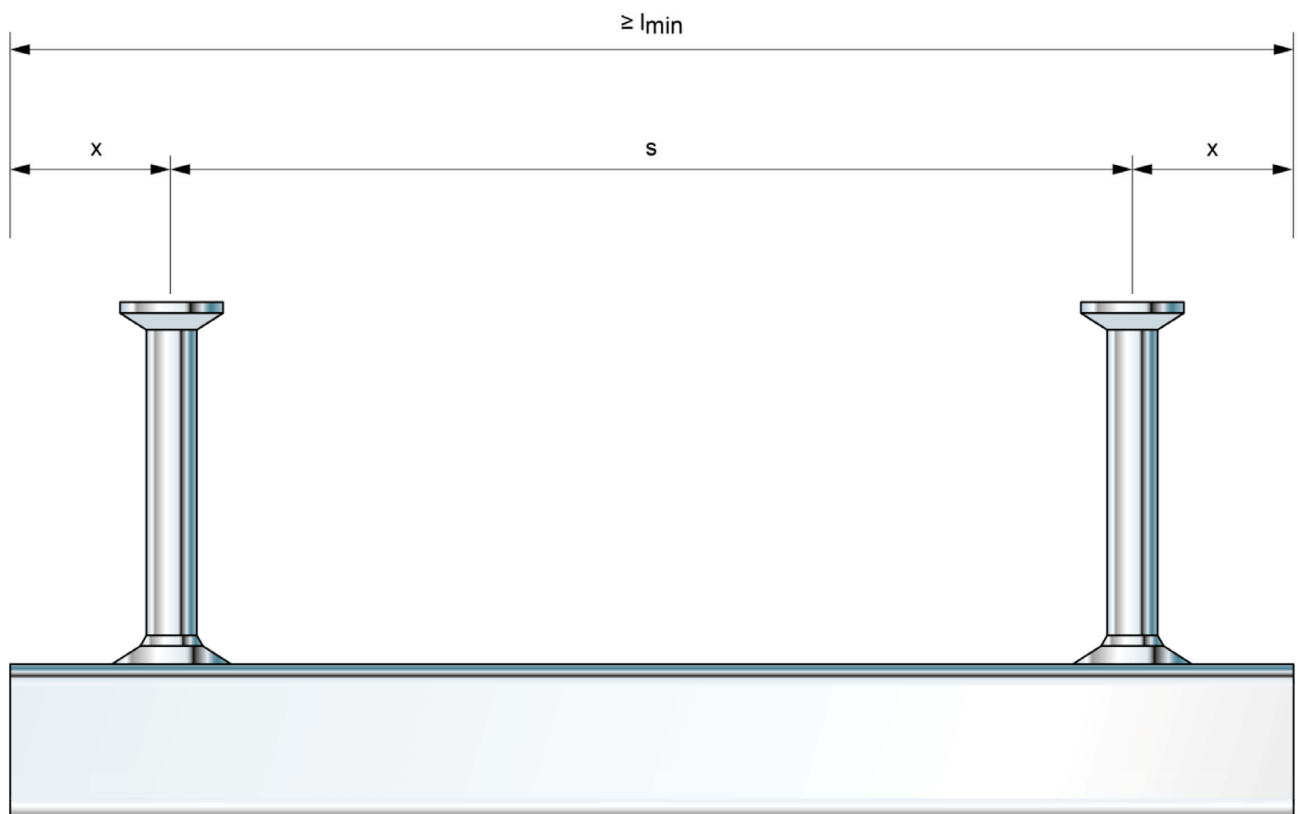

fischer Anchor Channel FES with fischer Channel Bolts FBC


Product Description
Anchor position and channel length

Annex A5


Table 4: Steel grade and corrosion class

Channel Bolt	Carbon steel ¹⁾	Stainless steel ¹⁾
Steel grade	8.8	A4-70
f_{uk} [N/mm ²]	800 / 830	700
f_{yk} [N/mm ²]	640 / 660 ²⁾	450
Finish	G ³⁾ F ⁴⁾	-


- ¹⁾ Material properties according to Annex A7.
²⁾ Material properties according to EN ISO 898-1.
³⁾ Electroplated.
⁴⁾ Hot-dip galvanized.

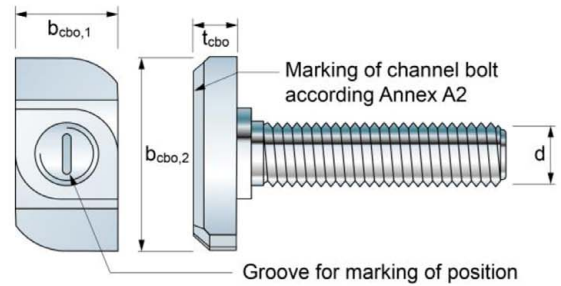


Channel Bolt FBC-28/15, FBC-38/17

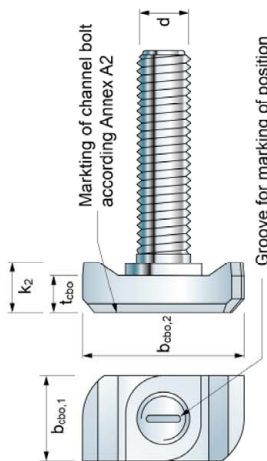

Channel Bolt
FBC-40/22, FBC-50/30

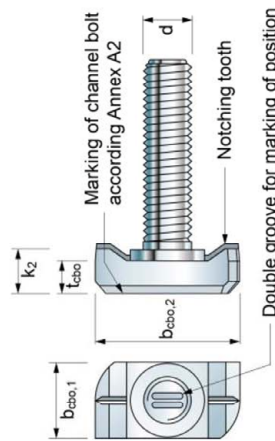

Notching Channel Bolt
FBC-N-40/22, FBC-N-50/30

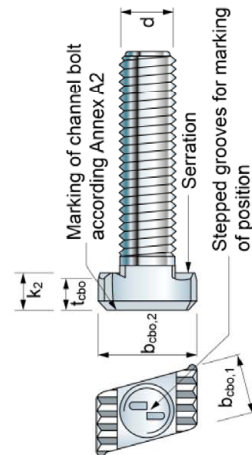

Serrated Channel Bolt
FBC-S-29/20, FBC-S-38/23

Table 5: Dimensions of fischer Channel Bolts FBC and matching fischer Anchor Channels FES

Anchor Channel FES-	Channel Bolt FBC-	Dimensions				
		d [mm]	b_cbo,1 [mm]	b_cbo,2 [mm]	t_cbo [mm]	k2 [mm]
C-28/15	28/15 8.8	8	11,0	22,2	5,0	- ¹⁾
		10			5,0	
		12			7,0	
C-38/17	38/17 8.8	10	16,0	30,0	6,0	- ¹⁾
		12			7,0	
H-S-29/20	S-29/20 8.8	12	13,0	22,0	6,5	8,0
H-S-38/23	S-38/23 8.8	12	16,7	29,1	5,8	7,3
H(-I)-40/22(-P) C-40/25	40/22 8.8	10	14,0	32,5	8,0	11,0
	40/22 8.8, A4-70	12	14,0			
	40/22 8.8, A4-70	16	17,0			
H(-I)-40/22(-P)	N-40/22 8.8	16	17,0	33,0	7,8	10,3
C-49/30 H(-I)-50/30 C-54/33 H(-I)-52/34	50/30 8.8	10	17,1	40,5	9,0	11,5
	50/30 8.8, A4-70	12	17,1		10,0	12,5
	50/30 8.8, A4-70	16	17,1		11,0	13,5
	50/30 8.8, A4-70	20	20,5		12,0	14,5
H(-I)-50/30(-P) H(-I)-52/34	N-50/30 8.8	16	17,5	42,2	12,0	15,5
		20	21,0	40,5	12,0	15,5

¹⁾ This dimension is not available for this product.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Product Description
Channel bolts

Annex A6

Table 6: Materials and properties

Component	Carbon steel			Stainless steel
	Mechanical properties	Coating	Coating	Mechanical properties
1	2a	2a	2b	3
Channel profile	1.0038, 1.0044 acc. to EN 10025:2004 1.0976, 1.0979 acc. to EN 10149:2013	Hot dip galvanized ≥ 50 µm acc. to EN ISO 1461:2022		- 2)
Anchor	1.0038, 1.0213, 1.0214 acc. to EN 10025:2004 1.5525, 1.5535 acc. to EN 10263:2017 1.5523	Hot dip galvanized ≥ 50 µm acc. to EN ISO 1461:2022		- 2)
Channel bolt	Steel grade 8.8 acc. to EN ISO 898-1:2013	Electroplated acc. to EN ISO 4042:2018	Hot dip galvanized ≥ 50 µm acc. to EN ISO 10684:2004 + AC:2009	Steel grade 70 according to EN ISO 3506-1: 2020
Plain washer ¹⁾ acc. to EN ISO 7089:2000 and EN ISO 7093- 1:2000	Hardness class A ≥ 200 HV	Electroplated acc. to EN ISO 4042:2018	Hot dip galvanized ≥ 50 µm acc. to EN ISO 10684:2004 + AC:2009	1.4401, 1.4404, 1.4571; 1.4578 according to EN 10088: 2009
Hexagonal nut acc. to EN ISO 4032:2012	Property class 5 or 8 acc. to EN ISO 898-2:2012	Electroplated acc. to EN ISO 4042:2018	Hot dip galvanized ≥ 50 µm acc. to EN ISO 10684:2004 + AC:2009	Property class 70 or 80 according to EN ISO 3506-2: 2020

¹⁾ Not in the scope of delivery.

²⁾ Product not available.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Product Description
Materials

Annex A7

Specification of intended use

Anchor channels and channel bolts subject to:

- Static and quasi-static tension and shear perpendicular to the longitudinal axis of the channel for FES in combination with channel bolt FBC.
- Static and quasi-static tension, shear perpendicular to the longitudinal axis of the channel and shear in the direction of the longitudinal axis of the channel for FES-H(-I)-40/22(-P) , FES-H(-I)-50/30(-P) or FES-H(-I)-52/34 in combination with notching channel bolt FBC-N.
- Static and quasi-static tension, shear perpendicular to the longitudinal axis of the channel and shear in the direction of the longitudinal axis of the channel for serrated anchor channels FES-H-S in combination with serrated channel bolts FBC-S.
- Fire exposure: Only for concrete class C20/25 to C50/60.

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000.
- Strength classes C12/15 to C90/105 according to EN 206-1:2000
- Cracked or uncracked concrete.

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (anchor channels and channel bolts according to Annex A7, Table 6, column 2a and 2b, 3).
- Structures subject to internal conditions with usual humidity (e.g. kitchens, bathrooms and laundries in residential buildings, exceptional permanent damp conditions and application under water) (anchor channels and channel bolts according to Annex A7, Table 6, column 2b, 3).

Design:

- Anchor channels are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor channel and channel bolts are indicated on the design drawings (e.g. position of the anchor channel relative to the reinforcement or to supports).
- For static and quasi-static loading as well as fire exposure the anchor channels have to be designed in accordance with EOTA TR 047 "Design of Anchor Channels", March 2018 or EN 1992-4:2018.
- The characteristic resistances are calculated with the minimum effective embedment depth.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Intended Use
Specifications

Annex B1

Installation:

- The installation of anchor channels is carried out by appropriately qualified personnel under the supervision of the person responsible for the technical matters on site.
- Use of the anchor channels only as supplied by the manufacturer - without any manipulations, repositioning or exchanging of channel components.
- Cutting of anchor channels is allowed only if pieces according to Annex A5, Table 3 are generated including end spacing x and minimum channel length l_{min} and only to be used in dry internal conditions.
- Installation in accordance with the installation instruction given in Annexes B5, B6, B7 or B8.
- The anchor channels are fixed on the formwork, reinforcement or auxiliary construction such that no movement of the channels will occur during the time of laying the reinforcement and of placing and compacting the concrete.
- The concrete around the head of the anchors is properly compacted. The channels are protected from penetration of concrete into the internal space of the channels.
- Washers may be chosen according to Annex A7 and provided separately by the user.
- Orientating the channel bolt (groove according to Annex B6, B7 and B8) rectangular to the channel axis.
- The required installation torque given in Annex B4 must be applied and must not be exceeded.
- Notching channel bolts FBC-N may be used only once after applying the installation torque $T_{inst,s}$.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Intended Use
Specifications

Annex B2

Table 7: Installation parameters

Anchor Channel FES-			C-28/15	C-38/17	H-S-29/20	H-S-38/23	C-40/25 H-40/22 H-40/22-P H-I-40/22	C-49/30 H-50/30 H-50/30-P H-I-50/30	C-54/33 H-52/34 H-I-52/34
Minimum effective embedment depth	$h_{ef,min}$	[mm]	45	76	77	97	79 90 91 79	94 94 106 94	155 155 155 155
Minimum edge distance	c_{min}		40	50	75	100	50 50 50 50	75 75 75 75	100 100 100 100
Minimum thickness of concrete member	$h_{min}^{1)}$		70	100	100	100	100 100 100 100	100 100 108 100	160 160 160 170

¹⁾ $h_{min} = h_{ef} + t_h + c_{nom}$; c_{nom} nach EN 1992-1-1:2004 + AC:2010.

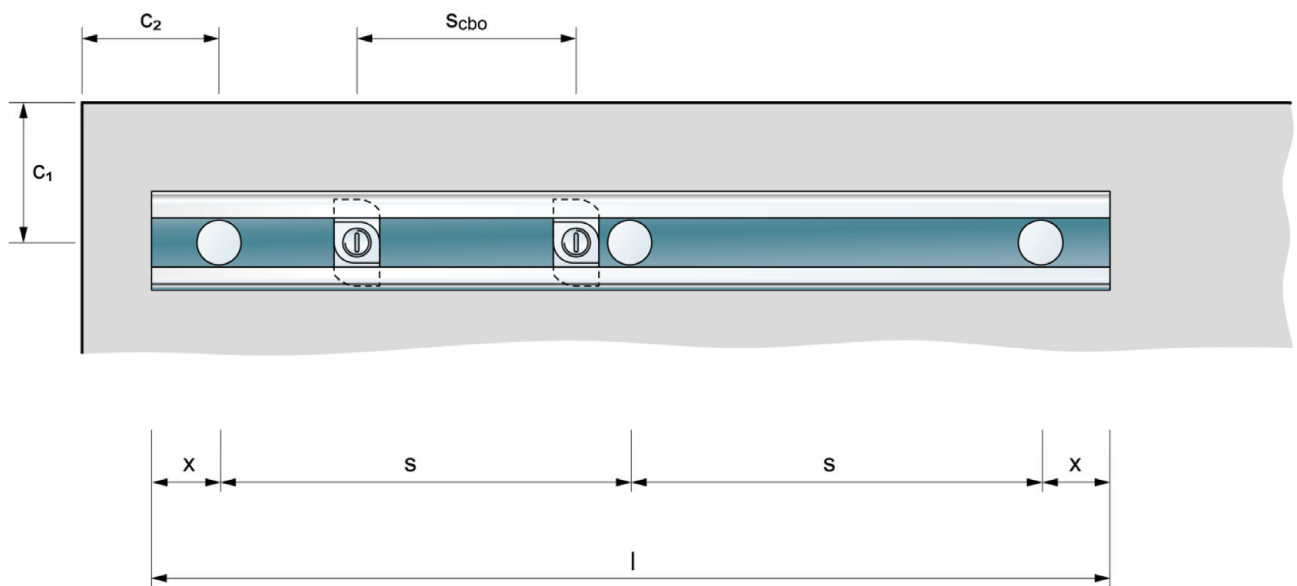


Table 8: Minimum spacing for channel bolts

Channel bolt			M8	M10	M12	M16	M20
Minimum spacing between channel bolts	$Sc_{bo,min}$	[mm]	40	50	60	80	100

fischer Anchor Channel FES with fischer Channel Bolts FBC

Intended Use

Installation parameters for fischer Anchor Channels FES


Annex B3

Table 9: Required installation torque T_{inst}

fischer Anchor channel FES-	fischer Channel Bolt FBC	Thread diameter	T _{inst} ¹⁾ [Nm]			
			General		Steel - steel contact	
			T _{inst,g}		T _{inst,s}	
			8.8	A4-70	8.8	A4-70
C-28/15	28/15	M8	7	–2)	15	–2)
		M10	10	–2)	30	–2)
		M12	13	–2)	45	–2)
C-38/17	38/17	M10	15	–2)	30	–2)
		M12	20	–2)	45	–2)
H-S-29/20	S-29/20	M12	80	–2)	80	–2)
H-S-38/23	S-38/23	M12	80	–2)	80	–2)
		M16	100	–2)	100	–2)
C-38/17		M12	40	–2)	80	–2)
		M16	50	–2)	100	–2)
H(-I)-40/22(-P) C-40/25	40/22	M10	15	–2)	30	–2)
		M12	24	24	45	45
		M16	32	32	100	100
	N-40/22	M16	–2)	–2)	200	–2)
C-49/30 H(-I)-50/30(-P) C-54/33 H(-I)-52/34	50/30	M10	15	–2)	30	–2)
		M12	25	25	45	45
		M16	60	60	100	100
		M20	75	75	230	230
H(-I)-50/30(-P), H(-I)-52/34	N-50/30	M16	–2)	–2)	200	–2)
		M20	–2)	–2)	400	–2)

1) T_{inst} must not be exceeded.

2) Product not available.

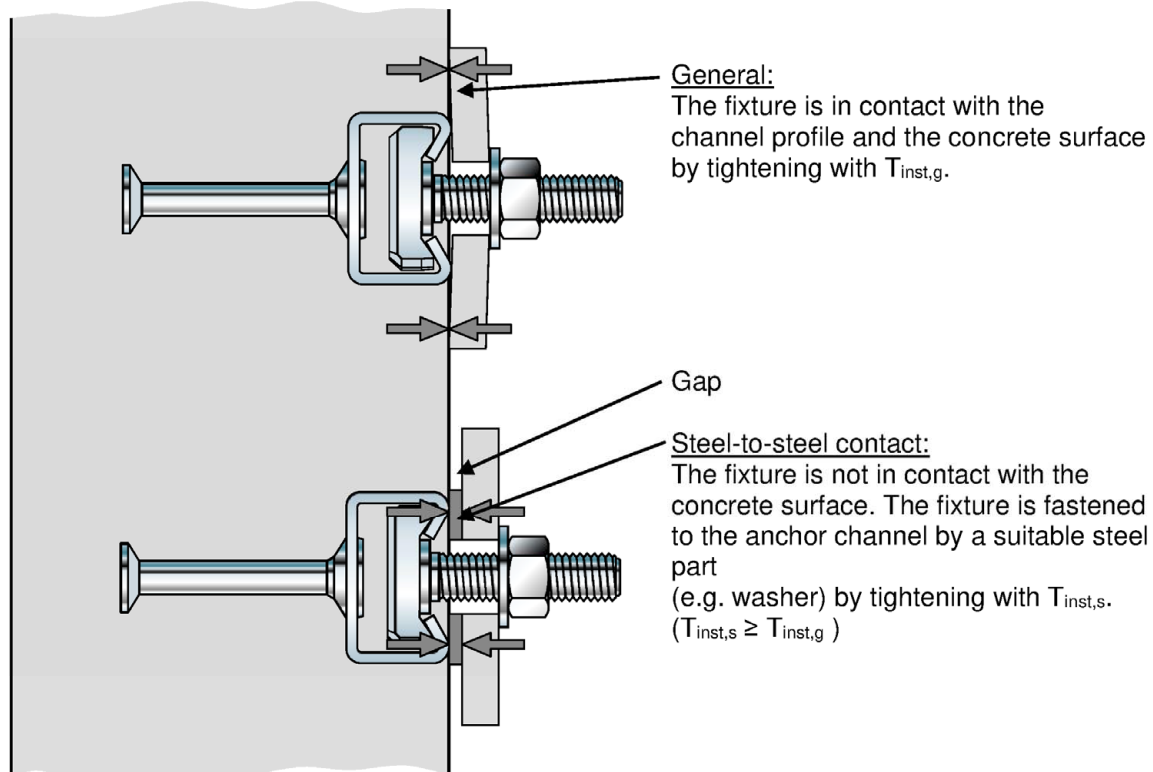

fischer Anchor Channel FES with fischer Channel Bolts FBC



Intended Use

Installation parameters for fischer Channel Bolts FBC








Annex B4



Anchor Channel FES

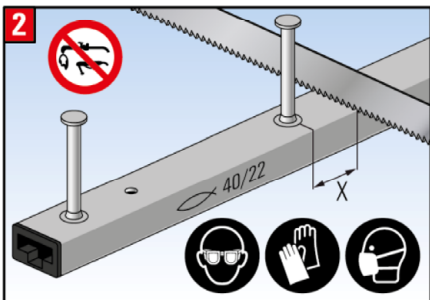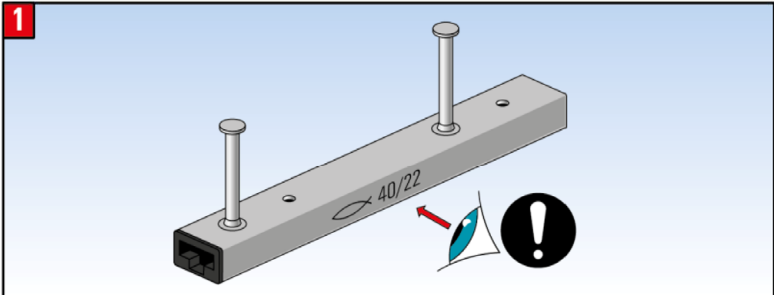

X	T	
25-30mm	FES-H-	FES-C-
	S-29/20	28/15
	S-38/23	38/17
	(I-)40/22(-P)	40/25
	(I-)50/30	49/30
35mm	I-52/34	54/33
	50/30-P	-
	52/34	-

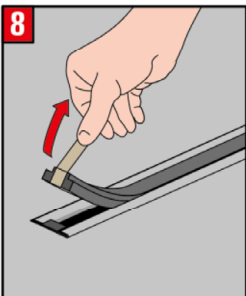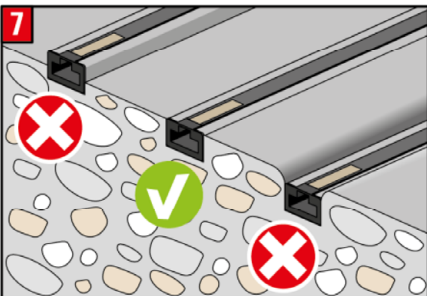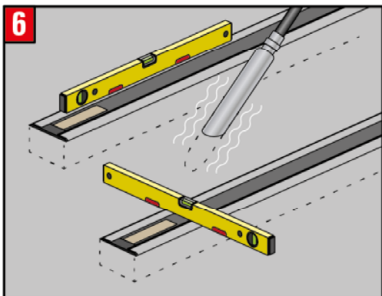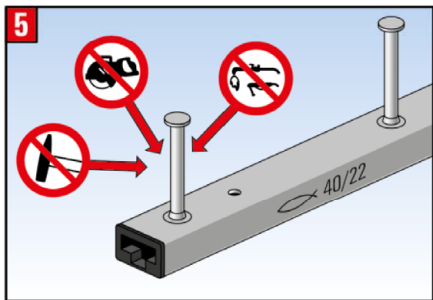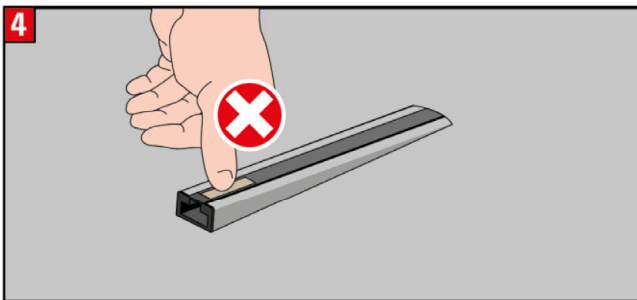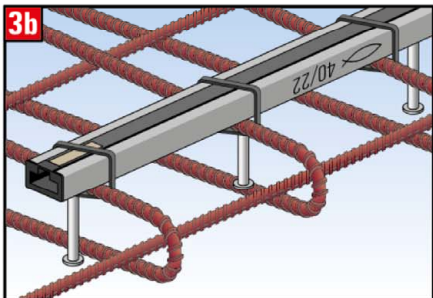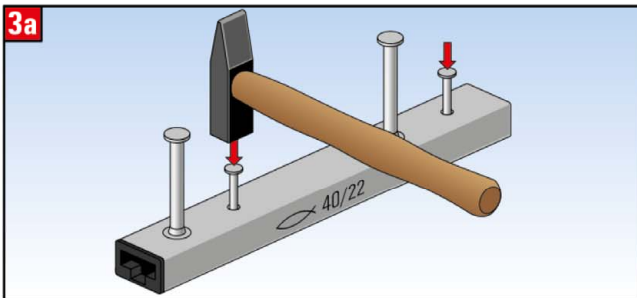


fischer Anchor Channel FES with fischer Channel Bolts FBC

Intended Use
Installation instruction for fischer Anchor Channels FES













Annex B5



Channel Bolts FBC

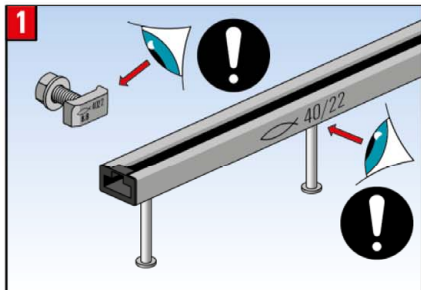

	FBC-	FES-H(-)	FES-C-
2815		-	28/15
3817		-	38/17
4022		40/22	40/25
5030		50/30	49/30
		52/34	54/33

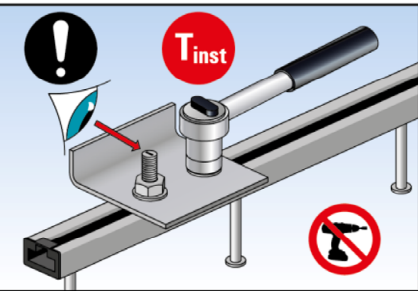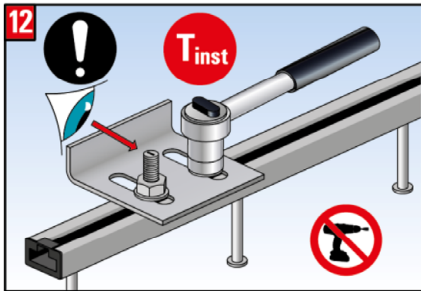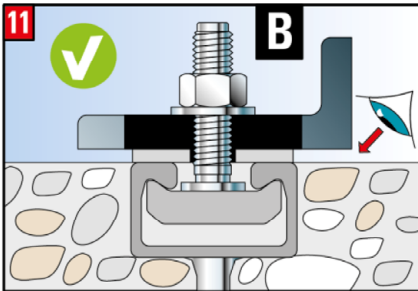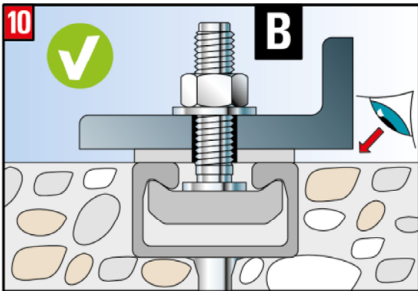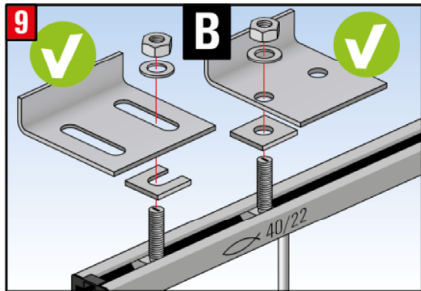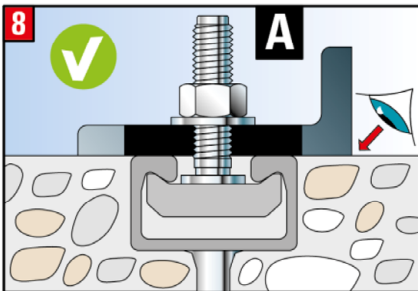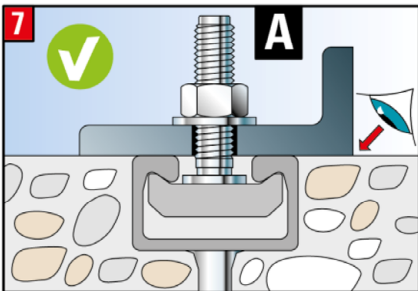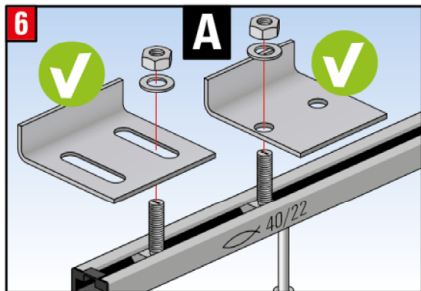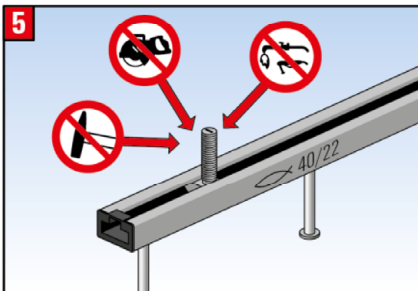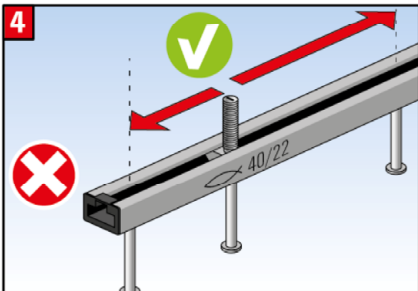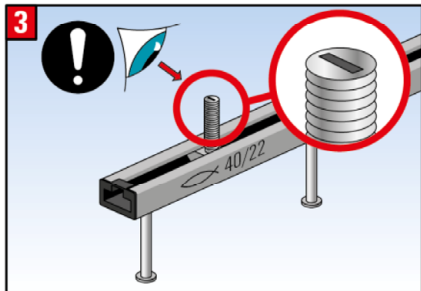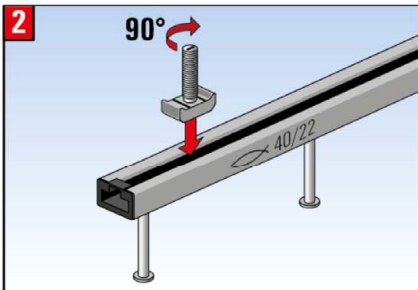

FBC	T _{inst} [Nm]	M8	M10	M12	M16	M20
2815	A	7	10	13	-	-
	B	15	30	45	-	-
3817	A	-	15	20	-	-
	B	-	30	45	-	-
4022	A	-	15	24	32	-
	B	-	30	45	100	-
5030	A	-	15	25	60	75
	B	-	30	45	100	230

T_{inst} must not be exceeded.

fischer Anchor Channel FES with fischer Channel Bolts FBC


Intended Use
Installation instruction for fischer Channel Bolts FBC

Annex B6













fischer



Serrated Channel Bolts FBC-S

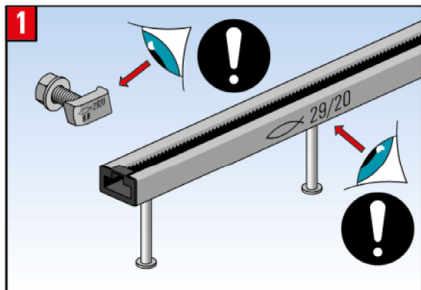

FBC-S-	FES-H-S-	FES-C-
2920	29/20	-
3823	38/23	38/17

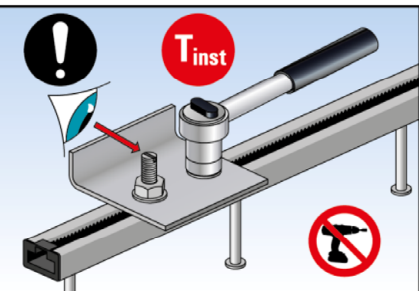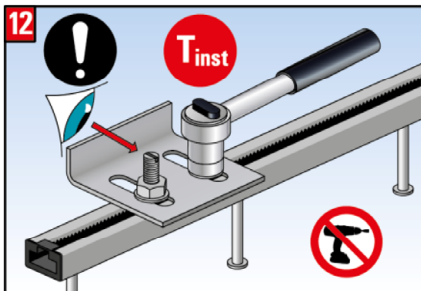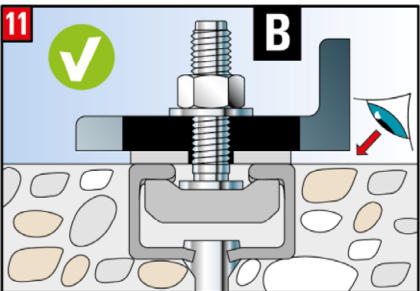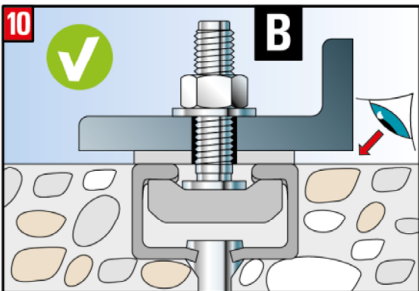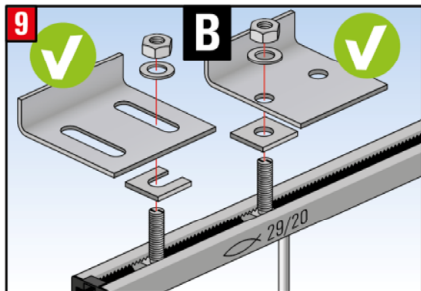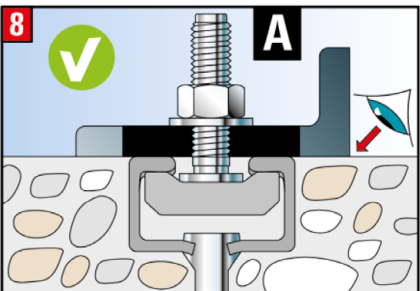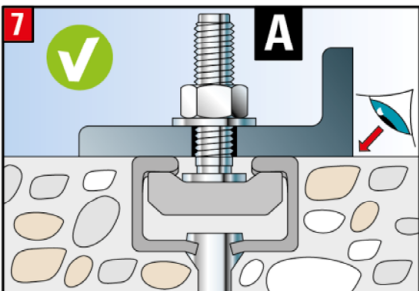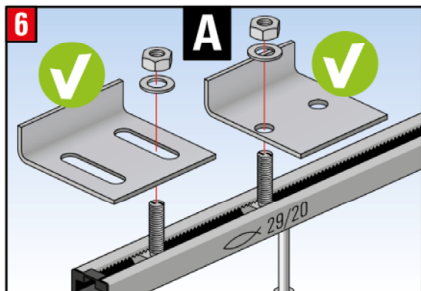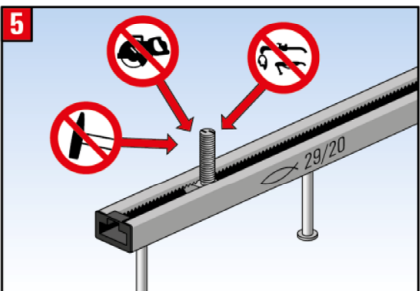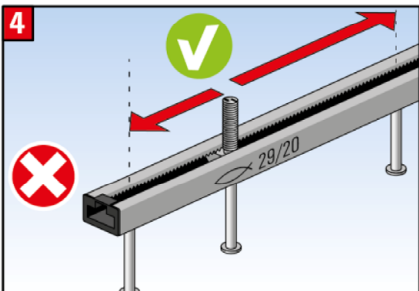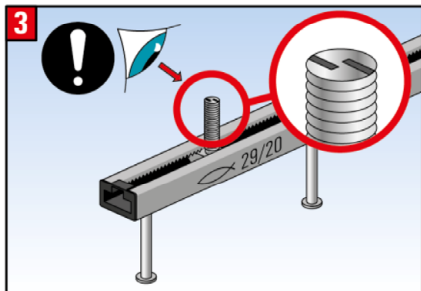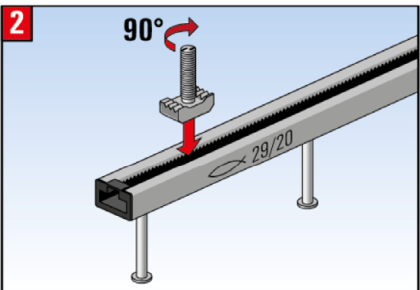

FBC-S-	FES-	T _{inst} [Nm]	M12	M16
2920	H-S-29/20	A	80	-
		B	80	-
	H-S-38/23	A	80	100
		B	80	100
3823	C-38/17	A	40	50
		B	80	100

T_{inst} must not be exceeded.


fischer Anchor Channel FES with fischer Channel Bolts FBC



Intended Use
Installation instruction for Serrated fischer Channel Bolts FBC-S










Annex B7

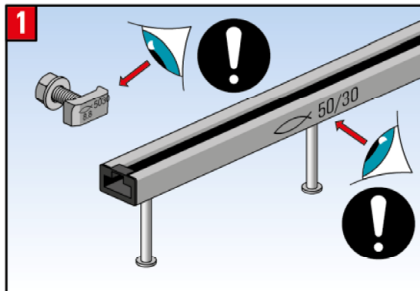

Notching Channel Bolts FBC-N



	
FBC-N-4022	40/22
FBC-N-5030	50/30 52/34

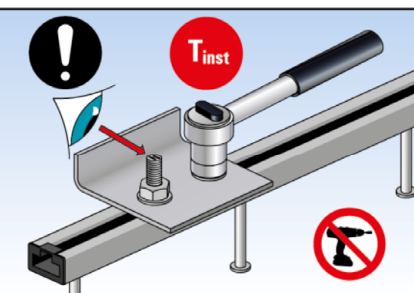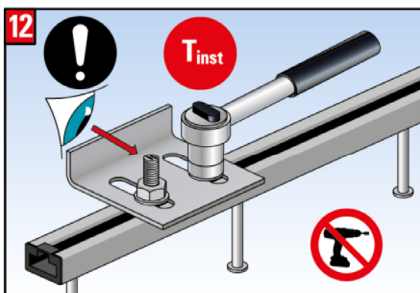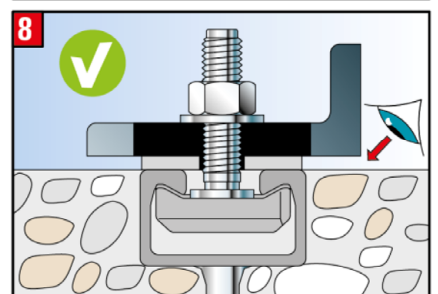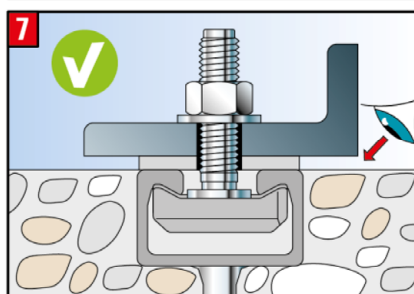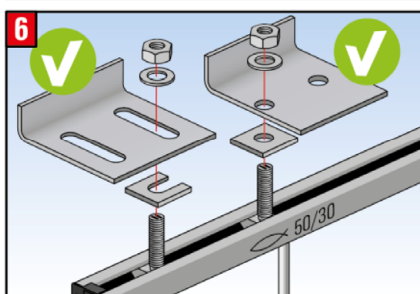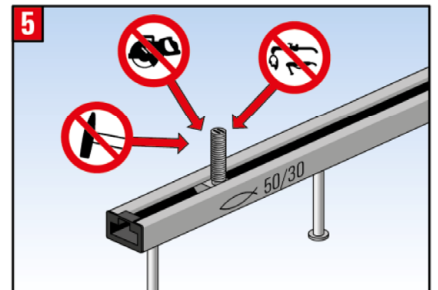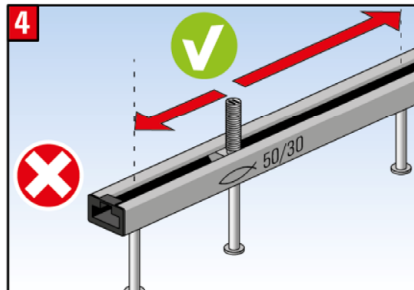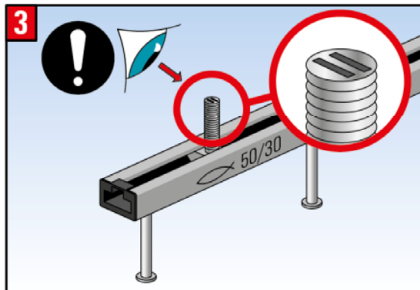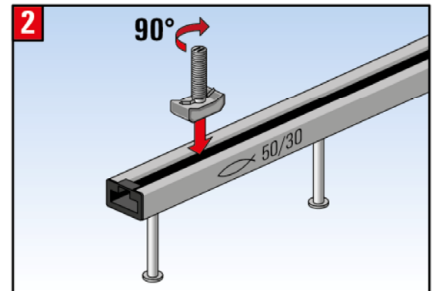

FBC-N-	FES-	T _{inst} [Nm]		
		M12	M16	M20
4022	H-(I-)40/22(-P)	-	200	-
5030	H-(I-)50/30(-P)	-	200	400
	H-(I-)52/34	-	200	400

T_{inst} must not be exceeded.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Intended Use

Installation instruction for Notching fischer Channel Bolts FBC-N

Annex B8

Table 10: Characteristic resistances under tension load – steel failure of hot-rolled anchor channels

Anchor Channel FES-H-			S-29/20	S-38/23	40/22 40/22-P I-40/22	50/30 50/30-P I-50/30	52/34 I-52/34
Steel failure: Anchor							
Characteristic resistance	N _{Rk,s,a}	[kN]	31,0	31,0	20,0 42,0 35,0	31,0 44,0 44,0	55,0 70,4
Partial factor	γ _{Ms} ¹⁾	[-]	1,8				
Steel failure: Connection between anchor and channel							
Characteristic resistance	N _{Rk,s,c}	[kN]	20,2	30,3	20,0 40,1 38,0	31,0 44,0 40,0	55,0 70,4
Partial factor	γ _{Ms} ¹⁾	[-]	1,8				
Steel failure: Local flexure of channel lips							
Characteristic spacing of channel bolts for N _{Rk,s,l}	s _{l,N}	[mm]	60	76	80 80 80	100 100 100	105 105
Characteristic resistance	N ⁰ _{Rk,s,l}	[kN]	20,2	30,3	38,0 42,0 38,0	43,0 52,0 43,0	72,0 72,0
Partial factor	γ _{Ms} ¹⁾	[-]	1,8				

¹⁾ In absence of other national regulations.

Table 11: Characteristic resistances under tension load – steel failure of cold-formed anchor channels

Anchor Channel FES-C-			28/15	38/17	40/25	49/30	54/33
Steel failure: Anchor							
Characteristic resistance	N _{Rk,s,a}	[kN]	9,0	20,0	20,0	31,0	55,0
Partial factor	γ _{Ms} ¹⁾	[-]	1,8				
Steel failure: Connection between anchor and channel							
Characteristic resistance	N _{Rk,s,c}	[kN]	9,0	18,0	20,0	31,0	55,0
Partial factor	γ _{Ms} ¹⁾	[-]	1,8				
Steel failure: Local flexure of channel lips							
Characteristic spacing of channel bolts for N _{Rk,s,l}	s _{l,N}	[mm]	56	76	80	100	108
Characteristic resistance	N ⁰ _{Rk,s,l}	[kN]	9,0	18,0	20,0	31,0	55,0
Partial factor	γ _{Ms} ¹⁾	[-]	1,8				

¹⁾ In absence of other national regulations.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Performance

Characteristic resistances under tension load – Steel failure of anchor channel

Annex C1

Table 12: Characteristic flexural resistance of hot rolled channels under tension load

Anchor Channel FES-H-			S-29/20	S-38/23	40/22 40/22-P I-40/22	50/30 50/30-P I-50/30	52/34 I-52/34
Steel failure: Flexure of channel							
Characteristic flexural resistance of channel	$M_{Rk,s,flex}$	[Nm]	745	1.241	1.118 1.118 1.118	2.185 2.185 2.185	3.163 3.670
Partial factor	$\gamma_{Ms,flex}^{1)}$	[-]	1,15				

¹⁾ In absence of other national regulations.

Table 13: Characteristic flexural resistance of cold-formed channels under tension load

Anchor Channel FES-C-			28/15	38/17	40/25	49/30	54/33
Steel failure: Flexure of channel							
Characteristic flexural resistance of channel	$M_{Rk,s,flex}$	[Nm]	310	567	915	1.554	2.350
Partial factor	$\gamma_{Ms,flex}^{1)}$	[-]	1,15				

¹⁾ In absence of other national regulations.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Performance

Characteristic resistances under tension load – Steel failure of anchor channel

Annex C2

Table 14: Characteristic resistances under tension load – concrete failure of hot rolled anchor channels

Anchor Channel FES-H-			S-29/20	S-38/23	40/22 40/22-P I-40/22	50/30 50/30-P I-50/30	52/34 I-52/34
Concrete failure: Pull-out failure							
Characteristic resistance in cracked concrete C12/15	N _{Rk,p}	[kN]	21,2	21,2	13,6 21,2 27,0	21,2 33,2 33,8	33,2 54,0
Characteristic resistance in uncracked concrete C12/15			29,7	29,7	19,0 29,7 37,8	29,7 46,5 47,3	46,5 75,6
Increasing factor of N _{Rk,p} = N _{Rk,p} (C12/15)* ψ _c	C16/20	ψ _c [-]	1,33				
	C20/25		1,67				
	C25/30		2,08				
	C30/37		2,50				
	C35/45		2,92				
	C40/50		3,33				
	C45/55		3,75				
	C50/60		4,17				
	C55/67		4,58				
≥C60/75		5,00					
Partial factor	γ _{Mp} =γ _{Mc} ¹⁾	[-]	1,5				
Concrete failure: Concrete cone failure							
Product factor k ₁	k _{cr,N}	[-]	7,8	8,1	8,0 8,0 7,9	8,1 8,2 8,1	8,7 8,7
	k _{ucr,N}	[-]	11,2	11,6	11,4 11,5 11,2	11,5 11,7 11,5	12,4 12,4
Partial factor	γ _{Mc} ¹⁾	[-]	1,5				
Concrete failure: Splitting							
Characteristic edge distance	C _{cr,sp}	[mm]	231	291	270 273 237	282 318 282	465 465
Characteristic spacing	S _{cr,sp}	[mm]	462	582	540 546 474	564 636 564	930 930
Partial factor	γ _{Msp} = γ _{Mc} ¹⁾	[-]	1,5				

¹⁾ In absence of other national regulations.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Performance

Characteristic resistances under tension load – concrete failure of hot rolled anchor channels

Annex C3

Table 15: Characteristic resistances under tension load – concrete failure of cold-formed anchor channels

Anchor Channel FES-C-			28/15	38/17	40/25	49/30	54/33
Concrete failure: Pull-out failure							
Characteristic resistance in cracked concrete C12/15	N _{Rk,p}	[kN]	7,6	13,6	13,6	21,2	33,2
Characteristic resistance in uncracked concrete C12/15			10,7	19,0	19,0	29,7	46,5
Increasing factor of N _{Rk,p} = N _{Rk,p} (C12/15)*ψ _c	C16/20	ψ _c [-]	1,33				
	C20/25		1,67				
	C25/30		2,08				
	C30/37		2,50				
	C35/45		2,92				
	C40/50		3,33				
	C45/55		3,75				
	C50/60		4,17				
	C55/67		4,58				
≥C60/75			5,00				
Partial factor	γ _{Mp} =γ _{Mc} ¹⁾	[-]	1,5				
Concrete failure: Concrete cone failure							
Product factor k ₁	k _{cr,N}	[-]	7,2	7,8	7,9	8,1	8,7
	k _{ucr,N}	[-]	10,3	11,2	11,2	11,5	12,4
Partial factor	γ _{Mc} ¹⁾	[-]	1,5				
Concrete failure: Splitting failure							
Characteristic edge distance	C _{cr,sp}	[mm]	135	228	237	282	465
Characteristic spacing	S _{cr,sp}	[mm]	270	456	474	564	930
Partial factor	γ _{Msp} = γ _{Mc} ¹⁾	[-]	1,5				

¹⁾ In absence of other national regulations.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Performance

Characteristic resistances under tension load – concrete failure of cold formed anchor channels

Annex C4

Table 16: Displacements of hot-rolled anchor channels under tension load

Anchor Channel FES-H-			S-29/20	S-38/23	40/22 40/22-P I-40/22	50/30 50/30-P I-50/30	52/34 I-52/34
Tension load	N	[kN]	8,0	12,0	15,1 16,7 15,1	17,1 20,6 17,1	28,6 28,6
Short-term displacement ¹⁾	δ_{N0}	[mm]	1,4	2,0	2,2 2,5 2,2	1,5 1,8 1,5	1,9 1,9
Long-term displacement ¹⁾	$\delta_{N\infty}$	[mm]	2,8	4,0	4,5 5,0 4,5	2,9 3,5 2,9	3,7 3,7

¹⁾ Displacements in midspan of the anchor channel, including slip of channel bolt, deformation of channel lips, bending of the channel and slip of the anchor channel in concrete.

Table 17: Displacements of cold-formed anchor channels under tension load

Anchor Channel FES-C-			28/15	38/17	40/25	49/30	54/33
Zuglast	N	[kN]	3,6	7,1	7,9	12,3	21,8
Kurzzeitverschiebung ¹⁾	δ_{N0}	[mm]	0,7	1,3	1,5	1,4	1,2
Langzeitverschiebung ¹⁾	$\delta_{N\infty}$	[mm]	1,4	2,6	3,0	2,8	2,4

¹⁾ Displacements in midspan of the anchor channel, including slip of channel bolt, deformation of channel lips, bending of the channel and slip of the anchor channel in concrete.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Performance

Characteristic resistance under tension load - displacements

Annex C5

Table 18: Characteristic resistances under shear load – steel failure of hot-rolled anchor channels

Anchor Channel FES-H-				S-29/20	S-38/23	40/22 40/22-P I-40/22	50/30 50/30-P I-50/30	52/34 I-52/34
Steel failure: Anchor								
Characteristic resistance	$V_{Rk,s,a,y}$	[kN]	20,2	30,3	40,0 50,8 40,0	60,0 87,9 60,0	100 100	
	$V_{Rk,s,a,x}$	[kN]	18,8	18,8	12,0 25,4 22,8	18,6 26,8 24,0	33,0 42,2	
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,8					
Steel failure: Connection between anchor and channel								
Characteristic resistance	$V_{Rk,s,c,y}$	[kN]	20,2	30,3	40,0 50,8 40,0	60,0 87,9 60,0	100 100	
	$V_{Rk,s,c,x}$	[kN]	12,1	18,2	12,0 25,2 22,8	18,6 26,4 24,0	33,0 42,2	
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,8					
Steel failure: Local flexure of channel lips								
Characteristic spacing of channel bolts for $V_{Rk,s,l}$	$s_{l,v}$	[mm]	60	76	80 80 80	100 100 100	108 108	
Characteristic resistance	$V_{Rk,s,l,y}^0$	[kN]	20,2	30,3	40,0 50,8 40,0	60,0 87,9 60,0	100 100	
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,8					

¹⁾ In absence of other national regulations.

²⁾ No performance assessed.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Performance

Characteristic resistance under shear load - Steel failure of hot-rolled anchor channels

Annex C6

Table 19: Characteristic resistances under shear load – steel failure of cold-formed anchor channels

Anchor Channel FES-C-			28/15	38/17	40/25	49/30	54/33
Steel failure: Anchor							
Characteristic resistance	$V_{Rk,s,a,y}$	[kN]	9	18	20	31	55
	$V_{Rk,s,a,x}$	[kN]	-2)	-2)	-2)	-2)	-2)
Partial factor	γ_{Ms} 1)	[-]	1,8				
Steel failure: Connection between anchor and channel							
Characteristic resistance	$V_{Rk,s,c,y}$	[kN]	9	18	20	31	55
	$V_{Rk,s,c,x}$	[kN]	-2)	-2)	-2)	-2)	-2)
Partial factor	γ_{Ms} 1)	[-]	1,8				
Steel failure: Local flexure of channel lips							
Characteristic spacing of channel bolts for $V_{Rk,s,l}$	$s_{l,v}$	[mm]	56	76	80	100	108
Characteristic resistance	$V^0_{Rk,s,l,y}$	[kN]	9	18	20	31	55
Partial factor	γ_{Ms} 1)	[-]	1,8				

¹⁾ In absence of other national regulations.

²⁾ No performance assessed.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Performance

Characteristic resistance under shear load - Steel failure of cold-formed anchor channels

Annex C7

Table 20: Characteristic resistance for shear load in direction of the longitudinal axis of the channel – steel failure

Anchor Channel FES-H-				S-29/20	S-38/23	40/22 40/22-P I-40/22	50/30 50/30-P I-50/30	52/34 I-52/34
Steel failure: Connection between channel lips and channel bolt								
Characteristic resistance	$V_{Rk,s,l,x}$	[kN]	FBC-S-29/20-M12-8.8	22,5	..2)	..2)	..2)	..2)
			FBC-S-38/23-M12-8.8	..2)	23,2	..2)	..2)	..2)
			FBC-S-38/23-M16-8.8	..2)	30,3	..2)	..2)	..2)
			FBC-N-40/22-M16-8.8	..2)	..2)	14,0	..2)	..2)
			FBC-N-50/30-M16-8.8	..2)	..2)	..2)	10,7	10,7
			FBC-N-50/30-M20-8.8	..2)	..2)	..2)	21,0	21,0
Installation factor	$\gamma_{inst}^{1)}$	[-]		1,2	1,0	1,2	M16: 1,2 M20: 1,4	M16: 1,2 M20: 1,4

¹⁾ In absence of other national regulations.

²⁾ No performance assessed.

Table 21: Characteristic resistances of the hot-rolled anchor channel under shear load – concrete failure

Anchor Channel FES-H-			S-29/20	S-38/23	40/22 40/22-P I-40/22	50/30 50/30-P I-50/30	52/34 I-52/34
Concrete failure: Pry-out failure							
Product factor	k ₈	[-]	2,0	2,0	2,0	2,0	2,0
Partial factor	γ _{Mc} ¹⁾	[-]	1,5				
Concrete failure: Concrete edge failure							
Product factor k ₁₂	k _{cr,V}	[-]	5,6	5,6	7,5	7,5	7,5
	k _{ucr,V}	[-]	7,8	7,8	10,5	10,5	10,5
Partial facto	γ _{Mc} ¹⁾	[-]	1,5				

¹⁾ In absence of other national regulations.

Table 22: Characteristic resistances of the cold-formed anchor channel under shear load – concrete failure

Anchor Channel FES-C			28/15	38/17	40/25	49/30	54/33
Concrete failure: Pry-out failure							
Product factor	k ₈	[-]	1	2	2	2	2
Partial factor	γ _{Mc} ¹⁾	[-]	1,5				
Concrete failure: Concrete edge failure							
Product factor k ₁₂	k _{cr,V}	[-]	5,8	6,9	7,5	7,5	7,5
	k _{ucr,V}	[-]	8,1	9,7	10,5	10,5	10,5
Partial factor	γ _{Mc} ¹⁾	[-]	1,5				

¹⁾ In absence of other national regulations.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Performance
Characteristic resistance under shear load

Annex C8

Table 23: Displacements under shear load

Anchor Channel FES-			C-28/15	C-38/17	H-S-29/20	H-S-38/23	C-40/25 H-40/22 H-40/22-P H-I-40/22	C-49/30 H-50/30 H-50/30-P H-I-50/30	C-54/33 H-52/34 H-I-52/34
Shear load perpendicular to the longitudinal axis of the channel	V_y	[kN]	3,6	7,1	8,0	12,0	7,9 15,9 20,2 15,9	12,3 23,8 34,9 23,8	21,8 39,7 39,7
Short-term displacement ¹⁾	$\delta_{V,y,0}$	[mm]	0,7	1,3	1,4	2,0	1,5 2,1 2,2 2,1	1,4 3,7 2,1 3,7	1,2 4,0 4,0
Long-term displacement ¹⁾	$\delta_{V,y,\infty}$	[mm]	1,1	2,0	2,1	3,0	2,3 3,2 3,3 3,2	2,1 5,5 3,2 5,5	1,8 5,9 5,9
Shear load in direction of the longitudinal axis of the channel	V_x	[kN]	- ³⁾	- ³⁾	6,6	12,0	- ³⁾ 4,6 4,6 4,6	- ³⁾ 4) 4) 4)	- ³⁾ 4) 4)
Short-term displacement ²⁾	$\delta_{V,x,0}$	[mm]	- ³⁾	- ³⁾	0,6	0,8	- ³⁾ 0,9 0,9 0,9	- ³⁾ 5) 5) 5)	- ³⁾ 5) 5)
Long-term displacement ²⁾	$\delta_{V,x,\infty}$	[mm]	- ³⁾	- ³⁾	0,9	1,3	- ³⁾ 1,4 1,4 1,4	- ³⁾ 6) 6) 6)	- ³⁾ 6) 6)

¹⁾ Displacements in midspan of the anchor channel, including slip of channel bolt, deformation of channel lips and slip of the anchor channel in concrete.

²⁾ Displacements of the anchor channel, including slip of channel bolt, deformation of channel lips and slip of the anchor channel in concrete.

³⁾ No performance assessed.

⁴⁾ For FBC-N-5030-M16 $V_x = 3,5$ kN, for FBC-N-5030-M20 $V_x = 6,7$ kN.

⁵⁾ For FBC-N-5030-M16 $\delta_{V,x,0} = 0,4$ mm, for FBC-N-5030-M20 $\delta_{V,x,0} = 0,1$ mm.

⁶⁾ For FBC-N-5030-M16 $\delta_{V,x,\infty} = 0,6$ mm, for FBC-N-5030-M20 $\delta_{V,x,\infty} = 0,2$ mm.

Table 24: Characteristic resistances under combined tension and shear load

Anchor Channel FES-	C-28/15	C-38/17	H-S-29/20	H-S-38/23	C-40/25	C-49/30	C-54/33
					H-40/22	H-50/30	H-52/34
					H-40/22-P <td>H-50/30-P<td>H-I-52/34</td></td>	H-50/30-P <td>H-I-52/34</td>	H-I-52/34
					H-I-40/22 <td>H-I-50/30<td></td></td>	H-I-50/30 <td></td>	
Steel failure: Local flexure of channel lips and flexure of channel							
Product factor	k ₁₃	[-]	according to EN 1992-4:2018, 7.4.3.1				
Steel failure: Anchor and connection between anchor and channel							
Product factor	k ₁₄	[-]	according to EN 1992-4:2018, 7.4.3.1				

fischer Anchor Channel FES with fischer Channel Bolts FBC

Performance

Displacement under shear load, characteristic resistance under combined tension and shear load

Annex C9

Table 25: Characteristic resistances under tension and shear load – steel failure of channel bolts

Channel bolt thread diameter				M8	M10	M12	M16	M20	
Steel failure: Channel bolt									
Characteristic resistance	FBC-28/15	N _{Rk,s}	[kN]	29,2	33,0	45,1	–2)	–2)	
	FBC-38/17			–2)	46,4	67,4	–2)	–2)	
	FBC-S-29/20			–2)	–2)	48,5	–2)	–2)	
	FBC-S-38/23			–2)	–2)	67,4	71,5	–2)	
	FBC-40/22			–2)	46,4	55,1	82,2	–2)	
	FBC-N-40/22			–2)	–2)	–2)	100,9	–2)	
	FBC-50/30			–2)	46,4	67,4	96,5	127,2	
	FBC-N-50/30			–2)	–2)	–2)	113,5	134,0	
Partial factor		γ _{Ms} ¹⁾	[-]	1,5					
Steel failure: Channel bolt				A4-70					
Characteristic resistance	FBC-40/22-A4-70	N _{Rk,s}	[kN]	–2)	–2)	54,9	102,8	–2)	
	FBC-50/30-A4-70			–2)	–2)	59,0	82,8	163,1	
Partial factor		γ _{Ms} ¹⁾	[-]	1,87					
Characteristic shear resistance 8.8			V _{Rk,s}	[kN]	14,6	23,2	33,7	62,8	98,0
Characteristic shear resistance A4-70					–2)	–2)	35,4	65,9	102,9
Partial factor (shear loads 8.8)			γ _{Ms} ¹⁾	[-]	1,25				
Partial factor (shear loads A4-70)			γ _{Ms} ¹⁾	[-]	1,56				

¹⁾ In absence of other national regulations.

²⁾ No performance assessed.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Performance

Characteristic resistances under tension and shear load of channel bolts

Annex C10

Table 26: Characteristic resistances under shear load with lever arm – steel failure of channel bolts

Channel bolt ²⁾ thread diameter					M8	M10	M12	M16	M20
Steel failure									
Characteristic flexural resistance	M ⁰ _{Rk,s}	[Nm]	FBC-(S-) (N-)	8.8	30,0	59,8	104,8	266,4	519,3
				A4-70	- ₂₎	- ₂₎	91,7	233,1	454,4
Partial factor	γ _{Ms} ¹⁾	[-]	FBC-(S-) (N-)	8.8	1,25				
				A4-70	1,56				
Internal lever arm	a	[mm]	FBC-28/15	8.8	16,7	18,1	19,4	- ₃₎	- ₃₎
			FBC-38/17	8.8	- ₃₎	22,7	24,0	- ₃₎	- ₃₎
			FBC-S-29/20	8.8	- ₃₎	- ₃₎	20,0	- ₃₎	- ₃₎
			FBC-S-38/23	8.8	- ₃₎	- ₃₎	23,7	25,7	- ₃₎
			FBC-40/22	8.8	- ₃₎	23,5	24,8	26,8	- ₃₎
			FBC-N-40/22	8.8	- ₃₎	- ₃₎	- ₃₎	26,9	- ₃₎
			FBC-50/30	8.8	- ₃₎	27,7	29,0	31,0	33,3
			FBC-N-50/30	8.8	- ₃₎	- ₃₎	- ₃₎	31,5	33,9
			FBC-40/22	A4-70	- ₃₎	- ₃₎	24,7	26,7	- ₃₎
			FBC-50/30	A4-70	- ₃₎	- ₃₎	28,8	30,9	33,1

¹⁾ In absence of other national regulations.

²⁾ Materials according to Annex A7, Table 6.

³⁾ No performance assessed.

The characteristic flexure resistance according to Table 26 is limited as follows:


$$M_{Rk,s}^0 \leq 0,5 \cdot N_{Rk,s,l}^0 \cdot a \quad (N_{Rk,s,l}^0 \text{ according to Annex C1, Table 10})$$

$$M_{Rk,s}^0 \leq 0,5 \cdot N_{Rk,s} \cdot a \quad (N_{Rk,s} \text{ according to Annex C5, Table 18})$$

a = Internal lever arm according to Table 26

T_s = Tension force acting on the channel lips

C_s = Compression force acting on the channel lips

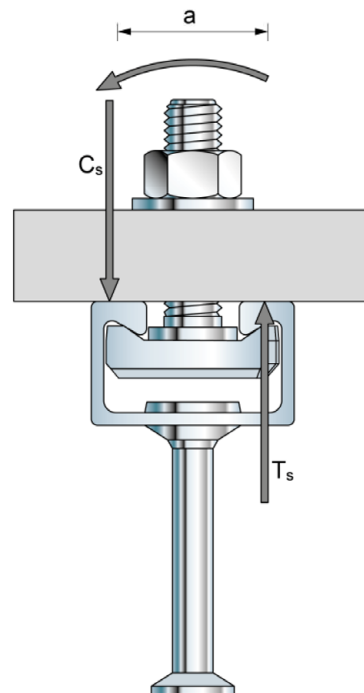

fischer Anchor Channel FES with fischer Channel Bolts FBC

Performance

Characteristic resistances under shear load of channel bolts

Annex C11

Table 27: Characteristic resistance under fire exposure – steel failure

Channel bolt thread diameter						M8	M10	M12	M16	M20
Steel failure:		Anchor, connection between anchor and channel, local flexure of channel lips, channel bolts								
Characteristic resistance under fire exposure	FES-H-S-29/2	FBC-S-29/20	R30 R60 R90 R120	$N_{Rk,s,fi}$ = $V_{Rk,s,fi}$	[kN]	- 2)	- 2)	2,5 2,4 1,7 1,4	- 2)	- 2)
	FES-H-S-38/23	FBC-S-38/23	R30 R60 R90 R120			- 2)	- 2)	- 2)	4,5 3,4 2,3 1,7	- 2)
	FES-H(-I)-40/22	FBC-40/22	R30 R60 R90 R120			- 2)	1,3 1,0 0,7 0,6	2,0 1,7 1,4 1,3	4,5 3,4 2,3 1,7	- 2)
	FES-H(-I)-50/30	FBC(-N)-50/30	R30 R60 R90 R120			- 2)	1,3 1,0 0,7 0,6	2,0 1,7 1,4 1,3	5,2 4,2 3,2 2,7	5,2 4,2 3,2 2,7
	FES-H(-I)-52/34	FBC(-N)-50/30	R30 R60 R90 R120			- 2)	1,3 1,0 0,7 0,6	2,0 1,7 1,4 1,3	5,2 4,2 3,2 2,7	8,0 6,5 5,0 4,2
	FES-C-28/15	FBC-28/15	R30 R60 R90 R120			0,6 0,6 0,5 0,4	1,3 1,0 0,7 0,6	1,3 1,0 0,7 0,6	- 2)	- 2)
	FES-C-38/17	FBC-38/17 FBC-S-38/23-M16	R30 R60 R90 R120			- 2)	1,3 1,0 0,7 0,6	1,3 1,0 0,7 0,6	3,5 2,8 1,8 1,3	- 2)
	FES-C-40/25	FBC-40/22	R30 R60 R90 R120			- 2)	1,8 1,5 1,1 0,8	3,0 2,4 1,7 1,4	3,5 2,8 1,8 1,3	- 2)
	FES-C-49/30	FBC-50/30	R30 R60 R90 R120			- 2)	1,3 1,0 0,7 0,6	2,9 2,4 1,8 1,6	3,1 2,5 1,9 1,6	3,1 2,5 1,9 1,6
	FES-C-54/33	FBC-50/30	R30 R60 R90 R120			- 2)	1,3 1,0 0,7 0,6	2,9 2,4 1,8 1,6	3,1 2,5 1,9 1,6	3,1 2,5 1,9 1,6
Partial factor				$\gamma_{Ms,fi}^{1)}$	[-]	1,0				

¹⁾ In absence of other national regulations.

²⁾ No performance assessed.

fischer Anchor Channel FES with fischer Channel Bolts FBC


Performance

Characteristic resistance under fire exposure


Annex C12

Table 28: Minimum axis distance under fire exposure

Anchor Channel FES-			C-28/15	C-38/17	H-S-29/20	H-S-38/23	C-40/25 H-40/22 H-40/22-P H-I-40/22	C-49/30 H50/30 H-50/30-P H-I-50/30	C-54/33 H-52/34 H-I-52/34
Minimum axis distance	R30	a [mm]	35	35	35	35	35	35	50
	R60		35	35	35	35	35	35	50
	R90		45	45	45	45	45	45	50
	R120		60	60	60	60	60	60	65

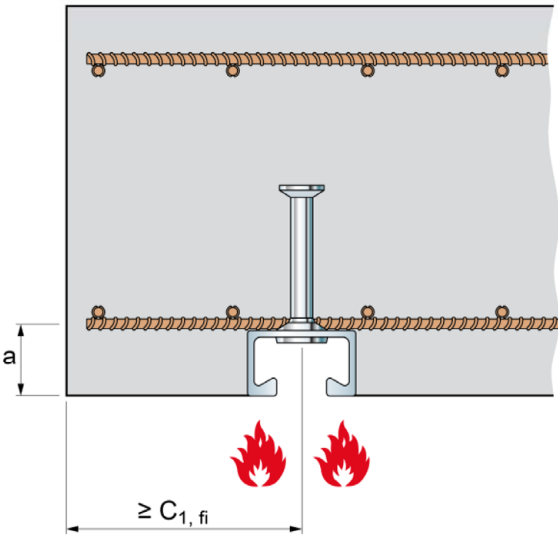

Fire exposure from one side only.

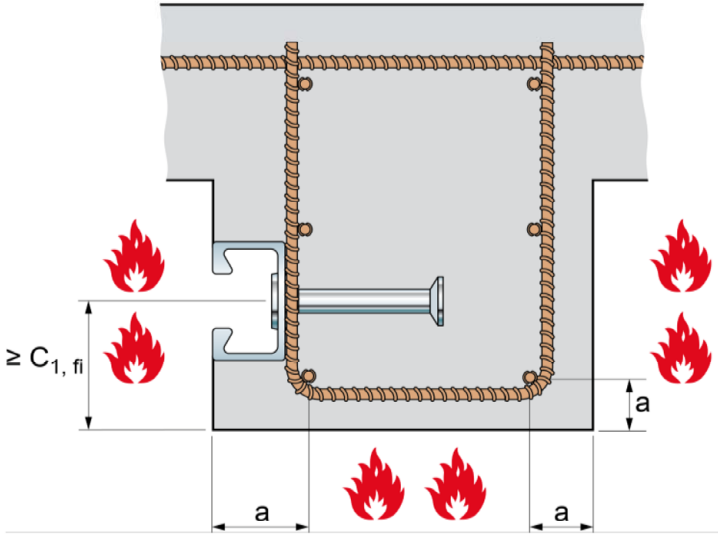

Fire exposure from more than one side.

fischer Anchor Channel FES with fischer Channel Bolts FBC

Performance
 Characteristic resistance under fire exposure

Annex C13