

YDEEVNEDEKLARATION**DoP 0206**

til Upat UKA3 Plus (Flydende fastgørelse til brug i beton)

DA

1. Varetypens unikke identifikationskode: **DoP 0206**
2. Anvendelsesformål: **Eftermonteret befæstelse i revnet eller ikke-revnet beton, se appendiks, specifikt Bilage B1 - B7.**
3. Fabrikant: **Upat Vertriebs GmbH, Bebelstraße 11, 79108 Freiburg im Breisgau, Tyskland**
4. Bemyndiget repræsentant: **-**
5. System(er) til vurdering og kontrol af konstansen af ydeevnen: **1**
6. Europæisk vurderingsdokument: **ETAG 001, Part 5, April 2013, anvendt som EAD**
Europæisk Teknisk Vurdering **ETA-17/0197; 2017-04-03**
Teknisk vurderingsorgan: **DIBt- Deutsches Institut für Bautechnik**
Notificeret organ(er) **2873 TU Darmstadt**
7. Deklareret ydeevne(r):
Mekanisk modstand og stabilitet (BWR 1)
Karakteristisk modstand for træklast (statisk og quasi-statisk belastning):
Modstand overfor stålsvig: Bilag C1, C2
Modstand overfor kombineret udtæk og beton-kegle brud: Bilag C4, C5
Modstand overfor svigt af beton-kegle: Bilag C3
Kantafstand til forhindring af flækning under belastning: Bilag C3
Robusthed: Bilag C3, C4, C5
Maksimal kærø ved montering: Bilag B3, B4
Min. kant og indbyrdes afstand: Bilag B3, B4
 $\psi_{\text{sus}}^0 = \text{NPD}$
Karakteristisk modstand for tværlast (statisk og quasi-statisk belastning):
Modstand overfor stålsvig: Bilag C1, C2
Modstand overfor svigt ved udtrækning: Bilag C3
Modstand overfor svigt af betonkant: Bilag C3
Karakteristisk modstand og Forskydninger for seismiske ydelseskategorier C1 og C2:
Modstand overfor spændingslast, forskydninger, kategori C1: NPD
Modstand overfor spændingslast, forskydninger, kategori C2: NPD
Modstand overfor tværlast, forskydninger, kategori C1: NPD
Modstand overfor tværlast, forskydninger, kategori C2: NPD
Faktor ringhul: NPD
Forskydninger under kortvarig og langvarig belastning:
Forskydninger under kortvarig og langvarig belastning: Bilag C6
Hygiene, sundhed og miljø (BWR 3)
Indhold, emission og / eller udledning af farlige stoffer: NPD
8. Relevant teknisk dokumentation og/eller specifik teknisk dokumentation: **-**

Ydeevnen for den vare, der er anført ovenfor, er i overensstemmelse med den deklarerede ydeevne. Denne ydeevnedeklaration er udarbejdet i overensstemmelse med forordning (EU) nr. 305/2011 på eneansvar af den fabrikant, der er anført ovenfor.

Underskrevet for fabrikanten og på dennes vegne af:



Dr.-Ing. Oliver Geibig, Administrerende direktør Forretningsenheder og ingeniørarbejde
Tumlingen, 2021-03-01

Jürgen Grün, Administrerende direktør Kemi & Kvalitet

Denne DoP er tilgængelig i forskellige sprogversioner. I tilfælde af fortolkningsmæssig uoverensstemmelse, henvises der til den engelske version, som altid er gældende.

Appendikset indeholder frivillige og udvidede informationer på engelsk. Disse overgår de lokale (sprogneutrale) retslige krav.

Specific Part

1 Technical description of the product

The Upat UKA3 Plus is a bonded anchor for use in concrete consisting of a capsule UKA3 Plus and a steel element according to Annex A1.

The capsule UKA3 Plus is placed in the hole and the steel element is driven by machine with simultaneous hammering and turning.

The anchor rod is anchored via the bond between steel element, chemical mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic values under static and quasi-static action, Displacements	See Annex C 1 to C 6

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

3.4 Safety in use (BWR 4)

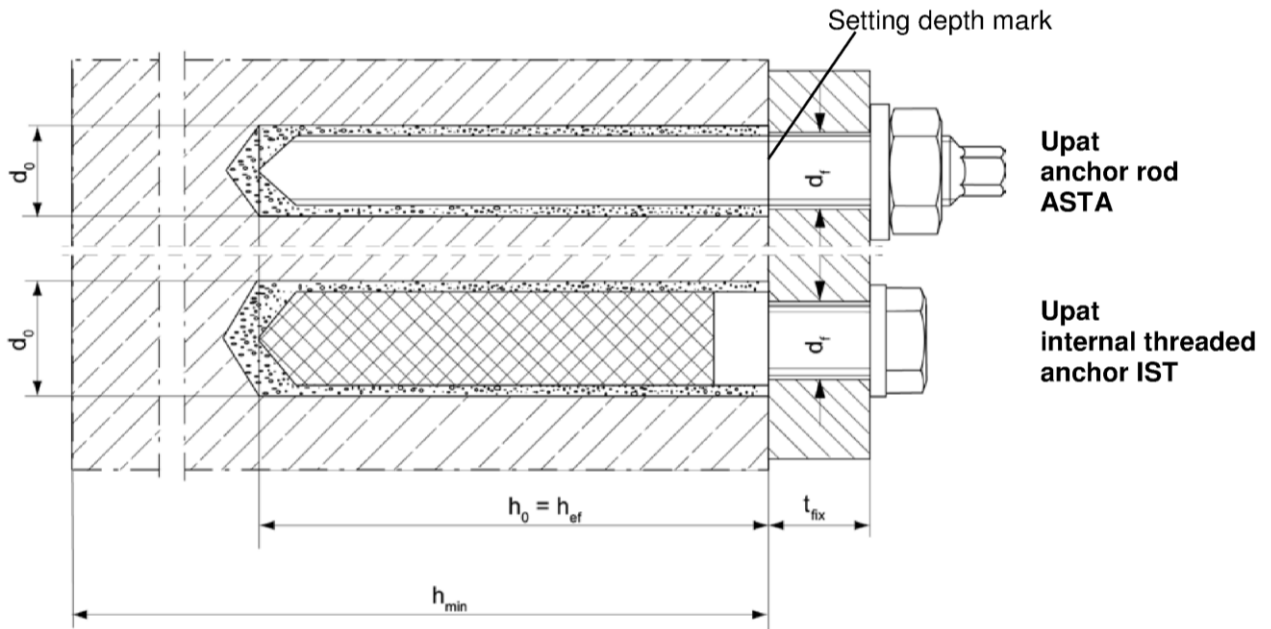
The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with guideline for European technical approval ETAG 001, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [96/582/EC].


The system to be applied is: 1

Installation conditions



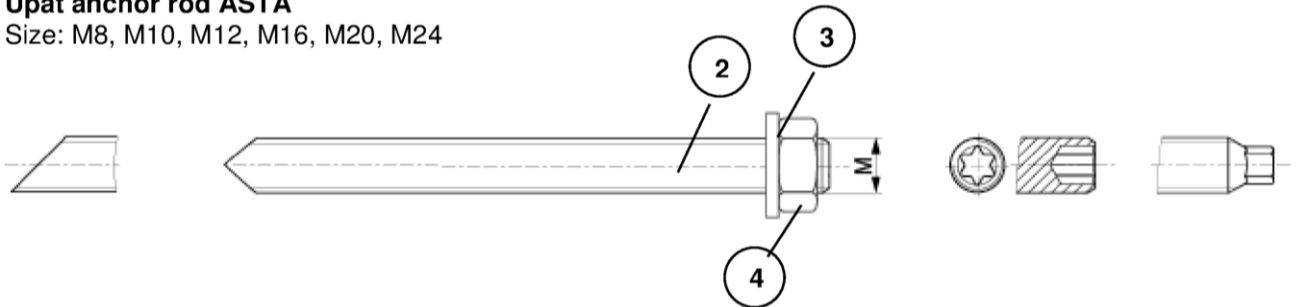
Capsule UKA3 Plus

Size: 8, 10, 12, 16, 16E, 20 / 22, 24



Upat anchor rod ASTA

Size: M8, M10, M12, M16, M20, M24



Upat internal threaded anchor IST

Größe: M8, M10, M12, M16, M20



Descriptions of parts see Annex A 2

Upat UKA3 Plus

Product description

Installation conditions

Capsule / anchor rod / internal threaded anchor

Annex A 1

Appendix 3 / 17

Table A1: Materials

Part	Designation	Material		
1	Capsule UKA3 Plus	Mortar, hardener, filler		
	Steel grade	Steel, zinc plated	Stainless steel A4	High corrosion resistant steel C
2	Anchor rod	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanized $\geq 40 \mu\text{m}$ EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662, 1.4462 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$	Property class 50 or 80 EN ISO 3506-1:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$
		fracture elongation $A_5 > 8 \%$		
3	Washer ISO 7089:2000	zinc plated $\geq 5 \mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanized $\geq 40 \mu\text{m}$ EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	1.4565; 1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2012 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:1999 A2K or hot-dip galvanized $\geq 40 \mu\text{m}$ EN ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
5	Upat internal threaded anchor IST	Property class 5.8 ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:1999 A2K	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
6	Commercial standard screw or anchor / threaded rod for Upat internal threaded anchor IST	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:1999 A2K fracture elongation $A_5 > 8 \%$	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014 fracture elongation $A_5 > 8 \%$	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014 fracture elongation $A_5 > 8 \%$

Upat UKA3 Plus


Product description
Materials

Annex A 2

Appendix 4 / 17

Specifications of intended use (part 1)

Table B1: Overview use and performance categories

Anchorages subject to		UKA3 Plus with ...			
		Upat anchor rod ASTA 	Upat internal threaded anchor IST 		
Hammer drilling with standard drill bit		all sizes		all sizes	
Hammer drilling with hollow drill bit (Heller "Duster Expert" or Hilti "TE-CD, TE-YD")		Nominal drill bit diameter (d ₀) 12 mm to 28 mm		all sizes	
Static and quasi static load, in	uncracked concrete	all sizes	Tables: C1, C3, C4, C6	all sizes	Tables: C2, C3, C5, C7
	cracked concrete	M10, M12, M16, M20, M24		all sizes	
	dry or wet concrete	all sizes		all sizes	
Use category	flooded hole	M12, M16, M20, M24		M8, M10, M16	
Installation temperature		-15 °C to +40 °C			
In-service temperature	Temperature range I	-40 °C bis +40 °C (max. long term temperature +24 °C and max. short term temperature +40 °C)			
	Temperature range II	-40 °C bis +120 °C (max. long term temperature +72 °C and max. short term temperature +120 °C)			

Upat UKA3 Plus

Intended Use
Specifications (part 1)

Annex B 1

Appendix 5 / 17

Specifications of intended use (part 2)

Base materials:

- Reinforced or unreinforced normal weight concrete Strength classes C20/25 to C50/60 according to EN 206-1:2000

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions
(zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist
(stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure, to permanently damp internal conditions or in other particular aggressive conditions (high corrosion resistant steel)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

Design:

- Anchorages have to be designed by a responsible engineer with experience of concrete anchor design
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages under static or quasi-static actions are designed in accordance with EOTA Technical Report TR 029 "Design of bonded anchors" Edition September 2010 or CEN/TS 1992-4:2009

Installation:

- Anchor installation has to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- In case of aborted hole: The hole shall be filled with mortar
- Anchorage depth should be marked and adhered to on installation
- Overhead installation is allowed

Upat UKA3 Plus

Intended Use
Specifications (part 2)

Annex B 2

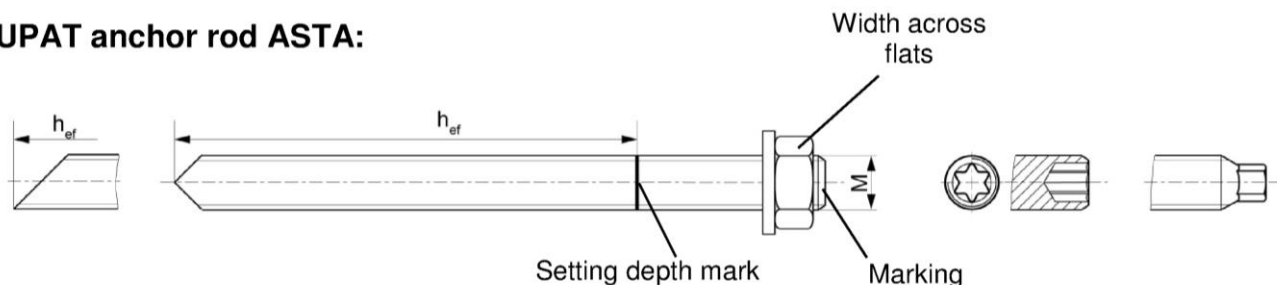
Appendix 6 / 17

Table B2: Installation parameters for Upat anchor rods ASTA

Size			M8	M10	M12	M16	M20	M24
Width across flats	SW	[mm]	13	17	19	24	30	36
Nominal drill bit diameter	d_0		10	12	14	18	25	28
Drill hole depth	h_0		$h_0 = h_{ef}$					
Effective anchorage depth	h_{ef}		80	90	110	125	170	210
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$		40	45	55	65	85	105
Diameter of pre-positioned clearance hole in the fixture anchorage ¹⁾	d_i		9	12	14	18	22	26
Minimum thickness of concrete member	h_{min}		$h_{ef} + 30$ (≥ 100)			$h_{ef} + 2d_0$		
Maximum installation torque	$T_{inst,max}$	[Nm]	10	20	40	60	120	150

¹⁾ For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

UPAT anchor rod ASTA:



Marking (on random place) UPAT anchor rod ASTA:

Property class 8.8, stainless steel, property class 80 or high corrosion resistant steel, property class 80: •
 Stainless steel A4, property class 50 and high corrosion resistant steel, property class 50: ••
 Or colour coding according to DIN 976-1

Upat UKA3 Plus

Intended Use

Installation parameters UPAT anchor rods ASTA

Annex B 3

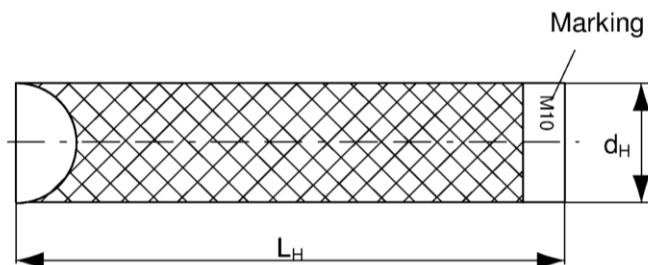
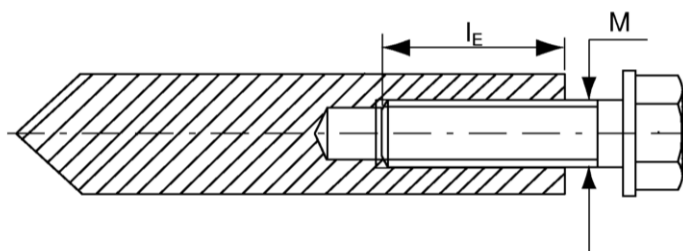
Appendix 7 / 17

Table B3: Installation parameters for Upat internal threaded anchors IST

Size		M8	M10	M12	M16	M20
Diameter of anchor	d_H	12	16	18	22	28
Nominal drill bit diameter	d_0	14	18	20	24	32
Drill hole depth	h_0	$h_0 = h_{ef}$				
Effective anchorage depth ($h_{ef} = L_H$)	h_{ef}	90	90	125	160	200
Minimum spacing and minimum edge distance	s_{min} = c_{min}	55	65	75	95	125
Diameter of clearance hole in the fixture ¹⁾	d_f	9	12	14	18	22
Minimum thickness of concrete member	h_{min}	120	125	165	205	260
Maximum screw-in depth	$l_{E,max}$	18	23	26	35	45
Minimum screw-in depth	$l_{E,min}$	8	10	12	16	20
Maximum installation torque	$T_{inst,max}$ [Nm]	10	20	40	80	120

¹⁾ For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

Upat internal threaded anchor IST



Marking: Anchor size
e.g.: **M10**

Stainless steel additional **A4**
e.g.: **M10 A4**

High corrosion resistant steel
additional **C**
e.g.: **M10 C**

Retaining bolt or threaded rods (including nut and washer) must comply with the appropriate material and strength class of Annex A 2, Table A1

Upat UKA3 Plus

Intended Use

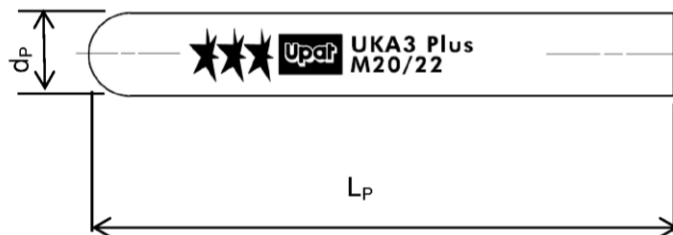
Installation parameters Upat internal threaded anchors IST

Annex B 4

Appendix 8 / 17

Table B4: Dimensions of capsules UKA3 Plus

Capsule UKA3 Plus		8	10	12	16	16 E	20 / 22	24	
Capsule diameter	d _p	[mm]	9,0	10,5	12,5	16,5		23,0	
Capsule length	L _p		85	90	97	95	123	160	190

**Table B5:** Assignment of the capsule UKA3 Plus to the Upat anchor rod ASTA

Size ASTA		M8	M10	M12	M16	M20	M24
Effective anchorage depth	h_{ef} [mm]	80	90	110	125	170	210
Related capsule UKA3 Plus	[-]	8	10	12	16	20 / 22	24

Table B6: Assignment of the capsule UKA3 Plus to the Upat internal threaded anchor IST

Size IST		M8	M10	M12	M16	M20
Effective anchorage depth	h_{ef} [mm]	90	90	125	160	200
Related capsule UKA3 Plus	[-]	10	12	16	16E	24

Table B1: Minimum curing time


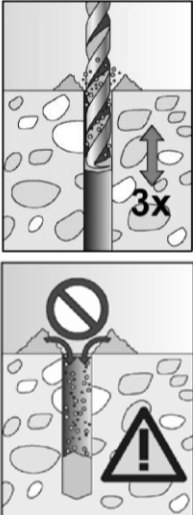
(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature; minimal capsule temperature -15 °C)

Concrete temperature [°C]	Minimum curing time t_{cure} [minutes]
-15 to -10	30 hours
-9 to -5	16 hours
-4 to ± 0	10 hours
+1 to +5	45
+6 to +10	30
+11 to +20	20
+21 to +30	5
+31 to +40	3

Upat UKA3 Plus		Annex B 5 Appendix 9 / 17
Intended Use Dimensions of the capsules, Assignment of the capsule to the anchor rod and internal threaded anchor, Minimum curing time		


Installation instructions part 1

Drilling and cleaning the hole (hammer drilling with standard drill bit)

1		Specified drill hole depth h_0 should be adhered to (e.g. mark on the drill bit). Drill the hole. Drill hole diameter d_0 and drill hole depth h_0 see Tables B2, B3
2		When reaching the drill hole depth h_0 pull out the drill bit whilst power drill is switched on. To reduce the drill dust in the drill hole repeat this step minimum three times , beginning from the drill hole bottom (discharging the bore hole) Trickling of the bore dust into the drill hole has to be avoided. (e.g. with exhausting the drill dust) Blowing out or brushing the drill hole is not necessary

Go to step 3

Drilling and cleaning the hole (hammer drilling with hollow drill bit)

1		Check a suitable hollow drill (see Table B1) for correct operation of the dust extraction
2		Use a suitable dust extraction system, e.g. Bosch GAS 35 M AFC or a comparable dust extraction system with equivalent performance data Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Diameter of drill hole d_0 and drill hole depth h_0 see Tables B2, B3

Go to step 3

Upat UKA3 Plus







Intended use
Installation instructions part 1

Annex B 6

Appendix 10 / 17

Installation instructions part 2

Installation of capsule UKA3 Plus with Upat anchor rods ASTA or
Upat internal threaded anchors IST

3		Push the capsule UKA3 Plus into the drill hole		Depending on the anchor being installed, use a suitable setting tool (e.g. MW-SDS)
4			Only use clean and oil-free anchors. Using a suitable adapter, drive the ASTA or Upat internal threaded anchor IST into the capsule using a hammer drill set on rotary hammer action. Stop when the anchor reaches the bottom of the hole and is set to the correct embedment depth	
5			When reaching the correct embedment depth, excess mortar must be emerged from the mouth of the drill hole	
6			Wait for the specified curing time t_{cure} see Table B7 Mounting the fixture $T_{inst,max}$ see Table B2, B3	

Upat UKA3 Plus

Intended use
Installation instructions part 2

Table C1: Characteristic values for the steel bearing capacity of Upat anchor rods ASTA under tensile / shear load

Size				M8	M10	M12	M16	M20	M24
Bearing capacity under tensile load, steel failure									
Charact.bearing capacity $N_{Rk,s}$	Steel zinc plated	5.8	[kN]	19	29	43	79	123	177
		8.8		29	47	68	126	196	282
	Stainless steel A4 and High corrosion resistant steel C	50		19	29	43	79	123	177
		70		26	41	59	110	172	247
		80		30	47	68	126	196	282
Partial safety factors ¹⁾									
Partial safety factor $\gamma_{Ms,N}$	Steel zinc plated	5.8	[-]	1,50					
		8.8		1,50					
	Stainless steel A4 and High corrosion resistant steel C	50		2,86					
		70		1,50 ²⁾ /1,87					
		80		1,60					
Bearing capacity under shear load, steel failure									
without lever arm									
Charact.bearing capacity $V_{Rk,s}$	Steel zinc plated	5.8	[kN]	9	15	21	39	61	89
		8.8		15	23	34	63	98	141
	Stainless steel A4 and High corrosion resistant steel C	50		9	15	21	39	61	89
		70		13	20	30	55	86	124
		80		15	23	34	63	98	141
Ductility factor acc. to CEN/TS 1992-4-5:2009 Section 6.3.2.1		k_2	[-]	1,0					
with lever arm									
Charact.bending moment $M^0_{Rk,s}$	Steel zinc plated	5.8	[Nm]	19	37	65	166	324	560
		8.8		30	60	105	266	519	896
	Stainless steel A4 and High corrosion resistant steel C	50		19	37	65	166	324	560
		70		26	52	92	232	454	784
		80		30	60	105	266	519	896
Partial safety factors ¹⁾									
Partial safety factor $\gamma_{Ms,V}$	Steel zinc plated	5.8	[-]	1,25					
		8.8		1,25					
	Stainless steel A4 and High corrosion resistant steel C	50		2,38					
		70		1,25 ²⁾ /1,56					
		80		1,33					

¹⁾ In absence of other national regulations

²⁾ Only for Upat ASTA made of high corrosion-resistant steel C

Upat UKA3 Plus

Performances

Characteristic steel bearing capacity of Upat anchor rods ASTA

Annex C 1

Appendix 12 / 17

Table C2: Characteristic values for the steel bearing capacity of Upat internal threaded anchors IST under tensile / shear load

Size				M8	M10	M12	M16	M20	
Bearing capacity under tensile load, steel failure									
Characteristic bearing capacity with screw	N _{Rk,s}	Property class	5.8	[kN]	19	29	43	79	123
			8.8		29	47	68	108	179
		Property class 70	A4		26	41	59	110	172
			C		26	41	59	110	172
Partial safety factors ¹⁾									
Partial safety factor	γ _{Ms,N}	Property class	5.8	[-]	1,50				
			8.8		1,50				
		Property class 70	A4		1,87				
			C		1,87				
Bearing capacity under shear load, steel failure									
without lever arm									
Characteristic bearing capacity with screw	V _{Rk,s}	Property class	5.8	[kN]	9,2	14,5	21,1	39,2	62,0
			8.8		14,6	23,2	33,7	54,0	90,0
		Property class 70	A4		12,8	20,3	29,5	54,8	86,0
			C		12,8	20,3	29,5	54,8	86,0
Ductility factor acc. to CEN/TS 1992-4-5:2009 Section 6.3.2.1			k ₂	[-]	1,0				
with lever arm									
Characteristic bending moment with screw	M ⁰ _{Rk,s}	Property class	5.8	[Nm]	20	39	68	173	337
			8.8		30	60	105	266	519
		Property class 70	A4		26	52	92	232	454
			C		26	52	92	232	454
Partial safety factors ¹⁾									
Partial safety factor	γ _{Ms,V}	Property class	5.8	[-]	1,25				
			8.8		1,25				
		Property class 70	A4		1,56				
			C		1,56				

¹⁾ In absence of other national regulations

Upat UKA3 Plus

Performances

Characteristic steel bearing capacity of Upat internal threaded anchor IST

Annex C 2

Appendix 13 / 17

Table C3: General design factors for the bearing capacity under tensile / shear load;
uncracked or cracked concrete

Size			All Sizes					
Bearing capacity under tensile load								
Factors acc. to CEN/TS 1992-4-5:2009 Section 6.2.3.1								
Uncracked concrete	k_{ucr}	[-]	10,1					
Cracked concrete	k_{cr}		7,2					
Factors for the compressive strength of concrete > C20/25								
Increasing factor for τ_{Rk}	C25/30	Ψ_c	[-]	1,02				
	C30/37			1,04				
	C35/45			1,07				
	C40/50			1,08				
	C45/55			1,09				
	C50/60			1,10				
Splitting failure								
Edge distance	$h / h_{ef} \geq 2,0$	$c_{cr,sp}$	[mm]	1,0 h_{ef}				
	$2,0 > h / h_{ef} > 1,3$			4,6 h_{ef} - 1,8 h				
	$h / h_{ef} \leq 1,3$			2,26 h_{ef}				
Spacing	$s_{cr,sp}$			2 $c_{cr,sp}$				
Concrete cone failure acc. to CEN/TS 1992-4-5:2009 Section 6.2.3.2								
Edge distance	$c_{cr,N}$	[mm]	1,5 h_{ef}					
Spacing	$s_{cr,N}$		2 $c_{cr,N}$					
Bearing capacity under shear load								
Installation safety factors								
All installation conditions	$\gamma_2 = \gamma_{inst}$	[-]	1,0					
Concrete pry-out failure								
Factor k acc. to TR029 Section 5.2.3.3 resp. k_3 acc. to CEN/TS 1992-4-5:2009 Section 6.3.3	$k_{(3)}$	[-]	2,0					
Concrete edge failure								
The value of h_{ef} (= l_t) under shear load		[mm]	$h_{ef} = h_0$					
Calculation diameters								
Size			M8	M10	M12	M16	M20	M24
Upat anchor rods ASTA	d	[mm]	8	10	12	16	20	24
Upat internal threaded anchors IST	d_{nom}		12	16	18	22	28	---

Upat UKA3 Plus

Performances

General design factors relating to the characteristic bearing capacity under tensile / shear load

Annex C 3

Appendix 14 / 17

Table C4: Characteristic values of resistance for Upat anchor rods ASTA; uncracked or cracked concrete

Size			M8	M10	M12	M16	M20	M24	
Combined pullout and concrete cone failure									
Calculation diameter		d	[mm]	8	10	12	16	20	24
Uncracked concrete									
Characteristic bond resistance in uncracked concrete C20/25									
Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)									
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$	[N/mm ²]	12,5	12,5	12,5	12,5	12,5	12,5
	II: 72 °C / 120 °C			10,5	10,5	10,5	10,5	10,5	10,5
Hammer-drilling with standard drill bit or hollow drill bit (flooded hole)									
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$	[N/mm ²]	---	---	12,5	12,5	12,5	12,5
	II: 72 °C / 120 °C			---	---	10,5	10,5	10,5	10,5
Installation safety factors									
Dry and wet concrete		$\gamma_2 = \gamma_{inst}$	[-]	1,2					
Flooded hole				---			1,4		
Cracked concrete									
Characteristic bond resistance in cracked concrete C20/25									
Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)									
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$	[N/mm ²]	---	4,5	4,5	4,5	4,5	4,5
	II: 72 °C / 120 °C			---	3,5	3,5	3,5	3,5	3,5
Hammer-drilling with standard drill bit or hollow drill bit (flooded hole)									
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$	[N/mm ²]	---	---	4,5	4,5	4,5	4,5
	II: 72 °C / 120 °C			---	---	3,5	3,5	3,5	3,5
Installation safety factors									
Dry and wet concrete		$\gamma_2 = \gamma_{inst}$	[-]	---	1,2				
Flooded hole				---	1,4				

Upat UKA3 Plus

Performances

Characteristic values for static or quasi-static action under tensile load for Upat anchor rod ASTA (uncracked or cracked concrete)

Annex C 4

Appendix 15 / 17

Table C5: Characteristic values of resistance for Upat internal threaded anchors IST; uncracked or cracked concrete

Size			M8	M10	M12	M16	M20	
Combined pullout and concrete cone failure								
Calculation diameter		d	[mm]	12	16	18	22	28
Uncracked concrete								
Characteristic bond resistance in uncracked concrete C20/25								
Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)								
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$	[N/mm ²]	11	11	11	11	11
	II: 72 °C / 120 °C			9,5	9,5	9,5	9,5	9,5
Hammer-drilling with standard drill bit or hollow drill bit (flooded hole)								
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,ucr}$	[N/mm ²]	11	11	---	11	---
	II: 72 °C / 120 °C			9,5	9,5	---	9,5	---
Installation safety factors								
Dry and wet concrete		$\gamma_2 = \gamma_{Inst}$	[-]	1,2				
Flooded hole				1,4		---	1,4	---
Cracked concrete								
Characteristic bond resistance in cracked concrete C20/25								
Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)								
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$	[N/mm ²]	4,5	4,5	4,5	4,5	4,5
	II: 72 °C / 120 °C			3,5	3,5	3,5	3,5	3,5
Hammer-drilling with standard drill bit or hollow drill bit (flooded hole)								
Temperature range	I: 24 °C / 40 °C	$\tau_{Rk,cr}$	[N/mm ²]	4,5	4,5	---	4,5	---
	II: 72 °C / 120 °C			3,5	3,5	---	3,5	---
Installation safety factors								
Dry and wet concrete		$\gamma_2 = \gamma_{Inst}$	[-]	1,2				
Flooded hole				1,4		---	1,4	---

Upat UKA3 Plus

Performances

Characteristic values for static or quasi-static action under tensile load for Upat internal threaded anchors IST (uncracked or cracked concrete)

Annex C 5

Appendix 16 / 17

Table C6: Displacements for Upat anchor rods ASTA

Size		M8	M10	M12	M16	M20	M24
Displacement-Factors for tensile load ¹⁾							
Uncracked or cracked concrete; Temperature range I, II							
δ _{N0} -Faktor	[mm/(N/mm ²)]	0,07	0,08	0,09	0,10	0,11	0,12
δ _{N∞} -Faktor		0,13	0,14	0,15	0,17	0,17	0,18
Displacement-Factors for shear load ²⁾							
Uncracked or cracked concrete; Temperature range I, II							
δ _{V0} -Faktor	[mm/kN]	0,18	0,15	0,12	0,09	0,07	0,06
δ _{V∞} -Faktor		0,27	0,22	0,18	0,14	0,11	0,09

¹⁾ Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0\text{-Faktor}} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty\text{-Faktor}} \cdot \tau_{Ed}$$

(τ_{Ed} : Design value of the applied tensile stress)

²⁾ Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0\text{-Faktor}} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty\text{-Faktor}} \cdot V_{Ed}$$

(V_{Ed} : Design value of the applied shear force)

Table C7: Displacements for Upat internal threaded anchors IST

Size		M8	M10	M12	M16	M20
Displacement-Factors for tensile load ¹⁾						
Uncracked or cracked concrete; Temperature range I, II						
δ _{N0} -Faktor	[mm/(N/mm ²)]	0,09	0,10	0,10	0,11	0,19
δ _{N∞} -Faktor		0,13	0,15	0,15	0,17	0,19
Displacement-Factors for shear load ²⁾						
Uncracked or cracked concrete; Temperature range I, II						
δ _{V0} -Faktor	[mm/kN]	0,12	0,09	0,08	0,07	0,05
δ _{V∞} -Faktor		0,18	0,14	0,12	0,10	0,08

¹⁾ Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0\text{-Faktor}} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty\text{-Faktor}} \cdot \tau_{Ed}$$

(τ_{Ed} : Design value of the applied tensile stress)

²⁾ Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0\text{-Faktor}} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty\text{-Faktor}} \cdot V_{Ed}$$

(V_{Ed} : Design value of the applied shear force)

Upat UKA3 Plus

Performances

Displacements for Upat anchor rods ASTA and Upat internal threaded anchors IST

Annex C 6

Appendix 17 / 17