

PRESTATIEVERKLARING

DoP 0200

voor boutanker Upat MAX, MAX R, MAX HCR (mechanisch anker voor gebruik in beton)

NL

1. <u>Unieke identificatiecode van het producttype:</u>	DoP 0200		
2. <u>Beoogd(e) gebruik(en):</u>	Bevestigingen in gescheurd of ongescheurd beton. Zie bijlage, met name de bijlagen B1- B6		
3. <u>Fabrikant:</u>	Upat Vertriebs GmbH, Bebelstraße 11, 79108 Freiburg im Breisgau, Duitsland		
4. <u>Gemachtigde:</u>	-		
5. <u>Het systeem of de systemen voor de beoordeling en verificatie van de prestatiebestendigheid:</u>	1		
6. <u>Europees beoordelingsdocument:</u>	EAD 330232-00-0601		
Europese technische beoordeling:	ETA-10/0170; 2020-04-28		
Technische beoordelingsinstantie:	DIBt- Deutsches Institut für Bautechnik		
Aangemelde instantie(s):	1343 MPA Darmstadt / 2873 TU Darmstadt		
7. <u>Aangegeven prestatie(s):</u>			
Mechanische weerstand en stabiliteit (BWR 1)			
Kenmerkende weerstand tegen spanningsbelasting (statische en quasi-statische belasting):	Weerstand tegen staalbreuk:	Bijlage C1	E _s = 210 000 MPa
	Weerstand tegen uittrekken:	Bijlage C1	
	Weerstand tegen betonnen kegelbreuk:	Bijlage C1	
	Robuustheid	Bijlage C1	
	Minimale rand- en hartafstand:	Bijlagen B3, B4	
	Randafstand om spleetbreuk onder belasting te voorkomen:	Bijlage C1	
	Verplaatsingen onder statische en quasi-statische belasting:	Bijlage C5	
	Kenmerkende weerstand tegen schuifbelasting (statische en quasi-statische belasting):		
	Weerstand tegen staalbreuk (afschuifbelasting):	Bijlage C2	
	Weerstand tegen uitbreken (pryout):	Bijlage C2	
Weerstand tegen bezwijken van betonranden:	Bijlage C2		
Verplaatsingen onder statische en quasi-statische belasting:	Bijlage C5		
Duurzaamheid:	Bijlagen A4, B1		
Kenmerkende weerstand en verplaatsingen voor de seismische prestatiecategorieën C1 en C2:	Weerstand tegen staalbreuk:	Bijlage C4	
	Weerstand tegen uittrekken:	Bijlage C4	
	Brakverlenging:	>8%	
	Factor ringvormige opening:	Bijlage C4	
	Verplaatsingen:	Bijlage C5	
Veiligheid in geval van brand (BWR 2)			
Reactie op brand:	Klasse (A1)		
Weerstand tegen vuur:	Weerstand bij brand, staalbreuk (trekbelasting):	Bijlage C3	
	Weerstand bij brand, uittrekken, (trekbelasting):	Bijlage C3	
	Weerstand bij brand, staalbreuk (afschuifbelasting):	Bijlage C3	



Einfach. Sicher.



8. Geëigende technische documentatie en/of specifieke technische documentatie: -

De prestaties van het hierboven omschreven product zijn conform de aangegeven prestaties. Deze prestatieverklaring wordt in overeenstemming met Verordening (EU) nr. 305/2011 onder de exclusieve verantwoordelijkheid van de hierboven vermelde fabrikant verstrekt.

Ondertekend voor en namens de fabrikant door:

Thilo Pregartner, Dr.-Ing.
Tumlingen, 2020-05-12

Peter Schillinger, Dipl.-Ing.

Deze DoP is opgesteld in meerdere talen. In het geval van geschillen over de interpretatie zal de Engelse tekst altijd prevaleren.

Het aanhangsel bevat vrijwillige en aanvullende informatie in het Engels die de (taal-neutraal gespecificeerde) wettelijke vereisten overschrijdt.

Specific Part

1 Technical description of the product

The Upat Anchor bolt MAX is an anchor made of galvanised steel (MAX) or made of stainless steel (MAX R) or high corrosion resistant steel (MAX HCR) which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B 3, C 1
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 2
Displacements (static and quasi-static loading)	See Annex C 5
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C 4
Durability	See Annex B 1

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 3



4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330232-00-0601 the applicable European legal act is: [96/582/EC].



The system to be applied is: 1

Cone bolt manufactured by cold - forming:

Cone bolt manufactured by turning:

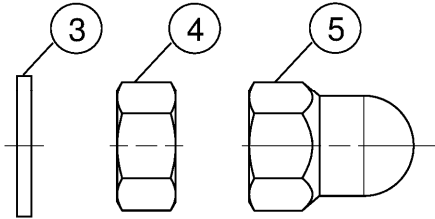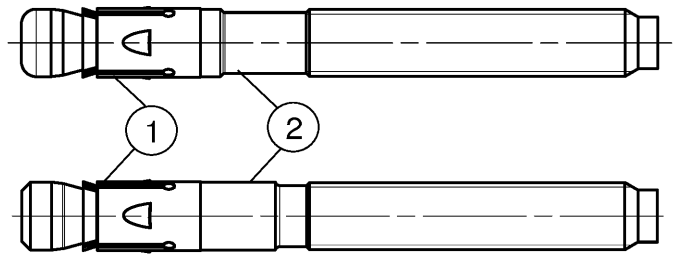

- ① Expansion sleeve
- ② Cone bolt (cold – formed or turned)
- ③ Washer
- ④ Hexagon nut
- ⑤ Upat MAX dome nut

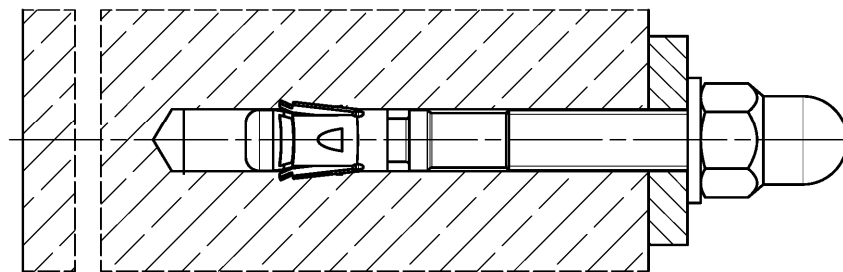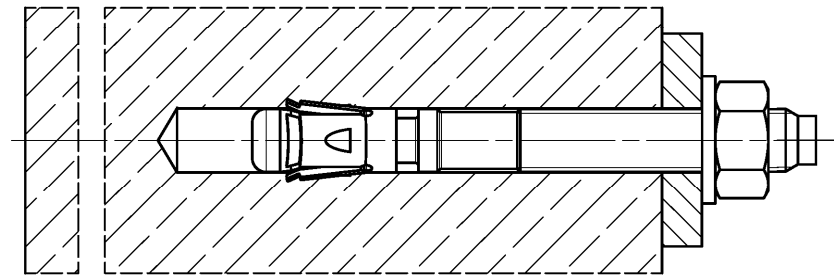

(Fig. not to scale)


Upat Anchor bolt MAX, MAX R, MAX HCR

Product description
Installed condition

Annex A 1

Appendix 2/ 16

Product label and letter-code:

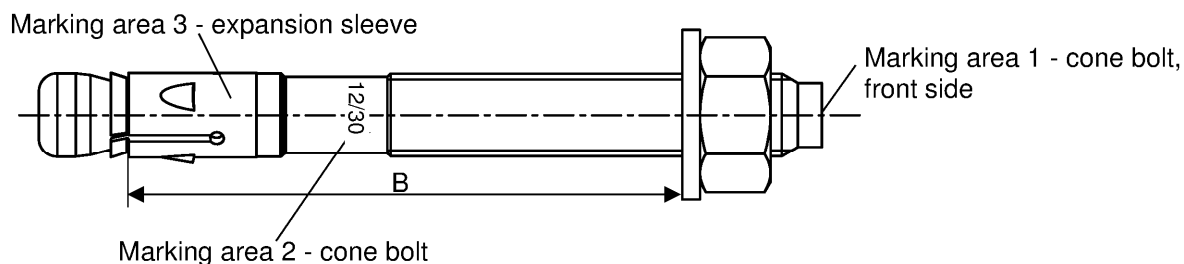

Product label, example:

MAX 12/30 R

Brand | type of fastener

placed at marking area 2 or marking area 3

Thread size / max. thickness of the fixture (t_{fix})

identification R or HCR placed at marking area 2

MAX: carbon steel, galvanized

MAX R: stainless steel

MAX HCR: high corrosion resistant steel

Table A2.1: Letter - code at marking area 1:

Marking		(a)	(b)	(c)	(d)	(A)	(B)	(C)	(D)	(E)	(F)	(G)	(H)	(I)	(K)
Max. t_{fix}		5	10	15	20	5	10	15	20	25	30	35	40	45	50
B ≥ [mm]	M6	-				45	50	55	60	65	70	75	80	85	90
	M8	40	45	-		50	55	60	65	70	75	80	85	90	95
	M10	45	50	55	60	65	70	75	80	85	90	95	100	105	110
	M12	55	60	65	70	75	80	85	90	95	100	105	110	115	120
	M16	70	75	80	85	90	95	100	105	110	115	120	125	130	135
	M20					105	110	115	120	125	130	135	140	145	150
	M24	-				130	135	140	145	150	155	160	165	170	175
Marking		(L)	(M)	(N)	(O)	(P)	(R)	(S)	(T)	(U)	(V)	(W)	(X)	(Y)	(Z)
Max. t_{fix}		60	70	80	90	100	120	140	160	180	200	250	300	350	400
B ≥ [mm]	M6	100	110	120	130	140	160	180	200	220	240	290	340	390	440
	M8	105	115	125	135	145	165	185	205	225	245	295	345	395	445
	M10	120	130	140	150	160	180	200	220	240	260	310	360	410	460
	M12	130	140	150	160	170	190	210	230	250	270	320	370	420	470
	M16	145	155	165	175	185	205	225	245	265	285	335	385	435	485
	M20	160	170	180	190	200	220	240	260	280	300	350	400	450	500
	M24	185	195	205	215	225	245	265	285	305	325	375	425	475	525

Calculation existing h_{ef} for installed fasteners:

$$\text{existing } h_{ef} = B_{(\text{according to table A2.1})} - \text{existing } t_{fix}$$

Thickness of the fixture t_{fix} including thickness of fastener plate t and e.g. thickness of grout layer t_{grout} or other non-structural layers

(Fig. not to scale)

Upat Anchor bolt MAX, MAX R, MAX HCR

Product description

Product label and letter code

Annex A 2

Product dimensions

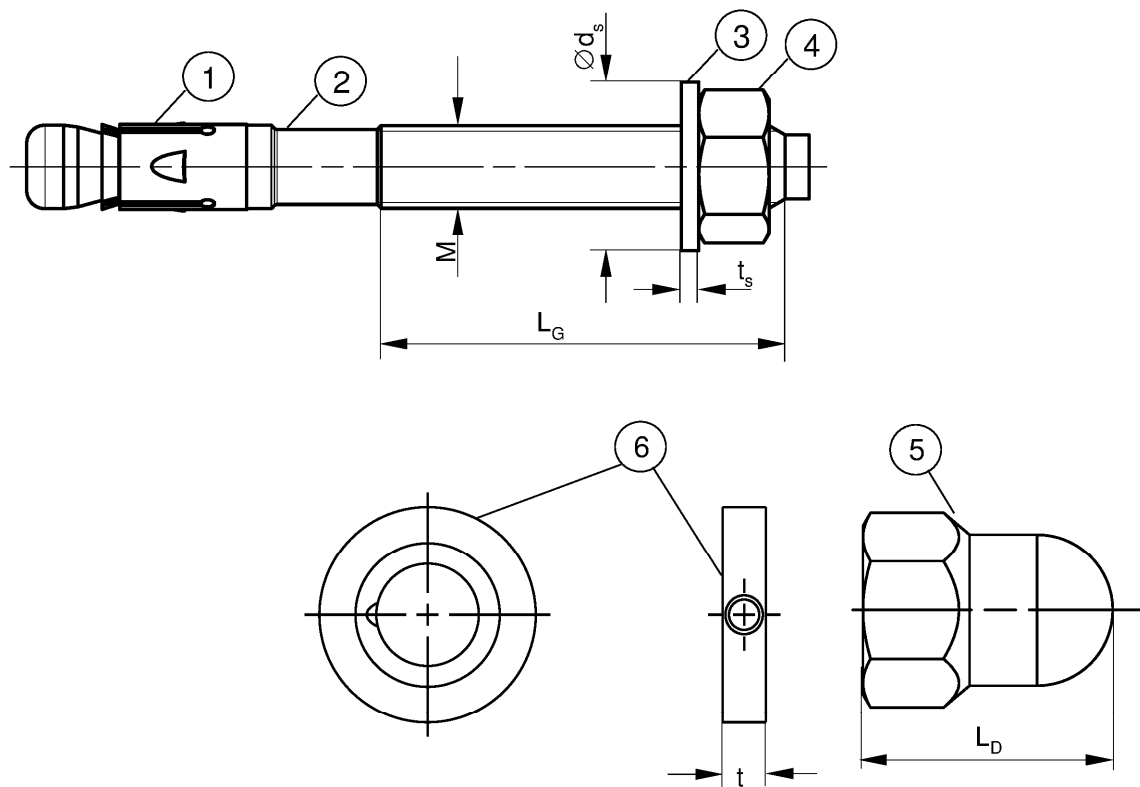


Table A3.1: Dimensions [mm]

Part	Designation		MAX, MAX R, MAX HCR						
			M6	M8	M10	M12	M16	M20	M24
1	Expansion sleeve	Sheet thickness	0,8	1,3	1,4	1,6	2,4		3,0
2	Cone bolt	Thread size M	6	8	10	12	16	20	24
		L_G	10	19	26	31	40	50	57
3	Washer	t_s	$\geq 1,4$		1,8	2,3	$\geq 2,7$		$\geq 3,7$
		$\varnothing d_s$	11	15	19	23	29	36	43
4 & 5	Hexagon nut / Upat MAX dome nut	Wrench size	10	13	17	19	24	30	36
5	Upat dome nut	L_D	$\geq -$		22	27	33	$-$	
6	Upat filling disc FFD	t	$= 6$				7	8	10

(Fig. not to scale)

Upat Anchor bolt MAX, MAX R, MAX HCR

Product description
Dimensions

Annex A 3

Appendix 4/ 16

Table A4.1: Materials MAX (ISO 4042:2018/Zn5/An(A2K))

Part	Designation	Material
1	Expansion sleeve	Cold strip, EN 10139:2016 or stainless steel EN 10088:2014
2	Cone bolt	Cold form steel or free cutting steel
3	Washer	Cold strip, EN 10139:2016
4	Hexagon nut	Steel, property class min. 8, EN ISO 898-2:2012

Table A4.2: Materials MAX R

Part	Designation	Material
1	Expansion sleeve	Stainless steel EN 10088:2014
2	Cone bolt	
3	Washer	
4	Hexagon nut	Stainless steel EN 10088:2014; ISO 3506-2:2018; property class – min. 70

Table A4.3: Materials MAX HCR

Part	Designation	Material
1	Expansion sleeve	Stainless steel EN 10088:2014
2	Cone bolt	High corrosion resistant steel EN 10088:2014
3	Washer	
4	Hexagon nut	High corrosion resistant steel EN 10088:2014; ISO 3506-2:2018; property class – min. 70

(Fig. not to scale)

Upat Anchor bolt MAX, MAX R, MAX HCR

Product description
Materials

Annex A 4

Appendix 5/ 16

Specifications of intended use

Anchorage subject to:

Size	MAX, MAX R, MAX HCR						
	M6	M8	M10	M12	M16	M20	M24
Static and quasi-static loads	✓						
Cracked and uncracked concrete							
Fire exposure							
Seismic performance category	C1	-	✓				
	C2 ¹⁾	-	✓				

¹⁾ MAX HCR: Only valid for cold-formed version (according to Annex A1)

Base materials:

- Compacted reinforced and unreinforced normal weight concrete without fibres (cracked and uncracked) according to EN 206-1:2013+A1:2016
- Strength classes C20/25 to C50/60 according to EN 206-1:2013+A1:2016

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (MAX, MAX R, MAX HCR)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (MAX R, MAX HCR)
- Structures subject to external atmospheric exposure and permanently damp internal condition, if other particular aggressive conditions exist (MAX HCR)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where deicing materials are used)

Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Design of fastenings according to EN 1992-4:2018 and EOTA Technical Report TR 055
- For effective embedment depth $h_{ef} < 40$ mm only statically indeterminate fixings (e.g. light-weight suspended ceilings with internal exposure) are covered by the ETA

Upat Anchor bolt MAX, MAX R, MAX HCR

Intended Use
Specifications


Annex B 1

Appendix 6/ 16

Table B2.1: Installation parameters

Size	MAX, MAX R, MAX HCR						
	M6	M8	M10	M12	M16	M20	M24
Nominal drill hole diameter $d_0 =$	6	8	10	12	16	20	24
Maximum bit diameter with hammer or hollow drilling $d_{cut,max}$ [mm]	6,40	8,45	10,45	12,5	16,5	20,55	24,55
Maximum bit diameter with diamond drilling	-	8,15		12,25	16,45	20,50	24,40
Overall fastener embedment depth in the concrete $h_{nom} \geq (L)$ [mm]	46,5 (6,5)	44,5 (9,5)	52,0 (12)	63,5 (13,5)	82,5 (17,5)	120 (20)	148,5 (23,5)
Existing $h_{ef} + L = h_{nom}$							
Depth of drill hole to deepest point $h_1 \geq$	$h_{nom} + 5$					$h_{nom} + 10$	
Diameter of clearance hole in the fixture $d_f \leq$ [mm]	7	9	12	14	18	22	26
Required setting torque $T_{inst} =$ [Nm]	8	20	45	60	110	200	270
Excess length after hammering-in the cone bolt (for Upat dome nut applications according to Annex B6) $O =$ [mm]	-		12	16	20	-	

Setting gauge MAX SL-H
for anchor with Upat MAX dome nut:

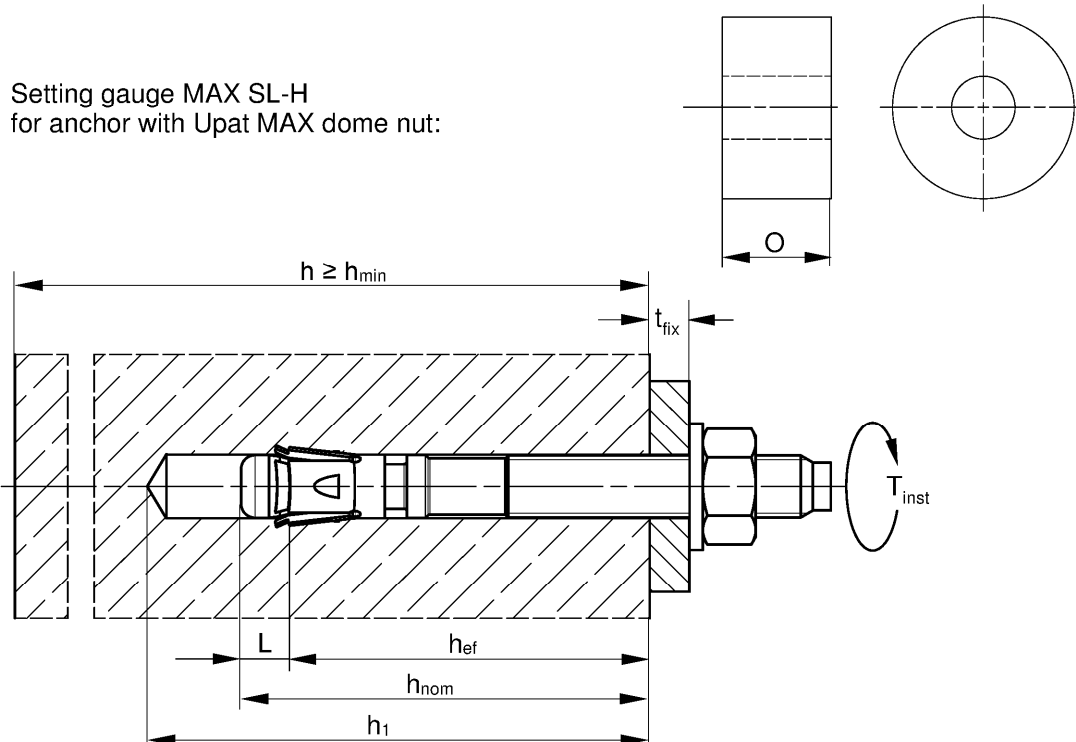

- h_{ef} = Effective embedment depth
- t_{fix} = Thickness of the fixture
- h_1 = Depth of drill hole to deepest point
- h = Thickness of the concrete member
- h_{min} = Minimum thickness of concrete member
- h_{nom} = Overall fastener embedment depth in the concrete
- T_{inst} = Required setting torque

(Fig. not to scale)

Upat Anchor bolt MAX, MAX R, MAX HCR

Intended Use
Installation parameters

Annex B 2

Appendix 7/ 16

Table B3.1: Minimum thickness of concrete members, minimum spacing and minimum edge distance

Size			MAX, MAX R, MAX HCR						
			M6	M8	M10	M12	M16	M20	M24
Minimum edge distance									
Uncracked concrete	C _{min}	s [mm]	45	40	45	55	65	95	135
Cracked concrete								85	100
Corresponding spacing	s		according to Annex B4						
Minimum thickness of concrete member	h _{min}		80		100	140	160	200	
Thickness of concrete member	h ≥		max. {h _{min} ; h ₁ ¹⁾ + 30}				max. {h _{min} ; h ₁ ¹⁾ + 2 · d _o }		
Minimum spacing									
Uncracked concrete	S _{min}	c [mm]	35	40	40	50	65	95	100
Cracked concrete				35					
Corresponding edge distance	c		according to Annex B4						
Minimum thickness of concrete member	h _{min}		80		100	140	160	200	
Thickness of concrete member	h ≥		max. {h _{min} ; h ₁ ¹⁾ + 30}				max. {h _{min} ; h ₁ ¹⁾ + 2 · d _o }		
Minimal splitting area									
Uncracked concrete	A _{sp,req}	[·1000 mm ²]	5,1	18	37	54	67	100	117,5
Cracked concrete			1,5	12	27	40	50	77	87,5

¹⁾ h₁ according to Annex B2


Splitting failure applied for minimum edge distance and spacing in dependence of the h_{ef}

For the calculation of minimum spacing and minimum edge distance of anchors in combination with different embedment depths and thicknesses of concrete members the following equation shall be fulfilled:

$$A_{sp,req} < A_{sp,ef}$$


A_{sp,req} = required splitting area
A_{sp,ef} = effective splitting area (according to Annex B4)

Table B4.1: Effective splitting area $A_{sp,ef}$ with member thickness $h > h_{ef} + 1,5 \cdot c$ and $h \geq h_{min}$

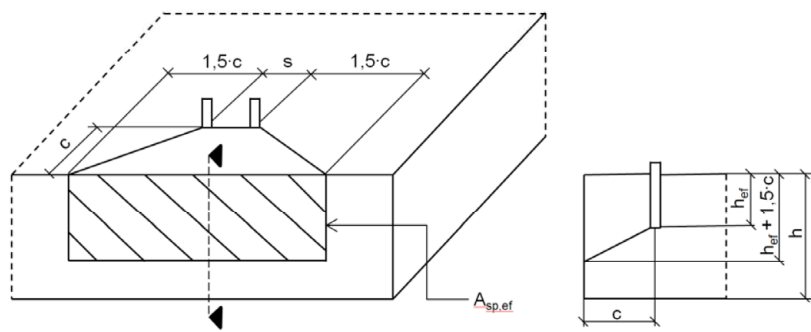

Single anchor and group of anchors with $s > 3 \cdot c$	$A_{sp,ef} = (6 \cdot c) \cdot (h_{ef} + 1,5 \cdot c)$	[mm ²]	with $c \geq c_{min}$
Group of anchors with $s \leq 3 \cdot c$	$A_{sp,ef} = (3 \cdot c + s) \cdot (h_{ef} + 1,5 \cdot c)$	[mm ²]	with $c \geq c_{min}$ and $s \geq s_{min}$

Table B4.2: Effective splitting area $A_{sp,ef}$ with member thickness $h \leq h_{ef} + 1,5 \cdot c$ and $h \geq h_{min}$

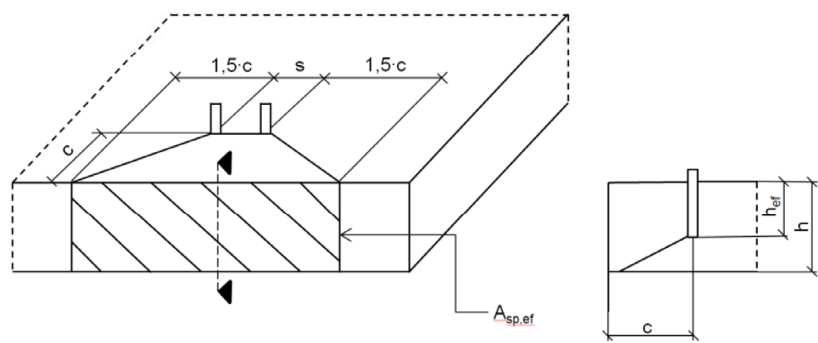

Single anchor and group of anchors with $s > 3 \cdot c$	$A_{sp,ef} = 6 \cdot c \cdot \text{existing } h$	[mm ²]	with $c \geq c_{min}$
Group of anchors with $s \leq 3 \cdot c$	$A_{sp,ef} = (3 \cdot c + s) \cdot \text{existing } h$	[mm ²]	with $c \geq c_{min}$ and $s \geq s_{min}$

Edge distance and axial spacing shall be rounded to at least 5 mm

(Fig. not to scale)






Upat Anchor bolt MAX, MAX R, MAX HCR	Annex B 4 Appendix 9/ 16
Intended Use Minimum thickness of member, minimum spacings and edge distances	

Installation instructions:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Use of the anchor only as supplied by the manufacturer without exchanging the components of the anchor
Exception: Upat MAX dome nut.
- Checking before placing the anchor to ensure that the strength class of the concrete in which the anchor is to be placed is in the range given and is not lower than that of the concrete to which the characteristic loads apply
- Check of concrete being well compacted, e.g. without significant voids
- Hammer, hollow or diamond drilling according to Annex B5
- Drill hole created perpendicular $\pm 5^\circ$ to concrete surface, positioning without damaging the reinforcement
- In case of aborted hole: new drilling at a minimum distance twice the depth of the aborted drill hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application
- It must be ensured that in case of fire local spalling of the concrete cover does not occur
- Fastenings in stand-off installation or with a grout layer under seismic action are not covered
- In case of seismic applications the fastener shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure

Installation instructions: Drilling and cleaning the hole

Types of drills and cleaning

Hammer drill			
		1: Drill the hole	2: Clean the hole
Hollow drill			-
		1: Drill the hole with automatic cleaning	
Diamond drill, for non seismic applications only and $\geq$ drill $\varnothing 8$			
		1: Drill the hole	2: Clean the hole

Upat Anchor bolt MAX, MAX R, MAX HCR


Intended Use
Installation instructions

Annex B 5


Appendix 10/ 16

Installation instructions: Installation of the anchor


HEXAGON NUT:



3: Set the fastener




4: Apply T_{inst}




5: Installed fastener

Upat MAX DOME NUT:


Option 1: Push through installation with setting gauge SL-H:




3: Set the fastener using setting gauge




4: Check offset



5: Turn on the washer and Upat MAX dome nut




6: Apply T_{inst}




7: Installed fastener


Option 2: Push through installation with hexagon nut:



3: Set the fastener



4: check setting position: Visible one turn of a thread





4.1: Remove nut

Upat FILLING DISC FFD optional for seismic C2 application or minimizing the annular gap:

Optional

The gap between bolt and fixture may be filled with mortar (compressive strength $\geq 50 \text{ N/mm}^2$ e.g. UPM 33) after step 7 (for eliminating the annular gap).
The filling disc is additional to the standard washer.
The thickness of the filling disc must be considered for definition of t_{fix}
Countersunk of the filling disc in direction to the anchor plate.



Upat Anchor bolt MAX, MAX R, MAX HCR

Intended Use
Installation instructions

Annex B 6

Table C1.1: Characteristic **tension** resistance under static and quasi-static action

Size				MAX, MAX R, MAX HCR								
				M6	M8	M10	M12	M16	M20	M24		
Steel failure												
Characteristic resistance	MAX	$N_{Rk,s}$	[kN]	7,6	16,6	28,3	43,2	67,0	123,3	176,7		
	MAX R/HCR			11,4	17,0	29,0	44,3	70,6	124,9	183,6		
Partial factor for steel failure			$\gamma_{Ms}^{1)}$	1,5								
Pullout failure												
Effective embedment depth for calculation			h_{ef}	[mm]	40	35 - < 45	45	40 - 60	50 - 70	65 - 85	100	125
Characteristic resistance in cracked concrete C20/25			$N_{Rk,p}$	[kN]	1,5	5,5	8	13	20	27,0	34,4	48,1
Characteristic resistance in uncracked concrete C20/25					10,5	14	20	22	38,6	49,2	68,8	
Increasing factors for $N_{Rk,p}$ for cracked and uncracked concrete			ψ_c	C25/30	1,12							
				C30/37	1,22							
				C35/45	1,32							
				C40/50	1,41							
				C45/55	1,50							
				C50/60	1,58							
Installation factor			γ_{Inst}	1,0								
Concrete cone and splitting failure												
Factor for uncracked concrete			$k_{Ucr,N}$	[-]	11,0 ²⁾							
Factor for cracked concrete			$k_{Cr,N}$		7,7 ²⁾							
Characteristic spacing			$s_{Cr,N}$	[mm]	3 · h_{ef}							
Characteristic edge distance			$c_{Cr,N}$		1,5 · h_{ef}							
Spacing			$s_{Cr,sp}$	2 · $c_{Cr,sp}$								
Edge distance for h = 80			$c_{Cr,sp}$	[mm]	40	2,4 · h_{ef}	2 · h_{ef}	-	-			
Edge distance for h = 100						2 · h_{ef}	2,4 · h_{ef}	2 · h_{ef}				
Edge distance for h = 120							1,9 · h_{ef}	2,1 · h_{ef}				
Edge distance for h = 140								1,5 · h_{ef}	2 · h_{ef}	-		
Edge distance for h = 160												
Edge distance for h = 180												
Edge distance for h = 200												
Characteristic resistance to splitting			$N^0_{Rk,sp}$	[kN]	min { $N^0_{Rk,c}$; $N_{Rk,p}$ } ³⁾							
1) In absence of other national regulations 2) Based on concrete strength as cylinder strength 3) $N^0_{Rk,c}$ according to EN 1992-4:2018												
Upat Anchor bolt MAX, MAX R, MAX HCR									Annex C 1			
Performances Characteristic values of resistance under tension loads												
									Appendix 12/ 16			

Table C2.1: Characteristic values of **shear** resistance under static and quasi-static action

Size			MAX, MAX R, MAX HCR						
			M6	M8	M10	M12	M16	M20	M24
Steel failure without lever arm									
Characteristic resistance	MAX	$V_{Rk,s}^0$ [kN]	5,9	13,6	21,4	30,6	55,0	81,4	110,1
	MAX R/HCR		8,8	16,8	26,5	38,3	69,8	106,3	148,5
Partial factor for steel failure		$\gamma_{Ms}^{1)}$	1,25						
Factor for ductility		k_7							
Steel failure with lever arm and Concrete pryout failure									
Effective embedment depth for calculation		h_{ef} [mm]	40	45	60	70	85	100	125
Characteristic bending resistance	MAX	$M_{Rk,s}^0$ [Nm]	11,4	26	52	92	233	513	865
	MAX R/HCR		10,7	29	59	100	256	519	898
Factor for pryout failure		k_8 [-]	2,6	2,8	3,2		3,0	2,6	2,4
Effective embedment depth for calculation		h_{ef} [mm]	-	35 - < 45	40 - < 60	50 - < 70	65 - < 85	-	
Characteristic bending resistance	MAX	$M_{Rk,s}^0$ [Nm]		20	44	92	184		
	MAX R/HCR			21	45	100	193		
Factor for pryout failure		k_8 [-]		2,5	2,6	3,1	3,2		
Partial factor for steel failure		$\gamma_{Ms}^{1)}$	1,25						
Factor for ductility		k_7							
Concrete edge failure									
Effective embedment depth for calculation		$l_f =$ [mm]	h_{ef}						
Outside diameter of a fastener		d_{nom}	6	8	10	12	16	20	24

¹⁾ In absence of other national regulations

Upat Anchor bolt MAX, MAX R, MAX HCR

Performances

Characteristic values of resistance under shear loads

Annex C 2

Table C3.1: Characteristic values of **tension** resistance under **fire exposure**

Size		MAX, MAX R, MAX HCR						
		M6	M8	M10	M12	M16	M20	M24
$h_{ef} \geq$ [mm]		40	35 / 45	40 / 60	50 / 70	65 / 85	100	125
Characteristic resistance steel failure	R30	0,6 ¹⁾ / 0,9 ²⁾	1,4	2,8	5,0	9,4	14,7	21,1
	R60	0,4 ¹⁾ / 0,9 ²⁾	1,2	2,3	4,1	7,7	12,0	17,3
	R90	0,3 ¹⁾ / 0,9 ²⁾	0,9	1,9	3,2	6,0	9,4	13,5
	R120	0,2 ¹⁾ / 0,7 ²⁾	0,8	1,6	2,8	5,2	8,1	11,6
Characteristic resistance Concrete cone failure	R30 - R90	$7,7 \cdot h_{ef}^{1,5} \cdot (20)^{0,5} \cdot h_{ef} / 200 / 1000$						
	R120	$7,7 \cdot h_{ef}^{1,5} \cdot (20)^{0,5} \cdot h_{ef} / 200 / 1000 \cdot 0,8$						
Characteristic resistance pullout failure	R30	0,4	0,9 / 2,0	2,2 / 3,3	3,0 / 5,0	4,5 / 6,8	8,6	12,0
	R60		0,8 / 2,0					
	R90		0,5 / 2,0					
	R120	0,3	0,3 / 1,6	1,7 / 2,6	2,4 / 4,0	3,6 / 5,4	6,9	9,6

Table C3.2: Characteristic values of **shear** resistance under **fire exposure**

Size MAX, MAX R, MAX HCR			R30		R60	
			V _{Rk,s,fi,30} [kN]	M ⁰ _{Rk,s,fi,30} [Nm]	V _{Rk,s,fi,60} [kN]	M ⁰ _{Rk,s,fi,60} [Nm]
M6	h _{ef} ≥	40	0,6 ¹⁾ / 0,9 ²⁾	0,5 ¹⁾ / 0,2 ²⁾	0,4 ¹⁾ / 0,9 ²⁾	0,3 ¹⁾ / 0,1 ²⁾
M8		35	1,8	1,4	1,6	1,2
M10		40	3,6		2,9	3,0
M12		50	6,3	7,8	4,9	6,4
M16		65	11,7	19,9	9,1	16,3
M20		100	18,2	39,0	14,2	31,8
M24		125	26,3	67,3	20,5	55,0
Size MAX, MAX R, MAX HCR			R90		R120	
			V _{Rk,s,fi,90} [kN]	M ⁰ _{Rk,s,fi,90} [Nm]	V _{Rk,s,fi,120} [kN]	M ⁰ _{Rk,s,fi,120} [Nm]
M6	h _{ef} ≥	40	0,3 ¹⁾ / 0,9 ²⁾	0,2 ¹⁾ / 0,1 ²⁾	0,2 ¹⁾ / 0,7 ²⁾	0,2 ¹⁾ / 0,1 ²⁾
M8		35	1,3	1,0	1,2	0,8
M10		40	2,2	2,4	1,9	2,1
M12		50	3,5	5,0	2,8	4,3
M16		65	6,6	12,6	5,3	11,0
M20		100	10,3	24,6	8,3	21,4
M24		125	14,8	42,6	11,9	37,0

Concrete pryout failure according to EN 1992-4:2018

Table C3.3: Minimum spacings and minimum edge distances of anchors under **fire exposure** for **tension** and **shear** load

Size		MAX, MAX R, MAX HCR						
		M6	M8	M10	M12	M16	M20	M24
Spacing	s_{min}	Annex B3						
Edge distance	c_{min}	$c_{min} = 2 \cdot h_{ef}$, for fire exposure from more than one side $c_{min} \geq 300$ mm						

1) MAX

2) MAX R / HCR

Upat Anchor bolt MAX, MAX R, MAX HCR

Performances

Characteristic values of resistance under fire exposure

Annex C 3

Appendix 14/ 16

Table C4.1: Characteristic values of tension and shear resistance under seismic action category C1

Size		MAX, MAX R, MAX HCR						
		M6	M8	M10	M12	M16	M20	M24
Length of anchor	$L_{\max}$	-	167	186	221	285	394	477
Effective embedment depth	h_{ef} [mm]		45	40 - 60	50 - 70	65 - 85	100	125
With filling of the annular gap	α_{gap} [-]	1,0						
Steel failure								
Characteristic resistance tension load C1	$N_{Rk,s,C1}$ [kN]	-	16,0	27,0	41,0	66,0	111,0	150,0
Partial factor for steel failure	$\gamma_{Ms,C1}^{1)}$ [-]		1,5					
Pullout failure								
Characteristic resistance tension load in cracked concrete C1	$N_{Rk,p,C1}$ [kN]	-	4,6	8,0	16,0	28,2	36,0	50,3
Installation factor	γ_{Inst} [-]		1,0					
Steel failure without lever arm								
Characteristic resistance shear load C1	$V_{Rk,s,C1}$ [kN]	-	11	17	27	47	56	69
Partial factor for steel failure	$\gamma_{Ms,C1}^{1)}$ [-]		1,25					

1) In absence of other national regulations

Table C4.2: Characteristic values of tension and shear resistance under seismic action category C2

Size		MAX, MAX R, MAX HCR ¹⁾						
		M6	M8	M10	M12	M16	M20	M24
Length of anchor	L _{max} [mm]	-		186	221	285	394	-
With filling of the annular gap	α _{gap} [-]	1,0						
Steel failure								
Characteristic resistance tension load C2	N _{Rk,s,C2} [kN]	-		27	41	66	111	-
Partial factor for steel failure	γ _{Ms,C2²⁾} [-]			1,5				
Pullout failure								
Characteristic resistance tension load in cracked concrete C2	h _{ef} [mm]	-		60	70	85	100	-
	N _{Rk,p,C2} [kN]			5,1	7,4	21,5	30,7	
	h _{ef} [mm]			40-59	50-69	65-84	-	
	N _{Rk,p,C2} [kN]			2,7	4,4	16,4		
Installation factor	γ _{inst} [-]	1,0						
Steel failure without lever arm								
Characteristic resistance shear load C2	h _{ef} [mm]	-		60	70	85	100	-
	V _{Rk,s,C2} [kN]			10,0	17,4	27,5	39,9	
	h _{ef} [mm]			40-59	50-69	65-84	-	
	V _{Rk,s,C2} [kN]			7,0	12,7	22,0		
Partial factor for steel failure	γ _{Ms,C2²⁾} [-]	1,25						

1) MAX HCR: Only valid for cold-formed version (according to Annex A1)

2) In absence of other national regulations

Upat Anchor bolt MAX, MAX R, MAX HCR	Annex C 4 Appendix 15/ 16
Performances Characteristic values of resistance under tension and shear loads under seismic action	

Table C5.1: Displacements under static and quasi static **tension** loads

Size	MAX, MAX R, MAX HCR						
	M6	M8	M10	M12	M16	M20	M24
Displacement – factor for tensile load¹⁾							
δ_{N0} - factor	0,13	0,22	0,12	0,09	0,08	0,07	0,05
$\delta_{N\infty}$ - factor	1,00	0,78	0,40	0,19	0,09		0,07
[mm/kN]							
δ_{N0} - factor	0,16	0,07	0,05	0,06		0,05	0,04
$\delta_{N\infty}$ - factor	0,24	0,29	0,21	0,14	0,10	0,06	0,05

Table C5.2: Displacements under static and quasi static **shear** loads

Size	MAX						
	M6	M8	M10	M12	M16	M20	M24
Displacement – factor for shear load²⁾							
δ_{V0} - factor	0,6	0,35	0,37	0,27	0,10	0,09	0,07
$\delta_{V\infty}$ - factor	0,9	0,52	0,55	0,40	0,14	0,15	0,11
in cracked and uncracked concrete [mm/kN]							
MAX R, MAX HCR							
δ_{V0} - factor	0,6	0,23	0,19	0,18	0,10	0,11	0,07
$\delta_{V\infty}$ - factor	0,9	0,27	0,22	0,16	0,11	0,05	0,09

1) Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0} - \text{factor} \cdot N_{ED}$$

$$\delta_{N\infty} = \delta_{N\infty} - \text{factor} \cdot N_{ED}$$

(N_{ED}: Design value of the applied tension force)

2) Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0} - \text{factor} \cdot V_{ED}$$

$$\delta_{V\infty} = \delta_{V\infty} - \text{factor} \cdot V_{ED}$$

(V_{ED}: Design value of the applied shear force)**Table C5.3:** Displacements under **tension** loads for **category C2** for all embedment depths

Size	MAX, MAX R, MAX HCR						
	M6	M8	M10	M12	M16	M20	M24
Displacement DLS $\delta_{N,C2(DLS)}$	-		2,7	4,4		5,6	-
Displacement ULS $\delta_{N,C2(ULS)}$			11,5	13,0	12,3	14,4	

Table C5.4: Displacements under **shear** loads for **category C2** for all embedment depths

Size	MAX, MAX R, MAX HCR						
	M6	M8	M10	M12	M16	M20	M24
Displacement DLS $\delta_{V,C2(DLS)}$	-		4,1	4,7	5,5	4,8	-
Displacement ULS $\delta_{V,C2(ULS)}$			6,2	7,8	10,1	11,2	

Upat Anchor bolt MAX, MAX R, MAX HCR

Performances

Displacements under tension and shear loads

Annex C 5